

What Language Reveals about Perception: Distilling Psychophysical Knowledge from Large Language Models

Raja Marjieh¹, Ilia Sucholutsky², Pol van Rijn³, Nori Jacoby³, Thomas L. Griffiths^{1,2}

¹Department of Psychology, Princeton University

²Department of Computer Science, Princeton University

³Computational Auditory Perception Group, Max Planck Institute for Empirical Aesthetics

{raja.marjieh, is2961, tomg}@princeton.edu; {nori.jacoby, pol.van-rijn}@ae.mpg.de

Abstract

Understanding the extent to which the perceptual world can be recovered from language is a fundamental problem in cognitive science. We reformulate this problem as that of distilling psychophysical information from text and show how this can be done by combining large language models (LLMs) with a classic psychophysical method based on similarity judgments. Specifically, we use the prompt auto-completion functionality of GPT3, a state-of-the-art LLM, to elicit similarity scores between stimuli and then apply multidimensional scaling to uncover their underlying psychological space. We test our approach on six perceptual domains and show that the elicited judgments strongly correlate with human data and successfully recover well-known psychophysical structures such as the color wheel and pitch spiral. We also explore meaningful divergences between LLM and human representations. Our work showcases how combining state-of-the-art machine models with well-known cognitive paradigms can shed new light on fundamental questions in perception and language research.

Keywords: perception, representation, natural language processing, artificial intelligence, psychology

Introduction

Imagine that you were selected to be part of a space expedition aimed at studying a newly discovered alien species. You are the chief cognitive scientist on board and your task is to understand the perceptual system of that species. You arrive at the planet and, to your dismay, discover that its inhabitants are long departed and the only thing they left behind is a huge archive of text. What can you do? How much of the perceptual world of that species can you recover based on text alone? Versions of this question have occupied philosophers for centuries (Hume, 1740; Locke, 1847), and recent psychological research on visual knowledge in congenitally blind individuals (Kim, Elli, & Bedny, 2019; Kim, Aheimer, Montané Manrara, & Bedny, 2021; Mamus, Speed, Rissman, Majid, & Özyürek, 2023) and on cross-modal and cross-system alignment between semantic representations (Aho, Roads, & Love, 2023; Marjieh, van Rijn, et al., 2022; Goldstone & Rogosky, 2002) provide glimpses into the rich perceptual content of language and its influence on perception (see also, Lupyan, Rahman, Boroditsky, and Clark (2020); Thompson, Roberts, and Lupyan (2020)).

But how can the amount of information that language provides about perception be quantified? Here we propose to do so by recasting the problem into that of distilling quantitative psychophysical measures from textual data. To make

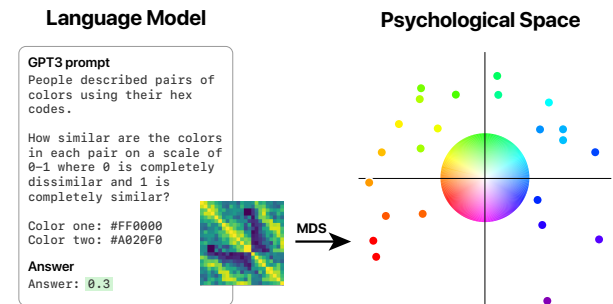


Figure 1: Schematic of the similarity extraction procedure from a language model through prompt engineering along with the resulting similarity matrix and its MDS solution and a color wheel for comparison.

this more concrete, in order to empirically study the psychophysics of a certain domain of stimuli, such as color, one needs to translate the physical characteristics of those stimuli, e.g., their spectral wavelengths, into psychophysical quantities that characterize their perceived qualities such as their degree of similarity (Shepard, 1980) and discriminability (Green, Swets, et al., 1966). These quantities are then used to uncover the underlying psychological organization of those stimuli, for example, through multidimensional scaling (MDS) (Shepard, 1980) whereby stimuli are embedded as points in a geometric space such that their distance reflects their similarity. Translating a corpus of text into these distilled metrics, however, is a hard problem. To address this, we turn to the fast growing field of natural language processing, and in particular to large language models such as GPT3 (Brown et al., 2020). These models provide a way to gain insight into this classic problem because they are trained on massive text corpora reflecting a substantial chunk of human language and they can be queried in a way that is analogous to humans. The latter property provides a way to apply psychophysical paradigms to these models, directly eliciting numerical similarity judgments that can be analyzed as if they came from human participants.

We test this approach on six standard psychophysical domains, namely, colors (Ekman, 1954), pitch (Shepard, 1982), vocal consonants (G. A. Miller & Nicely, 1955), loudness (Kornbrot, 1978), timbre (Esling, Bitton, et al., 2018)

and taste (Hettinger, Gent, Marks, & Frank, 1999) and show how the resulting judgments strongly correlate with human data and recover well-known psychological representations. In addition, we provide meaningful explanations for cases in which human and machine representations diverge. The paper proceeds as follows: in the next section we review the relevant research on this problem. We then describe our approach for eliciting similarity judgments from LLMs in further detail. We next turn to the methodological details and stimulus specification as well as human data, followed by our results. We conclude with a discussion of our findings.

Background

The Perceptual Content of Language

Multiple lines of psychological research contribute to our current understanding of the perceptual content of language. First, recent studies involving congenitally blind individuals (CBIs) who have no direct visual experience suggest that they possess in-depth understanding of object color (Kim et al., 2021) as well as of animal appearance (Kim et al., 2019) that is shared with sighted individuals. For example, by comparing the performance of CBIs against that of sighted participants across a battery of conceptual tasks, Kim et al. (2021) demonstrated that CBIs make similar intuitive generalizations to sighted individuals, such as that two artifacts with functional colors like stop signs are more likely to have similar colors than two items with nonfunctional colors like cars. This suggests that even though CBIs have no first-hand experience of color, they are still able to develop rich causal theories of that domain simply through linguistic communication with sighted individuals.

Second, research on cross-modal alignment provides strong evidence for the fact that linguistic conceptual representations tend to align nicely with non-linguistic perceptual representation. For example, Marjeh, van Rijn, et al. (2022) showed that perceptual similarity judgments over pairs of stimuli across different modalities such as images, audio and video can be efficiently predicted by crowdsourcing text descriptions and then using word embedding models to generate numerical predictions. Likewise, Aho et al. (2023) provide evidence for the fact that children’s early concepts are learned via a process of system alignment whereby mappings are inferred between linguistic and visual systems. Crucially, however, all of the aforementioned studies are either predominantly concerned with the visual modality due to their reliance on rare participant pools like CBIs, or with complex concepts and composite stimuli. The question regarding more basic psychophysical content such as that of pitch, therefore, remains open.

Large Language Models

Recent years have witnessed tremendous progress in natural language processing (Brown et al., 2020; Devlin, Chang, Lee, & Toutanova, 2018; Radford et al., 2021; Ramesh, Dhariwal, Nichol, Chu, & Chen, 2022). This has been in part due to sig-

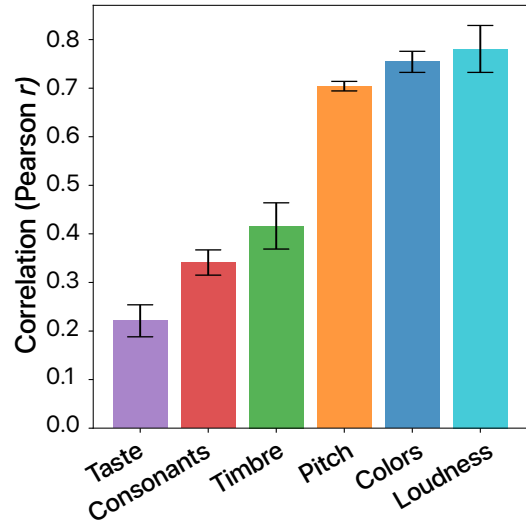


Figure 2: Pearson correlations between the GPT3-based and human similarity matrices across the different stimulus domains. Error bars indicate 95% confidence intervals bootstrapped over GPT3 samples with 1,000 bootstraps.

nificant advances in the training and scaling of large language models. Language models are a type of deep neural models that acquire linguistic representations by learning to predict the next word or a masked-out word given a linguistic context (also known more broadly as autoregressive models). This training scheme is often implemented using what is known as the transformer architecture (Devlin et al., 2018; Brown et al., 2020). The key idea behind transformers is that they possess an attention mechanism which learns to differentially reweight different parts of the linguistic input depending on its relevance for the task being considered.

Autoregressive models in general, and transformers in particular, have been at the center of many recent breakthroughs in machine learning including multimodal models such as DALLE2 (Ramesh et al., 2022), as well as massive language models like GPT3 (Brown et al., 2020) and its recent chatbot adaptation ChatGPT¹. The rapid increase in compute power allowed for training models like GPT3 with approximately 10^{11} parameters and datasets comprising hundreds of billions of words. These datasets include among other, Common Crawl², a corpus of raw web-page data and metadata collected over 8 years of web crawling, as well as online knowledge aggregation platforms like Wikipedia and Reddit. Crucially, the generative nature of GPT3 when combined with very large training sets, endows it with human-level text completion and question answering capabilities. In this work we leverage this property to elicit psychophysical judgments in a manner analogous to humans. We will describe this next.

¹<https://openai.com/blog/chatgpt/>

²<https://commoncrawl.org/>

Eliciting Similarity Judgments Through Prompt Engineering

The key insight behind extracting similarity judgments from language models relies in the observation that this can be achieved by creating a carefully crafted prompt that is given to the model to complete, a process known as prompt engineering (Liu et al., 2023). In this case, we created a prompt that gives some physical or semantic specifications of a pair of stimuli and constrains the model’s response (or more precisely, its auto-complete functionality) to be a numerical value capturing the similarity between them. This procedure is shown in Figure 1. Suppose, for example, that we would like to elicit similarity judgments over color pairs. To indicate which colors we are interested in we can use their hex color code, a coding convention common in HTML documents (and thus very frequent in the training set of GPT3) that specifies unique colors through 6 symbols. Given that coding, we can construct a prompt that introduces the context and the type of answer expected. Specifically, we can write for context: *“people described pairs of colors using their hex code.”*, then we can specify the question and response type: *“how similar are the colors in each pair on a scale of 0-1 where 0 is completely dissimilar and 1 is completely similar?”*. Then we can specify the color pair and a placeholder for the answer, say, *“Color one: #FF0000. Color two: #A020F0. Rating:”*. The similarity judgment is then generated by sampling from the conditional distribution over completions given the aforementioned prompt, and the model would fill in the rating, e.g. *“Rating: 0.3”*. By repeating this process multiple times over different color pairs from a set of interest c_1, \dots, c_N we can construct a similarity matrix where each element s_{ij} would correspond to the similarity score between colors c_i and c_j . At this point, we can study the properties of this matrix using all the standard tools of analysis we have from perception research (Shepard, 1980). In particular, we can apply MDS to reveal the underlying organization of the stimuli, or in other words, their corresponding psychological space (Figure 1).

Methods

In what follows, we will describe the details of our approach for generating, validating and analyzing the GPT3 similarity data against six perceptual datasets.

Stimuli

The six human similarity datasets we considered come in two flavors – direct (dis-)similarity ratings and confusion matrices – and from two sources – previous psychological studies from the literature and newly collected datasets. Confusion matrices provide an alternative way to compute similarity scores between stimuli by counting the number of times a stimulus x is confused for a stimulus y . By normalizing the counts one gets confusion probabilities p_{xy} which can be converted into similarity scores using the formula $s_{xy} = \sqrt{p_{xy}p_{yx}/p_{xx}p_{yy}}$ (Shepard, 1987; Sims, 2018).

Colors. This dataset was taken from Ekman (1954) (also reproduced in Shepard (1980)) and comprised direct similarity judgments across a set of 14 colors with wavelengths in the range 434 – 674 nanometers.³

Pitch. We collected this dataset ourselves through an online experiment (see details below). It contains similarity judgments over pairs of 25 harmonic complex tones (10 partials and 3dB/octave roll-off) over a two octave range from C4 (60 MIDI; 261.626 Hz) to C6 (84 MIDI; 1046.502 Hz). The pitch values were separated by 1 semitone steps to account for the fact that pitch perception is logarithmic (Jacoby et al., 2019) where the mapping between frequencies f in Hertz and pitch p in semitones are given by $p = 12 \log_2 f / 440 + 69$.

Vocal Consonants. This dataset was also collected via an online study (see below) and comprised similarity judgments over 16 recordings of vocal consonants taken from the International Phonetic Association⁴. The vocal consonants considered were b (**bay**), p (**pay**), m (**may**), n (**no**), g (**go**), k (**cake**), d (**die**), t (**tie**), f (**fee**), v (**vow**), s (**so**), θ (**thigh**), ð (**they**), ʒ (**Jacques**), and ʃ (**show**). The recordings came from two speakers, one male and one female.

Loudness. We accessed this dataset via Sims (2018) which itself takes the data from Kornbrot (1978). The dataset comes in the form of a confusion matrix over 8 pure tones of different loudness values ranging from 71.1 to 74.6 decibels.

Taste. This data was also accessed via Sims (2018) and is taken from Hettinger et al. (1999). The data comes in the form of a confusion matrix over 10 flavors described to participants as salt, salt-substitute, MSG, quinine, acid, sugar, artificial sweetener, salt-sugar, acid-sugar, quinine-sugar. Note that unlike the previous datasets there is no simple physical specification of the stimuli being complex, which is also the case for timbre. Nevertheless, we thought that considering them would be informative.

Timbre. This dataset was assembled in Esling et al. (2018). It comprises dissimilarity judgments over 12 instrument timbres: clarinet, saxophone, trumpet, cello, French horn, oboe, flute, English horn, bassoon, trombone, violin and piano.

Behavioral Experiments

To collect similarity judgments over pitch and vocal consonants we deployed two online experiments on Amazon Mechanical Turk (AMT).⁵ The recruitment and experimental pipelines were automated using PsyNet (Harrison et al., 2020), a modern framework for experiment design and deployment which builds on the Dallinger⁶ platform for recruitment automation. Overall, 186 participants completed the pitch study and 64 participants completed the vocal consonants study. Participants were recruited from the United States, were paid \$9-12 USD per hour, and provided informed

³We convert wavelengths into RGB using the script at <https://hasanyavuz.ozderya.net/?p=211> and then we use the ‘webcolors’ Python package to convert into hex codes.

⁴<https://www.internationalphoneticassociation.org/>

⁵<https://www.mturk.com/>

⁶<https://dallinger.readthedocs.io/en/latest/>

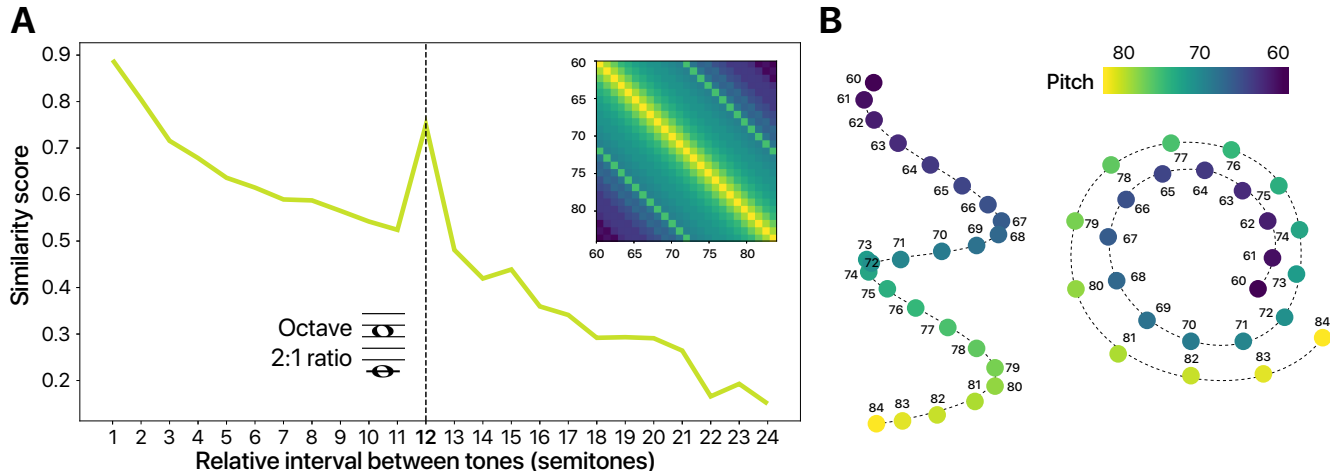


Figure 3: GPT3-generated similarity over pitch pairs. **A.** Mean similarity score over pairs of pitch values separated by a fixed interval and their smoothed similarity matrix. **B.** The corresponding MDS solution exhibiting a helical geometry with twists corresponding to octave intervals (12 semitones).

consent as approved by the Princeton IRB (#10859) and the Max Planck Ethics Council (#2021_42).

To ensure data quality, participants had to pass a standardized headphone check (Woods, Siegel, Traer, & McDermott, 2017) and were required to have successfully completed at least 3000 tasks on AMT. Upon passing the prescreening stage, participants were randomly assigned to rate the similarity between different pairs of stimuli and provided numerical judgments on a 7-Likert scale ranging from 0 (completely dissimilar) to 6 (completely similar). In the pitch experiment, participants provided an average of 80 judgments, and in the vocal consonants experiment an average of 55 judgments.

GPT3 Prompt Elicitation

For each dataset, we designed a tailored prompt template that could be filled in with in-context examples and the pair of target stimuli for which we would want GPT3 to produce a similarity rating. The general structure of this template was: one sentence describing the dataset, one sentence describing the similarity rating task and scale, three sets of three lines each corresponding to two stimuli and their actual similarity rating taken from behavioral experiments which serve as few-shot in-context examples, and an additional set of three lines corresponding to the pair of target stimuli and an associated empty rating field for GPT3 to fill in. See Figure 1 for a shortened prompt; the full prompt we use has the additional three sets of in-context examples described above which look like the last three lines of the shortened prompt but with the rating field filled-in. These were necessary to ensure that the model provided numerical values, and in all cases consisted of three fixed and randomly chosen comparisons so that most of the content was left for the model to produce. For each pair of target stimuli, we elicited ten ratings from GPT3. Across all repetitions of all pairs of stimuli for a given dataset, we used only the same three in-context examples to ensure that

the model is exposed to only a very small fraction of the similarity judgments against which its ratings will be compared. When querying GPT3, we used the official OpenAI text completion API with the default temperature parameter (0.7) and the most recent model (`text-davinci-003`). For each repetition, we take the single highest-probability text completion predicted by GPT3 to be its rating and discard any non-numeric responses.

Analysis and Evaluation

We quantified model performance by computing the Pearson r correlation coefficient between the GPT3-based and human-based similarity matrices for each domain (only the upper triangular parts were considered to account for the fact that those matrices are symmetric). In addition, MDS embeddings were computed using `sklearn.Manifold.MDS` in the `scikit-learn` Python library.⁷ We first applied metric MDS to the data and then fed the resulting embeddings as a starting value for a non-metric MDS. We used a maximum iteration limit of 10,000 and convergence tolerance of $1e-100$.

Results

The correlations between the GPT3-based similarity matrices and their human counterparts are summarized in Figure 2. As can be seen, in some of these domains, namely, loudness ($r = .78$, 95% CI [.73, .83]), colors ($r = .75$, 95% CI [.73, .76]) and pitch ($r = .70$, 95% CI [.69, .71]) the correlation are particularly high. As for the other three modalities the correlation range from moderate in the case of timbre ($r = .42$, 95% CI [.37, .46]) to low but non-trivial in vocal consonants ($r = .34$, 95% CI [.32, .37]) and taste ($r = .22$, 95% CI [.19, .25]). This provides clear evidence that the prompt-

⁷<https://scikit-learn.org/stable/about.html>

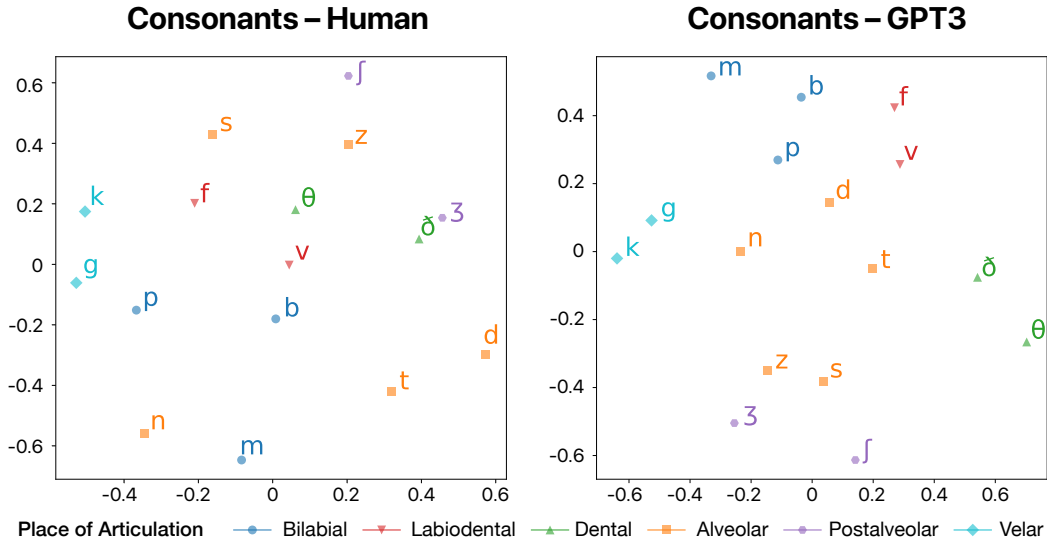


Figure 4: MDS solutions for human- and GPT3-based similarity judgments over vocal consonants colored based on the production group they belong to in the vocal tract.

based elicitation approach is indeed predictive of human psychophysical data.

To extend our investigation beyond simple correlational analysis, let us focus next on three domains that proved to be particularly informative, namely, colors, pitch and vocal consonants. Colors and pitch are extensively studied psychophysical domains with well-known geometric representations, namely, the color wheel and the pitch spiral, and it is natural to ask whether these geometric structures can be recovered from the GPT3 data. To that end, we extended the color dataset to 23 color stimuli by interpolating between the colors in the original dataset to get a denser coverage. We then recomputed the similarity matrix and applied MDS to it. The resulting geometric organization is shown in Figure 1, and it indeed neatly recovers the color wheel.

Next, we turn to GPT3 pitch data. Recall that the pitch spiral reflects the simple psychological fact that listeners tend to perceive tones with frequencies that are in 2:1 ratio to each other, i.e. $f_1 = 2f_2$ (or 12 semitones on a logarithmic scale), as equivalent (or at least of heightened similarity) (Shepard, 1982). This phenomenon is known as octave equivalence and has deep origins in psychoacoustic theories (Marjeh, Harrison, Lee, Deligiannaki, & Jacoby, 2022). To see whether the elicited data is indeed sensitive to this relation we computed the average similarity score over groups of tones that are separated by a fixed interval. The resulting marginal and its corresponding smoothed similarity matrix are shown in Figure 3A. We can see that apart from the linear decay as a function of separation (i.e. tones that are far apart in log-frequency are perceived as increasingly dissimilar) there is a clear spike precisely at 12 semitones which corresponds to tones separated by an octave. Applying MDS to the smoothed similarity matrix reveals a clear helical structure with twists that correspond to precisely 12 semitone separations (i.e., octaves).

Finally, let us take a look at a domain in which we found relatively low correlation with human data, namely, vocal consonants. Here it is natural to ask whether the performance is due to the model providing poor data or whether it is something more meaningful. To interrogate this, we applied MDS to the human and machine data and plotted them in Figure 4. As it turns out, the resulting GPT3 MDS space is far from random and in fact reflects a well-known organization of vocal consonant groups based on the nature of their production in the vocal tract. This can be readily seen by coloring the different points based on the production group they belong to. Crucially, while interpretable this representation misses important auditory similarities across different production groups. This is demonstrated most transparently in the case of the consonants *m* and *n* which sound very similar (hence being close in the human MDS space) but are quite separated in GPT3 MDS space since they belong to different production groups (bilabial and alveolar, respectively). A similar case can be seen for the consonants *ʒ* and *ð*. Thus, we see that the low correlation really arises from divergent but meaningful representations in humans and machines. We conclude this section by presenting the MDS solutions for the remaining domains in Figure 5. As in the case with vocal consonants, we see that the resulting GPT3 solutions are very interpretable. In the case of timbre, in particular, we see a clear organization of the different timbres based on their instrument family, with string instruments (violin and cello), wind instruments (English horn, oboe, flute, saxophone, bassoon, and clarinet), and brass instruments (trumpet, trombone, and French horn), falling close to each other, respectively, and the piano being isolated. Interestingly, the model also maps English horn and French horn close to each other even though the instruments sound pretty different and they belong to different families. As for taste, there is some sensible organization too, how-

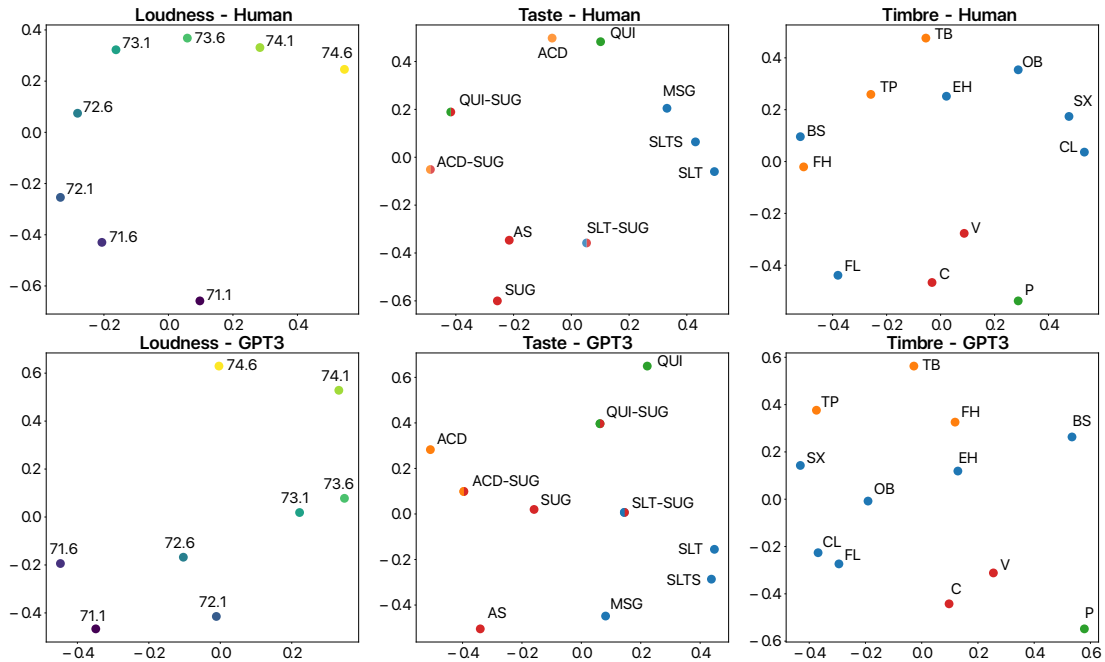


Figure 5: MDS solutions for human- and GPT3-based similarity judgments for loudness, taste, and timbre. Loudness stimuli are gradient colored based on their value. Taste stimuli are colored based on the groups: sweet (sugar; SUG, artificial sweetener; AS), bitter (quinine; QUI), acidic (Acid; ACD) and salty (salt; SLT, salt substitute; SLTS, MSG). Timbre stimuli are colored based on instrument family, namely, string (violin; V, cello; C), wind (flute; FL, bassoon; BS, English horn; EH, saxophone; SX, clarinet; CL, oboe; OB), brass (trombone; TB, French horn; FH, trumpet; TP) and piano (P) which forms its own group.

ever, the model clearly misses some simple similarities like the fact that an artificial sweetener is similar to sugar, which suggests a word-based representation. Finally, the MDS solution for loudness exhibits the expected gradient from low to high decibel intensity.

Discussion

In this work we showed how recent advances in large language models and, in particular, their flexible prompt engineering capabilities provide an elegant way to extract clear quantitative psychophysical signals from pure text corpora. This helped us shed light on deep questions concerning the perceptual content of language. We found that not only does the extracted data correlate highly with human judgments, but it also recovers well-known psychophysical structures from the literature such as the cyclical and helical organizations of color and pitch. We also found that divergences can arise due to meaningful differences between the machine and human representations (e.g., production vs. perception).

This work has some limitations that point to important directions for future research. First, the extent to which the derived signal from the language model can be called “knowledge” should be used with caution and remains to be seen. Indeed, it might be that the model simply learns to produce answers that merely sound sensible. To interrogate this, one could prompt the model in different ways in order to probe its representations from different angles, e.g., by consider-

ing other psychophysical metrics such as discriminability and seeing whether the structure they produce is consistent. Second, another promising avenue could utilize the powerful conversational interface of the recently released ChatGPT model in order to provide explicit explanations for its similarity scores. As a proof of concept, we asked ChatGPT to provide such explanations for color, pitch and vocal consonants comparisons. Remarkably, the model resorts to psychophysical constructs such as the color wheel, the octave equivalence and production-based representations for vocal consonants. For example, in the case of pitch the model wrote “*Note 1 and Note 2 have a frequency ratio of 2:1. In music, this is known as an octave, and the notes in an octave are considered to be completely similar.*” Third, in this work we focused on the leading symmetric and aggregate component of similarity matrices. However, one could also explore whether the model also captures secondary features such as response variability, asymmetric relations and respects which are all well studied in the literature (Tversky, 1977). Finally, our approach could be equally applied to other non-perceptual domains such as number representations (K. Miller & Gelman, 1983) and physical understanding (Lake, Ullman, Tenenbaum, & Gershman, 2017) and it would be interesting and informative to explore the extent it aligns with humans in these settings. We hope to explore these directions in future research.

Data Availability. All data used in this work can be accessed via the following link: <https://tinyurl.com/2p89pwzz>.

Acknowledgments. This work was supported by an NSERC fellowship (567554-2022) to IS.

References

- Aho, K., Roads, B., & Love, B. C. (2023). Signatures of cross-modal alignment in children’s early concepts. *PsyArXiv preprint 10.31234*.
- Brown, T., Mann, B., Ryder, N., Subbiah, M., Kaplan, J. D., Dhariwal, P., ... others (2020). Language models are few-shot learners. *Advances in neural information processing systems*, 33, 1877–1901.
- Devlin, J., Chang, M.-W., Lee, K., & Toutanova, K. (2018). BERT: Pre-training of deep bidirectional transformers for language understanding. *arXiv preprint arXiv:1810.04805*.
- Ekman, G. (1954). Dimensions of color vision. *The Journal of Psychology*, 38(2), 467–474.
- Esling, P., Bitton, A., et al. (2018). Generative timbre spaces: regularizing variational auto-encoders with perceptual metrics. *arXiv preprint arXiv:1805.08501*.
- Goldstone, R. L., & Rogosky, B. J. (2002). Using relations within conceptual systems to translate across conceptual systems. *Cognition*, 84(3), 295–320.
- Green, D. M., Swets, J. A., et al. (1966). *Signal detection theory and psychophysics* (Vol. 1). Wiley New York.
- Harrison, P., Marjeh, R., Adolphi, F., van Rijn, P., Anglada-Tort, M., Tchernichovski, O., ... Jacoby, N. (2020). Gibbs sampling with people. In H. Larochelle, M. Ranzato, R. Hadsell, M. F. Balcan, & H. Lin (Eds.), *Advances in neural information processing systems* (Vol. 33, pp. 10659–10671). Curran Associates, Inc.
- Hettinger, T. P., Gent, J. F., Marks, L. E., & Frank, M. E. (1999). Study of taste perception. *Perception & Psychophysics*, 61, 1510–1521.
- Hume, D. (1740). *An abstract of a treatise of human nature, 1740*. CUP Archive.
- Jacoby, N., Undurraga, E. A., McPherson, M. J., Valdés, J., Ossandón, T., & McDermott, J. H. (2019). Universal and non-universal features of musical pitch perception revealed by singing. *Current Biology*, 29(19), 3229–3243.
- Kim, J. S., Aheimer, B., Montané Manrara, V., & Bedny, M. (2021). Shared understanding of color among sighted and blind adults. *Proceedings of the National Academy of Sciences*, 118(33), e2020192118.
- Kim, J. S., Elli, G. V., & Bedny, M. (2019). Knowledge of animal appearance among sighted and blind adults. *Proceedings of the National Academy of Sciences*, 116(23), 11213–11222.
- Kornbrot, D. E. (1978). Theoretical and empirical comparison of Luce’s choice model and logistic Thurstone model of categorical judgment. *Perception & Psychophysics*, 24, 193–208.
- Lake, B. M., Ullman, T. D., Tenenbaum, J. B., & Gershman, S. J. (2017). Building machines that learn and think like people. *Behavioral and brain sciences*, 40, e253.
- Liu, P., Yuan, W., Fu, J., Jiang, Z., Hayashi, H., & Neubig, G. (2023). Pre-train, prompt, and predict: A systematic survey of prompting methods in natural language processing. *ACM Computing Surveys*, 55(9), 1–35.
- Locke, J. (1847). *An essay concerning human understanding*. Kay & Troutman.
- Lupyan, G., Rahman, R. A., Boroditsky, L., & Clark, A. (2020). Effects of language on visual perception. *Trends in cognitive sciences*, 24(11), 930–944.
- Mamus, E., Speed, L. J., Rissman, L., Majid, A., & Özyürek, A. (2023). Lack of visual experience affects multimodal language production: Evidence from congenitally blind and sighted people. *Cognitive Science*, 47(1), e13228.
- Marjeh, R., Harrison, P. M., Lee, H., Deligiannaki, F., & Jacoby, N. (2022). Reshaping musical consonance with timbral manipulations and massive online experiments. *bioRxiv*, 2022–06.
- Marjeh, R., van Rijn, P., Sucholutsky, I., Sumers, T. R., Lee, H., Griffiths, T. L., & Jacoby, N. (2022). Words are all you need? Capturing human sensory similarity with textual descriptors. *arXiv preprint arXiv:2206.04105*.
- Miller, G. A., & Nicely, P. E. (1955). An analysis of perceptual confusions among some English consonants. *The Journal of the Acoustical Society of America*, 27(2), 338–352.
- Miller, K., & Gelman, R. (1983). The child’s representation of number: A multidimensional scaling analysis. *Child development*, 1470–1479.
- Radford, A., Kim, J. W., Hallacy, C., Ramesh, A., Goh, G., Agarwal, S., ... others (2021). Learning transferable visual models from natural language supervision. In *International conference on machine learning* (pp. 8748–8763).
- Ramesh, A., Dhariwal, P., Nichol, A., Chu, C., & Chen, M. (2022). Hierarchical text-conditional image generation with clip latents. *arXiv preprint arXiv:2204.06125*.
- Shepard, R. N. (1980). Multidimensional scaling, tree-fitting, and clustering. *Science*, 210(4468), 390–398.
- Shepard, R. N. (1982). Geometrical approximations to the structure of musical pitch. *Psychological Review*, 89(4).
- Shepard, R. N. (1987). Toward a universal law of generalization for psychological science. *Science*, 237(4820), 1317–1323.
- Sims, C. R. (2018). Efficient coding explains the universal law of generalization in human perception. *Science*, 360(6389), 652–656.
- Thompson, B., Roberts, S. G., & Lupyan, G. (2020). Cultural influences on word meanings revealed through large-scale semantic alignment. *Nature Human Behaviour*, 4(10), 1029–1038.
- Tversky, A. (1977). Features of similarity. *Psychological Review*, 84(4), 327.
- Woods, K. J., Siegel, M. H., Traer, J., & McDermott, J. H. (2017). Headphone screening to facilitate web-based auditory experiments. *Attention, Perception, & Psychophysics*, 79, 2064–2072.