

Less, but Stronger: On the Value of Strong Heuristics in Semi-supervised Learning for Software Analytics

Huy Tu · Tim Menzies

Received: date / Accepted: date

Abstract In many domains, there are many examples and far fewer labels for those examples; e.g. we may have access to millions of lines of source code, but access to only a handful of warnings about that code. In those domains, semi-supervised learners (SSL) can extrapolate labels from a small number of examples to the rest of the data.

Standard SSL algorithms use “weak” knowledge (i.e. those not based on specific SE knowledge) such as (e.g.) co-train two learners and use good labels from one to train the other.

Another approach of SSL in software analytics is potentially use “strong” knowledge that use SE knowledge. For example, an often-used heuristic in SE is that unusually large artifacts contain undesired properties (e.g. more bugs). This paper argues that such “strong” algorithms perform better than those standard, weaker, SSL algorithms. We show this by learning models from labels generated using weak SSL or our “stronger” FRUGAL algorithm. In four domains (distinguishing security-related bug reports; mitigating bias in decision making; predicting issue close time; and (reducing false alarms in static code warnings), FRUGAL required only 2.5% of the data to be labeled yet out-performed standard semi-supervised learners that relied on (e.g.) some domain independent graph theory concepts.

Hence, for future work, we strongly recommend the use of strong heuristics for semi-supervised learning for SE applications. To better support other researchers, our scripts and data are on-line at <https://github.com/HuyTu7/FRUGAL>.

Keywords Semi-Supervised Learning · Effort-Aware Software Analytics

H. Tu, and T. Menzies
Department of Computer Science,
North Carolina State University,
Raleigh, USA
E-mail: huyqtu7@gmail.com and timmm@ieee.org

1 Introduction

Standard software analytics uses supervised learning where models are learned from data labelled with (e.g.) “this is/is not a buggy commit”. Hence, in standard analytics, *data labeling* is a vital initial task. But manual labelling can be very error prone [100, 81, 70, 75, 42]). Standard practice [72, 51, 26, 65, 62, 48, 43] is to label a commit “bug-fixing” if the commit text has keywords (e.g.) “bug”, “fix”, “error”, “patch”, etc. Such keyword-based approaches often misclassify a commit (i.e., a false-positive like “documentation updates and fixes”) [85, 84, 81]. Worse still, labelling can be very expensive; e.g. manually labelling the 500 projects used in one study [81] needs 39,000 hours (which, on a crowd-sourced platform, would cost \$320,000).

Accordingly, this paper explores ways to better (and faster and cheaper and more accurately) label examples. We will contrast two approaches that use *weak* or *strong* heuristics. In the AI literature [73], “weak heuristics” are general purpose algorithms that make little-or-no use of domain knowledge. Examples of such weak heuristics algorithms are depth-first-search or simple theorem provers. Strong heuristics, on the other hand, exploit specific domain knowledge. For example, if you have lost your car keys, a weak depth-first search might lead to every room in the house. A better approach might be to first apply the strong heuristic “look behind the couch cushions”.

We think that this strong-versus-weak distinction is relevant and useful for software analytics. For example, consider the problem of reducing the cost of data labelling:

- One solution to this approach is to use the weak heuristics of §4.2; i.e. cluster the data using some algorithms, label just a few items in each cluster, then use graph-theoretic methods to automatically propagate those labels to nearby clusters.
- Another approach, which we call FRUGAL, makes no use of graph theory, nor co-training nor any of the other techniques seen in standard AI semi-supervised algorithms. Instead, our FRUGAL tool is dependent on the following strong SE heuristic:



Big things tend to have more problems.

That is, unusually large and general methods are more likely to be buggy, take longer to resolve issues, may hide more security bugs, may generate more true positive static code warnings, etc.

This paper makes the case that strong heuristics are valuable and generality across a broad range of SE tasks. To make that case, we show here that we can have successfully apply FRUGAL’s strong heuristic to:

- Distinguishing security-related bug reports;
- Mitigating bias in decision making;
- Predicting issue close time; and
- Reducing false alarms in static code warnings.

Table 1: For self-admitted technical debt identification task, here are some examples of different labels from the original datasets curated by Maldonado and Shihab [56] and the updated datasets by Yu et al. [100].

Project	Comment Text	Original Label [56]	Yu et al.'s Label [100]
Apache Ant	//TODO Test on other versions of weblogic //TODO add more attributes to the task, to take care of all jspc options //TODO Test on Unix	no	yes
ArgoUML	// skip backup files. This is actually a workaround for the cpp generator, which always creates backup files (it's a bug).	no	yes
JFreeChart	// FIXME: we've cloned the chart, but the dataset(s) aren't cloned and we should do that	no	yes
JRuby	// All errors to sysread should be SystemCallErrors, but on a closed stream Ruby returns an IOError. Java throws same exception for all errors so we resort to this hack...	no	yes
Columba	// FIXME r.setPos();	no	yes

In all those studies, our strong SE heuristic typically defeated the weaker graph-theoretic heuristics used by standard semi-supervised learning methods Shu et al. [76], Chakraborty et al. [28], Yang et al. [94]. Better yet, these results were achieved after using merely 2.5% (i.e. $\frac{1}{40}$ th) of the labels in the data.

We say that our results are interesting in two ways:

- It shows that we can reduce the cost of labelling data by a factor of $\frac{100}{2.5} = 40$.
- It shows that specific SE knowledge can be more useful (for SE applications) than domain-independent notions of co-training or label-spreading.

To structure our work, we investigate the following research questions:

RQ1: Can we still reduce the cost of labeling for static warning analysis? Due to data duplication and features leakage, static warning analysis's data from Tu and Menzies [82] is problematic. Thanks to Kang et al.[49], the updated data is utilized here to revalidate FRUGAL's effectiveness against the SOTA for adoptable static warning identification.



Result:

FRUGAL exceeds the SOTA SVM (EMSE'20 [94] in identifying adoptable static warnings). FRUGAL requires only 2.5% at median of the train data to be labeled while using 97.5% less information than the SOTA SVM.

RQ2: How well does FRUGAL distinguish security bug reports?

From our investigation of various $L\%$ values in this task, FRUGAL's performance still suffice at 2.5%. FRUGAL outshines the SOTA solution in EMSE'21 in 2/3 metrics. However, the improvement is relatively less impressive in comparison to previously reported in issue close time prediction and static warning analysis due to highly imbalanced data nature and insufficient training data.

**Result:**

FRUGAL exceeds the SOTA SWIFT (EMSE'21 [76] in distinguishing security bug reports). FRUGAL requires only 2.5% at median of the train data to be labeled while using 97.5% less information than the SOTA SWIFT.

RQ3: Can FRUGAL better mitigate biases in SE ML models with less data? From our investigation of various $L\%$ values in this task, FRUGAL's performance still suffice at 2.5%. In fairness management of machine learning software, FRUGAL outshines the SOTA solution in FSE'21 in 7/9 metrics. This analysis indicates how FRUGAL can be generalized to non-SE tasks if their data does share similar nature as SE data.

**Result:**

Even with non-SE data, FRUGAL still exceeds the SOTA FAIR.SMOTE (FSE'21 [28] in managing fairness in machine learning software). FRUGAL requires only 2.5% at median of the train data to be labeled when being compared against unsupervised learning while using 97.5% less information than both SOTA methods.

RQ4: What labeling method would we recommend for SE data? Summarizing all the above results, here we contrast the Frugal strong-heuristic with weak-heuristic methods from standard AI (co-training, self-training, label propagation, and label spreading and all the methods described in §4.2). We will conclude that:

**Result:**

FRUGAL outperforms all standard semi-supervised learning method from the machine learning community across four software analytics tasks. Moreover, this ineffectiveness is hypothetically due to the (1) highly imbalanced data nature that is not often observed in standard ML tasks; and (2) these standard SSL methods does not tap into that SE domain knowledge that FRUGAL has access to.

1.1 Contributions

This work makes several contributions:

1. This work demonstrates the benefits of Semi-Supervised Learning for Software Analytics as applied to software fairness, security bug reports, static warning analysis, and issue close time.
2. In the initial conference version of this paper [80], some of the data (for the static warning analysis) was recently challenged (in a forthcoming ICSE'22 paper) due to data quality issues. Here, we take the fixed data resulting from that refutation study [50] and repeated all the prior analysis.

3. We extend FRUGAL’s effectiveness from SE data to non-SE data (i.e., software fairness). Specifically, FRUGAL is still able to perform well when non-SE data’s intrinsic dimensionality is low.
4. Our work incorporates FRUGAL to software fairness and security bug reports with more than 50 datasets, ten times more than the previous study. FRUGAL still outperforms both tasks while using 97.5% less data.
5. Our and previous work conclusions are further generalized and strengthened by contrasting against the standard SSL methods from the machine learning community.
6. To better support other researchers our scripts and data are on-line at <https://github.com/HuyTu7/FRUGAL>.

1.2 Connection to Prior Work

This paper studies four domains:

1. Distinguishing security-related bug reports;
2. Mitigating bias in decision making;
3. Predicting issue close time; and
4. Reducing false alarms in static code warnings.

The analysis of items #1,#2 has not appeared before. Preliminary results on #3 and #4 appeared in an ASE’21 paper [80]. A forthcoming ICSE’22 [49] paper found that the data used for the analysis of #4 has numerous errors. Hence, this paper repeats the entire analysis of #4, but this time with the corrected data.

1.3 Structure of this Paper

The rest of this paper is structured as follows. *Section 2* discusses the motivation, background and related works. *Section 3* describes our methodology. *Section 4* focuses on our experimental design, while *Section 5* analyzes the results. *Section 6* and *7* discuss our short-comings and directions for future work, respectively.

2 Motivation and Background

2.1 Standard versus Specialized Methodology for Software Analytics?

The SE research have limited exposures to semi-supervised learning. For instance, a lot of recent semi-supervised learning works [99, 98, 83, 82, 81] within the SE community are mostly classified as one class of SSL, called self-training (such as Yarowsky [96]). Other classes can also include label propagation (such as Zhu and Ghahramani [102]), majority voting (such as Blum and Mitchell [22]), and label spreading (such as Zhou et al. [101]). Most readers to the AI

literature would come away with a common picture on how to perform semi-supervised learning based on these four standard semi-supervised learners.

So, does it suffice to apply standard semi-supervised learning techniques to the SE community? Hindle et al. [44] claimed that software programs are written by real people, which are mostly simple and rather repetitive. Hence, there are predictable statistical properties embedded within them that can be learned through statistical language models and leveraged for software engineering tasks. Consequently, they believed that standard techniques from the Natural Language Processing community can be applied to software analytics as well (e.g., code search, summarization, classification, etc). For instance, software researchers [89] have adopted and applied the SOTA attention-based neural networks [86] from the NLP community to learn source code comments to identify self-admitted technical debts.

However, in this paper, we hypothesize that it is better to not adopt off-the-shelf technique blindly, and instead, to transform the technique specific to the software analytics community. Russell et al. [73] coined strong versus weak heuristic where weak heuristic relies on general algorithms while strong heuristic leverages on specific domain knowledge. There are many examples of strong versus weak heuristic in software engineering:

- To plan for defect reduction, instead of using plausible changes (i.e., changes with some precedence in the prior releases), Peng et al. [68] focused the plans to just those attributes which change the most within a project that is specialized to this domain.
- Novielli et al. [67] reported that their sentiment analysis tool did better when trained on SE data (e.g., Stack Overflow and Jira), not the off-the-shelf New York Times corpus.
- In defect prediction research, Fu et al. [37] conducted a literature review of 50 highly cited papers in the past decade and found that 80% of the papers only applied off-the-shelf methods. Yet, when they tuned their defect predictors to the specific SE data, they did significantly better (i.e., precision changes from 0% to 60%).
- Moreover, Agrawal et al. [13] documented how SE data are not as complex as standard ML data. Hence, they leveraged that to build their own technique by “DODGE-ing” (i.e. simply steering way from settings that lead to similar conclusions) which outperformed SOTA works across several software analytics tasks.

For the rest of this paper, we check if our strong heuristic (big things tend to have more problems) lets us reason “faster” about software projects. Here, by “faster” we do not mean “less CPU time” but rather “less manual work labelling instances”.

2.2 Static Code Warning

This paper explores SSL approach with SE domain knowledge as a strong approach across four domains. Our first domain is static code warnings. The

Table 2: Distribution summary of Wang et al. [87]’s problematic data and Kang et al. [49]’s updated data. The gray cells are median values for the corresponding columns. This demonstrates 90% from previous studies [87, 95, 94, 82] are unusable and previous work’s conclusions should be assessed again.

Dataset	Features	Wang et al.’s[87] Data	Kang et al.’s[49] Data
commons	39	1511	22
phoenix	44	4524	0
mvn (maven)	47	1631	4
jmeter	49	1217	18
cass (cassandra)	55	5185	17
ant	56	2344	35
lucence	57	6684	30
derby	58	4986	458
tomcat	60	2876	184

goal of this domain is to identify such a static code warning adoptable or unadoptable. The other domains are discussed in the next few sections.

2.2.1 Background

It has been 15 years since Findbugs [16] was introduced 15 years ago as an automatic static analysis tool (ASAT) to detect bugs in Java programs. These ASATs detect potential static code defects in source code or executable files at the stage of software product development by matching code against bug patterns. These issues include common programming errors, code styling, inline comments, style violations, and questionable coding decisions, for instance, patterns of code that may dereference a null pointer. Detecting this early in the project life cycle would better save projects from technical debts.

However, the warnings generated from these tools are not guaranteed to be real bugs. Many developers do not perceive the warnings by ASATs to be relevant due to the high incidence of effective false alarms [47]. Such warnings are considered as “unadoptable” since developers just ignored them. Between 35% and 91% of the warnings generated from static analysis tools are known to be unadoptable. Hence, SE researchers have extensively studied different warnings programmers usually act upon so the tools can be made more useful by first pruning away the unadoptable warnings [49, 87, 95, 94]. They also have proposed techniques to further reduce the false alarms and focused on the identifying the actionable warnings.

Recently, Wang et al. [87] completed a systematic evaluation of the features that have been proposed in the literature, and identified 23 “Golden Features” that seemed more useful for recognizing useful static code warnings. Using these features, subsequent studies [94, 95] showed that any off-the-shelf standard machine learning techniques, e.g. SVM, can perform effectively, and that the use of a small number of training instances can train effective models. These studies have reported the performances of up to 96% Recall, 98% Precision, and 99.5% AUC. Yang et al. [94] identified the nature of these strong

results within the task of detecting actionable warnings as “intrinsically easy”. This is essentially the domain knowledge within this task specifically and SE data generally that our FRUGAL would leverage on as a strong heuristic. However, Kang et al. [49] found evidences that the data utilized by prior studies and Tu et al.’s FRUGAL have data leakage and data duplication. Data leakage involves how the ground-truth labels have leaked into the features that compute the proportion of actionable warnings. Data duplication is simply many train data instances also appear in the testing dataset. These issues threaten the conclusion validity of prior studies including half of the data in Tu et al.[82]’s study to propose FRUGAL. This reaffirms the importance of data quality and effort within SE community to motivate this study.

2.2.2 Data and Algorithm

The data for this paper originally came from a recent study by Kang et al. [49]. Table 2 summarizes the data distribution after removing the data leakages and data duplication from Wang et al. [87]. The original 30,000 data instances in Wang et al. [87]’s study were reduced to 768. Moreover, the percentage of actionable warnings within the data on average was 15% in Wang et al. [87]’s study but 39.7% in Kang et al. [49]’s study. This shows that at least 90% of the previous data is unusable and previous work should be assessed again. However, regarding the nature of static warnings, Wang et al. [87] completed a systematic evaluation of the features that have been proposed in the literature, and identified 23 “Golden Features”, i.e., the most important features for detecting actionable warnings. Their data is problematic but this is the most exhaustive research about static warning characteristics yet published. As shown in Table 3, the “golden set” features are the independent variables fall into seven categories. To assign dependent labels, we applied the methods of Liang et al. [55]. They defined a specific warning as adoptable if it is closed after the later revision interval. However, seven out of nine projects have less than 40 data instances which is below than recommended (at least 75 per class [17]). Consequently, we combine all the projects’ data together to have a sufficient amount of data for training and testing.

2.3 Security Bug Reports Categorization

Our second domain is security bug reports. In this domain, the goal is to categorize such a bug report is a security one or not.

2.3.1 Background

Security bugs have been a pressing concern within software analytics. A NIST’s report commented that “*current systems perform increasingly vital tasks and are widely known to possess vulnerabilities*” [20] where *vulnerability* is a weakness in the computational logic (e.g., code) that, when exploited, results in

Table 3: Categories of Wang et al. [87]’s 23 Golden Features which was originally 95 features spanning across 8 categories.

Category	Features
Warning Combination	warning context in method, file warning context for warning type; defect likelihood for warning pattern; discretization of defect likelihood; average lifetime for warning type;
Code characteristics	comment-code ratio; method, file depth; methods in file package;
Warning characteristics	warning pattern; type, priority; package;
File history	file age; file creation; developers;
Code analysis	parameter signature, method visibility
Code history	added LOC in file in the last 25 revisions; added LOC in package in the past 3 months;
Warning history	warning lifetime by revision;

Table 4: Different filters used in FARSEC.

Filter	Description
farsecsq	Apply the Jalali et al. [46] support function to the frequency of words found in SBRs
farsectwo	Apply the Graham version [40] of multiplying the frequency by two.
farsec	Apply no support function.
clni	Apply Closet List Noise Identification (CLNI [52]) filter to non-filtered data.
clnifarsec	Apply CLNI filter to farsec filtered data.
clnifarsecsq	Apply CLNI filter to farsecsq filtered data.
clnifarsectwo	Apply CLNI filter to farsectwo filtered data.

a negative impact on confidentiality, integrity, or availability [61]. Daily news reports increasingly sophisticated security breaches. As seen in those reports, a single vulnerability can have devastating effects. For example, the WannaCry ransomware attack [5] crippled British medical emergency rooms, delaying medical procedures for many patients. A data breach of Equifax caused many personal information lost, as many as 143 million Americans – or nearly half the country – to be compromised [10].

Developers capture and document software bugs and issues into bug reports which are submitted to bug tracking systems. For example, the Mozilla bug database maintains more than 670,000 bug reports with 135 new bug reports added each day [31]. Submitted bug reports are explicitly labeled as a security bug report (SBR) or non-security bug report (NSBR). Within such bug tracking systems, Peters et al. [69] warn that it is important to correctly identify security bug reports and distinguish them from other non-security bug

Table 5: Imbalanced characteristic of bug report data sets from FARSEC [69].

Project	Filter	Training			Testing		
		#SBRs	#BRs	SBRs(%)	#SBRs	#BRs	SBRs(%)
Chromium	train	77	20,970	0.37	115	20,970	0.55
	farsecsq		14,219	0.54			
	farsectwo		20,968	0.37			
	farsec		20,969	0.37			
	clni		20,154	0.38			
	clnifarsecsq		13,705	0.56			
	clnifarsectwo		20,152	0.38			
	clnifarsec		20,153	0.38			
Wicket	train	4	500	0.80	6	500	1.20
	farsecsq		136	2.94			
	farsectwo		143	2.80			
	farsec		302	1.32			
	clni		392	1.02			
	clnifarsecsq		46	8.70			
	clnifarsectwo		49	8.16			
	clnifarsec		196	2.04			
Ambari	train	22	500	4.40	7	500	1.40
	farsecsq		149	14.77			
	farsectwo		260	8.46			
	farsec		462	4.76			
	clni		409	5.38			
	clnifarsecsq		76	28.95			
	clnifarsectwo		181	12.15			
	clnifarsec		376	5.85			
Camel	train	14	500	2.80	18	500	3.60
	farsecsq		116	12.07			
	farsectwo		203	6.90			
	farsec		470	2.98			
	clni		440	3.18			
	clnifarsecsq		71	19.72			
	clnifarsectwo		151	9.27			
	clnifarsec		410	3.41			
Derby	train	46	500	9.20	42	500	8.40
	farsecsq		57	80.70			
	farsectwo		185	24.86			
	farsec		489	9.41			
	clni		446	10.31			
	clnifarsecsq		48	95.83			
	clnifarsectwo		168	27.38			
	clnifarsec		435	10.57			

reports. They note that software vendors ask that security bug reports should be reported directly and privately to their own engineers. These engineers then assess the bug reports and, when necessary, offer a security patch. The security bug, and its associated patch, can then be documented and disclosed via public bug tracking systems. This approach maximizes the probability that a patch is widely available before hackers exploit a vulnerability. Sometimes, bug reporters lack the security domain knowledge [39] to know when their bug is a normal bug (which can be safely disclosed) or when that bug is a security bug (that needs to be handled more discretely). Hence, lamentably, security bugs are often publicly disclosed before they can be patched [90].

2.3.2 Data and Algorithms

Peters et al. recently proposed FARSEC [69] work where they reported more success after focusing on a particular problem within the security domain. FARSEC is a technique that adds an irrelevancy pruning step to data mining in building security bug prediction models. Table 4 lists the pruners explored in the FARSEC research. The purpose of filtering in FARSEC is to remove non-security bug reports with security related keywords. To achieve this goal, FARSEC applied an algorithm that firstly calculated the probability of the keywords appearing in security bug report and non-security bug report, and then calculated the score of the keywords.

Inspired by previous works [40, 46], several tricks were also introduced in FARSEC to reduce false positives. These filters include:

- *farsectwo*: multiplying the frequency of non-security bug reports by two, i.e., to achieve a good bias.
- *farsecsq*: squaring the numerator of the support function to improve heuristic ranking of low frequency evidence.
- *CLNI* (Closet List Noise Identification) [52]: a noise detection algorithm and removal that is based on Euclidean distance.

One of the common issues with imbalanced data prediction is the large number of false positives in the prediction results. This matters because it means the model’s performance is not sufficient and especially extra effort is required from developers to check those false positives. One possible solution is generating a list of ranked bug reports, as done via FARSEC. This method takes two steps:

1. For a filter f , the ranked prediction results are selected from non-filtered data or data with filters other than f which has less number of predicted security bug reports than filter f .
2. If the first step is not applicable, the chronological order is utilized. The predicted security bug reports are then prioritized as close to the top of the list than non-security bug reports.

Table 5 elaborates on the characteristics of the FARSEC datasets. Our experiments reproduce and improve the FARSEC results from the SOTA SWIFT [76] using the same datasets. As we see from the table, one unique feature of the data set is the rarity of the target class. The “SBRs%” column in both training and testing data set indicates that security bug reports make up a very small percentage of the total number of bug reports in projects like Chromium.

2.4 Software Fairness

Our third domain is software fairness. Similarly, the goal is still binary classification but not only to improve the performance metrics but also the associated fairness metrics (to be defined in §2.5.1). Moreover, each dataset here has their own class label, e.g., Home Credit dataset’s goal is to approve or reject a loan

application from an individual or Compas’s goal is to predict re-offend/no re-offend based on criminal history of defendants.

2.4.1 Background

Software is as important as it has ever been in our current society. Many processes that were once performed by humans have been automated by software, as the advances in machine learning, automation, big data, and artificial intelligence have granted software the capacity to make decisions. Every day, these systems take these decisions in our stead, ranging from health and diagnostics, bank loaning, automated vehicles, recommendation systems, and even criminal justice systems. Unfortunately, there are too many recent examples where models learned from AI are demonstrably discriminatory towards certain social sub-groups. Examples of this include:

- Translation and image search that exhibit gender stereotypes [25];
- Risk-assessment score computation used in assigning bond amounts and sentencing in the US criminal justice system, exhibits racial bias [15];
- Facial detection and recognition tools’ accuracy depends on demographic information, such as race and gender [53];
- Amazon’s software for automatically deciding where to offer same day delivery excluded areas by socio-economic indicators [45];
- Online search engines have been more likely to display ads related to arrest records with searches for traditionally-minority names [78];
- Orbitz.com has steered Mac users to more expensive hotels [57];
- Tools with natural English inputs parse English written by white people more accurately than that written by people of other races [21];
- Alphabet’s YouTube auto-captioning service’s accuracy is higher for male voices than female ones [79].

As it stands, software fairness testing is an under-explored discipline, often omitted from the top-level decisions when developing these decision-making systems [38]. This represents a hole in current research since, recently, the requirements for fairer AI have become more common. The European Union and Microsoft and the IEEE have all released white papers discussing fair and ethical AI [11, 7, 12]. While these documents differ in the details, they all agree that ethical AI should must be “FAT”; i.e. fair, accountable and transparent.

Recently, the software engineering and machine learning community have become interested in the problem of fairness. ICSE and ASE conducted separate workshops for software fairness [2, 1]. ACM and IEEE have started separate conferences like FAccT [4] and FILA [3] for fairness of ML models. Big software industries have started taking this fairness problem seriously, e.g., IBM [6], Microsoft [8], Facebook/Meta [9], etc.

2.4.2 Data and Algorithms

Table 6 contains the datasets used in this study. All of them are binary classification problems where the target class has only two values.

Table 6: Details of the software fairness datasets used in this study.

Dataset	#Rows	#Columns	Protected Attribute		Class Label	
			Privileged	Unprivileged	Favorable	Unfavorable
Adult Census Income	48,842	14	Sex: Male Race: White	Sex: Female Race: POC	High Income	Low Income
Compas	7,214	28	Sex: Female Race: White	Sex: Male Race: POC	Did not reoffend	Reoffended
German Credit	1,000	20	Sex-Male	Sex-Female	Good Credit	Bad Credit
Default Credit	30,000	23	Sex-Male	Sex-Female	Default Payment-Yes	Default Payment-No
Heart Health	297	14	Age-Young	Age-Old	Not Disease	Disease
Bank Marketing	45,211	16	Age-Old	Age-Young	Term Deposit - Yes	Term Deposit - No
Home Credit	3,075,11	240	Sex: Male	Sex: Female	Approved	Rejected
Student Performance	1,044	33	Sex: Male	Sex: Female	Good Grade	Bad Grade
MEPS15, MEPS16	35,428	1,831	Race: White	Race: POC	Good Utilization	Bad Utilization

- A class label is called a *favorable label* if it gives an advantage to the receiver such as receiving a loan, being hired for a job.
- A *protected attribute* is an attribute that divides the whole population into two groups (privileged & unprivileged) that have differences in terms of receiving benefits.

Every dataset in Table 6 has one or at most two protected attributes. For example, in case of credit card application datasets, based on protected attribute “sex”, “male” is privileged and “female” is unprivileged; in case of Medical Expenditure Panel Survey (MEPS) datasets, based on protected attribute “race”, “white” is privileged and “POC” (i.e., person of color) is unprivileged.

- *Group fairness* is the goal that based on the protected attribute, privileged and unprivileged groups will be treated similarly.
- *Individual fairness* means similar outcomes go to similar individuals.

To our knowledge, there are only two frameworks Fairway [27] and FAIR_SMOTE [28] that attempted to mitigate bias in SE ML models. Both of them are supervised methods that require a lot of labeled training data. Fairway [27] focused on removing the biased labels while FAIR_SMOTE [28] balanced the data to achieve fairer model and better performance. Since FAIR_SMOTE outperformed Fairway, we will employ FAIR_SMOTE as the SOTA work for this software analytics task.

2.5 Evaluation

2.5.1 Measures of Performance

Since we wish to compare our approach to prior work, we take the methodological step of adopting the same performance scores as that seen in prior work. Let TP, TN, FP, FN are the true positives, true negatives, false positives, and false negatives (respectively), then Shu et al. [76] used recall, false-alarm, and IFA while Chakraborty et al. [28] used recall, false-alarm, accuracy, precision, F1 for their studies (but see our cautionary note at the end of this list on precision and F1). We also include AUC and accuracy for validation in RQ3:

- **Recall** = $TP/(TP + FN)$ represents the ability of one algorithm to identify instances of positive class from the given dataset.
- **False Alarms (FAR)** = $TN/(TN + FP)$ measures the instances that are falsely classified by an algorithm as positive which are actually negative. This is an important index used to measure the efficiency of a model.
- **Precision** = $TP/(TP + FP)$ represents the ability of one algorithm to identify instances of positive class among the retrieved positive instances.
- **F1** = $(2 * Precision * Recall)/(Precision + Recall)$ is the harmonic mean of both precision and recall metrics.
- **Accuracy** = $(TP + TN)/(TP + TN + FP + FN)$ is the percentage of correctly classified samples.
- **AUC** (Area Under the ROC Curve) measures the two-dimensional area under the Receiver Operator Characteristic (ROC) curve [91, 41]. It provides an aggregate and overall evaluation of performance across all possible classification thresholds to overall report the discrimination of a classifier [87].
- In the effort-aware theme of this paper, we are interested in the labeling effort to commission new models building which is **Cost** = $\frac{|\{\text{human verified comments}\}|}{|\{\text{comments}\}|}$.
- Except for FAR and Cost, for the rest of these metrics (Accuracy, Recall, and AUC), the *higher* the value, the *better* the performance.

Cautionary note: Menzies et al. [59] warns that precision can be misleading for imbalanced data sets like that studied here (e.g. Table 5 reports that for static warning analysis, the median of target class is 15%). Hence, while we do not place much weight on classifiers that fail on precision or F1.

Outside of the performance metrics, for the software fairness task, we also employ fairness metrics in order to assess how the methods have mitigated the biases within the SE ML models:

- **Average Odds Difference (AOD)**: Average of difference in False Positive Rates (FPR) and True Positive Rates (TPR) for unprivileged and privileged groups [18]. $TPR = TP/(TP + FN)$, $FPR = FP/(FP + TN)$, $AOD = [(FPR_U - FPR_P) + (TPR_U - TPR_P)] * 0.5$
- **Equal Opportunity Difference (EOD)**: Difference of True Positive Rates (TPR) for unprivileged and privileged groups [18]. $EOD = TPR_U - TPR_P$
- **Statistical Parity Difference (SPD)**: Difference between probability of unprivileged group (protected attribute PA = 0) gets favorable prediction ($\hat{Y} = 1$) & probability of privileged group (protected attribute PA = 1)

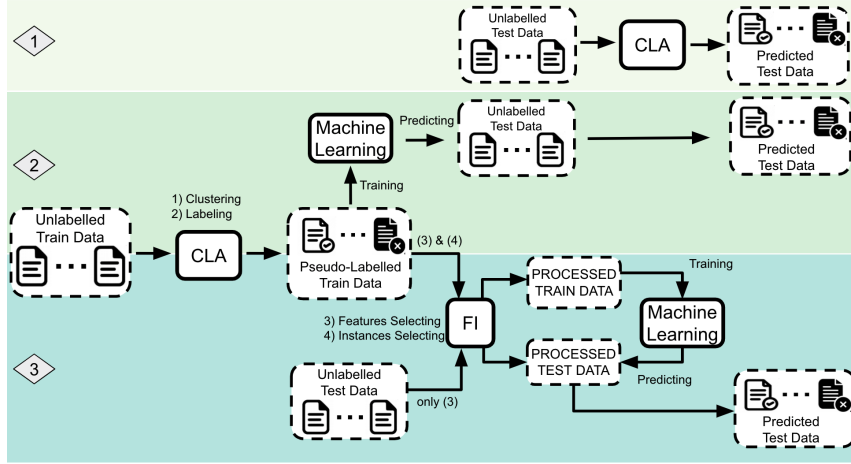


Fig. 1: The FRUGAL system, adopted from Tu et al.[82].

gets favorable prediction ($\hat{Y} = 1$) [24]. $SPD = P[\hat{Y} = 1|PA = 0] - P[\hat{Y} = 1|PA = 1]$

- **Disparate Impact (DI):** Similar to SPD but instead of the difference of probabilities, the ratio is measured [35]. $DI = P[\hat{Y} = 1|PA = 0]/P[\hat{Y} = 1|PA = 1]$

2.5.2 Statistical Analysis

With the deterministic nature, we employed Cohen’s d effect size test to determine which results are similar by calculating *medium_step2* across Recall, False Alarm, AUC, Accuracy, and cost. As to what d to use for this analysis, we take the advice of a widely accepted Sawilowsky et al.’s work [74]. That paper asserts that “small” and “medium” effects can be measured using $d = 0.2$ and $d = 0.5$ (respectively). Splitting the difference, we will analyze this data looking for differences larger than $d = (0.5 + 0.2)/2 = 0.35$:

3 Methodology

3.1 General Framework

Tu et al.’s FRUGAL [82] extended Nam et al.’s unsupervised learner, called CLA [64], by incorporating several variants of CLA, redesigning to be as semi-supervised learning method, and tuning. Nam et al.’s CLA is the SOTA unsupervised learner for defect prediction, which is also confirmed by Xu et al. [93]’s large-scale study. As shown in Figure 1, CLA consists of three modes: CLA, CLA+ML, and CLA+FI+ML. This study shall adopt and extend CLA with tuning in the grid search manner of (1) three modes of CLA while varying (2) the $C\%$ percentile parameter. Simply, FRUGAL finds the best combination of unsupervised learners = {CLA, CLA+ML, CLA+FI+ML} and $C = \{5\%$ to

95% increments by 5%}. The author only proposed CLA and CLAFI+ML but CLA+ML is a natural medium that can be useful during the tuning process.

We explain the details of our approach in §3.1, §3.2, and §3.3.

3.2 CLA

In the SOTA comparative study of unsupervised models in defect prediction, CLA starts with two steps of (1) **C**lustering the instances and (2) **L**A**B**elling those instances accordingly to the cluster. In the setting with no train data available, we can label or predict all new/test instances, as shown in the first block of Figure 1.

Clustering:

1. Find the median of feature F_1, F_2, \dots, F_n ($\text{percentile}(F_i, C)$) where $C = 50\%$ across the whole dataset.
2. For each data instance X_i , go through each feature value of the respective data instance to count the time when the feature $F_i > \text{percentile}(F_i, C)$ as K_i .

Labelling: label the instance X_i as the positive class if $K_i > \text{median}(K)$, else label it as the negative class.

The intuition of such method is based on the defect proneness tendency that is often found in defect prediction research, that is *the higher complexity is associated with the proneness of the defects* [64]. Simply, there is a tendency where the problematic instance’s feature values are higher than the non-problematic ones. This tendency and CLA’s/CLAFI+ML’s effectivenesses are confirmed via the recent literature and comparative study of 40 unsupervised models in defect prediction across 27 datasets and three types of features by Xu et al. [93]. They found CLA’s/CLAFI+ML’s performances are superior to other unsupervised methods while similar to supervised learning approaches. Therefore, this study investigated and found that the hypothesized tendency is also applicable in issues close time prediction and adoptable static code warning identification data but not with C at the median ($C = 50\%$). This opens opportunities for hyperparameter tuning.

3.3 CLA + ML

If there is an abundant train data in the wild but without labels, CLA can pseudo-label the train data before applying any machine learner in the “supervised” manner (as shown in the second block in Figure 1). For this step, we take Nam and Kim [64]’s advice to incorporate Random Forest [23] (RF, described in §4.5.1), an ensemble of tree learners method, as the machine learner of choice.

3.4 CLAFI + ML

CLAFI is an extension of CLA which is a fullstack framework that also include (3) **F**eatures selection and (4) **I**nstances selection. The setting is similar to CLA+ML, as shown in the **third block** of Figure 1, the pseudo-labelled train data (from CLA) and unlabelled test data will be processed with **F**I and **F** respectively. Finally, the machine learner can train the processed pseudo-labelled train data and then predict on the processed test data.

Feature Selection: Calculate the violation score per feature, called metric in the original proposal of Nam et al. [64]. The process is done on both the train and the test dataset.

1. For each F_i , go through all instances of X_j , a violation happens when F_i at X_j is higher than the $percentile(K_i, C)$ where $C = 50\%$ but $Y_j = 1$ and vice-versa.
2. Sum all the violations per feature across the whole dataset and sort it in ascending order.
3. Select the feature with the lowest violation score, if multiple of them have the same score then pick all of them.

Instance Selection:

1. With the selected features, go through each instance X_i and check if the respective F_j values violated the proneness assumption then remove that instance X_i .
2. If the dataset do not have instances with both classes at the end then pick the next minimum violation score to select metrics.
3. This process is only done on the train dataset.

After selecting features with the minimum violation scores and removing the instances that violated the proneness tendency, a practitioner can train an RF model on the processed train data to identify the target classes from the processed test dataset.

4 Experimentation

This section describes in details the experimental designs and the methodologies (i.e., standard semi-supervised learners from the machine learning community and the SOTA work from the additional software analytics).

4.1 Experimental Design

In order to make sure the method's effectiveness is not affected by the bias between deterministic and non-deterministic models or the bias of uncertainty, we randomly shuffle training/test sets and incorporate stratified sampling with five bins (ensuring that the class distribution of the whole data is replicated in each bin). The process is repeated for the training data but also includes an extra 2.5% validating partition for each 97.5% tuning partition. During the

simulation, the tune partition will not review labels for the semi-supervised learning model. FRUGAL does have access to the corresponding 2.5% labelled validation partition while deciding on the best configurations. For each 20% of the data (test set), the process learns a model on five stratified samples of the train data. This process is done for all four domains in this paper.

4.2 Standard Semi-Supervised Learners

Self Training is simple and popular in recent SE research [99, 98, 83, 82, 81]. It is based on Yarowsky et al.’s algorithm [96]. At first, a supervised classifier (here random forest) is trained on the $L\%$ *randomly labeled set* and then incrementally unlabeled data points are predicted. For each iteration, the data points having prediction probability more than “probability_threshold” (e.g., 0.7) are selected and added to the training set with the predicted labels. This process can be terminated when a certain criteria is fulfilled, e.g., max_iteration is reached. Finally, as a result, we get a new training dataset which contains $L\%$ *randomly labeled set* and pseudo-labeled data points (by self-training). Such an advantage of using self-training is that any supervised classifier with good calibration can be used as the baseline model.

Label Propagation is a semi-supervised graph inference algorithm as the “community detection algorithm” class (i.e., detect network structures or communities in a graph). Zhu et al [102] developed the core algorithm. The algorithm starts with building a graph from the available labeled and unlabeled data. Each data point is a node in the graph and edges are the similarity weights. It uses a ‘kernel’ function to project data into alternate dimensional spaces. The process will first assign unique labels to each node in the network. Then for each iteration, each node updates its label to the one that the maximum number of its neighbours belongs to. Generally, this process ‘propagates’ the labels throughout the network and form communities [102, 92]. Ties are broken using uniform logic:

$$C_x(t) = f(C_{x1}(t-1), C_{x2}(t-2), \dots, C_{xk}(t-k))$$

At the end of traversing through the network for each iteration, the convergence condition is checked. If not met, the process continues to iterate.

Label Spreading was invented by Zhou et al. [101]. It is also a graph inference algorithm like label propagation but has some differences. The method of changing the ground truth labels is called “clamping”. Label propagation uses “hard clamping” as the original labels of the labeled points never changed. Meanwhile, label spreading is a “soft clamping” approach and more robust to noise as it adjusts the relative amount of information the points obtain from the neighbors. Hence, label spreading does not blindly believe the original labels (like label propagation) and makes modifications to the ground truth.

The label spreading algorithm iterates on a modified version of the original graph and normalizes the edge weights by computing the normalized graph Laplacian matrix, i.e., symmetric normalized Laplacian matrix versus random walk normalized Laplacian matrix.

Co-Training: is a very popular semi-supervised approach developed by Blum et al. [22]. Co-training has had great success in the text mining [66, 88] and computer vision domain [19, 71]. Co-training trains two classifiers based on two different views of labeled data, the feature set is divided into two mutually exclusive sets. Then both classifiers predict on the unlabeled data (e.g., *clf1* and *clf2*). The data points confidently predicted by *clf1* are used for *clf2* training, and vice versa. The unlabeled samples that are predicted with the most confidence by *clf1* and *clf2* will be added to the training-set with the predicted label. The success of co-training depends on a very specific assumption, “original feature set can be divided into two mutually exclusive subsets which are conditionally independent given the class.”

4.2.1 State-of-the-art Methodologies

Support Vector Machine (SVM): is a classifier defined by a separating hyperplane [77]. Soft-margin linear SVMs are commonly used in text classification given the high dimensionality of the feature space. This was recommended by Yang et al. [94] as the state of the art for our adoptable static code warning identification domain. A soft-margin linear SVM looks for the decision hyperplane that maximizes the margin between training data of two classes while minimizing the training error (hinge loss):

$$\min \lambda \|w\|^2 + \left[\frac{1}{n} \sum_{i=1}^n \max(0, 1 - y_i(w \cdot x_i - b)) \right] \quad (1)$$

where the class of x is predicted as $\text{sgn}(w \cdot x - b)$.

SWIFT: Shu et al. [76] solved the dual optimization problems to optimize both learner and pre-processor options. SWIFT leveraged on the Deb et al. [33]’s idea of ϵ -dominance from 2005. ϵ -dominance partitions the output space of an optimizer into ϵ -sized grids. The principle of this idea is that if there exists some ϵ value below which it is useless or impossible to distinguish the results, then it is superfluous to explore anything less than ϵ . From a high level, SWIFT is essentially a tabu search; i.e., if some settings resulted in some performance within ϵ of any older result, then SWIFT marked that option as “to be avoided”. SWIFT applied “item ranking” in seeking optimal learner and pre-processor, and further refines their option ranges. SWIFT returned the best setting seen during the following three stage process:

- *Initialization:* all option items i (learners/pre-processor) are assigned equal weightings.
- The *item ranking* stage reweights items; e.g. terms like “Random Forest” or “RobustScaler”.

- The *numeric refinement* stage adjusts the tuning ranges of hyperparameter options of learners/pre-processor.

FAIR-SMOTE: Chakraborty et al. [28] proposed this method to achieve more balanced data, i.e., balancing both frequencies of not only class labels but also sensitive attributes. The tradition SMOTE only focuses on the class labels. Prior work [30, 28] in software fairness claimed that training data needs to be balanced in order to achieve fair prediction. Generally, training data is divided into four groups (Favorable & Privileged, Favorable & Unprivileged, Unfavorable & Privileged, Unfavorable & Unprivileged). Initially, these subgroups’ sizes are not equal. After synthetic oversampling, the training data becomes balanced based on target class and protected attribute, i.e., above mentioned four groups become of equal sizes.

5 Results

RQ1: Can we still reduce the cost of labeling for static warning analysis? Due to data duplication and features leakage, static warning analysis’s data from Tu et al. [82] is problematic as discussed in §. Thanks to Kang et al. [49], the updated data is utilized here to revalidate FRUGAL’s effectiveness against the SOTA for adoptable static warning identification.

Yang et al. [94] recommended off-the-shelf SVM as the SOTA solution for identifying adoptable static warnings. Table 7 reports the comparison of FRUGAL against SVM across three metrics (i.e., recall, FAR, and AUC) on the updated dataset. We observe:

- FRUGAL perform similarly to the SOTA at AUC, but outperforms in recall by 433% relatively while reducing FAR by 30.7% relatively.
- In term of labeling efforts, FRUGAL costs 2.5%, and the Shu et al. [76]’s method costs 100% because FRUGAL and the SOTA need 2.5% and 100% of the data labels to execute.



In summary, our answer to RQ1 is:

FRUGAL exceeds the SOTA SVM (EMSE’20 [94] in identifying adoptable static warnings). FRUGAL requires only 2.5% at median of the train data to be labeled while using 97.5% less information than the SOTA SVM. This validates and confirms FRUGAL’s effectiveness for this task from the previous study.

RQ2: How well does FRUGAL distinguish security bug reports?

First, we start by investigating the amount of labeled data ($L\%$) right for FRUGAL in distinguishing security bug report by vary $L\%$ values from 2.5% up to 20%.

Our hypothesis is “there are few key data regions where extra data would lead to indistinguishable results”. We test the different amounts of the train data’s labels that are required for FRUGAL’s performance to plateaus. Let L

Table 7: Comparison of FRUGAL($L = 2.5\%$) on three metrics as the SOTA SVM work (i.e., recall, FAR, and AUC) on median and number of wins across the aggregated dataset (across 8 projects). FRUGAL outperforms the SOTA SVM significantly in FAR and recall while performing similarly in AUC.

Treatment	Recall	FAR	AUC
FRUGAL_2.5%	96%	9%	51%
SVM [94]	18%	13%	52%
<i>M</i>	19%	1%	1%

be 2.5%, 5%, 10%, or 20%, Table 8 reports FRUGAL’s performance on security bug reports categorization (i.e., IFA, FAR, and recall). These metrics are derived from the SOTA’s evaluation metrics [76]. The comparison is summarized as the overall median and the number of wins across 40 available datasets (i.e., 5 projects and 8 filters) for security bug reports categorization. A win describes a methodology that performs the best per dataset statistically.

However, for security bug report identification, the performance increases as L increases. The relative improvements from increasing $L = 10\%$ to 20% are 17.6%, 100%, and 67% while the initial improvements (from $L = 2.5\%$ to 10%) are 174%, 33%, and 25% across recall, FAR, and IFA correspondingly. A possible interpretation here is that $L = 10\%$ are more suitable for security bugs reports categorization. However, briefly observing FRUGAL’s performance across all L , we notice that any L would suffice to perform similarly or even better than the SOTA work from this task. Hence, $L = 2.5\%$ would be optimal to minimize the labeling effort.

The changing effect were observed to be absent in previous study’s issue close time prediction task and this study’s software fairness, this is highly likely due to the more balanced nature of the data’s class distribution. The median distribution of the minority class within software fairness is 30%. However, the data in security bug reports are more imbalanced (with a median of 5% of the target class respectively). This is consistent with the motivations for oversampling and undersampling techniques for imbalanced data [29, 14].

SWIFT is employed as the SOTA solution for distinguishing security bug reports. Shu et al. [76] compared the proposed methods against three metrics

Table 8: Comparison of FRUGAL($L \in \{2.5\%, 5\%, 10\%, 20\%\}$) on three metrics as the SOTA work (i.e., Recall, FAR, and IFA) on overall median and number of wins across 40 datasets (5 projects and 8 filters). Except Recall, the lower the results the better the performance of the treatment.

Treatment	Recall		FAR		IFA	
	Wins	Median	Wins	Median	Wins	Median
FRUGAL_2.5%	10	31%	28	3%	23	4
FRUGAL_5%	17	57%	29	3%	32	2
FRUGAL_10%	26	85%	35	2%	27	3
FRUGAL_20%	39	100%	38	0%	31	1

Table 9: **RQ2** results. Except for Recall, the lower the results the better the performance of the treatment. For each row, the highlighted cells show best performing treatments (i.e., these cells that are statistically the same as the best median result – as judged by our Cohen test). Across all rows, FRUGAL has the most number of best results.

Project	Filter	Recall		FAR		IFA	
		SWIFT	FRUGAL	SWIFT	FRUGAL	SWIFT	FRUGAL
Chromium	train	86	100	24	0	58	80
	farsecsq	72	66	14	0	36	0
	farsectwo	77	100	26	0	87	0
	farsec	72	69	15	0	56	80
	clni	72	100	26	0	74	64
	clnifarsecsq	86	52	14	0	37	0
	clnifarsectwo	75	100	19	0	58	80
	clnifarsec	75	100	20	0	54	62
	Median	75	100	20	0	57	63
Wicket	train	67	17	28	1	46	43
	farsecsq	83	17	67	6	39	41
	farsectwo	67	17	62	9	31	0
	farsec	33	17	23	8	22	0
	clni	50	17	14	4	27	45
	clnifarsecsq	83	17	58	0	6	0
	clnifarsectwo	67	17	26	0	8	45
	clnifarsec	50	17	22	4	18	45
	Median	67	17	40	4	25	42
Ambari	train	86	14	18	3	1	0
	farsecsq	86	57	24	3	3	5
	farsectwo	86	57	20	3	3	4
	farsec	86	100	20	3	17	85
	clni	86	100	18	3	13	15
	clnifarsecsq	71	100	29	3	8	2
	clnifarsectwo	86	100	23	3	11	15
	clnifarsec	86	57	19	3	17	20
	Median	86	79	20	3	10	10
Camel	train	56	17	16	4	15	12
	farsecsq	67	17	28	13	14	12
	farsectwo	61	17	45	17	25	17
	farsec	56	17	36	4	8	8
	clni	50	17	25	7	30	5
	clnifarsecsq	61	17	27	5	10	2
	clnifarsectwo	61	17	39	7	12	2
	clnifarsec	56	17	37	9	22	4
	Median	58	17	32	7	15	7
Derby	train	69	52	20	3	2	2
	farsecsq	67	45	0	48	4	2
	farsectwo	79	31	40	7	3	2
	farsec	64	31	14	0	4	2
	clni	69	21	26	0	3	3
	clnifarsecsq	67	33	42	47	1	2
	clnifarsectwo	62	29	52	22	4	2
	clnifarsec	67	52	20	0	2	2
	Median	67	32	24	13	3	2
Overall Median		67	31	24	3	15	4

Table 10: Comparison of FRUGAL($L \in \{2.5\%, 5\%, 10\%, 20\%\}$) on three metrics as the SOTA work (i.e., recall, FAR, and IFA) on overall median and number of wins across 40 datasets (5 projects and 8 filters). The relative improvement gradually decreases on recall and disappears on IFA as L increases.

Treatment	Recall		FAR		IFA	
	Wins	Median	Wins	Median	Wins	Median
FRUGAL-2.5%	11	32%	39	2%	33	4
SWIFT [76]	31	67%	3	24%	31	15

(i.e., IFA, FAR, and recall) to finalize SWIFT as the best method for security bug reports categorization. Hence, Table 9 reports the comparison of FRUGAL against SWIFT on the same three metrics on each dataset while Table 10 summarizes Table 9 with overall number of wins and medians. We observe:

- FRUGAL, on average, lost to relative SOTA’s recall by -52.2% while reducing FAR and IFA by 91.3% and 73.3% relatively.
- Among 40 datasets, FRUGAL statistically performs the best 11, 39, and 33 times for recall, FAR, and IFA respectively.
- In term of labeling efforts, FRUGAL costs 2.5%, and the Shu et al. [76]’s method costs 100% because FRUGAL and the SOTA need 2.5% and 100% of the data labels to execute.

FRUGAL exceeds the SOTA SWIFT (EMSE’20 [76]) in distinguishing security bug reports. FRUGAL requires only 2.5% of the train data to be labeled when being compared against unsupervised learning while using 97.5% less information than the SOTA tuned deep learning method. Hence, FRUGAL is also effective in distinguishing security bug reports.



In summary, our answer to RQ2 is:

FRUGAL exceeds the SOTA SWIFT (EMSE’21 [76]) in distinguishing security bug reports). FRUGAL requires only 2.5% at median of the train data to be labeled while using 97.5% less information than the SOTA SWIFT. This analysis gives insights to when FRUGAL does not perform well.

RQ3: Can FRUGAL better mitigate biases in SE ML models with less data?

In this task, we first investigate the amount of labeled data ($L\%$) for FRUGAL across software fairness by vary $L\%$ values from 2.5% up to 20%.

We conjecture that the same intuition of “there are few key data regions where extra data would lead to indistinguishable results” is also applicable here. Let L be 2.5%, 5%, 2.5%, or 20%, Table 11 reports FRUGAL’s performance on software fairness (i.e., F1, AOD, EOD, DI, and SPD). Again, these metrics are derived from the SOTA’s evaluation metrics [28]. The comparison is summarized as the overall median and the number of wins across 11 avail-

Table 11: Comparison of FRUGAL($L \in \{2.5\%, 5\%, 10\%, 20\%\}$) on five metrics as the SOTA work (i.e., F1, AOD, EOD, DI, and SPD) on overall median and number of wins across 11 cases. Except F1, the lower the results the better the performance of the treatment.

Treatment	F1		AOD		EOD		DI		SPD	
	Wins	Median	Wins	Median	Wins	Median	Wins	Median	Wins	Median
FRUGAL_2.5%	11	71%	9	4%	11	3%	5	6%	7	2%
FRUGAL_5%	9	71%	9	3%	7	5%	7	4%	8	3%
FRUGAL_10%	10	71%	8	3%	7	3%	10	4%	8	3%
FRUGAL_20%	9	71%	10	3%	7	3%	9	1%	9	2%

Table 12: Comparison between **FAIR.SMOTE**[28] and FRUGAL across five performance metrics (Recall, FAR, Precision, Accuracy, and F1) and four fairness metrics (AOD, EOD, SPD, and DI) for software fairness. Note that in this table, the FRUGAL results were obtained after labeling just 2.5% of the data. Except for Recall, Precision, Accuracy, and F1, the lower the results the better the performance of the treatment. Medians are calculated for easy comparisons. Here, the highlighted cells show best performing treatments (i.e., these cells that are statistically the same as the best median result – as judged by our Cohen test).

Metrics	Treatment	Adult (Sex)	Adult (Race)	Compas (Sex)	Compas (Race)	German (Sex)	Default Credit (Sex)	Heart-Health (Age)	Bank Marketing (Age)	Student (Sex)	MEPS-15 (Race)	MEPS-16 (Race)	Median
Recall	FRUGAL	99	99	100	100	100	98	99	97	100	100	100	100
($M = 6\%$)	FAIR.SMOTE	71	70	62	62	62	58	66	76	91	68	66	66
FAR	FRUGAL	2	2	0	0	0	0	11	2	1	0	0	0
($M = 4\%$)	FAIR.SMOTE	25	22	32	30	36	26	20	18	18	4	2	22
Precision	FRUGAL	68	68	52	52	31	63	80	78	100	55	46	63
($M = 6\%$)	FAIR.SMOTE	51	51	56	72	71	39	69	72	84	41	41	56
Accuracy	FRUGAL	84	84	71	71	76	80	76	73	81	83	83	80
($M = 3\%$)	FAIR.SMOTE	73	72	55	55	64	68	68	72	87	77	77	72
F1	FRUGAL	71	71	50	50	49	80	87	79	100	72	57	71
($M = 5\%$)	FAIR.SMOTE	62	62	65	66	71	44	66	74	86	53	51	65
AOD	FRUGAL	1	2	6	4	0	2	27	4	7	3	2	7
($M = 2\%$)	FAIR.SMOTE	1	4	2	1	5	2	8	5	4	2	1	2
EOD	FRUGAL	2	2	2	4	0	4	30	5	4	1	2	2
($M = 2\%$)	FAIR.SMOTE	2	3	5	5	13	3	7	7	4	2	3	4
SPD	FRUGAL	0	2	1	8	0	2	27	7	28	1	5	2
($M = 3\%$)	FAIR.SMOTE	3	5	8	6	5	5	8	5	4	5	4	5
DI	FRUGAL	1	11	7	11	0	0	6	10	19	0	0	6
($M = 2\%$)	FAIR.SMOTE	12	26	9	11	5	3	2	3	8	15	17	9

able cases for software fairness. A win describes a methodology that performs statistically best per dataset.

The observation from the software fairness is similar to the original FRUGAL study on static analysis and issue close time. Except for DI, FRUGAL’s performance do not increase significantly as the L increases. They even de-

crease on F1 and EOD (11 wins from $L = 2.5\%$ on both metrics to 9 and 7 wins respectively). Hence, $L = 2.5\%$ would be optimal for FRUGAL in this domain.

FAIR.SMOTE is employed as the SOTA solution for mitigating biases in machine learning software. Chakraborty et al. [28] compared the proposed methods against five performance metrics (i.e., recall, precision, false-alarm rate, accuracy, and F1) and four fairness metrics (i.e., AOD, EOD, SPD, and DI) to finalize FAIR.SMOTE as the best method for software fairness. Hence, Table 12 reports the comparison of FRUGAL against FAIR.SMOTE on the same nine metrics. We observe:

- Across the five performance metrics, FRUGAL outperforms the SOTA FAIR.SMOTE significantly, i.e., 8/11 times per metric. The relative median improvements are 9%, 11%, 12.5%, 50%, and 100% for F1, accuracy, precision, recall, and FAR respectively.
- Across the four fairness metrics, FRUGAL loses in AOD, draws in SPD, and wins in EOD and DI.
- In term of labeling efforts, FRUGAL costs 2.5%, and the Shu et al. [76]’s method costs 100% because FRUGAL and the SOTA need 2.5% and 100% of the data labels to execute.

FRUGAL exceeds the SOTA FAIR.SMOTE (FSE’21 [76]) in software fairness. FRUGAL slightly outperforms FAIR.SMOTE across the fairness metrics but dominates FAIR.SMOTE across the performance metrics. Moreover, FRUGAL requires only 2.5% of the train data to be labeled while using 97.5% less information than the SOTA tuned deep learning method. Hence, FRUGAL is also effective in mitigating biases among ML software. The success in total of four areas let this study hypothesizes that other areas of SE may also benefit from FRUGAL.



In summary, our answer to RQ3 is:

Even with non-SE data, FRUGAL still exceeds the SOTA FAIR.SMOTE (FSE’21 [28]) in managing fairness in machine learning software). FRUGAL requires only 2.5% at median of the train data to be labeled when being compared against unsupervised learning while using 97.5% less information than both SOTA methods. Hence, FRUGAL is not only effective in static warning analysis and issue close time prediction, but also software fairness and security bug report. The success in these areas let this study hypothesizes that other areas of SE may also benefit from FRUGAL.

RQ4: What labeling method would we recommend for SE data?

Another part of this generalization extension includes employing standard semi-supervised learners from the ML community in order to check if they suffice or even outperform our proposed method, FRUGAL. We conjecture that FRUGAL that was designed with domain knowledge of software analytics in mind (i.e., SE’s data complexity) will outperform these standard methods. In order to validate our conjecture, we will conduct experiments to compare

Table 13: Comparison between self-training (ST), co-training (CT), label spreading (LS), label propagation (LP), and FRUGAL in terms of FAR, Recall, and AUC for identifying adoptable static warning. In this table, all results were found after labeling just 2.5% of the data. Except for FAR, the higher the results the better the performance of the treatment. Here, the highlighted cells show best performing treatments.

Treatment	Recall	FAR	AUC
ST	13.4%	10.5%	46.4%
LS	0%	0%	47.8%
LP	0%	0%	47.8%
CT	26.4%	14.3%	44.8%
FRUGAL_2.5%	95.5%	9.2%	49.8%
<i>M</i>	13.9%	2.3%	0.7%

these standard SSL methods against FRUGAL across four previous tasks: adoptable static warning identification, issue close time prediction, security bug report categorization, and ML software fairness management.

RQ4.a: How ML’s standard semi-supervised learning methods perform in identifying adoptable static warnings?

For this first task, the four standard semi-supervised learners - self-training (ST), co-training (CT), label-spreading (LS), and label-propagation (LP) - are compared against FRUGAL across three metrics from prior work (i.e., FAR, recall, and AUC). Table 13 reports that comparison. We observe:

- Among standard SSL methods, LP and LS outperform ST and CT in AUC and FAR while underperforming in recall. This indicates that graph-based SSL methods are more effective than the other two for this task.
- Similarly, FRUGAL performs the best as FRUGAL only loses in FAR but wins in recall and AUC. When comparing against the highest performing standard SSL method, FRUGAL’s absolute improvements are -9.2%, 2%, and 69.1% on FAR, AUC, and recall respectively.
- Regarding the labeling efforts, all methods are learned on 2.5% data labels so the comparison is fair and there is no cost saving here.

FRUGAL outshines standard ML’s SSL methods for adoptable static warning identification. This indicates the rudimentary effectiveness of the SE data complexity intuition within FRUGAL that standard ML’s SSL methods do not have access to.

RQ4.b: How ML’s standard semi-supervised learning methods perform in predicting issue close times?

For this second task, the four standard semi-supervised learners - self-training (ST), co-training (CT), label-spreading (LS), and label-propagation (LP) - are compared against FRUGAL across three metrics from prior work (i.e., accuracy, FAR, recall, and AUC). Table 14 reports that comparison. We observe:

Table 14: Comparison between self-training (ST), co-training (CT), label spreading (LS), label propagation (LP), and FRUGAL in terms of FAR, Recall, and AUC for predicting issues close time. Note that in this table, all results were obtained after labeling just 2.5% of the data. Except for FAR, the higher the results the better the performance of the treatment. Medians and IQRs (delta between 75th and 25th percentile, lower the better) are calculated for easy comparisons. Here, the highlighted cells show best performing treatments.

Metrics	Treatment	Chromium	Firefox	Eclipse	Median	IQR
Accuracy ($M = 1.9\%$)	ST	65	69.7	66.1	66.1	2.35
	LS	56.5	59.6	57.2	57.2	1.55
	LP	56.5	60.2	57.6	57.6	1.85
	CT	63.5	68.6	64.4	64.4	2.5
	FRUGAL	65.3	74.2	68.2	68.2	4.5
F1 ($M=2.6\%$)	CT	68.5	76.1	67.7	68.5	4.2
	ST	70.8	78.3	70.7	70.8	3.8
	LS	60.7	67.3	58.6	60.7	4.4
	LP	60.6	67.8	58.3	60.6	4.8
	FRUGAL	75	82.3	74.8	75	3.8
AUC ($M = 3.5\%$)	ST	51	54.2	50.3	51	1.95
	LS	54.2	54.8	51.2	54.2	1.8
	LP	57	57	54.8	57	1.1
	CT	52.1	58.6	47.3	52.1	5.65
	FRUGAL	72.1	80.2	75.8	75.8	4.1

- Among standard SSL methods, ST performs the best by winning in accuracy, recall, and FAR while losing in AUC. The graph-based SSL methods, LS and LP, only win in FAR and recall.
- FRUGAL performs the best across all four metrics and all datasets. When comparing against the highest performing standard SSL method, FRUGAL’s relative improvements are 3.2%, 27.1%, 48.6%, and 96% on accuracy, recall, AUC, and FAR respectively.
- Regarding the labeling efforts, all methods are learned on 2.5% data labels so the comparison is fair and there is no cost saving here.

FRUGAL also outshines standard ML’s SSL methods for issue close time prediction. This confirms the effectiveness of the SE data complexity intuition within FRUGAL that standard ML’s SSL methods do not have access to.

Interestingly, graph-based methods (LS and LP) that were observed more effective than the other twos for adoptable static warnings identification task are not effective for issue close time prediction. This is possibly due to the data balance nature of this task that are absent in adoptable static warnings identification and security bug report categorization tasks. Moreover, ST performs similarly to the previous SOTA SIMPLE by winning on accuracy and recall while losing on FAR and AUC with only 10% of the data’s labels.

Table 15: Comparison between self-training (ST), co-training (CT), label spreading (LS), label propagation (LP), and FRUGAL in terms of FAR, Recall, and AUC for distinguishing security bug reports. Note that in this table, all results were obtained after labeling just 2.5% of the data. Except for FAR, the higher the results the better the performance of the treatment. Overall Medians are calculated for easy comparisons. Here, the highlighted cells show best performing treatments.

Metrics	Treatment	AMBARI	CAMEL	CHROMIUM	DERBY	WICKET	Overall Wins	Overall Median
Recall ($M = 11.5\%$)	ST	0	0	0	19.1	0	1	0
	LS	0	0	0	0	0	0	0
	LP	0	0	0	0	0	0	0
	CT	0	0	0.5	20.3	0	1	0
	FRUGAL	100	17	79	17	32	40	31
FAR ($M = 4.1\%$)	ST	0	0	0	0.9	0	38	0
	LS	0	0	0	0	0	40	0
	LP	0	0	0	0	0	40	0
	CT	0	0	0	2.2	0	38	0
	FRUGAL	0	4	3	7	13	32	3
IFA ($M = 2.7\%$)	ST	-1	-1	-1	-0.5	-1	1	-1
	LS	-1	-1	-1	-1	-1	0	-1
	LP	-1	-1	-1	-1	-1	0	-1
	CT	-1	-1	-1	0.5	-1	4	-1
	FRUGAL	63	42	10	7	2	38	4

RQ4.c: How ML’s standard semi-supervised learning methods perform in distinguishing security bug reports?

For the third task, the four standard semi-supervised learners - self-training (ST), co-training (CT), label-spreading (LS), and label-propagation (LP) - are compared against FRUGAL across three metrics from prior work (i.e., FAR, recall, and IFA). Table 15 reports that comparison. We observe:

- Among standard SSL methods, ST and CT barely outperform LS and LP by winning in IFA and recall while underperforming in FAR. Because of the lack of clear evidences, the difference between SSL methods are inconclusive.
- FRUGAL performs the best as FRUGAL barely loses in FAR but wins in recall and IFA. When comparing against the highest performing standard SSL method, FRUGAL’s absolute improvements are -2.1%, 3%, and 84.6% on FAR, IFA, and recall respectively.
- Regarding the labeling efforts, all methods are learned on 10% data labels so the comparison is fair and there is no cost saving here.

The underwhelming performance of standard SSL methods in distinguishing security bug reports can be traced back to two main reasons. Firstly, the target class proportion within the data are significantly low, only 5.1% on average whereas 15% in adoptable static warnings identification and 50% in issue

Table 16: Comparison of FRUGAL($L \in \{2.5\%, 5\%, 10\%, 20\%\}$) on five metrics as the SOTA work (i.e., F1, AOD, EOD, DI, and SPD) on overall median and number of wins across 11 cases. Except F1, the lower the results the better the performance of the treatment. Here, the highlighted cells show best performing treatments.

Treatment	F1		AOD		EOD		DI		SPD	
	Wins	Median	Wins	Median	Wins	Median	Wins	Median	Wins	Median
FRUGAL	9	71%	8	4%	8	3%	8	6%	8	2%
ST	5	47%	6	7%	5	11.1%	7	5%	7	0%
LS	4	57%	6	7.4%	5	9.4%	5	6%	5	19%
LP	5	57%	5	4.2%	6	3.6%	7	5%	5	21%
CT	3	45%	4	5.2%	5	7.1%	6	5%	6	3%

close time prediction. SE literature has documented that software analytics tools often struggle to excel with imbalanced SE datasets. Secondly, they only use 2.5% of the dataset’s labels which is only 10 data instances (the median count of dataset’s bug reports number is 400) so there is less than 1 target instance or security bug reports (5.1% of 10) among them. It is difficult for standard SSL methods without the SE domain knowledge to learn the insights from a tiny dataset with little target instances. Hence, they end up predicting everything as non-security bug reports which result in very low FAR and recall along with invaluable IFA (i.e., -1).

FRUGAL again outshines standard ML’s SSL methods for security bugs report categorization. This indicates the effectiveness of the SE data complexity intuition within FRUGAL that standard ML’s SSL methods do not have access to.

RQ4.d: How ML’s standard semi-supervised learning methods perform in managing fairness in machine learning software?

For the fourth task, the four standard semi-supervised learners - self-training (ST), co-training (CT), label-spreading (LS), and label-propagation (LP) - are compared against FRUGAL across five metrics from prior work. This includes one performance metric (i.e., F1) and four fairness metrics (i.e., AOD, EOD, SPD, DI). Table 15 reports that comparison. We observe:

- Among standard SSL methods, ST outperforms the rest by a small margin. When being compared to the second best of LP, ST wins in AOD and SPD, draws in F1 and DI, and loses in EOD. LS and LP perform similarly (win 2, lose 2, draw 1) but LP’s total number of wins is higher than LS by one.
- FRUGAL performs the best as FRUGAL wins across the five metrics. When comparing against the highest performing standard SSL method, it is notable that FRUGAL, at median, improves F1 by 51.1% and reduces AOD and EOD by 42.9% and 73% relatively.
- Regarding the labeling efforts, all methods are learned on 2.5% data labels so the comparison is fair and there is no cost saving here.

Although, the performance of standard SSL methods cannot outperforms FRUGAL but they are a lot closer than the security bug reports case. This is due to the software fairness data is less imbalanced than the security bug re-

ports (30% versus 5% respectively). FRUGAL again outshines standard ML’s SSL methods for mitigating biases in ML software. This indicates the effectiveness of the SE data complexity intuition within FRUGAL that standard ML’s SSL methods do not have access to.

From this RQ, we conclude that:



Result:

FRUGAL outperforms all standard semi-supervised learning method from the machine learning community across four software analytics tasks. Moreover, this ineffectiveness is hypothetically due to the (1) highly imbalanced data nature that is not often observed in standard ML tasks; and (2) these standard SSL methods does not tap into that SE domain knowledge that FRUGAL has access to.

6 Threats of Validity

There are several validity threats [36] to the design of this finalized solution (i.e., FRUGAL). Any conclusion made from this work must be considered with the following issues in mind:

Conclusion validity focuses on the significance of the treatment. To enhance conclusion validity, we run experiments on 52 different projects across stratified sampling (25 runs) and find that our proposed method always performed better than the state-of-the-art approaches. More importantly, we apply a similar statistical testing of Cohen’s d as the SOTA works of Tu and Menzies [82]’s, to obtain fair comparison. In addition, we have taken into generalization issues of single evaluation metrics (e.g., recall and precision) into consideration and instead evaluate our methods on metrics that aggregate multiple metrics like AUC while being effort-aware via cost. As future work, we plan to test the proposed methods with additional analyses that are endorsed within SE literature (e.g., P-opt20 [81]) or general ML literature (e.g., MCC [32]).

According to Tu et al. [82], the simple effectiveness of both binary split of the output space (FRUGAL’s centrality) and 2.5% labeled train data requirement is highly due to how the approach is a strong heuristic that leverages on the intrinsic dimensionality. Levina and Bickel [54] argued that many datasets embedded in high-dimensional spaces can be compressed without significant information loss (similar to the PCA method [58]). To compute Levina’s intrinsic dimensionality, a 2-d plot is created where the x-axis shows r ; i.e., the radius of two configurations while the y-axis shows $C(r)$ as the number of

Table 17: Summary of intrinsic dimensions (D) of this study’s 50 datasets from Levina and Bickel [54].

		Security Bug Reports				
		Ambari	Camel	Chromium	Derby	Wicket
Static Code Warnings						
Median D	2.06	1.62	1.2	1.52	1.43	0.98

Software Fairness									
Adult		Compas	German	Default	Heart Health	Bank	Student	MEPS15	MEPS16
D	0.21	0.25	1.54	3.46	2.74	1.44	0.55	1.44	1.63

configurations after spreading out some distance r away from any of n data instances:

$$y = C(r) = \frac{2}{n(n-1)} \sum_{i=1}^n \sum_{j=i+1}^n I[\|x_i, x_j\| < r] \quad (2)$$

The maximum slope of $\ln C(r)$ vs. $\ln r$ is then reported as the intrinsic dimensionality, D . Note that $I[\cdot]$ is the indicator function (i.e., $I[x] = 1$ if x is true, otherwise it is 0); x_i is the i th sample in the dataset. Applying this calculation to the 50+ datasets of the domain (reports in Table 17), we found the intrinsic or latent dimensionality (D) of our data is very low. The median D are 2.06, 1.44, and 1.43 for static warnings, security bug reports, and software fairness respectively. FRUGAL’s effectiveness essentially roots in how the performance score generated from SE data can be divided into a few regions (low dimensional). FRUGAL’s central function of binary splitting compresses the data dimensions (features) via aggregated percentile C and survey the whole space by varying C ($\{5\%$ to 95% increments by $5\%\}$). Menzies et al. [60] and Hindle et al. [44] also reported on how several SE data are low dimensional and the benefits from building effective tools from such data. This work extends those findings: the labeling efforts to commission to tools building can be reduced greatly even on non-SE data as long as they share the low dimensionality characteristic of SE data [44, 13, 60, 94, 97].

Construct validity focuses on the relation between the theory behind the experiment and the observation. To enhance construct validity, we benchmarked our solution with the SOTA’s solutions across several domains to ensure that our proposed solution’s effectiveness is not due to random sampling of the data. However, we only show that with our default parameters settings of random forest learner. The performance can get even better by tuning the

parameters, employing different learners (e.g., deep learners), and introducing a variety of data preprocessors (e.g., synthetic minority over-sampling or SMOTE that is known to help with imbalanced datasets [29, 14] like our static code warnings domains). We aim to explore these in our future work.

Internal validity focuses on how sure we can be that the treatment caused the outcome. To enhance internal validity, we heavily constrained our experiments to the same dataset, with the same settings, except for the treatments being compared.

External validity concerns how widely our conclusions can be applied. In order to test the generalizability of our approach, we always kept a project as the holdout test set and never used any information from it in training. Moreover, we have validated our proposed method on four important software analytics domains: adoptable static code warnings identification, issues close time prediction, security bug report detection, and ML software fairness management.

Sampling Bias, like any data mining work, this work is threatened by sampling bias; i.e. what holds for the data we studied here may not hold for other kinds of data. For instance, for security bug report detection, FRUGAL outperformed the SOTA with only 2.5% but the performance actually plateaus after $L = 10\%$. However, FRUGAL’s performance plateaus beyond 2.5% data’s labels for adoptable static warning identification, issue close time prediction, and software fairness. That said, and to repeat the message of this study, when different methods work for different data, researchers must take the time to carefully check the ground truth in the new data. Let that check be overwhelmingly slow and expensive, we recommend the use of semi-supervised learning with our proposed tool here, i.e., FRUGAL.

7 Conclusion and Future Work

Previous work introduced a general semi-supervised learning solution (i.e., FRUGAL) to reduce the labeling effort while keeping the performance similar or better in building software analytics tools. However, several problems associated with that work include: (1) only evaluated on two tasks while half of the previous work’s conclusions were refuted due to data quality issues; (2) did not employ the method on non-SE data; and (3) did not benchmark against standard or “weak” SSL methods from the ML community. Therefore, in this paper, we have used FRUGAL to applying this “strong” heuristic (with SE domain knowledge) to tackle those problems by:

1. For static code warnings, we revalidated and confirmed Tu et al.’s FRUGAL’s effectiveness on the updated data.
2. We extended FRUGAL’s effectiveness from SE data to non-SE data, i.e., software fairness.
3. Our work identified two extra domains that also share data labeling effort and quality concerns, i.e., software fairness and security bug reports. These include more than 50 datasets, ten times more than the previous study

and FRUGAL still outperformed both tasks while using 97.5% less data or reducing the cost of labeling data by a factor of 40 times (100%/2.5%).

4. Our and previous work conclusions were further generalized and strengthened by contrasting against the standard SSL methods from the machine learning community. Moreover, we also asserted that FRUGAL does best while benchmarking against standard SSL methods from the machine learning community as its strong heuristic capability to leverage on the SE domain knowledge. Essentially, specific SE knowledge is more useful (for SE applications) than domain-independent notions (e.g., similar things share similar properties in graph-inference algorithms).
5. This work demonstrates the benefits of Semi-Supervised Learning for Software Analytics. This includes software fairness, security bug reports, static warning analysis, and issue close time. This suggests that many more software analytics tasks could benefit from unsupervised learning and semi-supervised learning. As mentioned above, those benefits include the ability to commission new models with less human efforts and costs. By restricting human involvement in the process, we also reduced erroneous labels that can cascade to the whole research community since human are still error-prone (Yu et al. [100] found 98% of the false-positive labels within Maldonado and Shihab [56] were actually true-positive labels).
6. Overall, our study restated the benefit in exploring low dimensional SE data [44, 13, 60, 94, 97, 82] and extended their findings that the labeling efforts can be reduced greatly for non-SE data as long as they share the SE data's low dimensionality characteristics.

That said, FRUGAL still suffers from the validity threats discussed in §6. To further reduce those threats and to move forward with this research, we propose the following future work:

- Test whether replacing the Random Forest model in FRUGAL with a deep learning model will further improve its performance.
- Apply non-trivial hyper-parameter tuning (e.g., DODGE [13] or FLASH [63]) on various data preprocessors and machine learners with FRUGAL to test whether tuning can further improve the performance.
- Extend the work to other software engineering domains (e.g., technical debts [56], software configurations [34], etc) and compare it with other state-of-the-art methods which continue to appear.

Acknowledgements

This work was partially funded by an NSF CISE Grant #1931425.

Conflict of Interest

The authors have no competing interests to declare that are relevant to the content of this article.

References

1. Explain 2019. URL <https://2019.ase-conferences.org/home/explain-2019>.
2. Fairware 2018:international workshop on software fairness. URL <http://fairware.cs.umass.edu/>.
3. International workshop on fair and interpretable learning algorithms. URL <http://tiny.cc/FILA>.
4. Acm conference on fairness, accountability, and transparency (acm fat*). URL <https://fatconference.org/>.
5. WannaCry Ransomware Attack. https://en.wikipedia.org/wiki/WannaCry_ransomware_attack, 2017.
6. Ai fairness 360: An extensible toolkit for detecting, understanding, and mitigating unwanted algorithmic bias. 10 2018. URL <https://github.com/IBM/AIF360>.
7. Ethics guidelines for trustworthy artificial intelligence., 2018. URL <https://ec.europa.eu/digital-single-market/en/news/ethics-guidelines-trustworthy-ai>.
8. Fate: Fairness, accountability, transparency, and ethics in ai. 2018. URL <https://www.microsoft.com/en-us/research/group/fate/>.
9. Facebook says it has a tool to detect bias in its artificial intelligence. 2018. URL <https://qz.com/1268520/facebook-says-it-has-a-tool-to-detect-bias-in-its-artificial-intelligence/>.
10. The Equifax Data Breach. <https://epic.org/privacy/data-breach/equifax/>, 2019.
11. Ethically-aligned design: A vision for prioritizing human well-being with autonomous and intelligence systems., 2019.
12. Microsoft AI principles, 2019. URL <http://tiny.cc/Microsoft>.
13. A. Agrawal, W. Fu, D. Chen, X. Shen, and T. Menzies. How to "dodge" complex software analytics. *TSE*, 2019.
14. Amritanshu Agrawal and Tim Menzies. Is "better data" better than "better data miners"? In *ICSE*, 2018.
15. Julia Angwin, Jeff Larson, Surya Mattu, and Lauren Kirchner. Machine bias. *ProPublica*, May, 23(2016):139–159, 2016.
16. N. Ayewah, W. Pugh, D. Hovemeyer, J. D. Morgenthaler, and J. Penix. Using static analysis to find bugs. *Software*, 2008.
17. C. Beleites, U. Neugebauer, T. Bocklitz, C. Krafft, and J. Popp. Sample size planning for classification models. *Analytica Chimica Acta*, 2013.
18. Rachel Bellamy, Kuntal Dey, Michael Hind, Samuel C. Hoffman, Stephanie Houde, Kalapriya Kannan, Pranay Lohia, Jacquelyn Martino, Sameep Mehta, Aleksandra Mojsilovic, Seema Nagar, Karthikeyan Nate-san Ramamurthy, John Richards, Diptikalyan Saha, Prasanna Sattigeri, Moninder Singh, Ramazon Kush, and Yunfeng Zhang. Ai fairness 360: An extensible toolkit for detecting, understanding, and mitigating unwanted algorithmic bias. 2018.

19. Simone Bianco, Gianluigi Ciocca, and Claudio Cusano. Curl: Image classification using co-training and unsupervised representation learning. *Computer Vision and Image Understanding*, 2016.
20. Paul E Black, Lee Badger, Barbara Guttman, and Elizabeth Fong. Dramatically reducing software vulnerabilities. *Report to the White House Office of Science and Technology Policy, Information Technology Laboratory*, 2016.
21. Su Lin Blodgett and Brendan O'Connor. Racial disparity in natural language processing: A case study of social media african-american english. *arXiv preprint arXiv:1707.00061*, 2017.
22. A. Blum and T. Mitchell. Combining labeled and unlabeled data with co-training. *COLT*, 1998.
23. Leo Breiman. Random forests. *Machine Learning*, 45(1):5–32, Oct 2001. ISSN 1573-0565. doi: 10.1023/A:1010933404324. URL <https://doi.org/10.1023/A:1010933404324>.
24. Toon Calders and Sicco Verwer. Three naive bayes approaches for discrimination-free classification. *Data Min. Knowl. Discov.*, 2010.
25. Aylin Caliskan, Joanna J Bryson, and Arvind Narayanan. Semantics derived automatically from language corpora contain human-like biases. *Science*, 356(6334):183–186, 2017.
26. G. Catolino. Just-in-time bug prediction in mobile applications: The domain matters! In *MOBILESoft*, 2017.
27. J. Chakraborty, S. Majumder, Z. Yu, and T. Menzies. Fairway: A way to build fair ml software. *FSE*, 2020.
28. Joymallya Chakraborty, Suvodeep Majumder, and Tim Menzies. Bias in machine learning software: Why? how? what to do? *FSE*, 2021.
29. Nitesh V Chawla, Kevin W Bowyer, Lawrence O Hall, and W Philip Kegelmeyer. Smote: synthetic minority over-sampling technique. *Journal of artificial intelligence research*, 16:321–357, 2002.
30. D. Chen, K. T. Stolee, and T. Menzies. Replication can improve prior results: A github study of pull request acceptance. In *ICPC*, 2019.
31. Liu Chen et al. R2fix: automatically generating bug fixes from bug reports. *Proceedings of the 2013 IEEE 6th ICST*, 2013.
32. Davide Chicco and Giuseppe Jurman. The advantages of the matthews correlation coefficient (mcc) over f1 score and accuracy in binary classification evaluation. *BMC Genomics*, 2020. doi: 10.1186/s12864-019-6413-7.
33. Kalyanmoy Deb, Manikanth Mohan, and Shikhar Mishra. Evaluating the ϵ -domination based multi-objective evolutionary algorithm for a quick computation of pareto-optimal solutions. *Evolutionary computation*, 13(4):501–525, 2005.
34. Jacky Estublier, David Leblang, André van der Hoek, Reidar Conradi, Geoffrey Clemm, Walter Tichy, and Darcy Wiborg-Weber. Impact of software engineering research on the practice of software configuration management. *ACM Trans. Softw. Eng. Methodol.*, 2005.

35. Michael Feldman, Sorelle Friedler, John Moeller, Carlos Scheidegger, and Suresh Venkatasubramanian. Certifying and removing disparate impact, 2015.
36. R. Feldt and A. Magazinius. Validity threats in empirical software engineering research-an initial survey. In *SEKE*, 2010.
37. Wei Fu, Tim Menzies, and Xipeng Shen. Tuning for software analytics: Is it really necessary? *IST*, 2016.
38. Sainyam Galhotra, Yuriy Brun, and Alexandra Meliou. Fairness testing: testing software for discrimination. In *Proceedings of the 2017 11th Joint Meeting on Foundations of Software Engineering*, pages 498–510, 2017.
39. Michael Gegick, Pete Rotella, and Tao Xie. Identifying security bug reports via text mining: An industrial case study. In *MSR*, 2010.
40. Paul Graham. *Hackers & painters: big ideas from the computer age.* "O'Reilly Media, Inc.", 2004.
41. Sarah Heckman and Laurie Williams. A systematic literature review of actionable alert identification techniques for automated static code analysis. *Information and Software Technology*, 53(4):363–387, 2011.
42. K. Herzig, S. Just, and A. Zeller. It's not a bug, it's a feature: How misclassification impacts bug prediction. In *ICSE*, 2013.
43. A. Hindle, D. M. German, and R. Holt. What do large commits tell us?: A taxonomical study of large commits. *MSR*, 2008.
44. Abram Hindle, Earl T Barr, Zhendong Su, Mark Gabel, and Premkumar Devanbu. On the naturalness of software. In *ICSE*. IEEE, 2012.
45. D. Ingold and S. Soper. Amazon doesn't consider the race of its customers. should it. *Bloomberg, April*, 2016.
46. Omid Jalali, Tim Menzies, and Martin Feather. Optimizing requirements decisions with keys. In *Proceedings of the 4th international workshop on Predictor models in software engineering*, pages 79–86. ACM, 2008.
47. B. Johnson, Y. Song, E. Murphy-Hill, and R. Bowdidge. Why don't software developers use static analysis tools to find bugs? *ICSE*, 2013.
48. Y. Kamei, E. Shihab, B. Adams, A. E. Hassan, A. Mockus, A. Sinha, and N. Ubayashi. A large-scale empirical study of just-in-time quality assurance. *TSE*, 2013.
49. H. J. Kang, K. L. Aw, and D. Lo. Detecting false alarms from automatic static analysis tools: How far are we? *ICSE*, 2022.
50. Hong Jin Kang, Khai Loong Aw, and David Lo. Detecting false alarms from automatic static analysis tools: How far are we? *arXiv preprint arXiv:2202.05982*, 2022.
51. S. Kim, E. J. Whitehead, Jr., and Y. Zhang. Classifying software changes: Clean or buggy? *IEEE Trans SE*, 2008.
52. Sunghun Kim, Hongyu Zhang, Rongxin Wu, and Liang Gong. Dealing with noise in defect prediction. In *Software Engineering (ICSE), 2011 33rd International Conference on*, pages 481–490. IEEE, 2011.
53. B. F Klare, M. J Burge, J. C Klontz, R. W V. Bruegge, and A. K Jain. Face recognition performance: Role of demographic information. *TIFS*, 2012.

54. Elizaveta Levina and Peter Bickel. Maximum likelihood estimation of intrinsic dimension. *Advances in neural information processing systems*, 2004.
55. Guangtai Liang, Ling Wu, Qian Wu, Qianxiang Wang, Tao Xie, and Hong Mei. Automatic construction of an effective training set for prioritizing static analysis warnings. In *Proceedings of the IEEE/ACM international conference on Automated software engineering*, pages 93–102. ACM, 2010.
56. E. da S Maldonado and E. Shihab. Detecting and quantifying different types of self-admitted technical debt. In *MTD*, 2015.
57. D. Mattioli. On orbitz, mac users steered to pricier hotels. *Wall Street Journal*, 2012.
58. Andrzej Maćkiewicz and Waldemar Ratajczak. Principal components analysis (pca). *Computers and Geosciences*, 1993.
59. T. Menzies, A. Dekhtyar, J. Distefano, and J. Greenwald. Problems with precision: A response to "comments on 'data mining static code attributes to learn defect predictors'". *TSE*, 2007.
60. T. Menzies, D. Owen, and J. Richardson. The strangest thing about software. *Computer*, 2007.
61. MITRE. Common Vulnerabilities and Exposures (CVE). <https://cve.mitre.org/about/terminology.html#vulnerability>, 2017.
62. A. Mockus and L. Votta. Identifying reasons for software changes using historic databases. In *ICPC*, 2000.
63. Vivek Nair, Zhe Yu, and Tim Menzies. Flash: A faster optimizer for sbse tasks. *arXiv preprint arXiv:1705.05018*, 2017.
64. Jaechang Nam and Sunghun Kim. Clami: Defect prediction on unlabeled datasets. In *ASE 2015*, 2015.
65. M. Nayrolles and A. Hamou-Lhadj. Clever: Combining code metrics with clone detection for just-in-time fault prevention and resolution in large industrial projects. In *MSR*, 2018.
66. K. Nigam and R. Ghani. Understanding the behavior of co-training. *WshKDD*, 2000.
67. N. Novielli, D. Girardi, and F. Lanubile. A benchmark study on sentiment analysis for software engineering research. *MSR*, 2018.
68. K. Peng and T. Menzies. Defect reduction planning (using timeline). *TSE*, 2021.
69. Fayola Peters, Thein Tun, Yijun Yu, and Bashar Nuseibeh. Text filtering and ranking for security bug report prediction. *IEEE Transactions on Software Engineering*, pages Early–Access, 2018.
70. Jean Petrić, David Bowes, Tracy Hall, Bruce Christianson, and Nathan Baddoo. The jinx on the nasa software defect data sets. In *EASE*, EASE '16, 2016.
71. Siyuan Qiao, Wei Shen, Zhishuai Zhang, Bo Wang, and Alan Yuille. Deep co-training for semi-supervised image recognition. *ECCV*, 2018.
72. C. Rosen, B. Grawi, and E. Shihab. Commit guru: Analytics and risk prediction of software commits. *ESEC/FSE 2015*, 2015.

73. S. Russell and P. Norvig. *Artificial Intelligence: A Modern Approach, 4th Edition*. Pearson, 2020.
74. S. Sawilowsky. New effect size rules of thumb. *Journal of Modern Applied Statistical Methods*, 8:26, 2009.
75. Martin Shepperd, Qinbao Song, Zhongbin Sun, and Carolyn Mair. Data quality: Some comments on the nasa software defect datasets. *TSE*, 2013.
76. Rui Shu, Tianpei Xia, Jianfeng Chen, Laurie A. Williams, and Tim Menzies. How to better distinguish security bug reports (using dual hyperparameter optimization). *Empirical Software Engineering*, 2021.
77. J. AK Suykens and J. Vandewalle. Least squares support vector machine classifiers. *Neural processing letters*, 1999.
78. L. Sweeney. Discrimination in online ad delivery. *Communications of the ACM*, 2013.
79. R. Tatman. Gender and dialect bias in youtube’s automatic captions. In *EthNLP@EACL*, 2017.
80. H. Tu and T. Menzies. Frugal: Unlocking ssl for software analytics. In *ASE*, 2021.
81. H. Tu, Z. Yu, and T. Menzies. Better data labelling with emblem (and how that impacts defect prediction). *TSE*, 2020.
82. Huy Tu and Tim Menzies. Frugal: Unlocking semi-supervised learning for software analytics. In *ASE*, 2021.
83. Huy Tu and Tim Menzies. Debtfree: A semi-supervised learning method for recognizing technical debt. In *EMSE*, 2022.
84. B. Vasilescu. Personnel communication at fse’18, 2018.
85. B. Vasilescu, Y. Yu, H. Wang, P. Devanbu, and V. Filkov. Quality and productivity outcomes relating to continuous integration in github. In *FSE*, 2015.
86. Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N. Gomez, Lukasz Kaiser, and Illia Polosukhin. Attention is all you need. *NeurIPS*, 2017.
87. J. Wang, S. Wang, and Q. Wang. Is there a golden feature set for static warning identification?: an experimental evaluation. In *ESEM*, 2018.
88. W. Wang and Z. Zhou. A new analysis of co-training. *ICML*, 2010.
89. X. Wang, J. Liu, L. Li, X. Chen, X. Liu, and H. Wu. Detecting and explaining self-admitted technical debts with attention-based neural networks. In *ASE*, 2020.
90. D. Wijayasekara, M. Manic, and M. McQueen. Vulnerability identification and classification via text mining bug databases. In *IECON*, 2014.
91. I. H Witten, E. Frank, M. A Hall, and C. J Pal. *Data Mining: Practical machine learning tools and techniques*. Morgan Kaufmann, 2016.
92. D. Wu. Network science and applications. Technical report, 2016.
93. Z. Xu, L. Li, M. Yan, J. Liu, X. Luo, J. Grundy, Y. Zhang, and X. Zhang. A comprehensive comparative study of clustering-based unsupervised defect prediction models. *JSS*, 2021.
94. X. Yang, J. Chen, R. Yedida, Z. Yu, and T. Menzies. How to recognize actionable static code warnings (using linear svms). In *EMSE*, 2020.

95. X. Yang, Z. Yu, J. Wang, and T. Menzies. Understanding static code warnings: An incremental ai approach. *ESA*, 2021.
96. D. Yarowsky. Unsupervised word sense disambiguation rivaling supervised methods. In *ACL*, 1995.
97. Rahul Yedida, Xueqi Yang, and Tim Menzies. When simple is better than complex: A case study on deep learning for predicting bugzilla issue close time. In *EMSE*, 2021.
98. Z. Yu, F. Fahid, T. Menzies, G. Rothermel, K. Patrick, and S. Cherian. Terminator: Better automated ui test case prioritization. *ESEC/FSE*, 2019.
99. Z. Yu, C. Theisen, L. Williams, and T. Menzies. Improving vulnerability inspection efficiency using active learning. *TSE*, 2019.
100. Z. Yu, F. Fahid, H. Tu, and T. Menzies. Identifying self-admitted technical debts with jitterbug: A two-step approach. *TSE*, 2021.
101. D. Zhou, O. Bousquet, T. Lal, J. Weston, and B. Schölkopf. Learning with local and global consistency. In *Advances in Neural Information Processing Systems*, 2004.
102. X. Zhu and Z. Ghahramani. Learning from labeled and unlabeled data with label propagation. Technical report, CMU, 2002.