

Resilient Consensus Sustained Collaboratively

Junchao Chen, Suyash Gupta[†], Alberto Sonnino[‡], Lefteris Kokoris-Kogias^{§‡}, Mohammad Sadoghi

Exploratory Systems Lab
University of California, Davis

[†]University of California, Berkeley

[‡] MystenLabs

[§] IST Austria

ABSTRACT

The recent growth of blockchain technology has accelerated research on decentralized platforms. Initial blockchain platforms decide on what should be added to the ledger based on Proof-of-Work (PoW) consensus protocol. PoW requires its participants to perform large computations and leads to massive energy wastage. Recent blockchains aim to replace PoW through Proof-of-Stake (PoS) and Malicious Fault-Tolerant (MFT) consensus protocols. However, the safety of the ledger created by these protocols is at the mercy of the long-term safe-keeping of the private keys of participants. As a result, these blockchains face long-range attacks. To ameliorate this situation, we present the design of our novel Power-of-Collaboration (PoC) protocol, which guards existing PoS and MFT blockchains against long-range attacks. We show that PoC can be easily appended to existing blockchains and only marginally degrades their throughputs.

1 INTRODUCTION

The key goal of any blockchain system is to offer its clients a transparent and accountable ledger [63]. This ledger is maintained by multiple untrusting parties (servers) that add client transactions to the ledger in an agreed-upon order by participating in a consensus protocol that can handle malicious behavior. Initial blockchain systems such as Bitcoin [53] and Ethereum [71] employed the *Proof-of-Work* (PoW) protocol [53, 71], which follows a *computation-oriented* consensus model. PoW protocol requires all its participants to compete toward solving a complex puzzle. Whichever participant solves the puzzle first, gets to add a new entry (*block*) to the ledger and fetches a monetary reward. The work done by other miners goes to waste, and therefore PoW protocols are infamous for massive energy wastage [24, 70].

This motivated the blockchain community to adopt two other categories of protocols: (1) Proof-of-Stake (PoS) protocols and (2) traditional Malicious Fault-Tolerant (MFT)¹ consensus protocols. PoS protocols advocate for a *stake-oriented* model where the node with the highest stake (or wealth) gets to add a new block to the ledger [23, 43]. Traditional MFT protocols advocate for an authenticated *communication oriented* architecture, where each node gets an equal chance (a vote) to add an entry to the ledger; agreement on the next block is reached through successive rounds of vote exchange [16, 47]. There also exists blockchains that employ both PoS and MFT for yielding efficient consensus [35]. However, all of these types of protocols are vulnerable to *long-range attacks* [9, 25].

¹In this paper, we intentionally refrain from the commonly accepted terminology of Byzantine behavior that may carry a negative and discriminatory connotation. We further adhere to ACM’s D&I policy, and instead of using the traditional phrase Byzantine Fault-Tolerant (BFT), we coin the term Malicious Fault-Tolerant (MFT) to refer to protocols that can handle malicious attacks.

These long-range attacks pose unprecedented dangers; a malicious party can re-write the *full history* of the ledger.

PoS and MFT protocols suffer from long-range attacks as, in these protocols, adding a new block to the ledger is *computationally inexpensive*. Each block added to the ledger includes the digital signatures of a quorum of participants, which proves that this quorum agreed to add this block to the blockchain. To perform a long-range attack on such blockchains, an adversary needs to simply *compromise the private keys* of the honest participants. Unsurprisingly, stealing private keys is a common attack, and some of these attacks have led to losses of up to \$200 million [4, 54]. Even if we assume there is a negligible possibility of stealing a large number of keys, which is not the case, an adversary only needs access to the keys of *old* participants. Such participants may no longer have any stake in the system, and based on the Tragedy of Commons theory [12], “rational” participants will opt for earning incentives by simply selling their old keys to the adversary. An adversary can use these keys to create an alternate ledger; such a long-range attack can incur catastrophic losses for the impacted parties [9, 25]. The key observation is that unlike PoW-chain, any chain that is constructed using PoS and MFT protocols is not self-verifiable and self-contained and relies on long-term external safe-keeping of private keys.

In this paper, we solve these challenges through our novel *Power-of-Collaboration* (PoC) protocol² that can be easily appended to existing PoS and MFT blockchains to guard their ledgers against long-range attacks. To guarantee a tamper-proof ledger that prevents long-range attacks, like PoW, PoC terms its participants as miners and requires them to solve compute-intensive puzzles. However, unlike PoW, PoC requires its miners to work together or *collaborate* to solve the compute-intensive puzzle. Subsequently, each miner is *rewarded* in proportion to the work it *had agreed to complete*. As PoC miners do not compete with each other, no honest miner’s work goes to waste. Further, this collaboration deters malicious miners as they can neither work alone, nor can they rewrite the ledger; malicious miners would need more computational power than the combined power of all the honest miners. If malicious miners decide to not collaborate with honest miners, our PoC protocol quickly identifies such malicious miners and heavily penalizes them for such behavior.

Prior attempts to eliminate long-range attacks require: (1) appending PoW consensus to impacted blockchain [10, 69] and (2) keys-evolving techniques [32, 34] and increasing the number of keys an adversary needs to compromise [9]. Unfortunately, these solutions lead to substantial energy wastage or delay the imminent long-range attack.

²The sketch of our collaborative consensus idea was presented as an extended abstract in [18].

Interestingly, this ability to collaborate instead of compete comes with massive opportunities. (1) PoC can sustain high throughput of the original blockchain, which is a major win for PoC as PoW-based blockchains have been shown to have extremely low throughput. (2) PoC guarantees a single blockchain, which is uncommon for PoW as the competition between its miners constantly forks the blockchain. These forks can trigger attacks like selfish mining and 51% [24, 30] and require PoW-based blockchains to continuously monitor and modify the difficulty of the mining.

To show that PoC is effective in practice, we run a series of experiments. The goal of our evaluation is twofold: illustrate PoC’s adaptability and scalability. To meet these goals we append PoC to a high-performance in-production blockchain platform, masked as RESILIENTDB due to the double-blind policy, which runs PBFT consensus protocol. We select RESILIENTDB’s PBFT implementation as it adds approximately 9000 blocks per second on a system of 4 replicas. At this high throughput, we show that our PoC can commit 1000 blocks per second with 64 miners. Notice that this 1000 blocks per second is a much higher throughput than a majority of state-of-the-art blockchains. We prove this by extending Diablo [37] framework with PoC against *four* popular blockchain systems, namely, Algorand [35], Diem [26], Ethereum [71], and Quorum [17]. This experiment affirms the high scalability of our PoC protocol. Next, we list our contributions.

- We present the Power-of-Collaboration (PoC) protocol, a sybil-resistant collaborative mining, that can be appended to existing PoS and MFT protocols to guard them against long-range attacks.
- PoC prevents an honest miner’s work from wasting by requiring all the miners to collaborate on solving a complex puzzle and rewards each miner for its share of work. This also makes it impractical for malicious miners to rewrite the ledger, as to do so, they would need more resources than the combined resources of honest miners.
- PoC quickly detects non-conforming behavior by malicious miners and penalizes them for such activities.

2 PRELIMINARIES

We adopt the standard communication and failure model adopted by most blockchain protocols [16, 36, 47]. We assume the existence of a blockchain system \mathcal{S} of the form $\mathcal{S} = \{\mathcal{R}, \mathcal{C}\}$. The set \mathcal{R} consists of $n_{\mathcal{R}}$ replicas (or stakeholders in case of PoS protocols) of which at most $f_{\mathcal{R}}$ can behave arbitrarily. In a typical blockchain system, these replicas store the state and participate in consensus. The remaining $n_{\mathcal{R}} - f_{\mathcal{R}}$ are honest: they follow the protocol and remain live. We also assume the existence of a finite set of clients \mathcal{C} , of which arbitrarily many can be malicious.

Miner Staking. Unlike PoW-based systems, we make a similar assumption as common PoS-based systems: PoC requires the knowledge of total number of miners participating in the mining process. Each miner that wishes to participate in PoC mining needs to *stake* some of its resources. This staking also determines the amount of collaborative work a miner has to perform (more on this in Sections 4.3 and 6.1).

We denote the set of miners as \mathcal{M} and the total number of miners as $n_{\mathcal{M}}$, of which at most $f_{\mathcal{M}}$ can act maliciously. In Section 6.2, we

show how miners can leave and join PoC mining. The roles of both miners and replicas can be played by the same party, however, for the sake of exposition, we denote miners and replicas separately.

Authenticated communication and Adversary model: replicas and miners employ standard cryptographic primitives such as MAC and/or digital signatures (DS) to sign messages. We denote a message m signed by a replica r using DS as $\langle m \rangle_r$. We employ a *collision-resistant* hash function $\text{hash}(\cdot)$ to map an arbitrary value v to a constant-sized digest $\text{hash}(v)$ [42]. Each replica/miner only accepts a message if it is *well-formed*. We assume the existence of a *standard adversary* which can corrupt arbitrary nodes, delay and reorder messages [16]. Further, there exists a mechanism for the system \mathcal{S} to allow replicas to join or leave \mathcal{S} , and this knowledge is percolated to all the existing members of \mathcal{S} . Each such system \mathcal{S} should provide the following guarantees:

Safety. If two honest replicas r_1 and r_2 order transactions T and T' at sequence numbers k , then $T = T'$.

Liveness. If a client sends a transaction T , then it will eventually receive a response for T .

Anonymity. Like existing PoW and PoS blockchains, we assume *pseudo-anonymity* for miners in set \mathcal{M} ; they are identified only through their *public keys*, which they may hold many. Similarly, like any PoS blockchain knows total number of stakeholders, we know $n_{\mathcal{M}}$, which allows us to assign a unique identifier to each miner in the range $[0, n_{\mathcal{M}}]$. The anonymity for replicas depends on the blockchain system \mathcal{S} , for example, several MFT protocols need to know the identities of their participants before the start of consensus [16, 72]. Each replica is assigned an identifier in the range of $[0, |\mathcal{R}|]$.

3 BACKGROUND

We begin by presenting the necessary conceptual background.

3.1 Proof-of-Work Consensus

Initial blockchain systems, such as Bitcoin and Ethereum employ the PoW consensus to add transactions to the ledger. Prior to running the PoW protocol, each miner³ $m \in \mathcal{M}$ selects some client transactions and packs them in a block. This block includes a header, which contains: (i) the *hash* of the previous block, (ii) the *Merkle root* of all transactions, (iii) D , which determines the difficulty of the puzzle, and (iv) *nonce*, the solution of the puzzle, among other fields [56].

Computing the Merkle root of all transactions requires a miner m to compute a pairwise hash from the leaf to the root. This Merkle root helps to verify if a transaction was included to create the Merkle tree. The main challenge for any PoW miner is to determine the nonce that solves the complex PoW puzzle, which is essentially a *desired hash* of the block (having a specific number of leading zero bits). For this purpose, the miners iterate through different *nonce* values and rehash the block until they reach the desired hash. Whichever miner discovers a *valid* nonce first, it gets to propose the next block to be added to the chain. The difficulty of finding the nonce is controlled through the system parameter D .

³In PoW, machines that participate in consensus are referred to as miners.

PoW Challenges. In blockchain systems running PoW consensus, *forks* are a common occurrence; multiple miners may propose the next block with valid nonces at approximately the same time. In such a case, the protocol states that each miner would only accept the first block it receives. This could lead to temporary branches or *forks*, all of which have the same previous hash. However, these systems assume that this condition would resolve as time passes because the honest miners would stick to the *longest chain*—the one with the largest number of blocks. Eventually, all the shorter forks are discarded, and only the longest chain survives. Consequently, to reduce the probability of forks, PoW-based systems periodically increase the difficulty in finding the nonce. As a result, the PoW protocol is often viewed as an energy guzzler: (1) miners need to perform massive computations to find the nonce, and (2) only one block is added to the chain (the rest are discarded).

Incentives. Considering energy costs, PoW-based systems award their miners incentives to act honestly and follow the protocol. Generally, there are two main sources for the awards: *winner's reward* and *transaction fees*. The winner's reward is given to the miner who successfully adds a new block to the chain, whereas each client pays a fee for its transaction to be added to the block.

3.2 Proof-of-Stake Consensus

Due to the performance and energy-inefficiency limitations of the PoW protocol, several recent blockchain systems have advocated a transition to the PoS consensus protocol [23, 35]. In PoS protocols, participants earn the opportunity to add the next block to the blockchain based on their invested stake. Often, the stake is equivalent to a monetary token or currency. As a result, the higher the stake a miner invests, the greater the opportunities it receives to add a block. Once a stakeholder proposes the next block, all the other participants also sign this block, which acts like an agreement among the participants.

3.3 Long-range attack on PoS and MFT

Among many other challenges, the key challenge for any PoS-based system is long-range attacks like *posterior corruption* [9, 34]. This attack aims to create an alternate history by re-writing the ledger. To do so, a malicious party tries to compromise the private keys of the honest parties. Alternatively, an adversary can buy keys from rational old stakeholders (who no longer have any stake in the system) by offering them incentives in exchange for their keys. Once an adversary has access to the private keys of honest stakeholders, it can create arbitrary blocks and sign them with the compromised keys. Next, we illustrate a simple long-range attack.

EXAMPLE 1. Assume a PoS blockchain: $\mathcal{B}_1, \mathcal{B}_2, \dots, \mathcal{B}_k, \dots, \mathcal{B}_n$. Say malicious stakeholders have access to the private keys of all the honest stakeholders and decide to create an alternate ledger, starting from the k -th block. Additionally, these malicious parties will eventually get chances to propose new blocks. So, the blockchain at these malicious stakeholders will look as follows: $\mathcal{B}_1, \mathcal{B}_2, \dots, \mathcal{B}_k', \dots, \mathcal{B}_n', \mathcal{B}_{n+1}'$, which they will reveal to everyone. Any new stakeholder joining this system cannot distinguish between these two chains and will choose the longest chain. Similarly, the existing honest stakeholders will forfeit their chain and switch to the malicious chain.

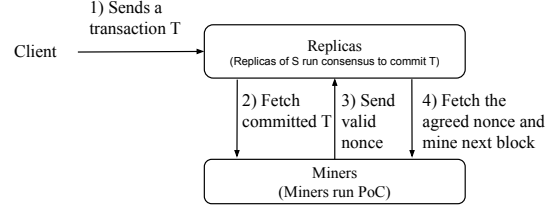


Figure 1: Transactional flow in a system S+PoC.

In hindsight, if the private keys of honest parties are compromised, all the bets are off. A common assumption made by existing MFT and PoS protocols is that *malicious parties cannot impersonate honest parties*. But, recent security breaches [4, 7, 41, 54] illustrate that hackers can easily compromise millions of accounts, which in turn allows malicious parties to impersonate and forge messages or blocks. Hence, we argue that the security of any ledger should not solely rely on the security of the private keys of its administrators.

This highlights an unprecedented fragility in the design of existing MFT and PoS systems: the only proof attached to each block is the signatures of a majority of participants. As the consensus mechanism of these protocols is computationally cheap, any malicious party that has access to the private keys of honest parties can trivially create an alternate ledger or *history*. This is where PoW-based systems differ; to rewrite the ledger, a malicious party has to solve computationally expensive puzzles. Longer the blockchain, the harder to replace existing blocks with desired blocks; not to forget that new blocks are being proposed continuously.

Existing attempts to resolve long-range attacks are either unscalable or insecure [9, 28]. We discuss these in § 9.

4 POWER-OF-COLLABORATION

One possible solution to prevent long-range attacks on PoS and MFT blockchains is to force each committed block from these chains to undergo PoW consensus [10, 69]. However, PoW-based chains yield extremely low throughput, consume massive energy, and can lead to forks in the chain. Our solution to this problem is to append our novel PoC protocol to an existing blockchain system. Our PoC protocol offers the following appealing properties:

(G1) **Tamper-proof ledger.** PoC guards the ledger against long-range attacks like posterior corruption.

(G2) **Minimal energy costs.** Unlike PoW, PoC requires miners to collaborate to solve the compute-intensive puzzle, which prevents competition among miners, utilizes the efforts of each miner, and helps to conserve energy.

(G3) **No forks and selfish mining attacks.** Collaboration allows PoC to prevent forking of the ledger and selfish mining by malicious miners.

(G4) **Sustainable throughput and latency.** PoC's collaboration allows it to continue offering clients high throughput at a minimal increase to the latency.

Figure 1 illustrates the transactional flow. Each client sends its transaction to the replicas participating in a blockchain system S . This system may run any PoS or MFT protocol of its choice to reach consensus on the client transactions. Once the replicas commit a batch of client transactions, they gossip this batch to the PoC miners. Following this, the miners collaboratively run the PoC protocol to

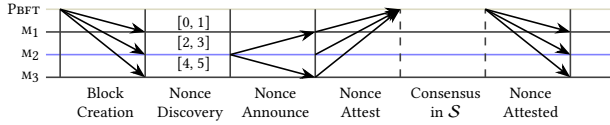


Figure 2: PoC protocol with miners $\mathcal{M} = \{M_1, M_2, M_3\}$. The solution space $\mathbb{S} = [0, 5]$ is divided into three slices $([0, 1], [2, 3], [4, 5])$. Post creating a block, each miner tries to discover a nonce in its slice. Assume the valid nonce is 2, which M_2 discovers.

add this batch to the tamper-proof ledger. This requires finding a valid nonce, which they forward to the replicas. PoC leverages the consensus protocol run by the system \mathcal{S} to *select* and *attest* a valid nonce. A selected nonce acts as one of the transactions in the next batch, therefore, negligible overhead for replicas of \mathcal{S} .

Sybil Resistance. On the one hand, PoW blockchains resist Sybil attacks because their miners do not benefit from creating fake identities; the only way for a miner to propose the next block is by solving compute-intensive problem. On the other hand, prior to any round of consensus, MFT blockchains verify the identities of all the participants and PoS blockchains require all participants to invest their monetary resources, which they cannot arbitrarily takeout. Like PoS, any miner that wishes to participate in PoC needs to invest its monetary resource, and the value of its invested resources determines the proportion of its work and rewards.

Next, we discuss our PoC assuming no attacks (*good case*). Later, we explain how we handle malicious attacks.

4.1 Client Transaction Ordering

Prior to running PoC, we expect the blockchain system \mathcal{S} to reach consensus on client transactions. **For PoC, the consensus run by \mathcal{S} is a black-box.** The system \mathcal{S} is free to run any consensus protocol of its choice. It needs to only provide PoC with committed batches of transactions.

Our use of the term “committed” implies that each committed batch of transactions has been accepted by a quorum of replicas of \mathcal{S} and will persist across adversarial failures. For instance, in MFT protocols like PBFT [16] and HotStuff [72], blocks are committed when they have quorum certificates from $2f_R + 1$ replicas. In several other blockchain systems, a batch of transactions is assumed committed if it is at a specific depth in the blockchain. A depth indicates the position of the block in the blockchain; the larger the depth of a block \mathcal{B} , the greater the number of blocks that succeed \mathcal{B} and the harder it is for another fork to overtake this chain.

The assumption of PoC miners working with only committed batches has two advantages: (1) It frees PoC from having any knowledge on the consensus run by \mathcal{S} , and (2) PoC miners will not waste their resources on batches that may not persist. Achieving this requirement of committed blocks is also rather trivial. We expect honest replicas to follow the protocol and only forward committed blocks to the miners. Additionally, we require PoC miners to download the blocks added to the blockchain and initiate mining on a block only if it has been committed by \mathcal{S} .

4.2 Chain Communication

Once the blockchain system \mathcal{S} has committed a block, we require it to forward the committed block to PoC miners. A popular way to achieve this task is to use a *gossip* protocol, which determines the number of parties acting as senders and as receivers. In this paper, we assume that each replica in \mathcal{S} gossips the committed block to all its neighboring miners. Notice that existing blockchain systems like Bitcoin and Ethereum also use this gossip protocol to exchange blocks among their nodes. All of these systems (including PoC) make a simplifying assumption that each node is connected to sufficient number of honest nodes, which helps to disseminate the messages. An efficient alternative to gossip is the Information Dispersal Algorithm [58], while a reliable alternative to the gossip protocol is to use Reliable Broadcast [1].

4.3 Collaborative Mining

Once a miner receives the next committed block from $f_R + 1$ replicas in \mathcal{S} , it prepares for mining this block. Essentially, an honest miner can only be certain that it is going to mine the correct next block if it receives the same block gossiped by $f_R + 1$ replicas. Next, we explain the PoC protocol under the assumption that each miner knows the next block to mine. In case this assumption is not met, it is trivial to resolve this situation by requiring each PoC miner to communicate all the committed blocks it has received.

PoC mining aims to reliably append the committed blocks to the ledger such that it can withstand long-range attacks. We term PoC mining as collaborative because, unlike PoW mining, miners do not compete with each other to propose the next block. As a result, PoC mining consumes and wastes significantly less energy. However, like PoW, our PoC also attaches a computational proof to each mined block, which proves that this block was correctly mined.

PoC supports collaboration by dividing the PoW hash computation into n_M disjoint sub-problems and requires each miner to work on a *distinct predetermined sub-problem* (refer to Section 6). Assume \mathbb{S} is the solution space for a PoW hash computation; the set of numbers a miner has to try to find a valid nonce. In our PoC protocol, without the loss of generality, we divide the solution space \mathbb{S} into n_M equal slices, $\{\mathbb{S}_1, \mathbb{S}_2, \dots, \mathbb{S}_{n_M}\}$, such that:

$$\mathbb{S}_1 \cap \mathbb{S}_2 \cap \dots \cap \mathbb{S}_{n_M} = \emptyset \quad \text{and} \quad \mathbb{S}_1 \cup \mathbb{S}_2 \cup \dots \cup \mathbb{S}_{n_M} = \mathbb{S}$$

Our PoC protocol assigns slice \mathbb{S}_1 to miner M_1 , \mathbb{S}_2 to M_2 , and \mathbb{S}_i to M_i , $i \in [1, n_M]$. As each miner is working on a reduced solution space, so if a PoW miner takes time τ to find a valid nonce on the solution space \mathbb{S} , then in PoC, if all the miners are honest, the time required to find the nonce is $O(\frac{\tau}{n_M})$. Consequently, PoC leads to reduced energy consumption by collaboratively finding solutions while eliminating the significant amount of redundant work that arises when parties compete to find the solution.

4.4 PoC Protocol Steps

From an outside view, our PoC protocol works in rounds, and within each round, each miner attempts to find a valid nonce in its slice. There are many ways to divide the solution space into different sizes of n_M disjoint slices. For example, like PoS [23, 43], PoC can assign miners with higher stakes a larger number of slices.

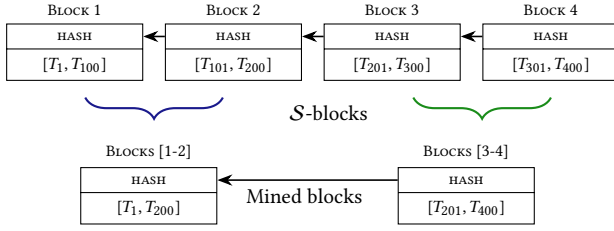


Figure 3: Illustrating how $\sigma = 2$ contiguous S -blocks produced by replicas of S are aggregated into one mined block of PoC. Here, each S -block includes 100 transactions.

We discuss more on this in Section 6.1. For the sake of exposition, in the following sections, we assume that the solution space \mathbb{S} is deterministically divided into n_M disjoint equal slices by each miner.

EXAMPLE 2. In Figure 2, the solution space $\mathbb{S} = [0, 5]$ is divided among three miners. The three slices are: $\mathbb{S}_1 = [0, 1]$, $\mathbb{S}_2 = [2, 3]$, and $\mathbb{S}_3 = [4, 5]$. Assume the valid nonce 2 lies in the slice of miner M_2 . Once M_2 finds the nonce, it broadcasts it to all the miners, following which each miner requests the replicas of S to attest this nonce.

Block Creation. As stated in Section 4.2, PoC miners receive blocks from the replicas in S . If system S yields a high throughput, it can produce blocks at a much higher rate than the PoC miners can mine. This will make PoC mining a bottleneck as the rate at which a new **mined block** is added to the ledger is much lower than the rate at which S generates the block. To tackle this challenge, each mined block is composed of $\sigma > 0$ committed S -blocks.⁴ The value of σ is a protocol parameter. Another advantage of aggregating multiple S -blocks into one mined block is that it helps to reduce the mining costs.

To maintain block ordering by S , PoC requires miners to only aggregate σ contiguous S -blocks. For the sake of discussion, let us assume that each S -block is assigned a monotonically increasing sequence number k and each mined block is assigned a sequence number b . If the last block mined by PoC miners had sequence number $b - 1$ and the sequence number of last S -block added to the b -th block is $k - 1$, then in the b -th block, each miner will aggregate the following blocks: $k, k + 1, \dots, k + \sigma$ (Figure 4, Line 16). Notice that aggregating S -blocks in this way is safe as (1) these blocks are already committed by replicas of S , and (2) miners only aggregate consecutive blocks.

EXAMPLE 3. In Figure 3, we illustrate the difference between S -blocks and mined blocks. The replicas of S have committed four S -blocks starting with sequence number 1. Assume $\sigma = 2$, then each PoC miner aggregates 2 consecutive S -blocks into a mined block.

As each S -block contains a Merkle root of all the transactions, PoC miners also generate a Merkle root for the aggregated block. This is simply the hash of the Merkle roots of all the aggregated blocks. The only thing remaining is slice discovery. We assume that each miner is deterministically assigned a slice (§6.1). Specifically,

⁴For disambiguation, we use the term “ S -blocks” to refer to the blocks produced by replicas of S and mined block to refer to the block produced by PoC miners.

the i -th miner M_i knows that a total of n_M miners are participating in the PoC protocol. It uses this information to create n_M slices and assigns itself the i -th slice \mathbb{S}_i (Figure 4, Line 21).

Nonce Discovery. Once a miner knows its slice, it starts nonce discovery (Figure 4, Line 22). A miner can initiate mining for the b -th block only after it knows the valid nonce (η) for the $(b - 1)$ -th block (Figure 4, Line 6). To discover a nonce, we assume that each miner M knows the characteristics of the expected hash (the number of leading zeroes). Each miner uses this hash information to search in its slice for any value that yields the desirable hash. This process may require M to iterate over all the possible values in its slice.

Nonce Announcement. Once a miner M computes the expected hash, it creates a message **NONCEFIND**, which includes the discovered nonce and broadcasts this message to all the miners (Figure 4, Line 25). When a miner receives a **NONCEFIND** message, it terminates the process of nonce discovery if the received nonce is valid. Next, each miner that has access to a valid nonce gossips this nonce to the replicas of S (Figure 4, Lines 27-29).

Nonce Attestation. As mentioned earlier in this section, PoC leverages the consensus protocol of S to attest the nonce. Specifically, when a replica R of S receives a matching **NONCEFIND** message from $f_M + 1$ miners, it creates a transaction that includes the received **NONCEFIND** message as its data. Whenever it is the turn of R to propose a new block, and if an S -block containing the **NONCEFIND** message for the b -th mined block is yet to be proposed, R proposes a new block that includes this message. We expect honest replicas to prioritize nonce transactions over others to prevent delays in adding newly mined blocks to the ledger.

Chain Append. When a miner M receives the valid nonce for the b -th block from replicas of S , M appends this block to its local blockchain and marks the nonce discovery process for the b -th block as complete (Figure 4, Lines 4-7). Post this, M executes the reward transactions in the block, which helps to distribute the reward (Figure 4, Lines 12-13). Finally, the miner begins working on the next block.

Multiple Nonces. In rare scenarios, two or more miners may find valid nonces that help to reach the expected hash. Specifically, miners M_i and M_j may both discover a valid nonce in their respective slices. This situation is *not unique* to PoC, even complex PoW computations can have multiple solutions. In such a situation, we need to ensure that all the miners select the same nonce. Interestingly, ensuring this is trivial in our model as each nonce is attested by system S . If the next proposer for an S -block receives two or more **NONCEFIND** messages with distinct valid nonces, it selects one of them as the solution. When, eventually, this block becomes committed, all the PoC miners will have access to the same nonce for block b .

4.5 Rewards

Like PoW-based systems, PoC also needs to incentivize their miners for their computational resources. However, in PoW systems, as miners compete with each other to propose the next block, only the winning miner receives the rewards. Consequently, the remaining miners end up wasting their resources and are not compensated for their efforts. In contrast, PoC requires miners to collaborate,

and once a block is added to the ledger, it distributes the rewards among all of them.

If \diamond is the reward for a miner to find a valid nonce in PoW-based blockchain, then in our PoC protocol, each i -th miner M_i receives a reward \diamond_i proportional to the size of its slice \mathbb{S}_i .

$$\diamond_i = \frac{|\mathbb{S}_i|}{|\mathbb{S}|} * \diamond$$

Like Bitcoin [53], in PoC, at the time of the creation of a mined block, each miner in \mathcal{M} adds $n_{\mathcal{M}}$ transactions to the block (includes them in the Merkle root). These $n_{\mathcal{M}}$ transactions help to deterministically divide the reward among the miners; i -th transaction adds the reward \diamond_i to the account of miner M_i . Hence, when the miner M_i has access to the valid nonce, its block already includes all the transactions. Including the reward transactions in the block does not imply their execution. Once a miner has access to the nonce attested by replicas of system \mathcal{S} , it executes the $n_{\mathcal{M}}$ transactions to update all accounts (Figure 4, Line 13).

Reward Economics. In Section 3.1, we briefly discussed the source of miner rewards, which are composed of transaction fees and a winner's reward. Existing blockchain systems like Bitcoin advocates the generation of a token (cryptocurrency) that acts as the winner's reward. We skip diving into the crypto-economics of token generation. However, the general idea behind this token is that it is a monetary compensation for the computational resources spent by the winning miner. Hence, we focus on the transaction fees, which are paid by each client that wants its transactions to be processed.⁵

5 MALICIOUS ATTACKS

Unsurprisingly, the decentralized nature of blockchain systems makes them a prime target for attack by malicious parties. By appending PoC to any existing system \mathcal{S} , we subject \mathcal{S} to newer attacks. As a result, in this section we enlist all the possible attacks on $\mathcal{S} + \text{PoC}$ and present solutions that can withstand these attacks without degrading system performance. Following is the list of malicious attacks on PoC.

- (A1) Miner does not participate in the PoC protocol.
- (A2) Long-range attacks.
- (A3) Nonce equivocation at system \mathcal{S} .

To resolve Attack (A1), we present our novel *slice shifting* protocol that also penalizes malicious miners for their behavior. For Attack (A3), we rely on the equivocation resolution mechanism provided by \mathcal{S} . All distributed systems also need to guard against **flooding or denial-of-service** attacks. To prevent these attacks, we follow the best practices suggested by prior works [19, 20] and assume that the replicas and miners use one-to-one virtual communication channels, which can be disconnected if needed.

5.1 Slice Shifting

Each honest PoC miner is expected to search for a nonce in its slice until it receives a valid nonce from another miner or it has exhausted its slice. A malicious miner may not follow this behavior; it may want to disrupt the process of nonce finding. If the malicious miners are fortunate and the nonce is present in their slices, then honest miners may never receive the nonce, and PoC will come

Miner-role (running at the miner M_i with identifier i):

```

1: event  $M_i$  receives  $f_R + 1$  matching copies of the next committed  $\mathcal{S}$ -block (sequence  $k$ ) such
   that each copy comes from a distinct replica in  $\mathcal{S}$  do
2:   Call functions NonceCheck( $k$ ), SliceCheck( $k$ ), and NewMine()

3: function NonceCheck ( $\mathcal{S}$ -block: identifier  $k$ )
4:   if  $k$  includes a NonceFind transaction for block  $b$  then
5:     Let  $\eta$  be the nonce.
6:     if  $\eta$  is valid then
7:       Add  $\eta$  to block  $b$  and terminate PoC mining for  $b$ .
8:     if Shift round  $r > 0$  then
9:        $\mathbb{S}_O :=$  Slice which contains  $\eta$ .
10:       $\mathcal{M}_{mal} = \{M_e\}$ , where  $e = (o + l - 1) \bmod n_{\mathcal{M}}$ ,  $l \in [1, r]$ 
11:      Broadcast  $\langle \text{PENALTY}(\mathcal{M}_{mal}, b, r) \rangle_{\mathcal{M}}$  to all miners.
12:      Execute the transactions.
13:      Add rewards to the accounts of all miners.
14:      Run function NewMine()

15: function NewMine ()
16:   if  $q$  was the sequence of last committed  $\mathcal{S}$ -block in the last mined block  $b - 1$  then
17:     if  $M_i$  has  $\sigma$  committed  $\mathcal{S}$ -blocks starting from  $q + 1$  then
18:       Create block  $b$  such that it includes these  $\sigma$  batches.
19:       if no nonce found for block  $b - 1$ , then create a merged block.
20:       Set shift round  $r = 0$  and start a timer  $\delta$ .
21:        $\mathbb{S}_i :=$  Initial slice assigned to  $M_i$ .
22:       Run function FindNonce( $\mathbb{S}_i$ ).
23: function FindNonce (slice:  $\mathbb{S}_i$ )
24:   Miner  $M_i$  tries to find a valid nonce  $\eta$  in slice  $\mathbb{S}_i$ .
25:   if  $M_i$  finds  $\eta$  then
26:      $M_i$  broadcasts  $\langle \text{NonceFind}(b, \eta) \rangle_{\mathcal{M}_i}$  to all miners.
27:   event  $M_i$  receives  $\langle \text{NonceFind}(b, \eta) \rangle_{\mathcal{M}_j}$  from some miner  $M_j$  do
28:     Verify the nonce and stop the Timer  $\delta$ .
29:      $M_i$  gossips  $\langle \text{NonceFind}(b, \eta) \rangle_{\mathcal{M}_i}$  to all replicas in  $\mathcal{S}$ .
30:   event Timer  $\delta$  expires while finding nonce for block  $b$  do
31:      $M_i$  broadcasts  $\langle \text{Shift}(b, r) \rangle_{\mathcal{M}}$  to all miners.
32:   event  $M_i$  receives  $\langle \text{Shift}(b, r) \rangle_{\mathcal{M}}$  from  $f_{\mathcal{M}} + 1$  distinct miners do
33:     Create the certificate  $\mathcal{C}$  that includes  $f_{\mathcal{M}} + 1$  Shift messages.
34:      $M_i$  gossips  $\langle \text{Shift}(b, r, \mathcal{C}) \rangle_{\mathcal{M}_i}$  to all replicas in  $\mathcal{S}$ .
35:   function SliceCheck ( $\mathcal{S}$ -block: identifier  $k$ )
36:     if  $k$  includes a transaction with certificate  $\mathcal{C}$  for block  $b$  then
37:       Let  $r$  be the shift round mentioned in  $\mathcal{C}$ .
38:       if Shift round  $r = f_{\mathcal{M}}$  then
39:         Terminate PoC mining for  $b$ -th block.
40:         Run function NewMine()
41:   else
42:      $r++$ .
43:     Reset timer  $\delta$ .
44:     if Last mined slice  $\mathbb{S}_i$  then
45:        $i = (i + 1) \bmod n_{\mathcal{M}}$ .
46:       Run function FindNonce( $\mathbb{S}_i$ ).
47:   event  $M_i$  receives  $\langle \text{PENALTY}(\mathcal{M}_{mal}, b, r) \rangle_{\mathcal{M}_j}$  from  $f_{\mathcal{M}} + 1$  distinct miners do
48:     Create a penalty certificate  $\mathcal{F}$  that includes  $f_{\mathcal{M}} + 1$  PENALTY messages.
49:      $M_i$  gossips  $\langle \text{PENALTY}(b, r, \mathcal{F}) \rangle_{\mathcal{M}_i}$  to all replicas in  $\mathcal{S}$ .

```

Figure 4: PoC miner protocol.

to a halt. We aim to quickly resolve such a situation and prevent further performance degradation. We do so by running our novel *slice shifting* algorithm that switches miner slices under failures. This is done with the aim that when an honest miner has access to the slice held by a malicious miner, it can discover the nonce in that slice and broadcast it to other miners.

EXAMPLE 4. Figure 5 illustrates the slice shifting protocol. Assume the nonce lies in slice $[2, 3]$ and miner M_2 fails to announce the nonce. Eventually, honest miners will timeout and trigger slice shifting protocol. These miners must create a certificate to prove that a majority wants to do slice shifting. They send this certificate to the replicas of \mathcal{S} for attestation. Post this, each miner works on a new slice. Once, they discover the nonce, they initiate the process of penalizing M_2 .

Timer Initialization. Honest PoC miners, who have exhausted their slice search space and do not have a valid nonce, need a mechanism to make progress. We follow existing MFT works and require each miner to set a *timer* before it starts mining a slice.

⁵Systems like Ethereum [71] set the maximum allowed transaction fees.

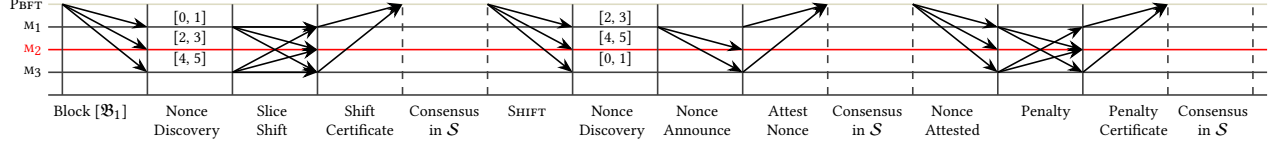


Figure 5: Slice shifting procedure: assume 2 is the valid nonce and is present in the slice of malicious miner M_2 . M_2 fails to broadcast 2, which triggers slice shifting; and with help of replicas of S , once 2 is found, it is penalized.

Specifically, each miner sets a timer δ for the b -th block (Figure 4, Line 20) and stops δ when it has a valid nonce for the b -th block.

Malicious Miner. In the case M 's timer δ expires before it has access to a valid nonce, M broadcasts to all the other miners that it wishes to initiate the *slice shifting* protocol (Figure 4, Line 30). The slice shifting protocol runs for at most f_M rounds and deterministically switches slices assigned to each miner. A round of slice shifting only takes place when at least $f_M + 1$ miners request to do so. Specifically, when a miner M_i timeouts, it creates a message $\text{SHIFT}(b, r)$ and broadcasts this message to all the other miners. Here, r represents the slice shifting round, which is initially set to zero. When M receives SHIFT messages from $f_M + 1$ distinct miners, it requests the replicas of system S to help reach a consensus on slice shifting (Figure 4, Line 32). To make this request, each miner must broadcast a certificate \mathcal{C} that includes $f_M + 1$ SHIFT messages.

Shift Attestation. When replicas of S receive a signed \mathcal{C} from $f_M + 1$ PoC miners, they agree to attest this slice shift. This attestation requires S to run consensus on this certificate \mathcal{C} . It does so by adding \mathcal{C} as a transaction in the next block. *Note:* consensus on \mathcal{C} is like consensus on any transaction where \mathcal{C} acts as the transactional data. Post consensus, as mentioned in Section 4.2, all the replicas gossip this block to the miners.

Once a miner M receives a S -block from $f_R + 1$ replicas that includes a committed certificate \mathcal{C} , it assumes it is time to shift its slices. Following this, it increments the shift round r by one and mines the next slice (Figure 4, Lines 42-46). Specifically, if in shift round r , M_i was responsible for mining slice \mathbb{S}_i , in round $r + 1$, M_i will mine slice \mathbb{S}_j , where $j = (i + 1) \bmod n_M$. Again, before mining for round $r + 1$, M restarts the timer δ for the k -th block.

It is possible that the timer δ again timeouts, due to more failures. In such a case, M_i would need to initiate another round of slice shifting. However, this slice shifting protocol would occur for only $r = f_M$ rounds (with high probability).

No nonce – Merge. In PoW-based systems like Bitcoin, it is possible that a miner may not find any valid nonce that helps it to reach the expected hash. In such a case, the miner modifies the variable fields of the block, such as timestamp, Merkle root, and block version, and initiates finding the nonce for this new block. This strategy works for systems like Bitcoin as each node independently decides the contents of the block it wants to mine next. However, in PoC, miners mine the slices of the same block.

As a result, it is possible that even after $r = f_M$ rounds, honest miners do not have access to a valid nonce. Such a case takes place if no value in any slice can yield the expected hash. To resolve this case, we require the miners to terminate their search for the nonce and initiate the *merge* process. The aim of merging blocks is to increase the probability of reaching the expected hash.

For instance, for the b -th block, if a miner M receives a certificate \mathcal{C} from S replicas, which has shift round $r = f_M$, M concludes that no valid nonce exists for the b -th block (Figure 4, Line 38). Following this, M creates a new block that merges contents of the b -th and $(b + 1)$ -th blocks (Figure 4, Line 19). This new merged block now serves as the b -th block and miners attempt to find the nonce for this new block. The merged block includes a Merkle root, which is the hash of all the transactions in b and $(b + 1)$ -th blocks.

Penalty for Slice Shifting. Frequent slice shifting due to malicious miners will be detrimental to the performance of our PoC protocol; it forces honest miners to do more work and wastes their resources. To discourage malicious attacks, we heavily *penalize* malicious miners. Specifically, we require each miner to track the number of shifts (r) it took to find a valid nonce and to identify the miners that failed to perform this task.

In our PoC protocol, identifying malicious miners responsible for r shifts is a trivial task for honest miners. When a miner M receives a valid nonce for the b -th block in shift round r ($1 \leq r \leq f_M$), it identifies malicious miners based on the slice containing the valid nonce. Let \mathbb{S}_j be the slice, then:

$$\mathcal{M}_{mal} = \{M_i\}, \text{ where } i = (j + l - 1) \bmod n_M, l \in [1, r]$$

Here \mathcal{M}_{mal} is the set of malicious miners who caused r rounds of slice shifting. To penalize these malicious miners, we again invoke the system S . Specifically, once a miner M has the knowledge of set \mathcal{M}_{mal} , it sends a message $\text{PENALTY}(\mathcal{M}_{mal}, b, r)$ to all the miners (Figure 4, Lines 8-11). Once M receives PENALTY messages from $f_M + 1$ miners, it creates a certificate (like it created for slice shifting) that includes these PENALTY messages and broadcasts this certificate to each replica in S (Figure 4, Line 47).

When the replicas of S receive a PENALTY certificate signed by $f_M + 1$ distinct miners, they add it to a new block for consensus. Post consensus, replicas of S penalize malicious miners by deducting their stakes (§ 6.1).

5.2 Long Range Attacks

Next, we demonstrate the hardness of PoC against long range attacks. For this, we follow Example 1 where starting from the k -th block, malicious parties want to rewrite the ledger. To do so, malicious replicas would first create an alternate set of S -blocks using the compromised private keys of honest parties. Next, these malicious replicas would forward these S -blocks to the malicious miners, who will attempt to forge the PoC ledger by creating new mined blocks. Notice that existing honest miners have a local copy of the chain and will not help malicious miners in creating these new mined blocks.

Assuming that honest miners control enough slices that cover 50% of the solution space, then malicious miners have at most a 50% chance to find the nonce for each replacement block that falls within their solution space. Clearly, the probability of constructing consecutive blocks for malicious miners decreases exponentially. Let, $\frac{1}{2}$ be the probability that malicious miners find the solution for the first replacement block. So, the probability that malicious miners find the solution for the b consecutive replacement blocks is $(\frac{1}{2})^b$, we refer to this probabilistic limit as the *solution space probability bound*. If $b \geq 7$, the probability is 0.7%. This task becomes infeasible if the number of blocks to mine is greater than 7, not to mention that in parallel, the chain at the honest miners may keep growing. Notice that in the case malicious miners do not find nonce in their solution space, their work at least doubles (equivalent to slice shifting) as they need to search for the nonce in slices assigned to honest miners.

Next, we re-examine PoC from the practical standpoint by demonstrating the actual time required to create an alternative chain taking into account two important parameters: (1) the age of the chain α (in months) and (2) the hashing power ratio of the malicious miners over the honest miners $\frac{m}{h}$.

Essentially, it takes $\alpha \times \frac{h}{m}$ months for the malicious miners to reconstruct an α -month-old chain given their overall hashing power ratio of $\frac{m}{h}$. For example, if the malicious miners hold $\frac{1}{2}$ of the mining power and want to reconstruct a 1-year old chain, it would require two years' worth of computation to mint an alternative chain of equal length. Of course, during these two years, the original chain may continue to grow as well. Of course, if the malicious miners have access to more resources than their honest counterparts, then they can mine at a greater hashing power, which will allow them to re-write the ledger at a faster rate. But, this argument holds for even PoW blockchains, which can be re-written with miners having more resources than honest miners. However, what we are able to demonstrate here is that simply compromising the private keys of honest miner and replicas is not sufficient to launch a long range attack on PoC

Invalid Nonce Attack. If malicious miners have access to the private keys of honest replicas of \mathcal{S} , they can even forge the transactions that include nonces and slice certificates. Such attacks will delay appending the next mined block to the chain, but cannot force honest miners to accept an invalid nonce.

6 DISCUSSION

We now present a discussion on how PoC miners join a system \mathcal{S} , how are the accounts of miners managed, and how is the difficulty of PoC mining controlled.

6.1 Staking and Account Database

Like existing blockchain systems [23, 71], PoC needs to reward (and penalize) miners. To do so, PoC makes use of the **native token** provided by these blockchains (say token Ψ).

Prior to the start of PoC mining, replicas of \mathcal{S} need to create a *PoC-genesis block*. This block stores information about the initial set of miners that wish to participate in the PoC mining. Each of these miners needs to exchange their dollars for Ψ . Each miner m **stakes** a portion of its tokens Ψ_s to be eligible for mining. For

simplicity, we assume that each miner has to stake at least $e \cdot \Psi_s$, where $e > 0$ and e is a system parameter. Staking implies that $e \cdot \Psi_s$ of the miner m are locked prior to its participation in PoC mining; m cannot access its $e \cdot \Psi_s$ till it is participating in PoC mining.

We follow the practices dictated by existing blockchain systems to bootstrap PoC [23, 26, 60]. Each of these systems assumed that the initial founding members of their network were honest; these members were vetted before being added to the network. Further, these systems assume that at all times at least 2/3-rd members are honest. For example, Ethereum Foundation [71], Avalanche [60], and Cardano [23], control large stakes in their respective networks to prevent malicious attacks. In a similar spirit, we assume that at least 51% of the initial set of PoC miners are honest.

The replicas of \mathcal{S} need to include the following information to the PoC-genesis block: (1) total number of miners (n_M), (2) keys of staking and mining accounts of each miner, (3) value of staking account of each miner, and (4) slice identifier for each miner. This genesis block is the first block of the mined ledger and it is added to the ledger after replicas of \mathcal{S} have reached consensus on this block.

To reward or penalize miners, we assume each PoC miner has two accounts: *stake account* and *mining account*. These accounts are managed as a **NoSQL** database. Each account is represented as a *key-value pair*; *key* is the public-key of a miner and *value* stores the number of Ψ_s held by the miner. We assume that each miner has a local copy of the account state (i.e., ledger state), and it updates the rewards or penalties for each miner as per the protocols described in Sections 4 and 5. Whenever PoC miners successfully append a new block to the ledger, they are rewarded with Ψ_r . These Ψ_r are added to their mining account. To penalize a malicious miner, Ψ_p are subtracted from its staking and mining accounts.

6.2 Miner Reconfiguration

During the execution of our PoC, some miners may want to join or leave the system. To allow dynamic participation, we make a simplifying assumption that each miner only leaves at the boundary of consensus; no miner leaves during an ongoing consensus. This assumption is not surprising as all the MFT systems make a similar assumption [26, 72]. Even PoS systems that use a committee of stakeholders to propose the next set of blocks require the committee members to stay until the next committee is selected [23, 35].

If a miner m wants to join PoC mining, it creates a message $\langle \text{JOINMINER}(pk, \Psi) \rangle_m$ and broadcasts this message to all the replicas of \mathcal{S} . In these messages, pk refers to the public key. The replicas of \mathcal{S} , on receiving a join request, are expected to prioritize this request and run consensus on this request. Once the request is successfully committed and received by existing miners, they initiate the process of appending this request to the ledger. Post this, the new miner is allowed to join PoC. In the case a new miner wants to join the system, once the committed transaction is added to the block, each existing miner creates staking and mining accounts for the new miner in its database. Notably, a new miner can only join the system if any existing miner is willing to sell its slice (or part of it).

Similarly, when a miner m wants to leave PoC mining, it broadcasts a message $\langle \text{LEAVEMINER}(pk) \rangle_m$ to all the replicas of \mathcal{S} . Post appending this request and *all the blocks*, in which this miner has

participated to the ledger, it can leave PoC mining. At this point, it is safe to release the Ψ s of the outgoing miner. Notably, a miner can only leave the system if either an existing or new miner is willing to purchase the slice of the miner that wishes to leave the system. Essentially, leaving the system will be seen as a transaction in which a slice from one miner is transferred to another.

6.3 Difficulty

Difficulty is a measure of how quickly a block can be generated. It determines the computational resources required to find a valid nonce. Specifically, difficulty states the characteristics of the expected hash—the number of leading zeroes. The higher the difficulty, the longer the amount of time it takes a miner to find the valid nonce.

In existing PoW-based blockchain systems, the difficulty frequently changes (mostly increasing) in an attempt to keep the ledger safe while reducing the probability of forks. When these systems have lower difficulty, there is a higher probability of two or more miners reaching the valid nonce, which leads to forks in the blockchain. Hence, by increasing the difficulty as competition increases, these systems aim to reduce the probability of forks. For example, Bitcoin changes its difficulty every 2016 blocks [13, 15].

Unsurprisingly, our PoC has a more stable difficulty as forks are eliminated. This stable difficulty helps to substantially save computation resources and energy. Every valid nonce is committed by consensus, which ensures that a malicious miner cannot produce a random nonce. However, as the hardware technology improves over time, malicious miners may have access to improved hardware. To keep up with the technological trajectory, the overall problem difficulty is expected to increase over time. This decision to increase the difficulty will be taken by PoS and MFT systems, and all the miners will be informed via committed transactions.

6.4 Performance Analysis

We now illustrate the time and energy required by PoC mining, in comparison to traditional PoW-based mining. We make the following simplifying assumptions: (1) Each miner has E computational resources, and (2) Each miner can solve the hash puzzle in τ seconds. If a system runs PoW mining, we conclude the following:

- Assume all miners are working in parallel.
- They all find the nonce at roughly the same time.
- Only one miner wins in proposing the block.
- Total resources consumed = $n_M \times E$
- Total time spent = τ
- Total energy = $n_M \times E \times \tau$

If a system runs PoC mining, we conclude the following:

- All the miners are working on their slices in parallel.
- Only one miner finds the nonce.
- Total resources consumed = $n_M \times E$
- Total time spent = τ/n_M
- Total energy = $E \times \tau$

This illustrates that the energy consumed by PoC is **independent of the number of miners**.

7 CORRECTNESS ARGUMENTS

We now state and prove the security properties of PoC. These properties hold under the standard MFT assumption stated in Section 2. Further, we assume that PoC is appended to a blockchain system \mathcal{S} , which provides the safety and liveness guarantees stated Section 2.

PoC adopts the same partial synchrony model adopted in most consensus systems [16, 72]. It guarantees *safety* in an asynchronous environment where messages can get lost, delayed or duplicated. However, *liveness* is only guaranteed during the periods of synchrony [16, 36, 72]. Additionally, PoC guarantees *fairness* for rewards and penalties only under synchrony. We present our detailed correctness proof in Appendix A, in which we prove the following *Safety*, *Liveness*, and *Fairness* theorems.

THEOREM 1 (SAFETY). *No two conflicting blocks are settled by the PoC protocol. That is, if two honest miners M_i and M_j add blocks \mathfrak{B}_i and \mathfrak{B}_j at sequence number b , then $\mathfrak{B}_i = \mathfrak{B}_j$.*

THEOREM 2 (LIVENESS). *Each committed block at \mathcal{S} is eventually settled by PoC.*

THEOREM 3 (FAIRNESS). *No honest miner receives a penalty if (i) it can find a nonce η within time δ and (ii) the network is experiencing a period of synchrony.*

8 EVALUATION

We implement our PoC protocol on top of our highly optimized RESILIENTDB fabric written in C++. RESILIENTDB provides us access to highly efficient realization of PBFT consensus, so we only had to implement our PoC protocol. The simplicity of our PoC implementation is evident from the fact that it has 2,400 LOC, while RESILIENTDB has 32,215 LOC. We also extend Diablo benchmarking framework [37] with our PoC protocol to illustrate that PoC can be attached to a wide range of leading blockchain platforms such as Algorand [35], Avalanche [60], Diem [26], Ethereum [71], and Quorum [17]. Our evaluation aims to answer the following:

- (1) Batching and scaling of PBFT in RESILIENTDB? (§8.1.1)
- (2) Batching and scaling of PoC? (§8.1.2)
- (3) Failures in PoC? (§8.1.3)
- (4) RESILIENTDB + PoC versus other blockchains in terms of both performance and energy consumption? (§8.1.4)
- (5) Blockchain X + PoC in the Diablo framework? (§8.2)

8.1 PoC Sustainability and Resiliency

We run experiments on Oracle Cloud Infra. (OCI); each replica or miner uses *VM.Standard2.8* architecture (16 cores, 8.2 Gbps bandwidth, 120 GB Memory). For each baseline, we present their peak throughput and least latency on a variety of cluster sizes: 16, 32, 64, and 120 nodes (OCI limited us from reaching 128 nodes).

We set the number of replicas and miners for RESILIENTDB system to 120. We require PBFT replicas to run consensus on a batch of 100 transactions. Each experiment we run for 30 minutes where first 20 min are for warmup and results are collected over last 10 minutes. We average results over *three* runs to remove noise. For RESILIENTDB, we require clients to sign their messages using *ED25519*-based DS while replicas use *CMAC*. In all the systems, clients send the next transaction after receiving confirmation that their previous block has been committed.

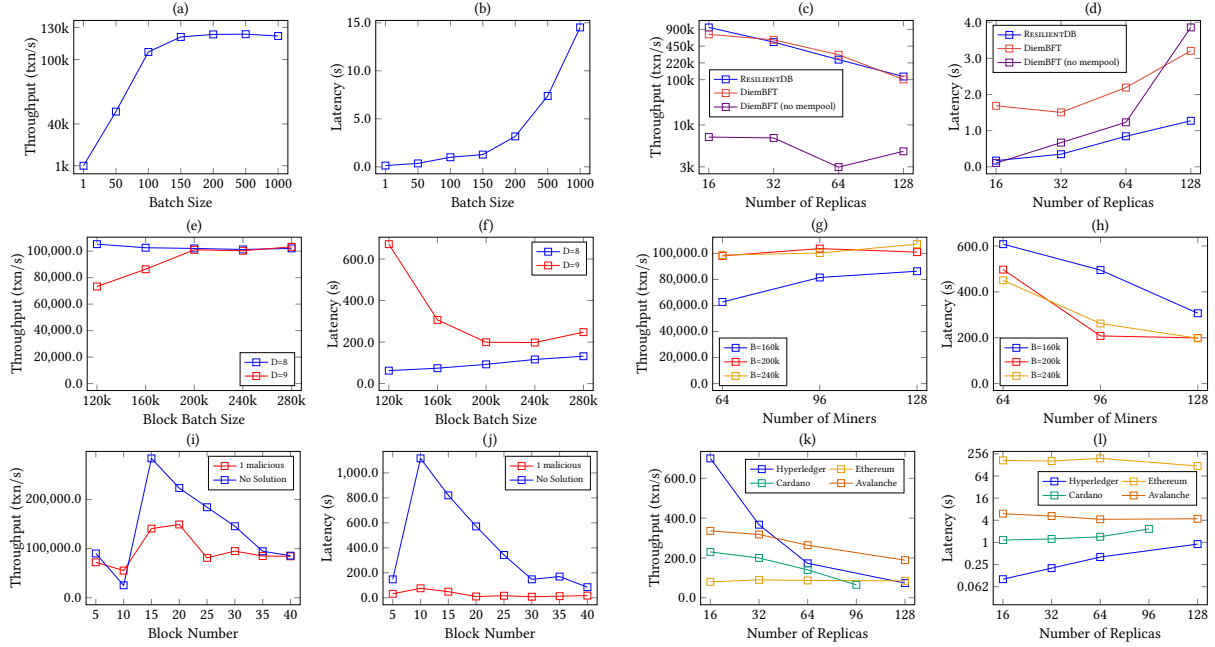


Figure 6: Peak throughput and average latency attained by different components of our PoC architecture.

We serve YCSB [21, 27] transactions from Blockbench [27] framework to PBFT replicas. These transactions are key-value store operations that access a database of 600 k records.

We evaluate our RESILIENTDB system against *five* popular blockchain systems: DiemBFT [26], Hyperledger Fabric [5], Avalanche [60], Ethereum [71], and Cardano [23]. We choose to compare against these systems: (1) Ethereum, Avalanche and Cardano are among the top ten cryptocurrencies by market capital. (2) Ethereum version 1.1 allows us to compare against a PoW-based system, while Avalanche and Cardano permit comparison against PoS-based system. (3) Hyperledger and DiemBFT are two popular permissioned blockchain systems using Raft [57] and HotStuff [72] consensus algorithms, respectively.

8.1.1 Scalability and Peak Performance of RESILIENTDB.

First, we illustrate the effect of batching transactions on PBFT in RESILIENTDB; in Figures 6(a) and (b), we vary the batch size from 1 to 1 k. We observe that PBFT hits the peak throughput when batch size is 150. Beyond this, we observe saturation of peak throughput, while there is a significant increase in latency. This is the case because the queues at replicas are all full and can no longer process any newer requests, which increases the wait time for client requests.

Next, in Figures 6(c) and (d), we increase the number of replicas from 16 to 120 and compare the scalability of PBFT against DiemBFT’s *linear* consensus, arguably one of the most fine-tuned state-of-the-art blockchain platform. As expected, on increasing the number of replicas, there is a drop in the peak throughput (consequential increase in latency) because there is a corresponding increase in the number of messages communicated per consensus.

In the case of DiemBFT, the no-mempool version has a much lower throughput as the implementation bottlenecks at the primary replica, which is forced to broadcast all requests.⁶ DiemBFT’s mempool version requires replicas to wait for 100 ms or to receive 500 Kb of transactions (whichever comes first) before propagating the batch. As a result, DiemBFT’s mempool variant trades latency for higher throughput. For PBFT, we observe a linear decrease in throughput when scaling from 16 to 120 replicas while sustaining well over 100,000 txn/s with nearly 1 second latency even at 120 replicas, which even outperforms state-of-the-art DiemBFT protocol that is further enhanced with mempool.

8.1.2 Performance of PoC: Micro Benchmark. In PoW-based systems, difficulty (D) is expressed as the number of leading zeroes in expected hash [53, 71]. Larger the difficulty, the greater the number of resources needed to find a nonce. As Bitcoin started with difficulty $D = 8$, so in this work, we experiment $D = 8$ and $D = 9$. With our available computing power, larger values of D require 20+ hours to find a valid nonce, which made the experiment infeasible financially. Like Bitcoin, we set the number of nonce bits to 42, which leads to a total solution space of 2^{42} .

Now given the peak performance of RESILIENTDB (as it was obtained in (§8.1.1)), in Figures 6(e) and (f), we vary the block size for PoC to sustain RESILIENTDB’s throughput. Within each block, we increase the number of transactions committed by RESILIENTDB from 120 k to 280 k. We require the miners to find nonce at $D = 8$ and $D = 9$. As $D = 8$ is easy to solve, PoC miners can find the nonce quickly and hit the peak throughput, which is also the maximum throughput achieved by RESILIENTDB at 128 replicas. For $D = 9$, we observe an increase in throughput with an increase

⁶Based on our communication with DiemBFT’s authors, we were informed that the no-mempool version of DiemBFT is unstable and has not been tested with more than 30 replicas.

in block size until it hits peak throughput of RESILIENTDB. This makes us conclude that our PoC protocol does not even bottleneck RESILIENTDB that even surpasses DiemBFT’s throughput.

Next, in Figures 6(g) and (h), we vary the number of PoC miners from 64 to 128 on three different block batch sizes. We observe that by increasing the degree of collaboration (number of miners), there is an improvement in system performance. Further, larger batch sizes help to quickly hit the peak throughput.

8.1.3 Resilience to Failures. We measure two types of failures in our PoC protocol: malicious miner and No nonce (§ 5.1). In both of these experiments (Figures 6(i) and (j)), we issue the failure at the 10-th block, which causes the honest miners to time out and start slice shifting protocol. For the malicious miner experiment, we run PoC among 128 miners, while for the no nonce case, we run PoC among 16 miners. As a result, we also select the highest block size necessary to hit RESILIENTDB’s throughput. Despite this, both experiments have a similar observable trend. There is a drop in throughput at block size 10 as miners timeout. Due to this, there is a large stack of pending transactions, which allows miners to aggregate more transactions in their block and leads to momentary higher throughput. However, this period soon fades away and the system reaches stable throughput.

8.1.4 Comparison with Popular Blockchains. Figures 6(k) and (l) show the throughput and latency attained by four state-of-the-art blockchain systems. Despite, fine-tuning these systems, we could not reproduce their *claimed* results. Prior works have also recorded such a performance gap [37]. We observe that Avalanche only reaches a peak throughput of 336 txn/s at 16 nodes, while Hyperledger attains 700 txn/s at 16 nodes but drops to 70 txn/s at 120 nodes. Similarly, Cardano attains up to 236 txn/s. However, despite yielding the least throughput, Ethereum’s throughput remains stable.

8.2 Extending Diablo Benchmark with PoC

Diablo blockchain benchmarking suite provides access to a unifying framework written in Golang for evaluating leading blockchain systems. Diablo is composed of three types of nodes: *primary*, *secondary*, and *chain* nodes. The primary node is responsible for generating transactions and delivering them to the chain nodes through secondary nodes (mimicking a mempool functionality). The secondary nodes assist the primary node in reducing resource overhead, e.g., CPU and network bandwidth, by disseminating transactions to the chain nodes and collecting results. The chain nodes run replication protocols (i.e., consensus). The primary node further regulates the number of transactions per second (TPS) injected into the system, thus controlling the transactional load.

We integrate our PoC protocol to five popular blockchains part of the Diablo framework: Algorand [35], Avalanche [60], Diem [26], Ethereum [71], and Quorum [17]. Our primary goal here is to showcase that PoC can be easily integrated with these blockchains and can guard them against long-range attacks with negligible effects on their performance. To do so, we simply connect RESILIENTDB+PoC to each of these five blockchains. To incorporate RESILIENTDB, we developed a Go SDK that provides an interface to send transactions from Diablo to RESILIENTDB. To integrate PoC, we implemented a Go-Server agent on each chain node that periodically

fetches blocks from the local chain on the chain node through their Go-SDKs. Essentially, the Go-Server provides a unified entry for PoC to obtain the block data. Note that in Diablo clients submit requests in an open loop.

Experiment Setup. For each blockchain, we run the configuration recommended by the Diablo framework. In their paper, Diablo authors ran experiments on AWS C5.9xlarge (36 vCPUs and 72 GiB memory). For each blockchain, we deploy one primary and 10 secondaries. We ran each experiment on the workloads provided by Diablo and quote their observed throughput (TPS): NasDAQ (168 TPS), Visa (1000 TPS), Fifa (3483 TPS), Dota 2 (13303 TPS), and Youtube (37976 TPS).

Experiment Results. Figure 7 summarizes our findings. Diem can sustain 1000 TPS and Quorum only 204 TPS; their performance drops significantly when the workload increases. Ethereum attains a consistently low throughput in part due to its default block generation period (15 seconds). Algorand exhibits a more stable performance of 500-600 TPS across workloads. All blockchains suffer from higher latency (as expected) when the load increases, in a sense, artificially over-saturating the system. We observe that RESILIENTDB can achieve a high throughput of 37,967 TPS, which nearly matching the injected load. When PoC is added to any system, we observe that the throughput drops at most by 10%-20% due to an increased communication and added network latency. We argue that this is a negligible cost as PoC helps these blockchains prevent long-range attacks, which continues to be a major vulnerability in their design.

9 RELATED WORK

MFT has been studied extensively in the literature [6, 8, 16, 39, 47, 49–51, 61, 62, 66, 68, 74]. A sequence of efforts [14, 16, 38, 45, 48, 52, 64, 65, 67, 72, 73] have been made to reduce the communication cost of the MFT protocols: (1) linearizing MFT consensus [36, 72], (2) optimizing for geo-replication [2, 40], and (3) sharding [3, 22, 29, 59]. Nevertheless, all of these protocols face long-range attacks [25]. Alternatively, prior works have focussed on designing PoS protocols that permit the node with the highest stake to propose the next block [23, 35, 44, 46]. However, even these protocols suffer from long-range attacks. Long-range attack [25] is a known attack against PoS-based blockchain system that cannot protect from compromised keys of old validators. Existing proposals to protect against such attacks include checkpointing [33], use of key-evolving cryptography [28, 31], or strict chain density statistics. However, recent studies show that these systems are still unsafe. As a result, recent works [10, 69] have proposed anchoring PoS chains on a PoW chain and more concretely Bitcoin [53, 55]. However, these protocols are designed ad-hoc assuming an external chain for security, and additionally, lack rigorous performance evaluations. Combined with the fact that as we show in our experiments classic PoS protocols are orders of magnitude slower than permissioned ones such as PBFT [16] and DiemBFT [11] it seems that the state-of-the-art is either performant or secure against long-range and stake-bleeding attacks. With PoC, we show how to get the best of both worlds, introducing a secure and performant blockchains.

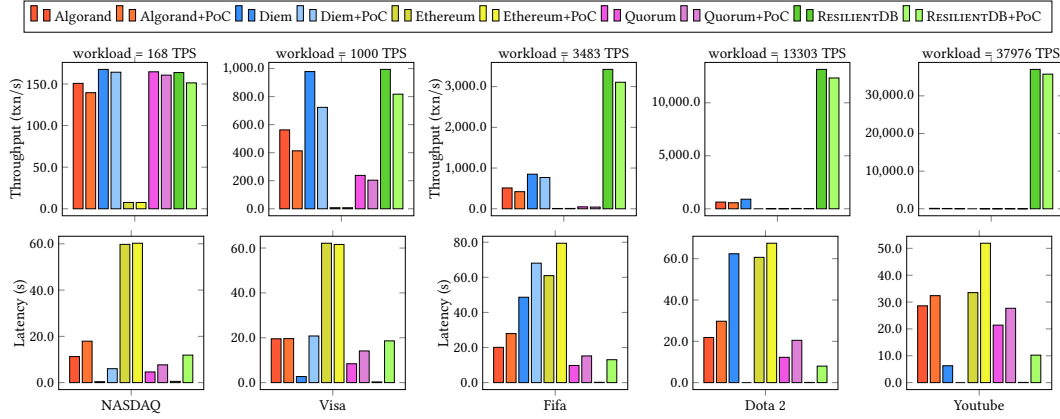


Figure 7: Performance of different blockchains with different applications.

10 CONCLUSIONS

We present the design of our collaborative mining architecture, which ensures that each client transaction undergoes a PoS or MFT consensus followed by our novel PoC mining. On the one hand, PoC mining prevents long-range attacks as each block added to the ledger includes a solution to a compute-intensive puzzle; PoC miners do not waste their resources as they collaborate to solve this puzzle. On the other hand, PoS or MFT consensus guarantees low latency response time to clients and stable difficulty for PoC puzzles. This combination allows any state-of-the-art blockchain enhanced with PoC to safeguard against long-range attacks while yielding higher throughput, lower latency, and lower energy costs compared to existing PoW-based systems.

ACKNOWLEDGMENTS

This work was supported in part by (1) *Oracle Cloud Credits* and related resources provided by the Oracle for Research program and (2) the *NSF STTR* under *Award Number* 2112345 provided to *Moka Blox LLC*.

REFERENCES

- [1] Ittai Abraham, Kartik Nayak, Ling Ren, and Zhuolun Xiang. 2021. Good-Case Latency of Byzantine Broadcast: A Complete Categorization. In *Proceedings of the 2021 ACM Symposium on Principles of Distributed Computing* (Virtual Event, Italy) (PODC'21). Association for Computing Machinery, New York, NY, USA, 331–341. <https://doi.org/10.1145/3465084.3467899>
- [2] Yair Amir, Claudiu Danilov, Jonathan Kirsch, John Lane, Danny Dolev, Cristina Nita-Rotaru, Josh Olsen, and David Zage. 2006. Scaling Byzantine Fault-Tolerant Replication to Wide Area Networks. In *International Conference on Dependable Systems and Networks (DSN'06)*. 105–114. <https://doi.org/10.1109/DSN.2006.63>
- [3] Mohammad Javad Amiri, Divyakant Agrawal, and Amr El Abbadi. 2021. *SharPer: Sharding Permissioned Blockchains Over Network Clusters*. Association for Computing Machinery, 76–88.
- [4] Derek Andersen. 2022. Well-known vulnerability in private keys likely exploited in \$160M Wintermute hack. <https://cointelegraph.com/news/well-known-vulnerability-in-private-keys-likely-exploited-in-160m-wintermute-hack>
- [5] Elli Androulaki, Artem Barger, Vita Bortnikov, Christian Cachin, Konstantinos Christidis, Angelo De Caro, David Enyeart, Christopher Ferris, Gennady Laventman, Yacov Manevich, Srinivasan Muralidharan, Chet Murthy, Binh Nguyen, Manish Sethi, Gari Singh, Keith Smith, Alessandro Sorniotti, Chrysoula Stathakopoulou, Marko Vukolić, Sharon Weed Cocco, and Jason Yellick. 2018. Hyperledger Fabric: A Distributed Operating System for Permissioned Blockchains. In *Proceedings of the Thirteenth EuroSys Conference*. ACM, 30:1–30:15. <https://doi.org/10.1145/3190508.3190538>
- [6] Karolos Antoniadis, Antoine Desjardins, Vincent Gramoli, Rachid Guerraoui, and Igor Zablotchi. 2021. Leaderless Consensus. In *41st IEEE International Conference on Distributed Computing Systems*. IEEE, 392–402. <https://doi.org/10.1109/ICDCS51616.2021.00045>
- [7] John Armstrong. 2017. AWS Encryption Keys Compromised in OneLogin Data Breach. <https://www.zettaset.com/blog/aws-encryption-keys-compromised-onelogin-data-breach/>
- [8] Pierre-Louis Aublin, Rachid Guerraoui, Nikola Knezevic, Vivien Quéma, and Marko Vukolic. 2015. The Next 700 BFT Protocols. *ACM Trans. Comput. Syst.* 32, 4 (2015), 12:1–12:45. <https://doi.org/10.1145/2658994>
- [9] Sarah Azouvi, George Danezis, and Valeria Nikolaenko. 2020. Winkle: Foiling Long-Range Attacks in Proof-of-Stake Systems. In *Proceedings of the 2nd ACM Conference on Advances in Financial Technologies*. Association for Computing Machinery, New York, NY, USA, 189–201. <https://doi.org/10.1145/3419614.3423260>
- [10] Sarah Azouvi and Marko Vukolić. 2022. Pikachu: Securing PoS Blockchains from Long-Range Attacks by Checkpointing into Bitcoin PoW using Taproot. *arXiv preprint arXiv:2208.05408* (2022).
- [11] Mathieu Baudet, Avery Ching, Andrey Chursin, George Danezis, François Garillot, Zekun Li, Dahlia Malkhi, Oded Naor, Dmitri Perelman, and Alberto Sonnino. 2019. State machine replication in the libra blockchain. *The Libra Assn., Tech. Rep* (2019).
- [12] Iddo Bentov, Charles Lee, Alex Mizrahi, and Meni Rosenfeld. 2014. Proof of Activity: Extending Bitcoin's Proof of Work via Proof of Stake [Extended Abstract]. *SIGMETRICS Perform. Eval. Rev.* 42, 3 (dec 2014), 34–37. <https://doi.org/10.1145/2695533.2695545>
- [13] Bitcoin Wiki. 2023. Difficulty. <https://en.bitcoin.it/wiki/Difficulty>
- [14] Erik-Oliver Blass and Florian Kerschbaum. 2020. BOREALIS: Building Block for Sealed Bid Auctions on Blockchains. In *ASIA CCS '20: The 15th ACM Asia Conference on Computer and Communications Security*. ACM, 558–571. <https://doi.org/10.1145/3320269.3384752>
- [15] Blockchain.com. 2023. Assets Explorer. <https://www.blockchain.com/explorer/assets/btc>
- [16] Miguel Castro and Barbara Liskov. 2002. Practical Byzantine Fault Tolerance and Proactive Recovery. *ACM Trans. Comput. Syst.* 20, 4 (2002), 398–461. <https://doi.org/10.1145/571637.571640>
- [17] JPMorgan Chase. 2019. Quorum Whitepaper. <https://github.com/ConsenSys/quorum/blob/master/docs/Quorum%20Whitepaper%20v0.2.pdf>
- [18] Junchao Chen, Suyash Gupta, Sajjad Rahnama, and Mohammad Sadoghi. 2022. Power-of-Collaboration: A Sustainable Resilient Ledger Built Democratically. *IEEE Data Eng. Bull.* 45, 2 (2022), 25–36. <http://sites.computer.org/debull/A22june/p25.pdf>
- [19] Allen Clement, Manos Kapritsos, Sangmin Lee, Yang Wang, Lorenzo Alvisi, Mike Dahlin, and Taylor Riche. 2009. Upright Cluster Services. In *Proceedings of the ACM SIGOPS 22nd Symposium on Operating Systems Principles*. ACM, 277–290. <https://doi.org/10.1145/1629575.1629602>
- [20] Allen Clement, Edmund Wong, Lorenzo Alvisi, Mike Dahlin, and Mirco Marchetti. 2009. Making Byzantine Fault Tolerant Systems Tolerate Byzantine Faults. In *Proceedings of the 6th USENIX Symposium on Networked Systems Design and Implementation*. USENIX, 153–168.
- [21] Brian F. Cooper, Adam Silberstein, Erwin Tam, Raghu Ramakrishnan, and Russell Sears. 2010. Benchmarking Cloud Serving Systems with YCSB. In *Proceedings of the 1st ACM Symposium on Cloud Computing*. ACM, 143–154. <https://doi.org/10.1145/1807128.1807152>
- [22] Hung Dang, Tien Tuan Anh Dinh, Dumitrel Loghin, Ee-Chien Chang, Qian Lin, and Beng Chin Ooi. 2019. Towards Scaling Blockchain Systems via Sharding. In *Proceedings of the 2019 International Conference on Management of Data*. ACM, 123–140. <https://doi.org/10.1145/3299869.3319889>

- [23] Bernardo David, Peter Gaži, Aggelos Kiayias, and Alexander Russell. 2018. Ouroboros Praos: An Adaptively-Secure, Semi-synchronous Proof-of-Stake Blockchain. In *Advances in Cryptology – EUROCRYPT 2018*, Jesper Buus Nielsen and Vincent Rijmen (Eds.). Springer International Publishing, Cham, 66–98.
- [24] Alex de Vries. 2018. Bitcoin's Growing Energy Problem. *Joule* 2, 5 (2018), 801–805. <https://doi.org/10.1016/j.joule.2018.04.016>
- [25] Evangelos Deirmentzoglou, Georgios Papakyriakopoulos, and Constantinos Pat-sakis. 2019. A survey on long-range attacks for proof of stake protocols. *IEEE Access* 7 (2019), 28712–28725.
- [26] Diem Association. 2022. Diem BFT. <https://www.diem.com/en-us/>
- [27] Tien Tuan Anh Dinh, Ji Wang, Gang Chen, Rui Liu, Beng Chin Ooi, and Kian-Lee Tan. 2017. BLOCKBENCH: A Framework for Analyzing Private Blockchains. In *Proceedings of the 2017 ACM International Conference on Management of Data*. ACM, 1085–1100. <https://doi.org/10.1145/3035918.3064033>
- [28] Manu Drijvers, Sergey Gorbunov, Gregory Neven, and Hoeteck Wee. 2020. Pixel: Multi-signatures for Consensus. In *29th USENIX Security Symposium (USENIX Security 20)*. USENIX Association, 2093–2110.
- [29] Muhammad El-Hindi, Carsten Binnig, Arvind Arasu, Donald Kossmann, and Ravi Ramamurthy. 2019. BlockchainDB: A shared database on blockchains. *Proceedings of the VLDB Endowment* 12, 11 (2019), 1597–1609.
- [30] Ittay Eyal and Emin Gün Sirer. 2018. Majority is Not Enough: Bitcoin Mining is Vulnerable. *Commun. ACM* 61, 7 (jun 2018). <https://doi.org/10.1145/3212998>
- [31] Matt Franklin. 2006. A survey of key evolving cryptosystems. *International Journal of Security and Networks* 1, 1-2 (2006), 46–53.
- [32] Matthew K. Franklin. 2006. A survey of key evolving cryptosystems. *Int. J. Secur. Networks* 1, 1/2 (2006), 46–53. <https://doi.org/10.1504/IJSN.2006.010822>
- [33] Peter Gaži, Aggelos Kiayias, and Alexander Russell. 2018. Stake-bleeding attacks on proof-of-stake blockchains. In *2018 Crypto Valley conference on Blockchain technology (CVCBT)*. IEEE, 85–92.
- [34] Peter Gaži, Aggelos Kiayias, and Alexander Russell. 2018. Stake-Bleeding Attacks on Proof-of-Stake Blockchains. In *2018 Crypto Valley Conference on Blockchain Technology (CVCBT)*. 85–92. <https://doi.org/10.1109/CVCBT.2018.00015>
- [35] Yossi Gilad, Rotem Hemo, Silvio Micali, Georgios Vlachos, and Nickolai Zeldovich. 2017. Algorand: Scaling Byzantine Agreements for Cryptocurrencies. In *Proceedings of the 26th Symposium on Operating Systems Principles*. Association for Computing Machinery, New York, NY, USA, 51–68. <https://doi.org/10.1145/3132747.3132757>
- [36] Guy Golan Gueta, Ittai Abraham, Shelly Grossman, Dahlia Malkhi, Benny Pinkas, Michael Reiter, Dragos-Adrian Seredinschi, Orr Tamir, and Alin Tomescu. 2019. SBFT: A Scalable and Decentralized Trust Infrastructure. In *49th Annual IEEE/IFIP International Conference on Dependable Systems and Networks*. IEEE. <https://doi.org/10.1109/DSN.2019.00063>
- [37] Vincent Gramoli, Rachid Guerraoui, Andrei Lebedev, Chris Natoli, and Gauthier Voron. 2012. Diablo-v2: A Benchmark for Blockchain Systems. <https://infoscience.epfl.ch/record/294268>
- [38] Guy Golan Gueta, Ittai Abraham, Shelly Grossman, Dahlia Malkhi, Benny Pinkas, Michael Reiter, Dragos-Adrian Seredinschi, Orr Tamir, and Alin Tomescu. 2019. Sbf: a scalable and decentralized trust infrastructure. In *2019 49th Annual IEEE/IFIP international conference on dependable systems and networks (DSN)*. IEEE, 568–580.
- [39] Suyash Gupta, Jelle Hellings, and Mohammad Sadoghi. 2021. *Fault-Tolerant Distributed Transactions on Blockchain*. Morgan & Claypool Publishers. <https://doi.org/10.2200/S01068ED1V01Y202012DTM065>
- [40] Suyash Gupta, Sajjad Rahnama, Jelle Hellings, and Mohammad Sadoghi. 2020. ResilientDB: Global Scale Resilient Blockchain Fabric. *Proc. VLDB Endow.* 13, 6 (2020), 868–883. <https://doi.org/10.14778/3380750.3380757>
- [41] Aaron Holmes. 2021. 533 million Facebook users' phone numbers and personal data have been leaked online. <https://www.businessinsider.com/stolen-data-of-533-million-facebook-users-leaked-online-2021-4>
- [42] Jonathan Katz and Yehuda Lindell. 2014. *Introduction to Modern Cryptography* (2nd ed.). Chapman and Hall/CRC.
- [43] Sunny King and Scott Nadal. 2012. PPCoin: Peer-to-Peer Crypto-Currency with Proof-of-Stake. <https://www.peercoin.net/whitepapers/peercoin-paper.pdf>
- [44] Sunny King and Scott Nadal. 2012. Ppcoin: Peer-to-peer crypto-currency with proof-of-stake. *self-published paper*, August 19, 1 (2012).
- [45] Eleftherios Kokoris Kogias, Philipp Jovanovic, Nicolas Gailly, Ismail Khoffi, Linus Gasser, and Bryan Ford. 2016. Enhancing bitcoin security and performance with strong consistency via collective signing. In *25th usenix security symposium (usenix security 16)*. 279–296.
- [46] Markulf Kohlweiss, Varun Madathil, Kartik Nayak, and Alessandra Scafuro. 2021. On the Anonymity Guarantees of Anonymous Proof-of-Stake Protocols. In *42nd IEEE Symposium on Security and Privacy*. IEEE, 1818–1833. <https://doi.org/10.1109/SP40001.2021.00107>
- [47] Ramakrishna Kotla, Lorenzo Alvisi, Mike Dahlin, Allen Clement, and Edmund Wong. 2009. Zyzzyva: Speculative Byzantine Fault Tolerance. *ACM Trans. Comput. Syst.* 27, 4 (2009), 7:1–7:39. <https://doi.org/10.1145/1658357.1658358>
- [48] Lucas Kuhring, Zsolt István, Alessandro Sorniotti, and Marko Vukolić. 2021. StreamChain: Building a Low-Latency Permissioned Blockchain For Enterprise Use-Cases. In *2021 IEEE International Conference on Blockchain (Blockchain)*. 130–139. <https://doi.org/10.1109/Blockchain53845.2021.00027>
- [49] Ahmed Lekssays, Giorgia Sirigu, Barbara Carminati, and Elena Ferrari. 2022. Mal-Rec: A Blockchain-Based Malware Recovery Framework for Internet of Things. In *Proceedings of the 17th International Conference on Availability, Reliability and Security (Vienna, Austria) (ARES '22)*. Association for Computing Machinery, New York, NY, USA, Article 99, 8 pages. <https://doi.org/10.1145/3538969.3544446>
- [50] Shengyun Liu, Paolo Viotti, Christian Cachin, Vivien Quéma, and Marko Vukolic. 2016. XFT: Practical Fault Tolerance beyond Crashes. In *Proceedings of the 12th USENIX Conference on Operating Systems Design and Implementation*. USENIX Association, USA, 485–500.
- [51] Dumitrel Loghin, Tien Tuan Anh Dinh, Aung Maw, Chen Gang, Yong Meng Teo, and Beng Chin Ooi. 2022. Blockchain Goes Green? Part II: Characterizing the Performance and Cost of Blockchains on the Cloud and at the Edge. *arXiv preprint arXiv:2205.06941* (2022).
- [52] Mads Frederik Madsen, Mikkel Gaub, Malthé Ettrup Kirkbro, and Søren Debois. 2019. Transforming Byzantine Faults using a Trusted Execution Environment. In *15th European Dependable Computing Conference*. 63–70. <https://doi.org/10.1109/EDCC.2019.00022>
- [53] Satoshi Nakamoto. 2009. Bitcoin: A Peer-to-Peer Electronic Cash System. <https://bitcoin.org/bitcoin.pdf>
- [54] Rahul Nambampurath and Kyle Baird. 2023. 2,000 Crypto Private Keys Stolen From Edge Wallet. <https://beincrypto.com/2000-crypto-private-keys-stolen-edge-wallet/>
- [55] Gleb Naumenko, Gregory Maxwell, Pieter Wuille, Alexandra Fedorova, and Ivan Beschastnikh. 2019. Erelay: Efficient Transaction Relay for Bitcoin. Association for Computing Machinery, New York, NY, USA, 817–831. <https://doi.org/10.1145/3319535.3354237>
- [56] Krzysztof Okupski. 2016. Bitcoin Developer Reference. <https://github.com/minium/Bitcoin-Spec>
- [57] Diego Ongaro and John Ousterhout. 2014. In Search of an Understandable Consensus Algorithm. In *Proceedings of the 2014 USENIX Conference on USENIX Annual Technical Conference*. USENIX, 305–320.
- [58] Michael O Rabin. 1989. Efficient dispersal of information for security, load balancing, and fault tolerance. *Journal of the ACM (JACM)* 36, 2 (1989), 335–348.
- [59] Sajjad Rahnama, Suyash Gupta, Rohan Sogani, Dhruv Krishnan, and Mohammad Sadoghi. 2022. RingBFT: Resilient Consensus over Sharded Ring Topology. In *Proceedings of the 25th International Conference on Extending Database Technology*. OpenProceedings.org, 2:298–2:311. <https://doi.org/10.48786/edbt.2022.17>
- [60] Team Rocket. 2018. *Snowflake to Avalanche: A Novel Metastable Consensus Protocol Family for Cryptocurrencies*. Technical Report. <https://ipfs.io/ipfs/QmUy4jh5mGNZvLkjes1RWM4YuvJh5o2YopNPVYwRVGV>
- [61] Christian Rondonini, Barbara Carminati, Federico Daidone, and Elena Ferrari. 2020. Blockchain-based controlled information sharing in inter-organizational workflows. In *2020 IEEE International Conference on Services Computing (SCC)*. 378–385. <https://doi.org/10.1109/SCC49832.2020.00056>
- [62] Pingcheng Ruan, Tien Tuan Anh Dinh, Qian Lin, Meihui Zhang, Gang Chen, and Beng Chin Ooi. 2021. LineageChain: a fine-grained, secure and efficient data provenance system for blockchains. *VLDB J.* 30, 1 (2021), 3–24. <https://doi.org/10.1007/s00778-020-00646-1>
- [63] Pingcheng Ruan, Tien Tuan Anh Dinh, Dumitrel Loghin, Meihui Zhang, and Gang Chen. 2022. *Blockchains: Decentralized and Verifiable Data Systems*. Springer. <https://doi.org/10.1007/978-3-031-13979-6>
- [64] Vasily A. Sartakov, Stefan Brenner, Sonia Ben Mokhtar, Sara Bouchenak, Gaël Thomas, and Rüdiger Kapitza. 2018. EActors: Fast and flexible trusted computing using SGX. In *Proceedings of the 19th International Middleware Conference*, Paulo Ferreira and Liuba Shrira (Eds.). ACM, 187–200. <https://doi.org/10.1145/3274808.3274823>
- [65] Youren Shen, Hongliang Tian, Yu Chen, Kang Chen, Runji Wang, Yi Xu, Yubin Xia, and Shoumeng Yan. 2020. *Occlum: Secure and Efficient Multitasking Inside a Single Enclave of Intel SGX*. Association for Computing Machinery, New York, NY, USA, 955–970.
- [66] Peiyao Sheng, Gerui Wang, Kartik Nayak, Sreeram Kannan, and Pramod Viswanath. 2021. BFT Protocol Forensics. In *CCS '21: 2021 ACM SIGSAC Conference on Computer and Communications Security*. ACM, 1722–1743. <https://doi.org/10.1145/3460120.3484566>
- [67] Man-Kit Sit, Manuel Bravo, and Zsolt István. 2021. An Experimental Framework for Improving the Performance of BFT Consensus for Future Permissioned Blockchains. In *Proceedings of the 15th ACM International Conference on Distributed and Event-Based Systems (Virtual Event, Italy) (DEBS '21)*. Association for Computing Machinery, New York, NY, USA, 55–65. <https://doi.org/10.1145/3465480.3466922>
- [68] Chrysoula Stathakopoulou, Matej Pavlovic, and Marko Vukolić. 2022. State Machine Replication Scalability Made Simple. In *Proceedings of the Seventeenth European Conference on Computer Systems*. Association for Computing Machinery, New York, NY, USA, 17–33. <https://doi.org/10.1145/3492321.3519579>
- [69] Ertem Nusret Tas, David Tse, Fisher Yu, and Sreeram Kannan. 2022. Babylon: Reusing Bitcoin Mining to Enhance Proof-of-Stake Security. *arXiv preprint*

arXiv:2201.07946 (2022).

- [70] Harald Vranken. 2017. Sustainability of bitcoin and blockchains. *Current Opinion in Environmental Sustainability* 28 (2017), 1–9. <https://doi.org/10.1016/j.cosust.2017.04.011>
- [71] Gavin Wood. 2015. Ethereum: A secure decentralised generalised transaction ledger. <http://gavwood.com/paper.pdf>
- [72] Maofan Yin, Dahlia Malkhi, Michael K. Reiter, Guy Golan Gueta, and Ittai Abraham. 2019. HotStuff: BFT Consensus with Linearity and Responsiveness. In *Proceedings of the ACM Symposium on Principles of Distributed Computing*. ACM, 347–356. <https://doi.org/10.1145/3293611.3331591>
- [73] Rui Yuan, Yubin Xia, Haibo Chen, Binyu Zang, and Jan Xie. 2018. ShadowEth: Private Smart Contract on Public Blockchain. *J. Comput. Sci. Technol.* 33, 3 (2018), 542–556. <https://doi.org/10.1007/s11390-018-1839-y>
- [74] Ce Zhang, Cheng Xu, Jianliang Xu, Yuzhe Tang, and Byron Choi. 2019. GEM²-Tree: A Gas-Efficient Structure for Authenticated Range Queries in Blockchain. In *2019 IEEE 35th International Conference on Data Engineering (ICDE)*. 842–853. <https://doi.org/10.1109/ICDE.2019.00080>

A CORRECTNESS ARGUMENTS

We now state and prove the security properties of PoC. These properties hold under the standard MFT assumption stated in Section 2. Further, we assume that PoC is appended to a blockchain system \mathcal{S} , which provides the safety and liveness guarantees stated Section 2.

PoC adopts the same partial synchrony model adopted in most consensus systems [16, 72]. It guarantees *safety* in an asynchronous environment where messages can get lost, delayed or duplicated. However, *liveness* is only guaranteed during the periods of synchrony [16, 36, 72]. Additionally, PoC guarantees *fairness* for rewards and penalties only under synchrony.

A.1 Safety Argument

We argue the safety of PoC by relying on the agreement property of the system \mathcal{S} .

THEOREM 4 (SAFETY). *No two conflicting blocks are settled by the PoC protocol. That is, if two honest miners m_i and m_j add blocks \mathcal{B}_i and \mathcal{B}_j at sequence number b , then $\mathcal{B}_i = \mathcal{B}_j$.*

PROOF. Assume that honest miners m_i and m_j added two conflicting blocks \mathcal{B}_i and \mathcal{B}_j at sequence number b . We know that each mined block has σ contiguous \mathcal{S} -blocks (§4.4). So each mined block, including \mathcal{B}_i and \mathcal{B}_j have the same number of \mathcal{S} -blocks. As both conflicting blocks \mathcal{B}_i and \mathcal{B}_j have the same sequence number b , it is safe to assume that mined blocks at sequence number $\leq b - 1$ have the same set of \mathcal{S} -blocks. This implies that \mathcal{B}_i and \mathcal{B}_j have at least one distinct \mathcal{S} -block. Miners m_i and m_j must have received this distinct \mathcal{S} -block from replicas of \mathcal{S} . This can only happen if replicas of \mathcal{S} committed two distinct blocks at the same sequence number. But, this is a contradiction as we assume that \mathcal{S} guarantees a globally consistent view of the transactions.

Similarly, each miner submits a NONCEFIND message to replicas in \mathcal{S} when it has access to a valid nonce. The replicas of \mathcal{S} add this message as a transaction in the next \mathcal{S} -block. Assume that this NONCEFIND message is in blocks \mathcal{B}_i and \mathcal{B}_j and it is the transaction on which miners differ. If this is the case, then replicas of \mathcal{S} committed different nonce in their \mathcal{S} -blocks. This contradicts the correctness guarantees provided by \mathcal{S} . \square

A.2 Liveness Argument

We argue about the liveness of PoC during periods of synchrony.

LEMMA 1 (COMMIT AVAILABILITY). *An honest miner eventually receives the k -th \mathcal{S} -block committed by an honest replica.*

PROOF. We argue this lemma by induction over the serialized communication of committed \mathcal{S} -blocks. Assuming a history of $k - 1$ committed \mathcal{S} -blocks for which this property holds, we consider the k -th committed \mathcal{S} -block. When an honest replica has a committed \mathcal{S} -block, it reliably broadcasts that block to the miners. It is thus guaranteed that an honest miner will receive all the committed \mathcal{S} -blocks. The inductive base case involves assuming that all replicas are initialized with a committed genesis ($k = 1$) block, which we can ensure axiomatically. \square

LEMMA 2 (NONCE SEARCH). *The first time an honest miner m_i obtains the b -th block containing $\sigma > 0$ committed \mathcal{S} -blocks, it searches for a valid nonce η in slice \mathbb{S}_i .*

PROOF. Upon receiving the k -th committed \mathcal{S} -block for the first time, correct miners call the function NEWMINE either through function NONCECHECK (Line 2 of Figure 4) or SLICECHECK (Line 2 of Figure 4). If neither of these calls succeed, then NEWMINE (Line 15) is directly called (Line 2). The function NEWMINE checks if there are $\sigma > 0$ \mathcal{S} -blocks available, since the last \mathcal{S} -block added to the ledger, for mining. If so, m_i aggregates these \mathcal{S} -blocks into mined block b (Line 18) and calls FINDNONCE (Line 23) to search for a nonce in slice \mathbb{S}_i . \square

LEMMA 3 (SHIFT LIVENESS). *If a correct miner does not find a valid nonce η in slice \mathbb{S}_i to settle block b within time δ , another miner eventually tries it.*

PROOF. While finding nonce, if the timer δ expires for an honest miner, it broadcast a message SHIFT to other miners. When it receives SHIFT message from $f_{\mathcal{M}} + 1$ miners it creates a certificate \mathcal{C} comprising of these SHIFT messages and broadcasts this \mathcal{C} to all the replicas. When an honest replica receives \mathcal{C} from at least $f_{\mathcal{M}} + 1$, it proposes it in the next block. The liveness property of \mathcal{S} ensures that these messages are eventually committed, and Lemma 1 ensures that honest miners are eventually notified of the commit. On receiving a committed \mathcal{S} -block with a certificate \mathcal{C} , an honest miner m_i calls function SLICECHECK. In this function, m_i resets its timer (Line 42 of Figure 4) and restarts the nonce finding process in slice \mathbb{S}_j (with $j = (i + 1) \bmod n_{\mathcal{M}}$, see Line 46 of Figure 4) if it has not already attempted to find a slice for $f_{\mathcal{M}} + 1$. Otherwise, it assumes that no nonce can be found for this block and starts a new mining. As a result, honest miners keep shifting and searching for each other nonces until they are all found. \square

LEMMA 4 (BLOCK SETTLEMENT). *All honest miners settle block b if a valid nonce η for block b exists.*

PROOF. When an honest miner m_i finds a nonce η , it broadcasts η to the other miners (Line 26 of Figure 4). Following this, each miner submits η to the replicas of \mathcal{S} (Line 29 of Figure 4). The liveness property of \mathcal{S} ensures that η is eventually committed by all honest replicas. Lemma 1 then ensures that all honest miners obtain the corresponding committed \mathcal{S} -block. We conclude the proof by noting that if the \mathcal{S} -block contains a valid nonce η , correct miners will settle b (Line 7 of Figure 4). \square

THEOREM 5 (LIVENESS). *Each committed block at \mathcal{S} is eventually settled by PoC.*

PROOF. Through the liveness property of \mathcal{S} and Lemma 1, we conclude that each honest miner eventually obtains a block committed by replicas of \mathcal{S} . Lemma 2 then ensures that the miner searches for a valid nonce η to settle this committed \mathcal{S} -block as part of a block b . Finally, an honest miner can find a nonce in its slice \mathbb{S}_i within time δ with non-zero probability. If it doesn't, Lemma 3 ensures that other honest miners will try it again until they succeed. As a result, correct miners eventually find a nonce η for block b in their slice within time δ . Lemma 4 then ensures that all correct miners use η to settle block b and thus the committed \mathcal{S} -block. \square

Fairness Argument

We argue that PoC is fair and no correct miners are penalized during periods of synchrony.

LEMMA 5 (PENALTY CERTIFICATE). *There cannot be a penalty certificate $\langle \text{PENALTY}(b, r, \mathbb{C}) \rangle_{\mathcal{M}}$ unless the timer δ of at least one honest miner expires.*

PROOF. We start by assuming that there exists a penalty certificate $\langle \text{PENALTY}(b, r, \mathbb{C}) \rangle_{\mathcal{M}}$ and the timers of none of the honest miners have expired. As each penalty certificate needs signatures of at least $f_{\mathcal{M}} + 1$ miners and at most $f_{\mathcal{M}}$ miners are malicious, such an assumption is a contradiction. \square

THEOREM 6 (FAIRNESS). *No honest miner receives a penalty if (i) it can find a nonce η within time δ and (ii) the network is experiencing a period of synchrony.*

PROOF. Let's assume an honest miner m_i receives a penalty based on shift round r (Line 10 of Figure 4). This implies the existence of a penalty certificate (Line 48 of Figure 4) including miner m_i in its list of miners to penalize. Lemma 5 states that this certificate can only exist if the timer δ of at least *one* honest miner expires. However, since the $f_{\mathcal{M}} + 1$ miners are honest, they only try to penalize m_i if they did not receive its nonce before δ . This implies that either miner m_i did not find its nonce before δ (which is a direct contradiction of assumption (i)), or that its nonce did not reach the $f_{\mathcal{M}} + 1$ honest miners before their timer expires (which is a direct contradiction of assumption (ii)). \square