

LEARNABLE FRONTENDS THAT DO NOT LEARN: QUANTIFYING SENSITIVITY TO FILTERBANK INITIALISATION

Mark Anderson^{*} Tomi Kinnunen[†] Naomi Harte^{*}

^{*} SIGMEDIA Lab, School of Engineering, Trinity College Dublin, Ireland

[†] School of Computing, University of Eastern Finland, Joensuu, Finland

ABSTRACT

While much of modern speech and audio processing relies on deep neural networks trained using fixed audio representations, recent studies suggest great potential in acoustic frontends learnt jointly with a backend. In this study, we focus specifically on learnable filterbanks. Prior studies have reported that in frontends using learnable filterbanks initialised to a mel scale, the learned filters do not differ substantially from their initialisation. Using a Gabor-based filterbank, we investigate the sensitivity of a learnable filterbank to its initialisation using several initialisation strategies on two audio tasks: voice activity detection and bird species identification. We use the Jensen-Shannon Distance and analysis of the learned filters before and after training. We show that although performance is overall improved, the filterbanks exhibit strong sensitivity to their initialisation strategy. The limited movement from initialised values suggests that alternate optimisation strategies may allow a learnable frontend to reach better overall performance.

Index Terms— Learnable Filterbanks, LEAF, Learnable Frontend, Sensitivity, Initialisation

1. INTRODUCTION

Speech tasks utilising deep learning typically use a fixed time-frequency (TF) representation of the audio signal, most commonly a spectrogram obtained through the short-time Fourier transform (STFT). Use of the STFT requires design choices [1] including the type of window function, frame length, and frame overlap. If a non-linear scaling of the frequency axis, or compression of magnitude is desired, further choices must be made (scale, number of filters, compression etc.). These *hyperparameters* may be optimised for a given task and classifier via tuning, but this increases the time spent developing models.

In recent years, there have been a number of promising frontends which learn from the data directly. These *learnable frontends* turn what were previously *hyperparameters* to be tuned, into *parameters* to be learned. Learnable frontends have the potential to provide TF representations of an input signal tailored to a given task or architecture, in exchange for additional computational cost during training and inference. The promise of learning the TF representation in different downstream audio tasks ranging from speech recognition [2] to music tagging [3] has been demonstrated. Additionally, the authors have shown similar positive findings for another class of challenging acoustic signals – bird audio [4].

Unlike what one might intuitively expect, a recurring finding reported independently in learnable filterbank studies [5, 6, 7, 8] is that the learned filters do not differ substantially from their initialised

values (see Fig. 1). These frontends are typically initialised to a mel scale and evaluated on speech tasks such as keyword spotting, speaker identification and emotion recognition [6, 7]. It is tempting to say that if the learned filters do not differ substantially from their initialisation (e.g. mel) then the initialisation was already well-suited for the task (e.g. speech recognition). While this may be true for some tasks, it does not explain the same phenomena occurring when using different filterbank initialisations. We feel this is more likely an optimisation problem, similar to the EM algorithms sensitivity to initial values [9, 10] and subsequent convergence to local optima.

Motivated by the above, we seek to answer the following question: are modern learnable frontends with trainable filterbanks sensitive to filterbank initialisation? To this end, our set-up involves two different audio tasks, namely Voice Activity Detection (VAD) and Bird Species Identification (BSID). The two tasks and domains serve to complement each other: since the frequency range of bird vocalizations ($\sim 800\text{Hz} - 8\text{KHz}$) differs drastically from that of human speech (most energy concentrated around $300\text{Hz} - 3.4\text{KHz}$), we expect differences in filterbank learning. We consider four initialisation strategies in both tasks, including an intentionally sub-optimal *random* initialisation for reference purposes. For each task, we evaluate the difference between the initialised and final filters.

Prior studies [5, 6, 7, 8] have been dismissive of the lack of learning in filterbank frontends. However, as in any optimisation problem, an investigation of the sensitivity to initialisation is crucial in avoiding sub-optimal solutions. We propose to quantify the lack of learning with the Jensen-Shannon distance and analysis of the final filterbanks. The main novelty of our study is this detailed quantification and interpretation of the difference between initialised and final filters for multiple initialisation strategies, and the determination of whether each initialisation leads to a local optima.

2. LEARNABLE FRONTENDS

Learnable audio frontends encompass a wide range of functionality, including filterbanks [5, 6], temporal downsamplers [6], and magnitude compressors [11] learnt from data. Some frontends specialise in one particular aspect, whereas others combine these elements in one pipeline, such as the recently proposed LEarnable Audio Frontend (LEAF) [6]. The authors in [7] categorise frontends implementing learnable filterbanks based on two criteria: (1) the domain of operation (time or frequency domain); and (2) whether filter responses are learned directly or via a parameterised function.

For (1), parametric filters in the frequency domain need few parameters (e.g. centre frequency, bandwidth) [8, 12, 13, 14], but computation requires the STFT and the additional design choices of window function and framing settings (which we wish to avoid). Time-domain filterbanks have become more common [5, 6, 15] and

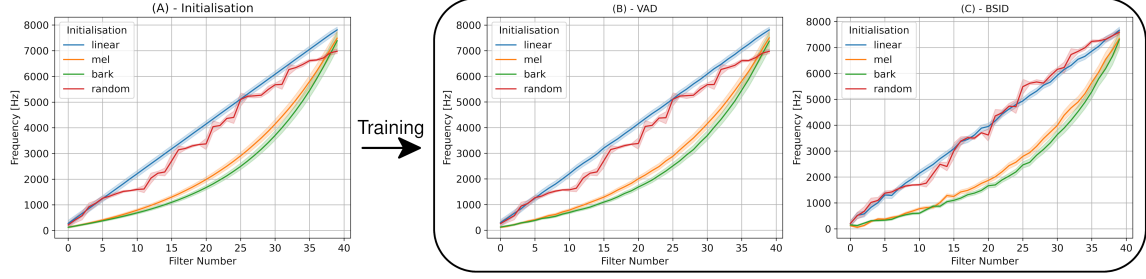


Fig. 1. (A) shows the frequency response of each initialisation. Centre frequency is represented by the solid line and bandwidth by the shaded area. In this paper we use four initialisation types: ‘linear’ (equally spaced, constant bandwidth), ‘mel’ & ‘bark’ (psychoacoustic pitch scales) and ‘random’ (ordered by frequency). B and C show the learned responses of the filters for the VAD and BSID tasks after training

are highly suitable for use with CNNs [16]. Regarding (2), learning coefficients directly [5] offers the most freedom and may lead to better performance [4], but this increases the number of parameters and training time of a model. Coefficients generated via a parameterised function [6, 15] not only reduce the number of parameters, but assign meaning to those parameters (typically relating to centre frequency and bandwidth). Although performance may degrade slightly, fewer and directly meaningful parameters can be beneficial, providing a path to explainability.

Regardless of form, filters are usually initialised based on a static filterbank. Since many of these frontends are aimed at human speech tasks, the mel scale is most often used. We discuss other initialisation regimes used in this paper below in Section 3. The frontend chosen for analysis in this work is LEAF [6] due to its multiple trainable sub-components covering the relevant aspects of frontends. In particular LEAF is chosen for its parameterised time-domain filterbanks. LEAF utilises learnable filters, as well as learnable low-pass filtering for temporal downsampling and learnable compression. We provide a brief overview of its operation below.

2.1. LEARNABLE AUDIO FRONTEND (LEAF)

LEAF [6] is a learnable frontend consisting of three learnable layers, and one fixed operation. In this paper, we use an improvement on LEAF, known as EfficientLEAF [7] for the filterbank and temporal downsampling sections. We do not use EfficientLEAF’s proposed learnable compression method, opting to use Per-Channel Energy Normalisation (PCEN) (as in the original LEAF implementation [6]) instead as its effects and usage [4, 11, 17] is well documented.

The operation of LEAF is as follows. The input audio signal is convolved with a set of band-pass filters (Eq. 1) of length W ($|t| \leq \frac{W}{2}$) in the time-domain. These filters are parameterised by the centre frequency ($\eta_n \in [0, 1]$) and bandwidth ($\sigma_{n_{bw}} \in (0, \frac{F_s}{W+1}]$). The output of the band-pass filtering operations produce time sequences at the same temporal resolution as the input. To ensure the filterbank is analytic (i.e. frequency response contains no negative frequency components), the squared modulus of these time sequences are calculated.

$$\phi_n(t) = e^{2\pi j \eta_n t} \frac{1}{\sqrt{2\pi} \sigma_{n_{bw}}} e^{-\frac{t^2}{2\sigma_{n_{bw}}^2}} \quad (1)$$

$$\Phi_n(t) = \frac{1}{\sqrt{2\pi} \sigma_{n_{lp}}} e^{-\frac{t^2}{2\sigma_{n_{lp}}^2}} \quad (2)$$

To downsample in time, LEAF convolves these time sequences with a learnable low-pass Gaussian filter (one per frequency band,

see Eq. 2) parameterised by its bandwidth $\sigma_{n_{lp}}$. This is followed by subsampling, achieved practically via strided convolution, producing a TF representation.

The final stage in the LEAF pipeline is a learnable PCEN layer, which consists of an *Automatic Gain Control* (AGC) and *Dynamic Range Compression* (DRC) parameters. The AGC is applied prior to DRC and yields Eq. 3. Both the AGC and DRC are learned per frequency channel.

$$\text{PCEN}(t, f) = \left(\frac{E(t, f)}{(M(t, f) + \epsilon)^\alpha} + \delta \right)^r - \delta^r \quad (3)$$

The AGC is implemented using a learnable smoother (Eq. 4). The division of the input TF representation ($E(t, f)$) by the smoothed TF representation ($M(t, f)$), emphasises changes relative to the recent spectral history along the temporal axis [17].

$$M(t, f) = (1 - s)M(t - 1, f) + sE(t, f) \quad (4)$$

The DRC section is controlled by δ and r , where δ roughly corresponds to the threshold parameter, and r the compression ratio. Higher values of r correspond to less compression.

3. EXPERIMENTAL SETUP

3.1. Frontend Initialisation

In this work, we use four different initialisation strategies. Two are based on psychoacoustic scales, *mel* [22] and *bark* [23]. The other two initialisations are labelled *linear* and *random*. Both *mel* and *bark* are well suited to human speech [22, 23, 24]. Prior work on bird audio offers no consensus [25] on the usage of *mel* or *bark* over other scale — some favouring *mel* [26] but others finding it sub-optimal for bird audio [12]. The *linear* initialisation is seen as sub-optimal for both tasks [26, 27] and *random* is purposefully designed to be sub-optimal on both tasks

For *mel* and *bark*, centre frequencies are linearly spaced in the respective scales. The bandwidth parameter $\sigma_{n_{bw}}$ is set to match the *Full-Width at Half Maximum* (FWHM) of an equivalent triangular filter. This corresponds to the -3dB point. The *linear* initialisation has linearly spaced centre frequencies. Bandwidth is constant per filter, with $\sigma_{n_{bw}}$ set in the same manner as above. The *random* initialisation is achieved by uniform sampling of valid frequency values to determine the centre frequencies of the filters. In order to cover the entire desired frequency spectrum, these centre frequencies are sorted, and $\sigma_{n_{bw}}$ is set such that the bandwidth covers at least the FWHM of the filters either side. For reproducibility the same seed is used in all relevant experiments. Fig. 1(A) shows the resulting filterbank from each initialisation strategy in the frequency domain.

Voice Activity Detection (VAD)			Bird Species Identification (BSID)		
Dataset	Name	TIMIT [18]	Dataset	Name	BirdCLEF2021 [19]
	Sample Rate	16KHz		Sample Rate	16KHz (Resampled)
	No. Speakers (Train)	630		No. Species	397
	No. Speakers (Test)	168		Recordings per species	Variable
	Sentences per speaker	10		Test Set	Hold-out (15%)
	Test Set	Dedicated		Normalisation	−6dbFS
Classifier	Model	STA-VAD [20]	Classifier	Model	EfficientNet-B0 [21]
	Initial Learning Rate	0.001		Initial Learning Rate	0.001
	Optimiser / Scheduler	ADAM / Cosine Annealing		Optimiser / Scheduler	ADAM / Cyclic
	Metrics	F1, AUC		Metrics	F1, Acc.

Table 1. Details of dataset and classifier for the VAD and BSID tasks

3.2. Experiments

We evaluate on two audio tasks, Voice Activity Detection (VAD) and Bird Species Identification (BSID). In all experiments we use 40 filters. Additionally, we train fixed filterbank models of each initialisation using LEAF. In the fixed filterbanks experiments the PCEN layer is still trainable; we only wish to fix the filterbank for analysis purposes. As a baseline, we use Log-Mel spectrograms with 40 mel filters (Static Log-Mel). Table 1 summarises both experiments.

Voice Activity Detection: In the VAD task, we use the TIMIT corpus [18] and Spectro-Temporal Attention Voice Activity Detection (STA-VAD) [20]. TIMIT provides a ‘clean’ corpus which disjoint train/test speakers, which is easily augmented with additive noise. STA-VAD is a recently proposed model which is noise-robust and lightweight. Similar to [20], we mitigate the speech/non-speech class imbalance through additional silence before/after each utterance. The length of this silence is randomly chosen between 0.5–1s. The corpus is augmented with additive noise (between −10dB and 30dB) from the MSNS dataset [28], which contains fourteen noise types (including stationary and non-stationary noise). The noise dataset also contains test data (same noise categories, different recordings). During training, SNR is adaptive, through a callback which increases the maximum allowed SNR by 5dB (starting from −10dB) when val-loss plateaus. Each epoch involves shuffling the data, and an equal split of data to be augmented with randomly selected noise at the available SNR values. The power of the added noise is calculated based only on segments containing speech.

The model was trained using a 90:10 train/val split. We utilise a Cosine Annealing learning rate scheduler [29], set to restart approximately when new SNR values are introduced. Noise levels in validation stages are a random selection of the currently available SNR values. Test data was taken from the TIMIT test set and augmented with additional silence and additive noise at a SNR of 15dB. Additive noise in the test set is randomly selected from all noise categories. In line with [6, 7, 20] we report accuracy and Area Under Receiver Operating Characteristic Curve (AUC) in our experiments.

Bird Species Identification: In the BSID task, we use the publicly available BirdCLEF2021 [19] training dataset and EfficientNet-B0 [21]. Both dataset and model were used to evaluate EfficientLEAF [7]. EfficientNet-B0 is also used extensively to evaluate the original implementation of LEAF [6]. The dataset contains variable length, high-quality, focal recordings taken from Xeno-Canto, an online collection of crowdsourced bird recordings. Recordings are normalised to −6dBFS. There are 397 species present in the dataset, from across North & South America. There is a significant class imbalance; 12 species contain 500 recordings, 9 species contain less than 25 recordings. We utilise a 70:15:15 split of this dataset (accounting for class imbalance) for training, evaluation and testing respectively. We report both accuracy (used to evaluate EfficientLEAF [7]) and F1-Score (official metric of BirdCLEF2021).

Filterbank	VAD				BSID			
	F1-Score		AUC		F1-Score		Acc (%)	
	Fixed	Learn	Fixed	Learn	Fixed	Learn	Fixed	Learn
Linear	0.841	0.862	0.839	0.858	0.663	0.674	71.6	73.4
Mel	0.826	0.858	0.778	0.840	0.660	0.668	71.4	71.8
Bark	0.834	0.860	0.816	0.846	0.660	0.665	70.8	71.6
Random	0.802	0.807	0.765	0.759	0.653	0.662	68.1	71.5
Log-Mel	0.847	-	0.881	-	0.646	-	69.7	-

Table 2. Results on hold-out test set for VAD and BSID tasks. Includes results using learnable frontends with fixed filterbanks (*Fixed*) and using learnable frontends with learnable filterbanks (*Learn*). Results between each *fixed/learn* pair are statistically significant. Best results marked in **bold**.

3.3. Evaluation of Frontend Sensitivity

Evaluation of sensitivity due to initialisation requires an adequate metric to quantify the difference between the initialised and final filterbanks. We use the Jensen-Shannon distance (JSD). The JSD (Eq. 5) is a means of measuring the difference of two probability distributions. It takes the form of a symmetrical Kullback-Leibler divergence (Eq. 6), comparing each distribution P and Q to a mixture distribution M . The JSD is a true metric [30] that satisfies all related axioms (including the triangle inequality), and is bounded by $[0, 1]$ when a logarithmic base of 2 is used in Eq. 6.

$$D_{JS}(P, Q) = \sqrt{\frac{1}{2} [D_{KL}(P||M) + D_{KL}(Q||M)]} \quad (5)$$

$$\text{Where, } M = \frac{P + Q}{2}$$

$$\text{And, } D_{KL}(A||B) = \sum_x A(x) \log \left(\frac{A(x)}{B(x)} \right) \quad (6)$$

The frequency response of each filter in LEAF is a sampled Gaussian kernel and can be interpreted similarly to a probability distribution. Typically used to compare between a ground truth distribution and a distribution of simulated values, for our purposes it compares between an initial distribution and a final distribution.

4. RESULTS & DISCUSSION

Table 2 reports performance for each task on their respective test set. These results are not the main findings of this work, but they demonstrate that each model has trained correctly. We observe that fully learnable frontends outperform their fixed counterparts; The fixed filterbank learnable frontends outperform the log-mel spectrogram baseline features with the exception of the *random* initialisation (expected as the *random* initialisation is intentionally sub-optimal). Although improving over their fixed counterparts, learnable filterbanks

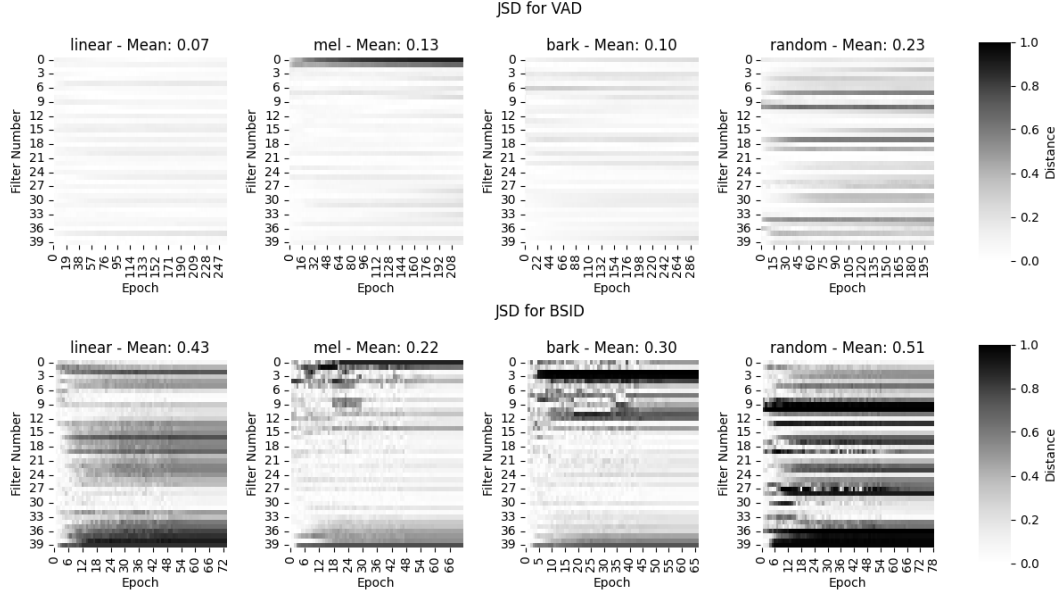


Fig. 2. Jensen-Shannon distance of each filter from its initialisation for the VAD and BSID tasks, by initialisation strategy. The mean of the final distances is also shown in each plot’s title.

with *random* initialisation perform worse than learned filterbanks using other initialisation strategies; lack of learning negatively impacts performance. Increases in performance from static baseline features to learnable features is most evident on the BSID task. This is likely due to the PCEN compression layer [4]. Performance improvement when using learnable filterbanks is greater in the VAD task. Prior work [26, 27] declares a fixed *linear* filterbank as sub-optimal on both tasks, however in both fixed and learnable cases, *linear* initialisation performs best on VAD and BSID.

For VAD, the best result was achieved using trainable filterbanks with linear initialisation (F1 0.862, AUC 0.858). Whilst a direct comparison is problematic due to a difference in testing dataset, our performance is in line with that reported in [20] (Mean AUC 0.886). In the BSID task, again best results are achieved using trainable filterbanks with linear initialisation (F1 0.674, Acc. 73.4%). Direct comparison of accuracy is possible, with our performance being in line with [7] who reported an accuracy of 72.2% on this task.

The more pertinent findings of this study can be seen in Figs. 1 and 2. Fig. 1 shows the frequency response of each filterbank before and after training. Fig. 2 depicts the filterbank movement from initial values over time, using the JSD. In Fig. 2, for the VAD task there is very little movement from the *linear* and *bark* initialisations (0.07 and 0.10 respectively), with no filters moving substantially. The *mel* initialisation (0.13) has movement in the lower frequency filters; there is a shift to lower centre frequencies while the bandwidth remains the same (this can be seen in Fig. 1, although the change is subtle). This shift results in a large distance due to the small bandwidth of the low frequency filters; any change in centre frequency for low bandwidth filters represents a large change in distance. There is more movement in the intentionally sub-optimal *random* initialisation, with mean distance of 0.23. Despite greater movement than the learned *linear* filterbanks, other initialisation strategies do not provide as good a solution. Contrasting these distances with the final learned filters in Fig. 1 however, we see the overall state of the filterbanks have not changed substantially from their initialisation.

Comparing these findings with the BSID task, in Fig. 2 we see

more movement between initial and final filters compared to the VAD task. The *mel* and *bark* initialisations move least (0.22 and 0.30 respectively), both showing movement in the lower and higher frequency filters. The *linear* initialisation (0.43) has more movement than either of the psychoacoustic initialisations, with movement across most frequency channels. Similar to the VAD task, the *random* initialisation shows the most movement (0.51). Contrasting again to Fig. 1 however, we do not see change in the overall state of the learned filterbanks with the exception of *random*, which moves towards a linear-like state. Similar to VAD, although the learned filterbanks in the BSID task exhibit some movement they do not achieve similar performance to the best performing filterbank (*linear* initialisation). If the optimisation strategy was functioning as intended, all learned filters would achieve similar performance.

5. CONCLUSION

In this paper we demonstrated the sensitivity of learnable filterbanks to initialisation, and quantified the change from initialisation to final learned filters. The lack of learning in learnable filterbanks was consistent across two different tasks and four initialisation strategies. Performance was improved with learnable filterbanks, but at additional computational cost

Our results have implications in considering the trade-off between training time and model utility. For learnable filterbanks to be merited, they must offer reliable performance increases. Learnable filterbanks should move from their initialisation, to a family of optimal filters. The inconsistency in the performance of the learned filters, coupled with the lack of movement from initial filterbank values, demonstrates a shortcoming in the overall optimisation strategy.

The authors believe that our methodology and results provide novel insights into quantifying the shortcomings of learnable filterbank based audio frontends. Explaining the root causes and developing tangible mitigation strategies to these shortcomings remain important longer-term goals. The authors are currently working towards these goals.

6. REFERENCES

- [1] F.J. Harris, "On the use of windows for harmonic analysis with the discrete fourier transform," *Proceedings of the IEEE*, vol. 66, no. 1, pp. 51–83, 1978.
- [2] Neil Zeghidour, Nicolas Usunier, Gabriel Synnaeve, Ronan Collobert, and Emmanuel Dupoux, "End-to-end speech recognition from the raw waveform," 2018.
- [3] Cyrus Vahidi, Charalampos Saitis, and György Fazekas, "A modulation front-end for music audio tagging," in *2021 International Joint Conference on Neural Networks (IJCNN)*, 2021, pp. 1–7.
- [4] Mark Anderson and Naomi Harte, "Learnable Acoustic Frontends in Bird Activity Detection," in *2022 International Workshop on Acoustic Signal Enhancement (IWAENC)*, 2022, pp. 1–5.
- [5] Neil Zeghidour, Nicolas Usunier, Iasonas Kokkinos, Thomas Schaiz, Gabriel Synnaeve, and Emmanuel Dupoux, "Learning filterbanks from raw speech for phone recognition," in *2018 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, 2018, pp. 5509–5513.
- [6] Neil Zeghidour, Olivier Teboul, Félix de Chaumont Quitry, and Marco Tagliasacchi, "LEAF: A learnable frontend for audio classification," *CoRR*, vol. abs/2101.08596, 2021.
- [7] Jan Schlüter and Gerald Gutenbrunner, "Efficientleaf: A faster learnable audio frontend of questionable use," 2022, arXiv:2207.05508.
- [8] Emre Cakir, Ezgi Can Ozan, and Tuomas Virtanen, "Filterbank learning for deep neural network based polyphonic sound event detection," in *2016 International Joint Conference on Neural Networks (IJCNN)*, 2016, pp. 3399–3406.
- [9] Christophe Biernacki, Gilles Celeux, and Gérard Govaert, "Choosing starting values for the EM algorithm for getting the highest likelihood in multivariate Gaussian mixture models," *Computational Statistics & Data Analysis*, vol. 41, no. 3, pp. 561–575, 2003, Recent Developments in Mixture Model.
- [10] Volodymyr Melnykov and Igor Melnykov, "Initializing the EM algorithm in gaussian mixture models with an unknown number of components," *Computational Statistics & Data Analysis*, vol. 56, no. 6, pp. 1381–1395, 2012.
- [11] Yuxuan Wang, Pascal Getreuer, Thad Hughes, Richard F. Lyon, and Rif A. Saurous, "Trainable frontend for robust and far-field keyword spotting," in *2017 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, 2017, pp. 5670–5674.
- [12] Wei Chu and Abeer Alwan, "FBEM: A filter bank EM algorithm for the joint optimization of features and acoustic model parameters in bird call classification," in *2012 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, 2012, pp. 1993–1996.
- [13] Quchen Fu, Zhongwei Teng, Jules White, Maria E. Powell, and Douglas C. Schmidt, "FastAudio: A Learnable audio front-end for spoof speech detection," in *2022 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, 2022, pp. 3693–3697.
- [14] Susanta Sarangi, Md Sahidullah, and Goutam Saha, "Optimization of data-driven filterbank for automatic speaker verification," *Digital Signal Processing*, vol. 104, pp. 102795, 2020.
- [15] Mirco Ravanelli and Yoshua Bengio, "Speaker recognition from raw waveform with SincNet," in *2018 IEEE Spoken Language Technology Workshop (SLT)*, 2018, pp. 1021–1028.
- [16] Dimitri Palaz, Ronan Collobert, and Mathew Magimai-Doss, "Estimating phoneme class conditional probabilities from raw speech signal using convolutional neural networks," in *Proc. Interspeech 2013*, 2013, pp. 1766–1770.
- [17] Vincent Lostanlen, Justin Salamon, Mark Cartwright, Brian McFee, Andrew Farnsworth, Steve Kelling, and Juan Pablo Bello, "Per-channel energy normalization: Why and how," *IEEE Signal Processing Letters*, vol. 26, no. 1, pp. 39–43, 2019.
- [18] John Garofolo, L Lamel, W Fisher, Jonathan Fiscus, D Pallett, and Nancy Dahlgren, "Darpa timit acoustic-phonetic continuous speech corpus cd-rom TIMIT," 1993-02-01 1993.
- [19] Stefan Kahl, Tom Denton, Holger Klinck, Hervé Glotin, Hervé Goëau, Willem-Pier Vellinga, Robert Planqué, and Alexis Joly, "Overview of birdclef 2021: Bird call identification in soundscape recordings," in *Working Notes of CLEF 2021 - Conference and Labs of the Evaluation Forum*, 2021.
- [20] Younglo Lee, Jeongki Min, David K. Han, and Hanseok Ko, "Spectro-temporal attention-based voice activity detection," *IEEE Signal Processing Letters*, vol. 27, pp. 131–135, 2020.
- [21] M. Tan and Q.V. Le, "EfficientNet: Rethinking model scaling for convolutional neural networks," *36th International Conference on Machine Learning, ICML 2019*, vol. 2019-June, pp. 10691–10700, 2019.
- [22] D. O'Shaughnessy, *Speech Communication: Human and Machine*, Addison-Wesley series in electrical engineering. Addison-Wesley Publishing Company, 1987.
- [23] Hartmut Traunmüller, "Analytical expressions for the tonotopic sensory scale," *The Journal of the Acoustical Society of America*, vol. 88, no. 1, pp. 97–100, 1990.
- [24] S. Davis and P. Mermelstein, "Comparison of parametric representations for monosyllabic word recognition in continuously spoken sentences," *IEEE Transactions on Acoustics, Speech, and Signal Processing*, vol. 28, no. 4, pp. 357–366, 1980.
- [25] Dan Stowell, "Computational bioacoustics with deep learning: a review and roadmap," *PeerJ*, vol. 10, pp. e13152, Mar. 2022.
- [26] Martin Graciarena, Michelle Delplanche, Elizabeth Shriberg, Andreas Stolcke, and Luciana Ferrer, "Acoustic front-end optimization for bird species recognition," in *2010 IEEE International Conference on Acoustics, Speech and Signal Processing*, 2010, pp. 293–296.
- [27] Terri Kamm, Hynek Hermansky, and Andreas Andreou, "Learning the mel-scale and optimal VTN mapping," *Technical Report, JHU/CLSP Workshop*, 1997.
- [28] Chandan KA Reddy, Ebrahim Beyrami, Jamie Pool, Ross Cutler, Sriram Srinivasan, and Johannes Gehrke, "A scalable noisy speech dataset and online subjective test framework," *Proc. Interspeech 2019*, pp. 1816–1820, 2019.
- [29] Ilya Loshchilov and Frank Hutter, "SGDR: Stochastic Gradient Descent with Warm Restarts," 2016, arXiv:1608.03983.
- [30] D.M. Endres and J.E. Schindelin, "A new metric for probability distributions," *IEEE Transactions on Information Theory*, vol. 49, no. 7, pp. 1858–1860, 2003.