

Generating Query Focused Summaries without Fine-tuning the Transformer-based Pre-trained Models

Deen Abdullah, Shamanth Nayak, Gandharv Suri, and Yllias Chali

University of Lethbridge
Alberta, Canada

Abstract

Fine-tuning the Natural Language Processing (NLP) models for each new data set requires higher computational time associated with increased carbon footprint and cost. However, fine-tuning helps the pre-trained models adapt to the latest data sets; what if we avoid the fine-tuning steps and attempt to generate summaries using just the pre-trained models to reduce computational time and cost. In this paper, we tried to omit the fine-tuning steps and investigate whether the Marginal Maximum Relevance (MMR)-based approach can help the pre-trained models to obtain query-focused summaries directly from a new data set that was not used to pre-train the models. First, we used topic modelling on Wikipedia Current Events Portal (WCEP) and Debatepedia datasets to generate queries for summarization tasks. Then, using MMR, we ranked the sentences of the documents according to the queries. Next, we passed the ranked sentences to seven transformer-based pre-trained models to perform the summarization tasks. Finally, we used the MMR approach again to select the query relevant sentences from the generated summaries of individual pre-trained models and constructed the final summary. As indicated by the experimental results, our MMR-based approach successfully ranked and selected the most relevant sentences as summaries and showed better performance than the individual pre-trained models.

1 Introduction

In text summarization, the aim is to summarize a long document considered as the source text and convert it into a summary that holds all the important information from the source text. Some large-scale datasets have been created with document and summary pairs to perform the summarization tasks. However, the majority of these datasets are not prepared for the Query Focused Summarization (QFS) task (Abdullah and Chali, 2020). Hence,

for each new experiment, preparing the large-scale datasets for the QFS task and then training each neural model may result in higher memory requirement and computational cost (Xu and Lapata, 2020, 2021). Moreover, fine-tuning a pre-trained model for each large-scale dataset is a vital step that also requires higher computational time and resources. Therefore, we attempt to determine whether we can minimize the computational time and cost by avoiding the steps of fine-tuning the pre-trained models for each new dataset.

The Maximal Marginal Relevance (MMR) is one of the bagging approaches that has been widely used for video and text summarization tasks (Lebanoff et al., 2018; Hoang et al., 2012). Therefore, we planned to use the MMR approach (Carbonell and Goldstein, 1998) to generate query-focused summaries only from the pre-trained models without performing the task of fine-tuning. At first we used Latent Dirichlet Allocation (LDA) (Blei et al., 2003) which is a topic modeling approach to generate queries for Wikipedia Current Events Portal (WCEP) (Ghalandari et al., 2020) and Debatepedia (Nema et al., 2017) datasets. We performed the QFS task on multiple pre-trained models to get conglomerate summaries for each document using these datasets. Finally, we used the MMR approach to obtain a final summary considering the query and the generated summaries from the previous steps. We hypothesized that the final generated summary is the better summary among all the generated summaries since MMR selects the highly relevant sentences from the generated summaries of all the seven pre-trained models. Therefore, our proposed approach may choose the most query relevant sentences from conglomerate summaries for a given document and combine the information to generate a better summary.

2 Related Work

In Natural Language Processing (NLP), researchers have been showing their interest in summarization for several years and implemented different neural architectures to obtain remarkable performances (Dong et al., 2019; See et al., 2017; Zaheer et al., 2020). To perform the different NLP tasks including the summarization, researchers are using different pre-trained language models such as T5 (Raffel et al., 2020), XLNet (Yang et al., 2019), GPT-2 (Radford et al., 2019), Pegasus (Zhang et al., 2020), BART (Lewis et al., 2019), and LED (Beltagy et al., 2020). Although some pioneer works focused on query-focused extractive summaries (Davis et al., 2012; Feigenblat et al., 2017; Su et al., 2021; Litvak and Vanetik, 2017), unfortunately, the generated summaries from these works could not conquer the problem of maintaining cohesion in the summaries.

The idea of query focused summarization task was first introduced by Dang (Dang, 2005), where the authors showed that a document with a relevant query can be used to generate short summaries (Vig et al., 2021). Again, Nema et al. (2017) have proposed an attention mechanism to create query focused summaries. Emphasizing the answer relevant to the summary, Su et al. (2021) have presented the QFS-BART model that generates relevant answer or summary from a given source document by creating query with a question answering model. Some other QFS related researches were performed (Abdullah and Chali, 2020; Egonmwan et al., 2019; Aryal and Chali, 2020) where Abdullah and Chali (2020) focused on generating queries and performed Query focused Abstractive Summarization (QFAS) task by using document sorting and ranking in preprocessing steps. Egonmwan et al. (2019) proposed a transfer learning approach by using the tasks of Machine Reading Comprehension (MRC) and query focused summarization. Aryal and Chali (2020) focused on the noisy encoder problem and presented the input sequence in a selective approach to generate query focused abstractive summaries.

In this research, we did not consider any training or fine-tuning approaches since our aim was not to achieve any state-of-the-art (SOTA) result on the QFS task. To minimize the high computational time and cost, we attempted to omit the training and fine-tuning steps of pre-trained models. To the best of our knowledge, we are the first to factor out the steps of fine-tuning the pre-trained models for

the summarization task. Therefore, we compared the results of the pre-trained models (without fine-tuning) with our proposed MMR-based approach.

3 Proposed Framework

Our proposed framework has three sub-modules. First, query generation, then the document ranking and finally, the query focused summarization task.

3.1 Query Generation

Inspired by the work of Blei et al. (2003), we used the LDA topic modelling approach on the document to extract topics (5 topics) to be considered as the query of that document. We get a mixture of latent topics from a document using this approach. Equation 1 shows the distribution over words of a document for characterizing the latent topics, which we considered as queries.

$$p(\theta, z, w|\alpha, \beta) = p(\theta|\alpha) \prod_{n=1}^N p(z_n|\theta) p(w_n|z_n, \beta) \quad (1)$$

where θ denotes the mixture of the latent topics of the document, α and β are the joint distribution of θ , z is a set of N topics, and w is a set of N words. We set the hyperparameters as 1 and 5 for the number of topics and words, respectively. A graphical representation of the LDA model is shown in Figure 1.

3.2 Document Ranking

We used the MMR approach to rank the documents according to the generated query to get the query relevance of the documents. During optimization, the lambda constant for the approach was set to 0.76. Equation 2 represents the MMR equation for obtaining the query relevant sentences.

$$MMR = \underset{D_i \in R \setminus S}{\operatorname{argmax}} [\lambda \operatorname{sim}_1(D_i, Q) - (1 - \lambda) \underset{D_j \in S}{\operatorname{max}} \operatorname{sim}_2(D_i, D_j)] \quad (2)$$

where, Q is the query, D is the set of documents related to Q , S is the subset of documents in R which are already selected, $R \setminus S$ = set of unselected documents in R and λ is the constant in range of $0 - 1$, for diversification of the results.

3.3 Summarization Task

After preparing the documents as query-relevant documents, we fed them to seven pre-trained mod-

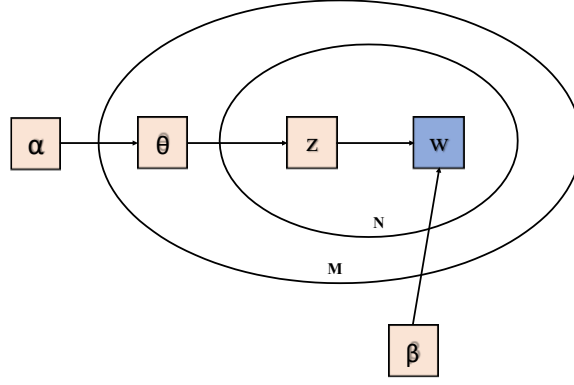


Figure 1: Graphical representation of LDA model. Here, M is the number of sentences in a document and N is the number of words in a sentence. The outer circle represents the document, while the inner circle represents the repeated choice of topics and words within a document.

els (LED, T5, Pegasus, BART-AB, XL-Net, BART-EX, GPT2). We produced seven summaries from each document using these seven different models. Then we tokenized all the sentences of the summaries. Finally, we used the MMR approach to select the sentences from these summaries and form the final summary by concatenating the sentences. Sentences were selected based on similarity with the query. The number of sentences to be selected was based on the number of sentences present in the gold summary. The optimal similarity measures were tf-idf for both similarity measures in the MMR algorithm. The lambda constant for the MMR algorithm was 0.83. Overall model architecture is shown in Figure 2.

3.4 Datasets

3.4.1 WCEP Dataset

The Wikipedia Current Events Portal (WCEP) dataset holds contents from Wikipedia, where human-written summaries and corresponding news articles are kept. The authors also stated that they searched for similar articles in the Common Crawl News dataset for each summary and increased the number of source articles. The dataset has a total of 10200 clusters, a total of 2.39M articles where 100 articles per cluster are assigned, and the authors divided the data set for 80% train, 10% validation and 10% for testing purposes (Ghalandari et al., 2020).

3.4.2 Debatepedia dataset

The Debatepedia dataset was created to facilitate the query-focused abstractive summarization task. The data set consists of 663 debates under 53 categories. The authors extracted 12695 query, doc-

ument, summary triples from debatepedia which is an encyclopedia of critical debate topics. The authors distributed 80% of the data for training, 10% for validation, and 10% for testing purposes (Nema et al., 2017).

4 Experimental Setup

We used two datasets for our experiment: WCEP (multi-document) and Debatepedia (single document). Since the WCEP dataset consists of 100 documents on each cluster, and many of the documents do not summarize to cover what is present in the gold summary (ground truth summary), we needed to extract those documents which summarize close to the gold summary. We ran an MMR on each cluster with a gold summary as the query for this preprocessing step and selected the top 12 documents from each cluster of the WCEP dataset. We chose MMR for document preprocessing instead of the document-sorting approach on the WCEP dataset, as most of the documents in a cluster contain the same text. While selecting the top 12 documents, a few pairs or triplets (of documents) were present that had the same text. The vectorization of the documents (and the gold summary) was done using pretrained doc2vec. For the similarity measure, we used cosine similarity. The lambda constant used in the MMR algorithm was set at 0.75. Debatepedia dataset is a single document data set and is already preprocessed for the summarization task.

We used Google Colab (GC)¹ as our experimental environment. For the pretrained models, we used Hugging Face² on GC. We passed 512 tokens

¹<https://research.google.com/colaboratory/>

²<https://huggingface.co/>

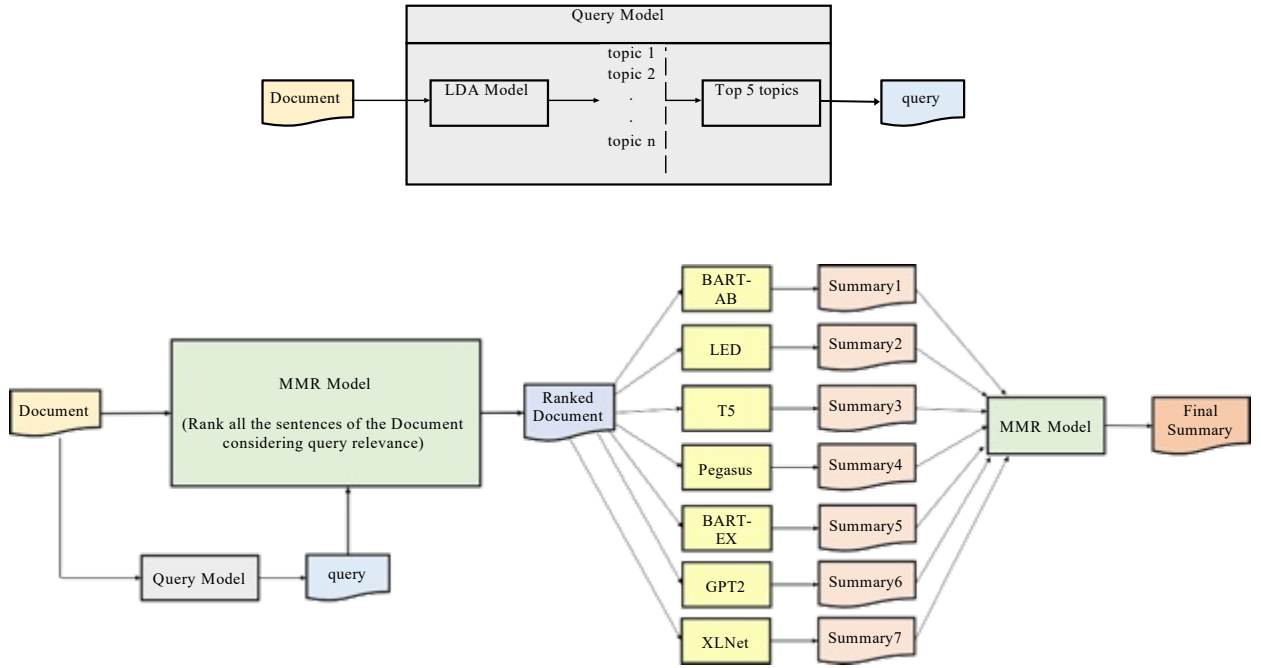


Figure 2: Proposed model.

from the ranked document as the input to the models and set the minimum length of the summaries as 15 as the output. We evaluated our proposed approach using ROUGE-1 (R-1), ROUGE-2 (R-2), and ROUGE-L (R-L) (Lin, 2004) to calculate the word-overlap between the reference and the system summaries.

5 Results

Table 1 shows the performance of the pre-trained models on the WCEP dataset. From the table, we can see that the Pegasus model shows the highest performance in R-1, R-2 and R-L scores which is 32.79, 12.84 and 23.73. BART-AB model shows the next highest performance, then T5 and LED, while BART-EX, GPT-2 and XLNet show the lowest performance. After applying the MMR approach, the model successfully outperformed the individual models' performance with R-1, R-2 and R-L scores of 36.89, 16.15 and 27.94, respectively.

Table 2 shows the performance of the individual pre-trained models on the Debatedpedia dataset. From the table, we can see that the LED model shows the highest performance in R-1, R-2 and R-L scores which is 20.64, 7.09 and 18.30. T5, GPT-2, BART-EX, BART-AB, and XLNet models show the next highest performance, while the Pegasus model showed the lowest performance. After applying the MMR approach, the model successfully outperforms the performance of all the individual

models with R-1, R-2 and R-L scores of 24.79, 9.05 and 22.16 respectively.

Based on the results in Table 1 and Table 2, we can say that our MMR-based approach was successful in generating better summaries by combining the summaries of the individual summarization models.

6 Discussion

In this research, our goal was to generate queries using the LDA approach for QFS tasks. Next, we ranked all the query-relevant sentences from a source document using the MMR model and performed the summarization task using seven pre-trained models, including BART-AB, LED, T5, Pegasus, BART-EX, GPT-2 and XLNet for WCEP and Debatedpedia datasets. Then, we passed all the summaries generated from the pre-trained models to the MMR-based model and finally generated summaries that outperformed the results of the individual models. The MMR model selected the most query relevant sentences as the final summary. We hypothesized that the MMR approach could help to generate better summaries without any training or fine-tuning approach, and with the performance of our approach, we proved our hypothesis. In this work, we did not consider any approach for training or fine-tuning the pre-trained models. Hence, we did not show any comparison of our MMR-based approach with the SOTA models that used train-

Model	R-1	R-2	R-L
BART-AB	31.55	12.16	22.23
LED	23.22	9.40	15.90
T5	28.75	9.08	20.51
Pegasus	32.79	12.84	23.73
BART-EX	16.03	7.03	11.01
GPT2	16.96	7.43	11.59
XLNet	16.91	7.23	11.51
MMR(Our)	36.89	16.15	27.94

Table 1: ROUGE scores of the models on WCEP dataset

Model	R-1	R-2	R-L
BART-AB	19.47	6.67	17.93
LED	20.64	7.09	18.30
T5	20.08	6.47	18.09
Pegasus	13.31	3.20	11.82
BART-EX	19.52	6.42	16.44
GPT2	19.75	6.63	16.61
XLNet	19.27	6.17	16.08
MMR(Our)	24.79	9.05	22.16

Table 2: ROUGE scores of the models on Debatedpedia dataset

ing or fine-tuning approaches. However, since our goal was not to achieve a better result than the recent SOTA summarization models, we compared our work with the individual pre-trained models trained with other datasets.

7 Conclusion

In this research, one of our aims was to generate queries using the LDA approach and prepare two datasets, such as WCEP and Debatedpedia, for the QFS task. Our other goal was to pre-process the source documents and rank the query relevant sentences before passing those sentences to the pre-trained models. Finally, we aimed to use the MMR approach to generate the final summary based on aggregating the summaries of the other seven models. We tried to prove that the MMR-based approach can successfully condense the relevant sentences from different models and generate a better summary for a given document. We found that our MMR-based approach successfully generated a better summary than the summary generated from individual models. Therefore, our proposed MMR-based approach can facilitate the future QFS task and help to obtain better summaries.

8 Acknowledgments

The research reported in this paper was conducted at the University of Lethbridge and supported by the Natural Sciences and Engineering Research Council (NSERC) of Canada discovery grant and the NSERC Alliance - Alberta Innovates Advance Program grant.

References

- Deen Mohammad Abdullah and Yllias Chali. 2020. [Towards generating query to perform query focused abstractive summarization using pre-trained model](#). In *Proceedings of the 13th International Conference on Natural Language Generation*, pages 80–85, Dublin, Ireland. Association for Computational Linguistics.
- Rie Kubota Ando and Tong Zhang. 2005. A framework for learning predictive structures from multiple tasks and unlabeled data. *Journal of Machine Learning Research*, 6:1817–1853.
- Galen Andrew and Jianfeng Gao. 2007. Scalable training of L1-regularized log-linear models. In *Proceedings of the 24th International Conference on Machine Learning*, pages 33–40.
- Chudamani Aryal and Yllias Chali. 2020. Selection driven query focused abstractive document summarization. In *Canadian Conference on Artificial Intelligence*, pages 118–124. Springer.

- Iz Beltagy, Matthew E Peters, and Arman Cohan. 2020. Longformer: The long-document transformer. *arXiv preprint arXiv:2004.05150*.
- David M Blei, Andrew Y Ng, and Michael I Jordan. 2003. Latent dirichlet allocation. *Journal of machine Learning research*, 3(Jan):993–1022.
- Jaime Carbonell and Jade Goldstein. 1998. The use of mmr, diversity-based reranking for reordering documents and producing summaries. In *Proceedings of the 21st annual international ACM SIGIR conference on Research and development in information retrieval*, pages 335–336.
- Hoa Trang Dang. 2005. Overview of duc 2005. In *Proceedings of the document understanding conference*, volume 2005, pages 1–12.
- Sashka T Davis, John M Conroy, and Judith D Schlesinger. 2012. Occams—an optimal combinatorial covering algorithm for multi-document summarization. In *2012 IEEE 12th International Conference on Data Mining Workshops*, pages 454–463. IEEE.
- Li Dong, Nan Yang, Wenhui Wang, Furu Wei, Xiaodong Liu, Yu Wang, Jianfeng Gao, Ming Zhou, and Hsiao-Wuen Hon. 2019. Unified language model pre-training for natural language understanding and generation. *Advances in Neural Information Processing Systems*, 32.
- Elozino Egonmwan, Vittorio Castelli, and Md Arafat Sultan. 2019. Cross-task knowledge transfer for query-based text summarization. In *Proceedings of the 2nd Workshop on Machine Reading for Question Answering*, pages 72–77.
- Guy Feigenblat, Haggai Roitman, Odellia Boni, and David Konopnicki. 2017. Unsupervised query-focused multi-document summarization using the cross entropy method. In *Proceedings of the 40th International ACM SIGIR Conference on research and development in information retrieval*, pages 961–964.
- Demian Gholipour Ghalandari, Chris Hokamp, Nghia The Pham, John Glover, and Georgiana Ifrim. 2020. A large-scale multi-document summarization dataset from the wikipedia current events portal. *arXiv preprint arXiv:2005.10070*.
- Dan Gusfield. 1997. *Algorithms on Strings, Trees and Sequences*. Cambridge University Press, Cambridge, UK.
- Tu-Anh Hoang, Khai Nguyen Nguyen, and Quang-Vinh Tran. 2012. Tsgvi: A graph-based summarization system for vietnamese documents. *Journal of Ambient Intelligence and Humanized Computing*, 3.
- Logan Lebanoff, Kaiqiang Song, and Fei Liu. 2018. Adapting the neural encoder-decoder framework from single to multi-document summarization. In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, pages 4131–4141, Brussels, Belgium. Association for Computational Linguistics.
- Mike Lewis, Yinhan Liu, Naman Goyal, Marjan Ghazvininejad, Abdelrahman Mohamed, Omer Levy, Ves Stoyanov, and Luke Zettlemoyer. 2019. Bart: Denoising sequence-to-sequence pre-training for natural language generation, translation, and comprehension. *arXiv preprint arXiv:1910.13461*.
- Chin-Yew Lin. 2004. Rouge: A package for automatic evaluation of summaries. In *Text summarization branches out*, pages 74–81.
- Marina Litvak and Natalia Vanetik. 2017. Query-based summarization using mdl principle. In *Proceedings of the multiling 2017 workshop on summarization and summary evaluation across source types and genres*, pages 22–31.
- Preksha Nema, Mitesh Khapra, Anirban Laha, and Balaraman Ravindran. 2017. Diversity driven attention model for query-based abstractive summarization. *arXiv preprint arXiv:1704.08300*.
- Alec Radford, Jeffrey Wu, Rewon Child, David Luan, Dario Amodei, Ilya Sutskever, et al. 2019. Language models are unsupervised multitask learners. *OpenAI blog*, 1(8):9.
- Colin Raffel, Noam Shazeer, Adam Roberts, Katherine Lee, Sharan Narang, Michael Matena, Yanqi Zhou, Wei Li, Peter J Liu, et al. 2020. Exploring the limits of transfer learning with a unified text-to-text transformer. *J. Mach. Learn. Res.*, 21(140):1–67.
- Mohammad Sadegh Rasooli and Joel R. Tetreault. 2015. Yara parser: A fast and accurate dependency parser. *Computing Research Repository*, arXiv:1503.06733. Version 2.
- Abigail See, Peter J Liu, and Christopher D Manning. 2017. Get to the point: Summarization with pointer-generator networks. *arXiv preprint arXiv:1704.04368*.
- Dan Su, Tiezheng Yu, and Pascale Fung. 2021. Improve query focused abstractive summarization by incorporating answer relevance. *arXiv preprint arXiv:2105.12969*.
- Jesse Vig, Alexander R Fabbri, Wojciech Kryściński, Chien-Sheng Wu, and Wenhao Liu. 2021. Exploring neural models for query-focused summarization. *arXiv preprint arXiv:2112.07637*.
- Yumo Xu and Mirella Lapata. 2020. Coarse-to-fine query focused multi-document summarization. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 3632–3645, Online. Association for Computational Linguistics.

- Yumo Xu and Mirella Lapata. 2021. [Generating query focused summaries from query-free resources](#). In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, pages 6096–6109, Online. Association for Computational Linguistics.
- Zhilin Yang, Zihang Dai, Yiming Yang, Jaime Carbonell, Russ R Salakhutdinov, and Quoc V Le. 2019. Xlnet: Generalized autoregressive pretraining for language understanding. *Advances in neural information processing systems*, 32.
- Manzil Zaheer, Guru Guruganesh, Kumar Avinava Dubey, Joshua Ainslie, Chris Alberti, Santiago Ontanon, Philip Pham, Anirudh Ravula, Qifan Wang, Li Yang, et al. 2020. Big bird: Transformers for longer sequences. *Advances in Neural Information Processing Systems*, 33:17283–17297.
- Jingqing Zhang, Yao Zhao, Mohammad Saleh, and Peter Liu. 2020. Pegasus: Pre-training with extracted gap-sentences for abstractive summarization. In *International Conference on Machine Learning*, pages 11328–11339. PMLR.