

Meet in the Middle: A New Pre-training Paradigm

Anh Nguyen* Nikos Karampatziakis* Weizhu Chen

Microsoft Azure AI

March 14, 2023

Abstract

Most language models (LMs) are trained and applied in an autoregressive left-to-right fashion, assuming that the next token only depends on the preceding ones. However, this assumption ignores the potential benefits of using the full sequence information during training, and the possibility of having context from both sides during inference. In this paper, we propose a new pre-training paradigm with techniques that jointly improve the training data efficiency and the capabilities of the LMs in the infilling task. The first is a training objective that aligns the predictions of a left-to-right LM with those of a right-to-left LM, trained on the same data but in reverse order. The second is a bidirectional inference procedure that enables both LMs to meet in the middle. We show the effectiveness of our pre-training paradigm with extensive experiments on both programming and natural language models, outperforming strong baselines.¹

1	Introduction	2
2	Preliminaries	4
2.1	The Infilling task	4
2.2	Bidirectional Language Modeling	5
3	Meet in the Middle	5
3.1	Pre-training	5
3.2	Infilling	6
3.2.1	Inference	6
3.2.2	Optional Enhancements	9

*Equal Contribution

¹Code and models available at <https://github.com/microsoft/Meet-in-the-Middle>

4	Experiments	10
4.1	Data and Models	10
4.2	Benchmarks and metrics	11
4.2.1	Code generation and infilling	11
4.2.2	Language Modeling	11
4.3	Main results	12
4.3.1	Code generation and infilling	12
4.3.2	Language Modeling	13
4.4	Ablation Study	13
4.4.1	Effect of Optional Enhancements	13
4.4.2	Effect of Agreement Regularizer	14
4.5	Efficiency of Inference	14
5	Related work	15
6	Conclusion	18
A	Appendix	23
A.1	Model training details	23
A.2	Programming language dataset details	23

1 Introduction

Language models (LMs) are powerful tools for generating natural and programming language, and have been widely used for various assisted authoring tasks, such as text summarization, code completion, and paraphrasing. In order to be usable in many different applications, most LMs have to be able to generate the next token from the sequence of previous tokens. Given the importance of this operation, pre-training has focused on optimizing the model’s ability to predict the next token given the previous tokens, as measured by perplexity. However, at pre-training time we have additional information that we are not utilizing. In particular, when training the model to predict one token we condition on the previous tokens (prefix) but completely ignore the subsequent tokens (suffix). While the suffix cannot be used as an input to the model, there are other ways to incorporate it into pre-training which have not received attention in the literature. Our goal is to utilize the pre-training data more efficiently while preserving the autoregressive nature of the underlying LM.

The approach we advocate involves additional modeling which at first blush may seem wasteful. After all, the main artifact produced during pre-training is an autoregressive left-to-right LM and the pre-training objective closely matches how the LM is applied. Still, there are two reasons to consider alternative training objectives. The first is about data efficiency. The LM is trained by a cheap-to-obtain but rather sparse signal: it produces a probability distribution over all possible choices for the next token yet it is only supervised by the actual next token in the training data. What if during training we provided a

denser form of supervision, where the probability distribution over next tokens is compared with another probability distribution?

The second reason has to do with other related tasks. In particular, in many real-world scenarios, the user may not want to generate text from scratch, but to rather infill or modify an existing sequence of tokens. For example, a programmer may want to add a new argument to a function, or a writer may want to insert a sentence or a phrase to improve the coherence of a paragraph. In these cases, a left-to-right LM cannot use the context from both sides of the insertion position, and may produce suboptimal results. The additional modeling we do during training will also help us develop a state-of-the-art infilling technique.

In this work, we propose a unified pre-training and inference paradigm that we call “Meet in the Middle” (MIM) to tackle both pre-training as well as infilling. MIM leverages two main ideas. The first idea is to introduce an additional language model that processes tokens right-to-left and use the two models to co-regularize each other. This allows each LM to benefit from the context provided by the other LM, which improves data efficiency and consistency. Here the models “meet in the middle” metaphorically in the sense of adjusting their output probabilities to agree with the other side. The second idea is a simple and effective inference procedure for infilling that takes advantage of all the artifacts produced during pre-training: both language models, as well as their tendency to agree. In this case, the two models will be building the completion each from their own side until they literally “meet in the middle”. Our agreement regularizer has two important benefits: it regularizes the two language models and makes them more consistent, and it helps us stop the generation process early in the infilling task, by detecting when the two models converge to the same token.

In other words, to train MIM, we use two decoding flows under a single shared decoder-only architecture [BMR⁺20], [CND⁺22]. The two LMs generate tokens in opposite directions. The forward direction predicts the next token given the prefix and the tokens it generates. The backward direction predicts the previous token given the suffix and the tokens it generates. We pre-train the two models jointly on a large corpus of text, using a combination of the standard language modeling loss and the agreement regularizer. Once, pre-training is complete, the forward model is a drop-in replacement for existing autoregressive LMs. The backward model can either be discarded or be used for related tasks such as infilling.

In our experiments, we aim to evaluate the effectiveness of MIM for pre-training LMs on different domains and tasks. We use public code and language data to pre-train LMs of different sizes and measure their performance in terms of perplexity and code completion tasks. We compare MIM with FIM [BJT⁺22] and other baselines, and show that MIM outperforms them in terms of both perplexity as well as task-specific evaluation metrics. We also conduct ablation studies to show the effectiveness of our main proposals during training and inference. To summarize, our main contributions are:

- We introduce a new pre-training paradigm for LMs that uses the training

data more efficiently by leveraging both the prefix and the suffix while still maintaining the autoregressive nature of LMs. We do this by training both a forward and a backward model and encourage them to agree.

- Propose a simple and efficient inference procedure for the infilling task, that takes advantage of context from both sides and the tendency of the forward and backward models to agree. Our procedure can use parallelism more effectively than existing infilling procedures and on average achieves better quality and latency than the state of the art.
- Pre-train language models of different sizes on public code and language data using MIM, evaluate them both with human and programming languages, and show that MIM outperforms many baselines in terms of standard evaluation metrics. Finally, some models and code are made publicly available.

2 Preliminaries

We introduce some notation here we use throughout the paper. For a sequence of tokens x_1, x_2, \dots, x_N we denote $x_{<i}$ the prefix x_1, x_2, \dots, x_{i-1} . We use $x_{>i}$ for the suffix $x_{i+1}, x_{i+2}, \dots, x_N$. The definitions for $x_{\leq i}$ and $x_{\geq i}$ are analogous. To reduce notation clutter, we are suppressing all dependence of models on learnable parameters and when it is clear from context we even suppress the inputs to the models. We will use arrows to distinguish the two models and their outputs. For example, \vec{p} is the forward model and \overleftarrow{p} is the backward model. Similarly, \vec{H} will be a hidden representation from the forward model while \overleftarrow{H} will be the corresponding representation from the backward model.

2.1 The Infilling task

In the infilling task we are given a sequence of tokens x_1, x_2, \dots, x_N , an insertion position i and a length M . The task is to generate a plausible (according to a LM) sequence of M tokens y_1, \dots, y_M to fill the gap between $x_{\leq i}$ and $x_{\geq i+1}$. In real world applications, M is unknown. We consider it as an additional input to avoid convoluted arguments about what constitutes a good infilling when M is unknown. Given an autoregressive LM $p(x_t|x_1, \dots, x_{t-1})$, a prefix $x_{\leq i}$, a suffix $x_{\geq i+1}$, and a length M , the task of finding the sequence y_1, \dots, y_M , among all M token sequences, that maximizes this probability requires time exponential in M . This is because a left-to-right LM cannot account for any disfluency that may occur between tokens y_M and x_{i+1} .

A simple technique for infilling that allows a LM to use context from both sides is called ‘‘Fill in the Middle’’ (FIM). [BJT⁺22]. In FIM, the context for the LM is formed by concatenating the suffix and the prefix, in that order, to ensure coherence near the position where a completion is desired. The advantages of the FIM approach are first, it can be applied to any pre-trained LM with very little modification, and second, it is computationally efficient, as it only requires one

forward pass of the LM. However, the FIM approach also has some drawbacks namely the contexts are unnatural concatenations of tokens. Furthermore, FIM cannot properly balance the influence of the prefix and the suffix, as the LM generation is typically biased towards the last few tokens of the context. With FIM we either have to move the suffix far from the point where the completion is requested, or (worse) move the prefix far from the completion. Moreover, the FIM training procedure is itself ad-hoc as the documents are arbitrarily split into prefix, middle, and suffix, and the model is trained to predict the middle from the concatenation of suffix and prefix. The problem here is that during pre-training the model only sees one (or few) of the $O(N^2)$ possible (prefix, middle, suffix) splits in a document with N tokens.

2.2 Bidirectional Language Modeling

Bidirectional language modeling has been mainly used in the literature to train non-autoregressive LMs using training objectives such as Masked Language Modeling. Empirically, these non-autoregressive models seem to produce better representations than autoregressive LMs but have other disadvantages such as the difficulty to perform in-context learning [PLR⁺22].

The first difference between our use of bidirectional modeling and the rest of the bidirectional modeling research is that our model remains autoregressive. The future tokens are only used to regularize the model and are not necessary for inference. The second difference is that we do not attempt to produce a single probability for every token. Instead there are always two probabilities, one computed from the past tokens (prefix) and one computed from the future tokens (suffix).

3 Meet in the Middle

We now describe the details of our proposed solution first for pre-training and then for infilling. Intuitively, during pre-training we train two models that need to balance two goals: The first is that the models need to independently predict their next token well each using a different view of the input (prefix vs. suffix). The second is that the probability distributions assigned to the next token from each model need to agree. This gives each model a glimpse of its future and provides a more dense supervision signal than simply the prediction of the next token. Thus for pre-training we encourage the two models to “meet in the middle” in the sense of reaching a compromise between what is predicted from the prefix and what is predicted from the suffix.

3.1 Pre-training

We use two decoder-only language models that share all of their parameters, and we train both a forward model \vec{p} and a backward model \overleftarrow{p} . The forward model \vec{p} is trained to predict next tokens in the forward direction x_1, x_2, \dots and

the backward model \overleftarrow{p} is trained to predict previous tokens in the backward direction x_N, x_{N-1}, \dots . In other words, \overrightarrow{p} is trained to maximize the likelihood of x_t given x_1, x_2, \dots, x_{t-1} and \overleftarrow{p} is trained to maximize the likelihood of x_t given $x_N, x_{N-1}, \dots, x_{t+1}$.

To improve data efficiency during training we employ a natural co-regularization term that encourages \overrightarrow{p} and \overleftarrow{p} to *agree* on their predicted probability distribution over the vocabulary for each token. Many choices are possible here, such as different f -divergences or even more stringent measures of agreement such as the Euclidean distance between the contextualized representations of the same token according to the two models. We do not explore these choices here and leave them for future work. For our purposes, we used the simple total variation distance to capture the disagreements among the two models on the i -th token:

$$D_{i,x}^{TV}(\overrightarrow{p}||\overleftarrow{p}) = \frac{1}{2} \sum_{z \in \mathcal{V}} |\overrightarrow{p}(z|x_{<i}) - \overleftarrow{p}(z|x_{>i})|$$

where \mathcal{V} is the vocabulary. The agreement regularizer is the sum of these distances over all sentences and tokens. The benefit of this regularizer is two-fold. First, it can provide the models with a denser supervision signal which improves data efficiency and helps us train a better autoregressive LM. The reason we say it is a dense supervision signal is because the probabilities of all tokens from one side are compared with the probabilities of all tokens from the other side. In contrast the traditional language modeling objective only assesses the probability of the token that is actually observed. The second benefit of the agreement regularizer is that it encourages the models to agree on their predictions. As we will argue later, this degree of agreement affects the efficiency of our inference technique in the infilling task.

To sum up, for a dataset S of sequences, the full training loss is

$$\sum_{x \in S} \sum_{i=1}^{|x|} -\log(\overrightarrow{p}(x_i|x_{<i})) - \log(\overleftarrow{p}(x_i|x_{>i})) + \beta D_{i,x}^{TV}(\overrightarrow{p}||\overleftarrow{p}). \quad (1)$$

The hyperparameter β is set to 0.1 in our experiments (except for ablation studies where $\beta = 0$). Once pre-training is done, we can directly use \overrightarrow{p} as a left-to-right autoregressive LM.

3.2 Infilling

We now turn our attention to the infilling problem and describe how our inference procedure works. Afterwards, we will discuss some optional modifications to the model architecture and training that could be used if we are only interested in infilling and do not need \overrightarrow{p} to be a drop-in replacement for existing autoregressive LMs.

3.2.1 Inference

At inference time, our goal is to have an efficient and low-latency generation procedure. At a conceptual level, a naive procedure could work as follows: First

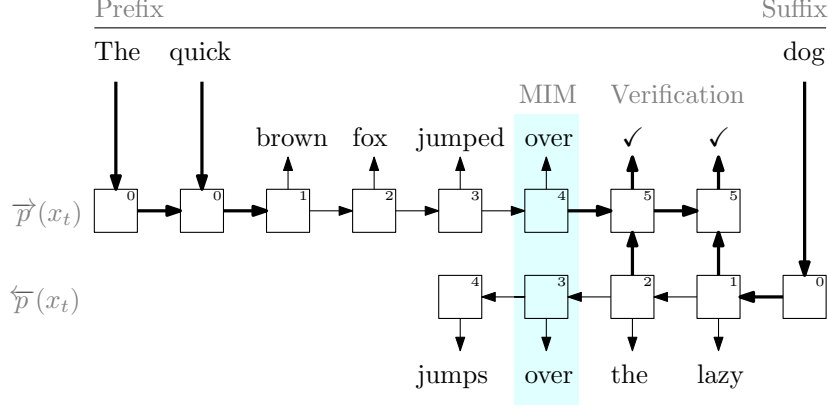


Figure 1: Inference procedure for infilling. Given the prefix “The quick” and the suffix “dog”, the models \vec{p} and \overleftarrow{p} generate tokens until a candidate meet-in-the-middle token is detected (shaded area). We use a single token for illustration purposes, although the method can use more tokens. Given the candidate MIM token, the \vec{p} (respectively \overleftarrow{p}) model can in parallel verify that the tokens generated by \overleftarrow{p} (resp. \vec{p}) are acceptable completions (only the \vec{p} verification is shown to reduce clutter). The numbers in the top right of each box show the order of operations. Two boxes with the same number can be executed in parallel. Similarly, thick lines show that information (embeddings, tokens) can flow in parallel, while thin lines denote sequential steps.

generate candidates from both models. As mentioned earlier, M the length of the desired infilling is unknown in many applications. So in practice we would generate from the two models until each meets a condition (e.g. an application specific token, such as the newline or the EOS token is generated). If \vec{p} generates $\vec{y}_1, \vec{y}_2, \dots, \vec{y}_F$ and \overleftarrow{p} generates $\overleftarrow{y}_1, \overleftarrow{y}_2, \dots, \overleftarrow{y}_B$ then we would need to find the best stitching $\vec{y}_1, \dots, \vec{y}_i, \overleftarrow{y}_j, \dots, \overleftarrow{y}_B$ among all (i, j) pairs $1 \leq i \leq F$, $1 \leq j \leq B$. However, this can be time-consuming as we would need to examine and assign a score to all $F \times B$ possible stitchings.

Instead we propose a simplified procedure that interleaves generation and scoring and can terminate as quickly as a unidirectional LM. Moreover, with enough parallelism, it can even be faster. This approach is shown in Figure 1. At a high level, the two models start building a completion each from their own side and they try to literally meet in the middle.

The steps of our approach are as follows. Initially, the prefix and suffix are consumed by \vec{p} and \overleftarrow{p} respectively. Then \vec{p} and \overleftarrow{p} generate tokens synchronously one at a time. For each generated token from \vec{p} we check whether it is in the generated tokens from \overleftarrow{p} (or the first token of the suffix). Likewise, for each generated token from \overleftarrow{p} we check whether it is in the generated tokens from \vec{p} (or the last token of the prefix). If there is a match, we have a “meet in the middle” candidate position for joining the two generated sequences.

In the most optimistic scenario, \vec{p} and \overleftarrow{p} produce the same sequence (\overleftarrow{p} produces it in reverse order). In that case we will detect that we can join the two generated sequences after each model has generated half of the tokens. Thus the two models have “met in the middle”. The importance of the agreement regularizer should now be more clear: if \vec{p} and \overleftarrow{p} produce completely different sequences, then our method is slower than FIM as it has no chance to terminate the generation early. But if the two models completely agree (and we have enough parallelism) it can even beat FIM in terms of generation latency as each model only needs to autoregressively generate half of the completion (while the other half is generated in parallel). As we will see in the experiments, our method achieves *lower latency* than FIM which suggests that in most cases the two generated sequences meet somewhere near the middle.

Admittedly, the above procedure can suffer from false positives: just because one side generated “the” and the other side had generated “the” it does not necessarily mean that joining the two generated sequences at that position would produce a coherent infilling. To reduce false positives we use n-grams instead of a single token. In all of the infilling experiments, we use 4-gram matching. Finally, to be confident that the resulting sequence could have been generated by running \vec{p} or \overleftarrow{p} until the end, we run a parallel verification procedure which we describe next.

Our parallel verification procedure is adapted from [GXS⁺22] where they used it in the context of certain tasks with special structure. Fortunately, our setup is the ideal place to apply their techniques. To make things more concrete, let’s assume that the latest token generated from \vec{p} matches with a token in position s generated from \overleftarrow{p} , as is the case in Figure 1 for the token “over”. Then we can use the tokens that were generated by \overleftarrow{p} before s as inputs to \vec{p} *in parallel*. In the context of Figure 1 we provide the tokens “over”, “the”, “lazy” as inputs to \vec{p} in parallel. If each output of \vec{p} matches the corresponding input, we have verified that \vec{p} would have autoregressively generated the tokens it copied from \overleftarrow{p} ’s output. Grounding the discussion back to Figure 1, if \vec{p} generates (in parallel) “the” and “lazy” we have verified that \vec{p} would have autoregressively generated the same tokens. If there is a partial match we can fast-forward the generation from \vec{p} to the point of the first disagreement. If there is no partial match we can return to autoregressive generation from \vec{p} and \overleftarrow{p} . So far, we have described verification as performing greedy top-1 sampling and checking whether the output from one position is the input we provided into the next position. While this closely matches our parallel verification implementation, more relaxed acceptance criteria could be adopted such as the provided candidate token having a high enough probability in the previous output. If the generations from \vec{p} and \overleftarrow{p} terminate without meeting or passing verification, we return the sequence with higher probability according to the model that generated it.

To sum up, we generate by running both the forward and backward direction in parallel, and after each step check whether there is a candidate meeting point where the two generated sequences are likely to be compatible. If so, we then apply a parallel verification procedure [SSU18], [GXS⁺22] to the joined sequence and decide whether we should stop the generation process early. With this

technique, “Meet in the Middle” (MIM) can produce high-quality outputs with *better latency* than FIM.

3.2.2 Optional Enhancements

To improve the infilling performance of our models, we can trade off their compatibility with autoregressive LMs and adopt a more powerful attention mechanism that allows bidirectional conditioning during generation. To do so, we switch the regular attention layer to a Synchronous Bidirectional Attention [ZZZ19] layer which has recently shown promising results in Neural Machine Translation. This layer couples the forward and backward models together and allows the generation of one direction to condition on context and previously generated tokens from the opposite direction (in addition to its own context and previously generated tokens).

More concretely the Synchronous Bidirectional Attention [ZZZ19] layer modifies the regular attention layer activations in the following way: Let \vec{H} be the output of an attention layer in \vec{p} and \overleftarrow{H} the corresponding layer in \overleftarrow{p} . Then for a hyperparameter λ we define the fused attention hidden representation as

$$\vec{H}_f = \vec{H} + \lambda \overleftarrow{H} \text{ and } \overleftarrow{H}_f = \overleftarrow{H} + \lambda \vec{H}.$$

The models \vec{p} and \overleftarrow{p} then use \vec{H}_f and \overleftarrow{H}_f in place of \vec{H} and \overleftarrow{H} . When $\lambda = 0$, \vec{p} and \overleftarrow{p} are decoupled and reduce to classic autoregressive transformers.

With this modified architecture, care must be exercised during training. Recall that the LMs are trained with teacher forcing which means that during training the prediction for each token is conditioned on the previous ground truth tokens rather than the previously generated tokens. Therefore, it is possible for the Synchronous Bidirectional Attention layer to leak information from the other direction during training. This could cause the LMs to simply learn to copy ground truth tokens from the other side. To prevent this we make the training procedure somewhat closer to how inference is performed. Similar to [ZZZ19], we employ a two stage process: In the first stage we do not update the model parameters and simply use $\lambda = 0$ to generate candidates \vec{z} , \overleftarrow{z} from \vec{p} and \overleftarrow{p} respectively. We denote the candidates produced up to the $i - 1$ -th step of the first stage as $\vec{z}_{<i}$ and $\overleftarrow{z}_{<i}$. In the second stage we use the actual $\lambda > 0$ and condition the probability of x_i according to \vec{p} on both $x_{<i}$ and $\overleftarrow{z}_{<i}$. Similarly for \overleftarrow{p} we condition the probability of $x_{|x|-i}$ on both $x_{>|x|-i}$ and $\vec{z}_{<i}$, where $|x|$ is the length of sequence x . Training is only done for the second stage. For the gradient computations, we treat \vec{z} and \overleftarrow{z} as constants even though they do depend on the current model parameters.

As we will show, the modifications suggested here further improve infilling metrics but come at the cost of incompatibility with existing autoregressive LMs. Therefore we consider them optional and application dependent.

4 Experiments

This section presents the pre-training experiments, evaluation setup, main results and ablation studies for our models.

4.1 Data and Models

We first pre-train our models on a large and diverse corpus of public code with permissive licenses, which covers multiple programming languages. Python, Java, C++ are the dominant languages in our corpus, accounting for most of the pre-training data. After filtering and deduplication, our corpus contains about 300 billion tokens. Table 7 shows the detailed statistics of our pre-training data. We pre-train our models with a single pass over the data, processing about 300B tokens in total. This is about six times larger than the pre-training dataset used in the original InCoder model trained on 50B tokens including code and Stack Overflow data [FAL⁺22].

Apart from pre-training our model on public code datasets, we also pre-train our model on natural language, specifically the union of the following datasets: **CC-News**, **OpenWebText**, **CC-Stories** and **CC-100** with the following details.

- **CC-News** contains 63 million English news articles crawled between September 2016 and February 2019 (76GB).
- **OpenWebText** is an open source recreation of the WebText dataset used to train GPT-2 (38GB).
- **CC-Stories** contains a subset of CommonCrawl data filtered to match the story-like style of Winograd schemas (31GB).
- **CC-100** is a dataset extracted from CommonCrawl snapshots between January 2018 and December 2018, filtered to match the style of Wikipedia (292GB)

The first three of them are used to pre-train Roberta models [LOG⁺19] and the rest is the English subset of CC-100 dataset, which in total contains 112B tokens.

We adopt a decoder-only transformer language model [VSP⁺17, BMR⁺20] and train it to predict the next token in both directions, i.e., the same model and parameters are used for left-to-right and right-to-left prediction. To investigate the effect of model size, we pre-train models with three different capacities: 350M, 1.3B and 2.7B parameters. The hyperparameters and training setup for each model size are provided in the Appendix.

As baselines, following [BJT⁺22], we pre-train three FIM models with context-level FIM, apply transformations at the character level, use a FIM-rate of 0.5 and SPM+PSM joint training. Both the MIM and the FIM models are pre-trained using Megatron-LM framework [SPP⁺19]. The model configurations for these variants as well as architectural details can be found in the Appendix.

4.2 Benchmarks and metrics

4.2.1 Code generation and infilling

We evaluate MIM in two different settings: Autoregressive left-to-right generation and infilling, and use different benchmarks and metrics for each setting.

To evaluate the autoregressive generation task, where the model needs to generate the code body given the function signature, docstring, and test cases, we use three widely used datasets of Python programming problems and one dataset containing multiple programming languages: **HumanEval** [CTJ⁺21], which contains hand-crafted problems and solutions; **MBPP** [AON⁺21], which consists of problems and solutions collected from crowd workers with a cleaned version that removes duplicates and errors; and **APPS** [HBK⁺21], which has problems and solutions scraped from online coding platforms with varying difficulty levels. For the experiments with multiple programming languages, we use the **HumanEval-X** dataset, a multilingual benchmark that contains 820 human-crafted coding problems in 5 programming languages, each of these problems is associated with tests and solutions. In this task, we only use the left-to-right model for inference, as there is no given suffix for the problems.

For the infilling task, where the model needs to fill in the blank lines in an incomplete program, we use two recently proposed datasets that are designed for this scenario: **HumanEval Infilling** [BJT⁺22] and **MBXP** [AGW⁺22]. This task mimics the common use cases of code completion tools like GitHub Copilot and document editors. Since these datasets provide suffixes and not all models can handle them properly, we compare MIM with InCoder, three variants of FIM, and code-davinci-002.

As for the metrics, we use the pass@k metrics [CTJ⁺21], which measure the percentage of times that the generated code passes all the test cases within the top-k candidates. Specifically, we report pass@1, pass@10, and pass@100, and compute them using the unbiased estimator described in [CTJ⁺21]. For generation, we use top-p sampling with $p = 0.95$ and different temperatures: 0.2 for pass@1 and 0.8 for pass@10 and pass@100. Additionally, we report the single-line exact match (EM) metrics, which indicate the percentage of times that the completed lines exactly match the masked lines in the reference solution, as introduced in [FAL⁺22] and adopted in [BJT⁺22].

4.2.2 Language Modeling

Apart from experiments on code generation and infilling, we also evaluate our models in the language modeling tasks to test the ability of our model to predict next token in a sequence measured by perplexity.

We evaluate and report perplexity in both **in-domain** and **out-of-domain** settings. For the **in-domain** setting, we sample a held-out subset of the combined training data. For the **out-of-domain** setting, we used the Pile dataset [GBB⁺21], a public language modeling dataset that combines data from various domains. We report the average perplexity across all subsets of the Pile dataset for our baselines and models.

4.3 Main results

4.3.1 Code generation and infilling

First, we present the results of our FIM model, pre-trained from scratch, in Table 1, along with various baselines from the literature. Our FIM implementation significantly outperforms the Incoder models [BJT⁺22], on all metrics and datasets. For instance, our 2.7B model achieves 28.5% pass@1 in HumanEval, while their 6.7B model only reaches 15.2%. This impressive performance of our FIM model is attributed to several factors, such as the larger and better-filtered training data, and the implementation details we provide in the Appendix. Our FIM-2.7B model also surpasses other strong baselines, such as Codex 2.5B and CodeGen-Multi-6.1B, by a large margin. For example, FIM-2.7B attains 67.8% in pass@100, compared to 44.9% and 59.5% of CodeGen-Multi-6.1B and Codex-2.5B, respectively. These results clearly establish that our FIM models are very competitive baselines. Therefore, in the following sections, we will focus on comparing MIM with our FIM baselines directly to highlight the benefits of "Meet-in-the-Middle".

Second, we evaluate MIM’s autoregressive left-to-right generation in a prefix-only setting (no suffix). We compare FIM with MIM on both the HumanEval and MBPP benchmarks in Table 1. Both of them have three different model sizes: 350M, 1.3B, and 2.7B. It is evident that MIM consistently outperforms FIM across all the metrics in both datasets. For example, the MIM-2.7B model boosts the HumanEval pass@1 to 30.7%, surpassing the FIM-2.7B by 2.2% (30.7% vs. 28.5%). The improvement on MBPP is similar, in terms of pass@1, 4.0% (42.2% vs. 38.2%) on the 2.7B model and 0.9% (26.8% vs. 25.9%) on the 1.3B model. We note that the improvements increase with the model size. This is evidence that the larger models benefit more from the agreement regularizer. We further evaluate this setting on the APPS dataset, which has three different difficulty levels. We report the results in Table 3. The trend and improvement are similar to the other two datasets, in which MIM consistently outperforms FIM across all the metrics and difficulty levels. In the multilingual setting, we compare MIM with FIM baselines in the HumanEval-X dataset. We observe consistent improvement across all metrics and all the programming languages that we evaluated on. Results are reported in Table 2.

These results clearly demonstrate the advantage of MIM over FIM in the setting of left-to-right autoregressive generation. The main claim in [BJT⁺22] is that FIM does not harm the original left-to-right generative capability and can be learned for free. We argue that MIM is not only free, but also better in this setting. In other words, MIM pre-training which receives a more dense supervision from the agreement regularizer leads to a high quality left-to-right generative model and should become a new pre-training paradigm.

Lastly, we evaluate MIM in the infilling setting, which is the setting that inspired us to design the MIM approach at the beginning. This is because in real-world applications, such as Copilot, we observe that the majority of usage is in developers jumping to the middle of a source file and then editing it with both

the prefix and the suffix providing rich context. For this task, we reported results of both MIM and FIM baselines on the HumanEval Infilling benchmark and the MBXP Infilling benchmark in Table 1. Comparing to the baselines, MIM consistently outperforms FIM in both datasets across all metrics and model sizes. Specifically, the MIM-2.7B model achieved pass@1 of 26.3%, an improvement of 3.5% over FIM-2.7B model which achieved pass@1 of 22.8%. In terms of the exact match metric, an improvement of 6.1% is also substantial (57.8% vs 51.7%). Similar to autoregressive left-to-right generation, we also notice improvement across three model sizes we consider.

4.3.2 Language Modeling

In this section, we compare FIM and MIM Models pre-trained on natural language datasets. We use perplexity as our evaluation metric and look at two different language modeling settings, namely **in-domain** and **out-of-domain**.

The perplexity results of both settings are summarized in Table 4. It is evident that across all experiments, MIM consistently outperform FIM baselines in terms of perplexity. The largest model MIM-2.7B has the best perplexity across all datasets in both settings. For example, MIM-2.7B model obtains a perplexity of 9.54 in OpenWebText dataset, a relative 19.9% reduction in perplexity over FIM-2.7B model, which obtains a perplexity of 11.92.

In the Pile dataset [GBB⁺21], which represents the **out-of-domain** setting, MIM-2.7B model also outperforms FIM-2.7B model by a relative reduction of 15.3% in perplexity (9.24 vs 10.92), which further reinforces the advantages of MIM pre-training for natural languages.

4.4 Ablation Study

4.4.1 Effect of Optional Enhancements

In this section, we perform an ablation study to qualitatively assess the effect of the optional enhancements we proposed in section 3.2.2 for the infilling task. We compare the purely autoregressive MIM model ($\lambda = 0$) where the LMs are not allowed to observe generated tokens from the opposite side, and only utilize context from their own side during generation. We contrast this with using the Synchronous Bidirectional Attention layer with $\lambda = 0.3$ that conditions on previously generated tokens from both sides. We used perplexity on the validation data to select the value λ . We reuse the same value of λ during infilling to avoid any potential mismatch between training and inference.

We conduct an experiment on the HumanEval Infilling benchmark [BJT⁺22] and results are summarized in Table 5. We notice that models that directly incorporate bidirectional context always outperform models that only utilize unidirectional context across all model sizes. As always, this is at the expense of the forward model no longer being a drop-in replacement for standard autoregressive LMs.

Methods	HumanEval			MBPP			HE Infilling		MBXP
k	1	10	100	1	10	100	1	EM	1
Incoder-1.3B	8.9	16.7	25.6	11.3	26.8	42.7	8.6	31	9.2
Incoder-6.7B	15.2	27.8	47	19.4	46.5	66.2	14.5	44.1	20.8
CodeGen-Multi-6B	18.2	28.7	44.9	-	-	-	-	-	-
CodeGen-Multi-16B	18.32	32.07	50.80	-	-	-	-	-	-
Codex-2.5B	21.36	35.42	59.5	-	-	-	-	-	-
Codex-12B	28.81	46.81	72.31	-	-	-	-	-	-
code-davinci-001	39	60.6	84.1	51.8	72.8	84.1	-	-	-
code-davinci-002	47	74.9	94.1	58.1	76.7	84.5	51.3	74	57.6
PaLM-8B	3.6	-	18.7	5.0	-	-	-	-	-
PaLM-62B	15.9	-	46.3	21.4	-	-	-	-	-
PaLM-540B	26.2	-	76.2	36.8	-	-	-	-	-
LLaMA-7B	10.5	-	36.5	17.7	-	-	-	-	-
LLaMA-13B	15.8	-	52.5	22.0	-	-	-	-	-
LLaMA-33B	21.7	-	70.7	30.2	-	-	-	-	-
LLaMA-65B	23.7	-	79.3	37.7	-	-	-	-	-
FIM-350M	12.8	16.7	27.8	14.8	30.2	44.5	11.8	37.6	14.3
FIM-1.3B	20.8	39.4	51.7	25.9	45.6	62.5	15.7	42.2	22.1
FIM-2.7B	28.5	45.6	67.8	38.2	61.2	76.1	22.8	51.7	30.4
MIM-350M	13.7	17.2	28.5	16.5	33.7	47.4	14.6	41.7	16.4
MIM-1.3B	22.4	41.7	53.8	26.8	47.6	65.1	17.4	47.6	24.5
MIM-2.7B	30.7	48.2	69.6	42.2	64.8	79.3	26.3	57.8	35.7

Table 1: pass@k (%) on the HumanEval, MBPP and HumanEval Infilling and MBXP benchmarks. Additionally, Exact Match (EM) metric [FAL⁺22] is reported for HumanEval Infilling. FIM is the baseline ‘Fill in the Middle’ (FIM). MIM is our proposed bidirectional language modeling with Meet-in-the-middle. For reference, we also report evaluation numbers of other models, namely Incoder-1.3B and Incoder-6.7B [FAL⁺22], Codex-12B [CTJ⁺21], code-davinci-001 and code-davinci-002. Note that, Codex-12B, davinci-001, PaLM [CND⁺22] and LLaMA [TLI⁺23] were trained only with left-to-right autoregressive objective, thus, cannot perform infilling.

4.4.2 Effect of Agreement Regularizer

In this section, we perform an ablation study to qualitatively assess the importance of the token-level agreement regularizer of Section 3.1 during training. We show that encouraging agreement during training helps improve the infilling performance of our models in the HumanEval Infilling benchmark [BJT⁺22], as summarized in Table 6.

Comparing with Table 5, we see that models trained without token-level agreement regularization in general perform worse than models that do not utilize bidirectional context ($\lambda = 0$), which further emphasizes the importance of our agreement regularizer in making the predictions consistent between forward and backward directions.

4.5 Efficiency of Inference

In this section, we further look into the efficiency of our MIM inference procedure for infilling and compare to FIM in terms of inference latency with various batch sizes. Figure 2 shows the speedup of MIM in terms of inference latency over FIM baselines in both single and half precision format with the same model size

Methods	C++			Java			Go		
k	1	10	100	1	10	100	1	10	100
Incoder-6B	10.0	20.0	35.0	9.0	19.0	40.0	8.0	14.0	29.0
CodeGen-6B	12.0	20.0	36.0	15.0	18.0	40.0	9.0	22.0	40.0
CodeGen-16B	18.0	30.0	50.0	15.0	38.0	60	13.0	25.0	47.0
CodeGeeX-13B	20.0	31.0	50.0	16.0	38.0	58.0	15.0	25.0	49.0
FIM-350M	8.5	18.3	24.3	11.3	21.5	27.6	10.2	16.8	31.4
FIM-1.3B	16.7	31.5	43.2	15.4	25.2	32.6	12.5	23.7	39.6
FIM-2.7B	24.5	38.6	51.3	18.3	28.6	38.7	15.2	30.4	50.2
MIM-350M	10.2	19.6	26.3	11.1	22.4	28.2	10.8	17.5	31.8
MIM-1.3B	19.3	36.5	45.7	17.6	27.4	34.7	13.6	25.1	41.7
MIM-2.7B	27.4	41.3	54.1	21.6	30.8	39.1	17.4	32.7	53.6

Table 2: $pass@k$ (%) results on the HumanEval-X benchmarks in the zero-shot settings for the baselines FIM and our MIM approach. Results of $k = 1, 10$ and 100 are reported across all categories.

Methods	Introductory			Interview			Competition		
k	1	10	100	1	10	100	1	10	100
FIM-350M	3.6	7.8	11.5	0.0	0.3	1.2	0.0	0.04	0.9
FIM-1.3B	8.2	11.6	17.4	0.12	0.59	1.9	0.01	0.07	1.7
FIM-2.7B	12.4	15.7	20.8	0.27	0.72	2.4	0.03	0.095	2.4
MIM-350M	4.7	9.2	14.3	0.2	0.51	2.3	0.02	0.06	1.4
MIM-1.3B	10.6	14.2	21.2	0.36	0.76	3.6	0.043	0.09	2.2
MIM-2.7B	14.3	18.2	24.6	0.52	1.4	5.2	0.067	0.18	3.3

Table 3: $pass@k$ (%) results on the APPS benchmarks in the zero-shot settings for the baselines FIM and our MIM approach. Results of $k = 1, 10$ and 100 are reported across all categories.

of 1.3B average over all the examples in the HumanEval Infilling benchmark. In particular, the inference speed of MIM-1.3B is 4% to 6% faster compared to the inference speed of FIM-1.3B in single precision, and 3% to 5% faster if using half precision.

We speculate that the speedup of MIM over FIM baselines during inference is attributed to several factors. Firstly, the generation of tokens in the left-to-right and right-to-left models are done in parallel. Furthermore, MIM inference procedure allows the generation from both sides to terminate early when there is an n-gram match and the sequence of tokens generated passes the verification. Our verification procedure based on [GXS⁺22] is also very efficient as it can be parallelized over all the remaining time steps in the sequence.

5 Related work

There is an extensive body of work on bidirectional language modeling. Early models such as BERT [DCLT19] masked tokens randomly, while T5 [RSR⁺20], SpanBERT [JCL⁺20] masked spans of contiguous tokens and demonstrate improved performance. XLNET [YDY⁺19], on the other hand, utilizes bidirectional

Methods	Datasets				
MODELS	CC-News	OpenWebText	CC-Stories	CC-100	THE PILE
FIM-350M	21.16	17.91	20.89	14.23	15.14
FIM-1.3B	18.78	13.28	17.52	11.34	12.48
FIM-2.7B	13.45	11.92	13.43	9.43	10.92
MIM-350M	19.43	17.23	18.75	13.45	13.97
MIM-1.3B	16.04	12.23	14.63	11.16	10.79
MIM-2.7B	11.17	9.54	11.35	8.76	9.24

Table 4: Perplexity results on all datasets in **in-domain** setting including **CC-News**, **OpenWebText**, **CC-Stories**, and **CC-100** held-out datasets, and perplexity results in **out-of-domain** setting - the Pile dataset [GBB⁺21]

Methods		HE Infilling		MBXP
MODELS	λ	pass@1	EM	pass@1
MIM-350M	0.0	12.5	38.6	14.1
	0.3	14.6	41.7	16.4
MIM-1.3B	0.0	15.6	45.2	21.7
	0.3	17.4	47.6	24.5
MIM-2.7B	0.0	24.7	54.3	32.4
	0.3	26.3	57.8	35.7

Table 5: pass@1 (%) results of MIM without bidirectional context ($\lambda = 0.0$) and with bidirectional context ($\lambda = 0.3$) on the HumanEval Infilling and MBXP benchmarks. Exact match results on the HumanEval Infilling benchmark are also reported.

context during training by the permutation language modeling objective, which maximizes the likelihood over all factorization orderings of the training sequences. However, because these models typically focus on representation learning, in-context learning via prompting can be difficult [PLR⁺22].

Two works that train neural models using similar ideas are [SKS⁺18] and [ZWL⁺19]. In the former the authors train RNNs for acoustic modeling which needs to happen in real-time. This constraint is very similar to our desire of having a forward model that can generate the next token from the previous ones. However, they propose to regularize the forward and backward RNNs by requiring their representations to be close in Euclidean distance. We suspect that this constraint may be unnecessarily stringent, and trading it off against the LM’s perplexity during training could hurt overall performance.

On the other hand, [ZWL⁺19] only encourage agreement in probability space. However, they are interested only in neural machine translation and only encourage agreement of probabilities at whole output sequence level. In contrast, we encourage agreement on every token. Another difference is that they are using a sum of two KL divergence terms $KL(\vec{p}||\overleftarrow{p}) + KL(\overleftarrow{p}||\vec{p})$ as the regularizer while we use total variation distance. We suspect that KL is more stringent as it is unbounded and can hurt the overall model when the model’s

Methods		HE Infilling		MBXP
MODELS	Regularizer	pass@1	EM	pass@1
MIM-350M	no reg	11.8	35.9	13.5
	+ reg	14.6	41.7	16.4
MIM-1.3B	no reg	13.8	42.7	22.7
	+ reg	17.4	47.6	24.5
MIM-2.7B	no reg	23.2	52.5	30.6
	+ reg	26.3	57.8	35.7

Table 6: pass@1 (%) results of MIM with token-level agreement regularizer and without token-level agreement regularizer on the HumanEval Infilling and MBXP benchmark. Exact match results on the HumanEval Infilling benchmark are also reported.

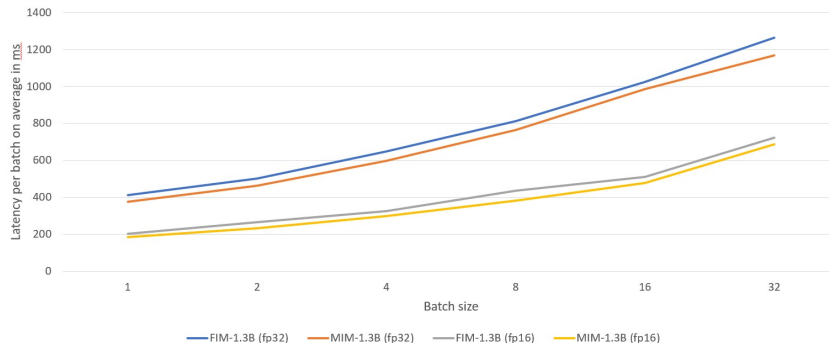


Figure 2: Inference latency of MIM and FIM baselines with batch implementation in A100 GPU with fp32 and fp16 precision.

perplexity needs to be traded off against the regularizer during training.

Sharing all parameters between different factorizations of the sequence was first proposed in XLNET [YDY⁺19] but has also been used with only forward and backward models in the context of image captioning [ZHL⁺22]. That work motivated us to share all parameters between the forward and backward LMs.

Using LMs for infilling was first proposed in [DLL20] where the authors tackled the more challenging setup with multiple places that need infilling. [BJT⁺22] applies “Fill in the Middle” (FIM) to the training data by randomly splitting each training instance into a tuple of (prefix, middle, suffix) and concatenate all these sections into a single example together with their sentinel tokens after tokenization. [BJT⁺22] also contains a thorough section on research related to infilling. We refer the reader there for more details.

Furthermore, [AHR⁺22] and [FAL⁺22] propose an extension of FIM, namely “Causal Masked Language Modeling” (CM3) and explore multi-region infilling problem. Similar to us, [BJT⁺22] and [FAL⁺22] leverage FIM to pre-train

decoder-only language model on code data and evaluate their models on zero-shot code completion benchmark created from HumanEval dataset [CTJ⁺21].

In [SLB17] the authors propose a bidirectional beam search procedure that also employs forward and backward LMs. However their focus is in improving accuracy at the expense of latency. Their procedure performs multiple passes over the completion, fixing tokens one-by-one and re-evaluating the probabilities from the LMs. Our approach focuses on achieving better infilling accuracy than FIM while also reducing latency.

6 Conclusion

In this paper we addressed two challenges faced by large LMs: Pre-training data efficiency and better handling of context for the task of infilling. We proposed “Meet in the Middle”, a method that uses both forward and backward LMs that share parameters and are trained to agree with each other in addition to predicting the next token. The resulting forward LM is a drop-in replacement for existing autoregressive LMs while also achieving better quality over strong baselines. Moreover, for the task of infilling, we proposed an inference procedure that employs both LMs and can in certain cases reduce the inference latency by up to 50%. Though in our experiments the latency reduction was modest, compared to FIM, the reduction in perplexity and the improvements over FIM in both autoregressive and infilling settings were substantial.

Acknowledgments

We would like to thank Dejian Yang and Jian-Guang Lou at Microsoft Research Asia for helping us with processing training data. We also sincerely thank Daniel Fried and Armen Aghajanyan at Meta AI for helpful discussion regarding the training details of FIM baselines.

References

- [AGW⁺22] Ben Athiwaratkun, Sanjay Krishna Gouda, Zijian Wang, Xiaopeng Li, Yuchen Tian, Ming Tan, Wasi Uddin Ahmad, Shiqi Wang, Qing Sun, Mingyue Shang, Sujan Kumar Gonugondla, Hantian Ding, Varun Kumar, Nathan Fulton, Arash Farahani, Siddhartha Jain, Robert Giaquinto, Haifeng Qian, Murali Krishna Ramanathan, Ramesh Nallapati, Baishakhi Ray, Parminder Bhatia, Sudipta Sengupta, Dan Roth, and Bing Xiang. Multi-lingual evaluation of code generation models. *CoRR*, abs/2210.14868, 2022.
- [AHR⁺22] Armen Aghajanyan, Bernie Huang, Candace Ross, Vladimir Karpukhin, Hu Xu, Naman Goyal, Dmytro Okhonko, Mandar Joshi, Gargi Ghosh, Mike Lewis, and Luke Zettlemoyer. CM3: A causal

- masked multimodal model of the internet. *CoRR*, abs/2201.07520, 2022.
- [AON⁺21] Jacob Austin, Augustus Odena, Maxwell I. Nye, Maarten Bosma, Henryk Michalewski, David Dohan, Ellen Jiang, Carrie J. Cai, Michael Terry, Quoc V. Le, and Charles Sutton. Program synthesis with large language models. *CoRR*, abs/2108.07732, 2021.
- [BJT⁺22] Mohammad Bavarian, Heewoo Jun, Nikolas Tezak, John Schulman, Christine McLeavey, Jerry Tworek, and Mark Chen. Efficient training of language models to fill in the middle. *CoRR*, abs/2207.14255, 2022.
- [BMR⁺20] Tom B. Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, Sandhini Agarwal, Ariel Herbert-Voss, Gretchen Krueger, Tom Henighan, Rewon Child, Aditya Ramesh, Daniel M. Ziegler, Jeffrey Wu, Clemens Winter, Christopher Hesse, Mark Chen, Eric Sigler, Mateusz Litwin, Scott Gray, Benjamin Chess, Jack Clark, Christopher Berner, Sam McCandlish, Alec Radford, Ilya Sutskever, and Dario Amodei. Language models are few-shot learners. In Hugo Larochelle, Marc’Aurelio Ranzato, Raia Hadsell, Maria-Florina Balcan, and Hsuan-Tien Lin, editors, *Advances in Neural Information Processing Systems 33: Annual Conference on Neural Information Processing Systems 2020, NeurIPS 2020, December 6-12, 2020, virtual*, 2020.
- [CND⁺22] Aakanksha Chowdhery, Sharan Narang, Jacob Devlin, Maarten Bosma, Gaurav Mishra, Adam Roberts, Paul Barham, Hyung Won Chung, Charles Sutton, Sebastian Gehrmann, Parker Schuh, Kensen Shi, Sasha Tsvyashchenko, Joshua Maynez, Abhishek Rao, Parker Barnes, Yi Tay, Noam Shazeer, Vinodkumar Prabhakaran, Emily Reif, Nan Du, Ben Hutchinson, Reiner Pope, James Bradbury, Jacob Austin, Michael Isard, Guy Gur-Ari, Pengcheng Yin, Toju Duke, Anselm Levskaya, Sanjay Ghemawat, Sunipa Dev, Henryk Michalewski, Xavier Garcia, Vedant Misra, Kevin Robinson, Liam Fedus, Denny Zhou, Daphne Ippolito, David Luan, Hyeontaek Lim, Barret Zoph, Alexander Spiridonov, Ryan Sepassi, David Dohan, Shivani Agrawal, Mark Omernick, Andrew M. Dai, Thanumalayan Sankaranarayanan Pillai, Marie Pellat, Aitor Lewkowycz, Erica Moreira, Rewon Child, Oleksandr Polozov, Katherine Lee, Zongwei Zhou, Xuezhi Wang, Brennan Saeta, Mark Diaz, Orhan Firat, Michele Catasta, Jason Wei, Kathy Meier-Hellstern, Douglas Eck, Jeff Dean, Slav Petrov, and Noah Fiedel. Palm: Scaling language modeling with pathways. *CoRR*, abs/2204.02311, 2022.
- [CTJ⁺21] Mark Chen, Jerry Tworek, Heewoo Jun, Qiming Yuan, Henrique Ponde de Oliveira Pinto, Jared Kaplan, Harrison Edwards,

Yuri Burda, Nicholas Joseph, Greg Brockman, Alex Ray, Raul Puri, Gretchen Krueger, Michael Petrov, Heidy Khlaaf, Girish Sastry, Pamela Mishkin, Brooke Chan, Scott Gray, Nick Ryder, Mikhail Pavlov, Alethea Power, Lukasz Kaiser, Mohammad Bavarian, Clemens Winter, Philippe Tillet, Felipe Petroski Such, Dave Cummings, Matthias Plappert, Fotios Chantzis, Elizabeth Barnes, Ariel Herbert-Voss, William Hebgen Guss, Alex Nichol, Alex Paino, Nikolas Tezak, Jie Tang, Igor Babuschkin, Suchir Balaji, Shantanu Jain, William Saunders, Christopher Hesse, Andrew N. Carr, Jan Leike, Joshua Achiam, Vedant Misra, Evan Morikawa, Alec Radford, Matthew Knight, Miles Brundage, Mira Murati, Katie Mayer, Peter Welinder, Bob McGrew, Dario Amodei, Sam McCandlish, Ilya Sutskever, and Wojciech Zaremba. Evaluating large language models trained on code. *CoRR*, abs/2107.03374, 2021.

- [DCLT19] Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. BERT: pre-training of deep bidirectional transformers for language understanding. In Jill Burstein, Christy Doran, and Tamar Solorio, editors, *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, NAACL-HLT 2019, Minneapolis, MN, USA, June 2-7, 2019, Volume 1 (Long and Short Papers)*, pages 4171–4186. Association for Computational Linguistics, 2019.
- [DFE⁺22] Tri Dao, Daniel Y. Fu, Stefano Ermon, Atri Rudra, and Christopher Ré. Flashattention: Fast and memory-efficient exact attention with io-awareness. *CoRR*, abs/2205.14135, 2022.
- [DLL20] Chris Donahue, Mina Lee, and Percy Liang. Enabling language models to fill in the blanks. *arXiv preprint arXiv:2005.05339*, 2020.
- [FAL⁺22] Daniel Fried, Armen Aghajanyan, Jessy Lin, Sida Wang, Eric Wallace, Freda Shi, Ruiqi Zhong, Wen-tau Yih, Luke Zettlemoyer, and Mike Lewis. InCoder: A generative model for code infilling and synthesis. *CoRR*, abs/2204.05999, 2022.
- [GBB⁺21] Leo Gao, Stella Biderman, Sid Black, Laurence Golding, Travis Hoppe, Charles Foster, Jason Phang, Horace He, Anish Thite, Noa Nabeshima, Shawn Presser, and Connor Leahy. The pile: An 800gb dataset of diverse text for language modeling. *CoRR*, abs/2101.00027, 2021.
- [GXS⁺22] Tao Ge, Heming Xia, Xin Sun, Si-Qing Chen, and Furu Wei. Lossless acceleration for seq2seq generation with aggressive decoding. *CoRR*, abs/2205.10350, 2022.
- [HBK⁺21] Dan Hendrycks, Steven Basart, Saurav Kadavath, Mantas Mazeika, Akul Arora, Ethan Guo, Collin Burns, Samir Puranik, Horace He,

Dawn Song, et al. Measuring coding challenge competence with apps. *arXiv preprint arXiv:2105.09938*, 2021.

- [JCL⁺20] Mandar Joshi, Danqi Chen, Yinhan Liu, Daniel S. Weld, Luke Zettlemoyer, and Omer Levy. Spanbert: Improving pre-training by representing and predicting spans. *Trans. Assoc. Comput. Linguistics*, 8:64–77, 2020.
- [KB15] Diederik P. Kingma and Jimmy Ba. Adam: A method for stochastic optimization. In Yoshua Bengio and Yann LeCun, editors, *3rd International Conference on Learning Representations, ICLR 2015, San Diego, CA, USA, May 7-9, 2015, Conference Track Proceedings*, 2015.
- [LOG⁺19] Yinhan Liu, Myle Ott, Naman Goyal, Jingfei Du, Mandar Joshi, Danqi Chen, Omer Levy, Mike Lewis, Luke Zettlemoyer, and Veselin Stoyanov. Roberta: A robustly optimized BERT pretraining approach. *CoRR*, abs/1907.11692, 2019.
- [MNA⁺18] Paulius Micikevicius, Sharan Narang, Jonah Alben, Gregory F. Diamos, Erich Elsen, David García, Boris Ginsburg, Michael Houston, Oleksii Kuchaiev, Ganesh Venkatesh, and Hao Wu. Mixed precision training. In *6th International Conference on Learning Representations, ICLR 2018, Vancouver, BC, Canada, April 30 - May 3, 2018, Conference Track Proceedings*. OpenReview.net, 2018.
- [PLR⁺22] Ajay Patel, Bryan Li, Mohammad Sadegh Rasooli, Noah Constant, Colin Raffel, and Chris Callison-Burch. Bidirectional language models are also few-shot learners. *arXiv preprint arXiv:2209.14500*, 2022.
- [RSR⁺20] Colin Raffel, Noam Shazeer, Adam Roberts, Katherine Lee, Sharan Narang, Michael Matena, Yanqi Zhou, Wei Li, and Peter J. Liu. Exploring the limits of transfer learning with a unified text-to-text transformer. *J. Mach. Learn. Res.*, 21:140:1–140:67, 2020.
- [Sha19] Noam Shazeer. Fast transformer decoding: One write-head is all you need. *CoRR*, abs/1911.02150, 2019.
- [SKS⁺18] Dmitriy Serdyuk, Nan Rosemary Ke, Alessandro Sordoni, Adam Trischler, Chris Pal, and Yoshua Bengio. Twin networks: Matching the future for sequence generation. In *International Conference on Learning Representations*, 2018.
- [SLB17] Qing Sun, Stefan Lee, and Dhruv Batra. Bidirectional beam search: Forward-backward inference in neural sequence models for fill-in-the-blank image captioning. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, pages 6961–6969, 2017.

- [SPP⁺19] Mohammad Shoeybi, Mostofa Patwary, Raul Puri, Patrick LeGresley, Jared Casper, and Bryan Catanzaro. Megatron-lm: Training multi-billion parameter language models using model parallelism. *CoRR*, abs/1909.08053, 2019.
- [SSU18] Mitchell Stern, Noam Shazeer, and Jakob Uszkoreit. Blockwise parallel decoding for deep autoregressive models. In Samy Bengio, Hanna M. Wallach, Hugo Larochelle, Kristen Grauman, Nicolò Cesa-Bianchi, and Roman Garnett, editors, *Advances in Neural Information Processing Systems 31: Annual Conference on Neural Information Processing Systems 2018, NeurIPS 2018, December 3-8, 2018, Montréal, Canada*, pages 10107–10116, 2018.
- [TLI⁺23] Hugo Touvron, Thibaut Lavril, Gautier Izacard, Xavier Martinet, Marie-Anne Lachaux, Timothée Lacroix, Baptiste Rozière, Naman Goyal, Eric Hambro, Faisal Azhar, Aurélien Rodriguez, Armand Joulin, Edouard Grave, and Guillaume Lample. Llama: Open and efficient foundation language models. *CoRR*, abs/2302.13971, 2023.
- [VSP⁺17] Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N. Gomez, Lukasz Kaiser, and Illia Polosukhin. Attention is all you need. In Isabelle Guyon, Ulrike von Luxburg, Samy Bengio, Hanna M. Wallach, Rob Fergus, S. V. N. Vishwanathan, and Roman Garnett, editors, *Advances in Neural Information Processing Systems 30: Annual Conference on Neural Information Processing Systems 2017, December 4-9, 2017, Long Beach, CA, USA*, pages 5998–6008, 2017.
- [YDY⁺19] Zhilin Yang, Zihang Dai, Yiming Yang, Jaime G. Carbonell, Ruslan Salakhutdinov, and Quoc V. Le. Xlnet: Generalized autoregressive pretraining for language understanding. In Hanna M. Wallach, Hugo Larochelle, Alina Beygelzimer, Florence d’Alché-Buc, Emily B. Fox, and Roman Garnett, editors, *Advances in Neural Information Processing Systems 32: Annual Conference on Neural Information Processing Systems 2019, NeurIPS 2019, December 8-14, 2019, Vancouver, BC, Canada*, pages 5754–5764, 2019.
- [ZHL⁺22] Yuanen Zhou, Zhenzhen Hu, Daqing Liu, Huixia Ben, and Meng Wang. Compact bidirectional transformer for image captioning. *arXiv preprint arXiv:2201.01984*, 2022.
- [ZWL⁺19] Zhirui Zhang, Shuangzhi Wu, Shujie Liu, Mu Li, Ming Zhou, and Tong Xu. Regularizing neural machine translation by target-bidirectional agreement. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 33, pages 443–450, 2019.
- [ZZZ19] Long Zhou, Jiajun Zhang, and Chengqing Zong. Synchronous bidirectional neural machine translation. *Trans. Assoc. Comput. Linguistics*, 7:91–105, 2019.

A Appendix

A.1 Model training details

To evaluate the effectiveness of “Meet in the Middle” (MIM) pre-training compared to left-to-right autoregressive and “Fill in the Middle” (FIM) pre-training baselines, we adopt standard transformer-based autoregressive language models used in previous works [BMR⁺20] for all the models we trained, varying the number of parameters (350M, 1.3B, 2.7B). Moreover, we replace the use of the Multi Head Attention [VSP⁺17] with the use of the Multi Query Attention proposed in [Sha19] in all the models we trained, allowing faster inference and reducing the memory requirements to store multiple key and values embeddings that are not shared between attention heads.

For our bidirectional language models, we run the forward model and the backward model in parallel within a single decoder-only architecture, leveraging bidirectional context explicitly during pre-training. We use the sentinel token $\langle l2r \rangle$ to specify that the generation comes from the forward model and sentinel token $\langle r2l \rangle$ to specify that generation comes from the backward model.

Regarding optimization, we use the Adam optimizer [KB15] with $\beta_1 = 0.9$, $\beta_2 = 0.95$, $\epsilon = 10^{-8}$ and a global gradient norm clipping of 1.0. We follow [BMR⁺20] to decay learning rate to 10% of its maximum value using cosine annealing with linear warm-up of 2% of the total number of training steps.

For scaling the training of these models, we employ the open source Megatron-LM framework [SPP⁺19] and partition the training across multiple GPUs along the batch dimension. All the training runs that we conducted use mixed precision training [MNA⁺18] and FlashAttention [DFE⁺22] to reduce memory requirements and increase training throughput. During pre-training of our models, we observed that MIM, FIM and autoregressive left-to-right pre-training have similar training wall-clock time, it is because the forward model and the backward model are executed in parallel in MIM pre-training. Our largest models of size 2.7B parameters are trained using 128 A100 GPU with 80GB memory each over 4 days, while the smaller models are trained using 64 A100 GPU with 80GB memory each over 3.5 days. See Table 8 for the details of all the training runs.

A.2 Programming language dataset details

Table 7 details the statistics of the datasets of different programming languages we use to pre-train our code language models in terms of number of tokens and dataset size. We perform some filtering and deduplication to obtain the final dataset. Our tokenizer is based on the Byte-Pair Encoding algorithm widely used in previous work [CTJ⁺21] to directly encode raw bytes with a vocabulary of size 100257 tokens. We pre-tokenize the text using a special regex pattern that accounts for splitting on digit and newlines together with the default GPT-2 pre-tokenization [BMR⁺20].

Languages	Size (GB)	Tokens (B)
C	34.3	12.3
C++	215.6	70.8
Python	252.3	75.5
Java	178.5	46.7
JavaScript	120.1	39.3
TypeScript	21.8	8.6
PHP	30.7	11
Ruby	26.8	10.1
C#	35.3	12.6
Others	40.2	13.3
Total	955.6	300

Table 7: Approximate statistics of the programming language pre-training data

Hyper-parameters	350M	1.3B	2.7B
Number of layers	24	24	32
Number of heads	16	16	32
Dimension per head	64	128	80
Context length	2048	2048	2048
Batch size	786k	1M	1M
Weight decay	0.1	0.1	0.1
Learning rate	0.0003	0.0002	0.0002
Warmup steps	7k	5k	5k
Total steps	382k	286k	286k

Table 8: Details of each training run for all of our model specifications.