

# Available online at www.sciencedirect.com

# ScienceDirect

Procedia Computer Science 00 (2023) 000-000



The 14th International Conference on Ambient Systems, Networks and Technologies (ANT) March 15-17, 2023, Leuven, Belgium

# An Adaptive Decision-Making Approach for Better Selection of a Blockchain Platform for Health Insurance Frauds Detection with Smart Contracts: Development and Performance Evaluation

Rima Kaafarani<sup>a</sup>, Leila Ismail<sup>b,c,d\*</sup>, Oussama Zahwe<sup>a</sup>

<sup>a</sup> ICCS-Lab, Computer Science Department, American University of Culture and Education, 1507 Beirut, Lebanon
<sup>b</sup>Cloud Computing and Distributed Systems (CLOUDS) Laboratory, School of Computing and Information Systems, The University of Melbourne, Melbourne, Australia

<sup>c</sup>Intelligent Distributed Computing and Systems (INDUCE) Laboratory, Department of Computer Science and Software Engineering, College of Information Technology, United Arab Emirates University, Abu Dhabi, United Arab Emirates

<sup>d</sup>National Water and Energy Center, United Arab Emirates University, Abu Dhabi, United Arab Emirates

\*Correspondence: Leila Ismail (email:leila@uaeu.ac.ae)

### Abstract

Blockchain technology has piqued the interest of businesses of all types, while consistently improving and adapting to developers and business owners requirements. Therefore, several blockchain platforms have emerged, making it challenging to select a suitable one for a specific type of business. This paper presents a classification of over one hundred blockchain platforms. We develop smart contracts for detecting healthcare insurance frauds using two blockchain platforms selected based on our proposed decision-making map approach for the selection of the top two suitable platforms for healthcare insurance frauds detection application, followed by an evaluation of their performances. Our classification shows that the largest percentage of blockchain platforms could be used for all types of application domains, and the second biggest percentage is to develop financial services only, even though generic platforms can be used, while a small number is for developing in other specific application domains. Our decision-making map revealed that Hyperledger Fabric is the best blockchain platform for detecting healthcare insurance frauds. The performance evaluation of the top two selected platforms indicates that Fabric surpassed Neo in all metrics.

© 2023 The Authors. Published by Elsevier B.V.

This is an open access article under the CC BY-NC-ND license (http://creativecommons.org/licenses/by-nc-nd/4.0/) Peer-review under responsibility of the Conference Program Chairs.

Keywords: Blockchain; Smart Contract; Hyperledger Fabric; Neo

### 1. Introduction

Frauds in health insurance is the intentional deception or misrepresentation in order to obtain unauthorized benefits to the policyholder, another party, or the entity providing services. The global sustainability of the healthcare system is threatened by the high cost incurred due to healthcare insurance frauds. Consequently, the need for an automated system to detect frauds without human intervention is critical [1]. Machine learning solutions for detecting frauds rely on datasets to train models, which raises privacy and security concerns [2]. Blockchain, a peer-to-peer distributed ledger that is secured with hash functions and public/private keys cryptography, has demonstrated its potential in the healthcare sector by combining important characteristics such as immutability, transparency, and traceability [3]-[9]. Furthermore, blockchain provides the possibility to run smart contracts. Therefore, in this paper, we develop a blockchain-based smart contract for the detection of healthcare insurance frauds. In addition, we present a classification for 102 blockchain platforms and then we devise a methodology to select the best platform that is suitable for the development of healthcare insurance frauds detection. To our knowledge we are the first to provide these solutions for healthcare insurance.

Our contributions in this paper are as follows:

- We develop the detection of frauds by implementing smart contracts, based on a taxonomy of frauds and scenarios.
- We propose a decision-making map to identify the best blockchain platform(s) adequate for the implementation of healthcare insurance frauds detection, and we apply this map to 102 platforms.
- We develop and implement the detection of frauds on the top two selected platforms by the decision-making map, and evaluate their performance.

2) we provide an overview of related work. 3) we present a classification of current blockchain architectures. 4) we discuss our proposed decision-making map for selecting a suitable blockchain platform for healthcare insurance frauds detection. 5) we present the smart contract algorithms for the detection of frauds in healthcare insurance. 6) we present a performance analysis of the top two selected platforms. 7) we conclude the paper.

### 2. Related Work

Healthcare frauds has significantly increased losses for individuals, businesses, and governments. Combating healthcare frauds has become a critical concern. As a result, recent work proposed solutions based on blockchain to detect frauds. Authors in [10] proposed a solution based on blockchain to detect if the claim meets the relevant provisions of the healthcare insurance policy. In [11] proposed a solution to prevent health insurance frauds using two frauds scenarios. Authors in [12] used the Ethereum blockchain to develop a framework to record claims data and transaction patients to be validators to help detect frauds. However, none of these works consider all the frauds scenarios and the performance of blockchains, and the selection of used blockchain platforms is not justified. Therefore, authors in [1] solve this problem by proposing a new blockchain architecture for better performance and presenting a taxonomy of 12 frauds scenarios that implement using smart contracts on two blockchain platforms selected by our decision-making map. Table 1 presents the strengths and weaknesses of recent works using blockchain platforms for healthcare insurance frauds detection.

Table 1. Strengths and weaknesses of works on blockchain-based healthcare insurance frauds detection

Work	Throughput	Latency	CPU usage	Memory	Number of frauds scenarios implemented	Platform	Reason for choosing platform
[10]	X	X	X	X	1	Ethereum	N/A
[11]	X	X	X	X	2	BigchainDB	N/A
[12]	X	X	X	X	3	N/A	N/A
Our work	✓	✓	✓	✓	12	Hyperledger Fabric & Neo	Based on our proposed decision- making map for healthcare insurance frauds detection

# 3. Classification of current blockchain architectures

Blockchain is a secure distributed ledger across a network of peers to record transactions without the need for central coordination. Peers are given the choice to approve changes and commit to the ledger through a consensus mechanism [3]. Blockchain has four types, permissionless, permissioned, hybrid, and consortium [3]. Considering the important characteristics of blockchain, many blockchain platforms have emerged for different application domains [8]-[9]. Blockchain platforms enable the development of applications. We classify One Hundred Two platforms based on the application domains they support, Table 2 consists of platforms used for all types of domains, Table 3 constitutes of those which are used for financial services and other specified domains.

Table 2. Blockchain platforms used for all types of domains

Application domain	Platforms
All domains	Fantom Opera Platform, Ignite, Blockchain Service Network (BSN), Quorum, Kaleido, Chain Core, CCF (previously coco), ICON, Elements Block Platform, Chain33, Multichain, Hyperledger Fabric, Tendermint, EOS, Hyperledger Iroha, Stratis Platform, Universa, Secrete Network, Monax, Hyperledger Burrow, Autonity, Eris:db, Qasis, XinFin-XDC network, Ethereum, Hyperledger Sawtooth, Neo, Azure blockchain workbench, BigchainDB, Oracle blockchain, Credits blockchain, Nem, Smilo, LISK, Neblio, Dragonchain, Hyperledger Besu, ÆTERNITY, Cosmos, Near, Cypherium, QANplatform, IBM Blockchain Platform, Hedera
	hashgraph, Polygon, Algorand, IOTA, Waves, ZILIQA, Elrond, WanChain, Rubix, Stack, CORTEX, Nervos CKB, Casper Network, Open Zeppelin, iOlite.

Table 3. Blockchain platforms for financial services and other specified domains

Application domain	Platforms				
Financial services	TRON, ripple, Monero, Binance Smart Chain, Bitcoin, Litecoin, NXT, Nano, SpaceMint. Parity,				
	Exonum, Bitshares, Stellar, Cordano, Libra, Counterparty, Shadow coin, Decentralized Credits				
	(Decred), Chia, Avalanche, Komodo, Symbiont Assembly, Kadena, FISCO BCOS, R3 Corda				
Digital identities	Hyperledger Indy				
Storing structured data	Factom				
Add Ethereum smart contracts	Otum				
to Bitcoin's blockchain	Vanii				
Digital asset management	brustCoin, Openchain				
Blockchain interoperability	Polkadot, Aion				
DNS	Namecoin				
Economic	Vechain				
Global trade	CargoX				
IoT	Tikiri				
Metaverse	Klaytn				
Money transfers	Peercoin				
NFT, DeFi, payment, gaming, DAO	Solana				
Ownership	Poex.io				
Security for IoT	Iotchain				
Social media	Steem.it				
Storage	Byteball, Filecoin				

# 4. Decision-Making Map for Healthcare Frauds Detection Platform

Due to the proliferation of blockchain platforms, it becomes a very tedious task to select a platform for development. [13] proposed a methodology for selecting a platform, however, it considers category features that may not be needed by a particular application and does not consider the specificity of healthcare insurance frauds detection. Therefore, we propose a decision-making map to select a platform for healthcare insurance frauds detection. It considers three main categories of blockchain features, "compulsory features", "recommended features" which are significantly adequate features, and "possible features" that would be preferably existent in the platform. Categories are given importance weights. The first category consists of seven features: 1) The application layer enables to build user interface and run smart contracts for health insurance. 2) Network layer allows a peer-to-peer decentralized network. 3) Protocol layer specifies the consensus protocol; we use Byzantine-based consensus because it is lightweight in terms of memory and CPU usage [3]. 4) Interoperability technologies such as Oracle, to import data for smart contracts from off-chain resources. 5) On-chain transaction where a transaction is executed on

the main blockchain for security, decentralization, and transparency. 6) Permissioned blockchain, where the ledger is shared only with trusted nodes. 7) Smart contracts to execute algorithms for detecting healthcare insurance frauds. The second category consists of six features: 1) Enterprise system interrogation provides easy access to data, seamless data flow, and time and cost savings. 2) Private so that only authenticated users can participate in the network. 3) Turing complete indicates that the blockchain platform's virtual machine can solve any computational problem. 4-5-6) we select JavaScript, Python, and Solidity because they are easy to use and learn. Finally, in the third category, we consider seven features: 1-2) Java and Golang, they share the same reason as the last 3 features in the second category of the "recommended features" list. 3) Virtual Machine to run smart contracts. 4) Data privacy technology and certificates for authentication are essential when dealing with sensitive patient data. 5) Zero-knowledge proof which is an encryption scheme in which one party (prover) guarantees another party (verifier) that they know value X without revealing the actual value. 6) Cryptographic tokens, could be used for payments. 7) Cross-chain interoperable to link two independent blockchains. Our results show Hyperledger Fabric [14] as the most suitable platform, followed by Neo [15], then Quorum, Hydrachain, and Chain. R3 Corda, and BigchainDB are eliminated because they missed some of the features in the "compulsory features" category. Fig. 1 shows the percentage score for the top five platforms that are deemed suitable.




Fig. 1 Platforms scores

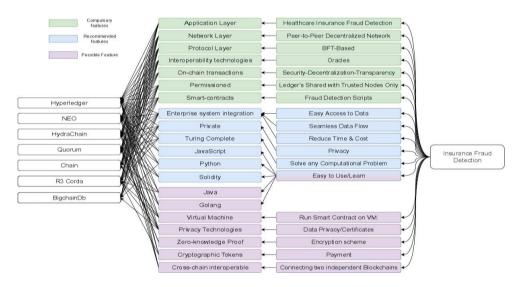


Fig. 2. Proposed decision-making map for selecting a platform for healthcare insurance frauds detection


Fig. 2 shows our adaptive-blockchain-frauds detection-based selection map, with examples of how we map the platforms to select the best platforms for fraud detection development. We apply this mapping to all the platforms used for all types of application domains to find their suitability for fraud detection, after eliminating the platforms

that use permission-less blockchains and do not support smart contracts. As a result, we apply the map on 46 platforms.

# 5. Algorithms for Smart-Contract frauds detection

We focus on verifying submitted claims to determine whether or not they are fraudulent. For each fraud scenario, we look for a detectable pattern. In some scenarios we need data from external sources, for example in Table 4, algorithm 1 requires a list of the licensed healthcare providers, which can be obtained from the ministry of health. Algorithm 2 covers three fraud scenarios in one function, the pattern that should be found is the same: 1) when a healthcare provider is referring patients within the same healthcare provider, 2) involves a provider referring patients to earn a commission, and 3) involves the providers having a financial relationship with the healthcare provider to whom they refer patients (see Appendix). The participants in the network are allied health professionals, patients, pharmacists, diagnostic centers, pharmaceutical companies, the branch medical insurance company, the head medical insurance company, hospitals, and medical equipment suppliers.

Table 4. Algorithms for smart-contract frauds detection

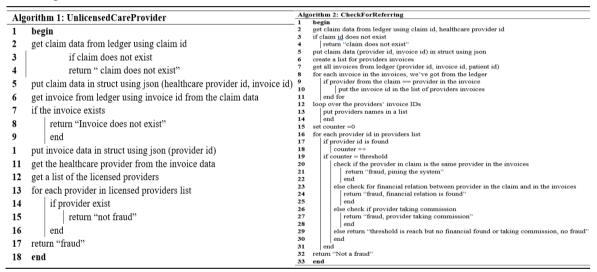

### 6. Performance Evaluation

### 6.1. Experiments

We develop smart contracts algorithms for the fraud scenarios that were identified in [1], using the two platforms which have been selected as the top two by our decision-making map. A transaction includes one record of the claim and requires files for verification e.g., invoices. We evaluate the performance of the platforms using throughput, latency, CPU usage, and Memory usage performance metrics. We set two testing scenarios, the first one consists of sending a constant number of transactions by peers for a duration ranging from 30sec to 120sec. In the second scenario, we increase the number of transactions sent over the network from 1000TX to 10,000TX.

# 6.2. Experimental Environment

We used Ubuntu 20.04 WSL2 on Windows 11 operating systems. Fabric was running on Docker, with all peers joining one channel representing a single insurance company. Nodes run on Fabric v2.2, with 4 orgs and one orderer, we use a batch size of 500. Neo private blockchain was created using the N3 Neo Visual DevTracker extension on Visual Studio Code. We used c# as the programing language recommended in the documentation of Neo, and use a batch size of 500 as well. On both platforms, we use LevelDB which is a key value data storage. For

the hardware setup, we utilize a 16 GB Ram, Core i7 11th gen 2.80 GHz processor. For the benchmarking, we use Hyperledger Caliper [16] for Fabric, and Neo-bench [17] for Neo.

# 6.3. Results analysis

Fig. 3 demonstrates the throughput for Neo and Fabric in different scenarios. In the first scenario we set a fixed transaction number to be sent for a duration in seconds Fig. 3 (a, b), Neo increases at the duration of 60 seconds and reaches a throughput of 629 transactions per second (TPS), but then declined to 304 TPS and held to that to the end of the test. On the other hand, Fabric showed a similar pattern, it started with a high throughput of almost 800 TPS then decreased to ~450TPS at the end of the test. In The second test scenario with an increasing number of transactions, Fabric outperformed Neo again in this test and was increasing with the number of transactions sent, while Neo was showing fluctuations. As for latency, Neo always takes from 14 to 24 sec to confirm a transaction.

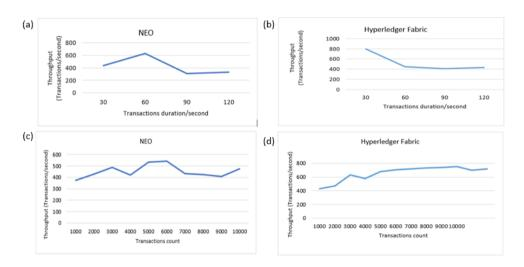


Fig. 3. Throughput for (a) Neo while sending 1000TX for a certain duration. (b) Hyperledger Fabric throughput while sending 1000TX for a certain duration. (c) Neo with transaction count ranging from 1000TX to 10,000TX. (d) Hyperledger Fabric with transaction count ranging from 1000TX to 10,000TX.

Fig. 4 (a) shows the Fabric's latency during the second test scenario; although latency increased slightly, it remained between 0.03sec and 0.04sec. Fig. 4 (b) displays the Fabric's latency for the first test scenario, latency increases with more transactions being submitted.

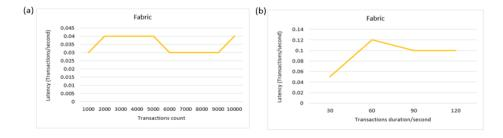


Fig. 4. Fabric latency result (a) sending transactions from 1000TX to 10,000TX. (b) sending 1000TX for a certain duration.

Fig. 6 shows the CPU and memory usage for the platforms, Fabric used fewer resources than NEO. During all the tests, the two platforms score a 100% success rate, making them more reliable platforms for the sharing of sensitive

healthcare insurance data. Fabric outperformed Neo in all the tests, demonstrating that it is the best choice for creating healthcare insurance frauds detection.


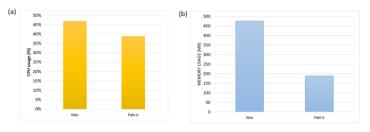


Fig. 5. (a) Memory usage of Fabric and Neo. (b) CPU usage for Fabric and Neo

### 7. Conclusion and Future Work

The number of blockchain platforms is growing at an exponential rate, and software companies are becoming increasingly interested in incorporating blockchain technology into their products. Medical insurance frauds detection is a significant issue in the medical industry. Every year, healthcare insurance frauds costs tens of billions of dollars, and numerous frauds endanger patients' health. In this paper, we develop smart contracts for the detection of healthcare insurance frauds, which is based on the taxonomy of frauds scenarios in [1]. In addition, we propose a decision-making map, which allows us to identify the best blockchain platform for healthcare insurance frauds detection. Finally, we develop and implement the detection of frauds on the top two selected platforms by the map, and evaluate their performance; Fabric outperformed Neo; Fabric's network structure and features are far better suited to the use case, and its performance could be enhanced with using configurations options.

# **Appendix**

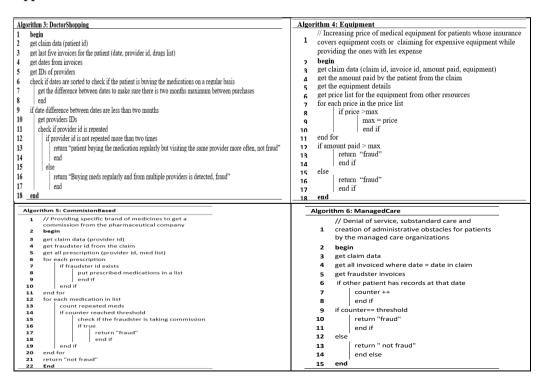

```
Algorithm 7: ManipulateDiagnosis
                                                                                           Algorithm 8: UnapprovedOffLable
       // Manipulation of diagnosis in the claims without
                                                                                                  // A pharmaceutical company provides
       the knowledge of the patients
                                                                                                  incentives to doctors to promote unapproved or
                                                                                                  off-label drugs
       begin
       get claim data (claim id, diagnosis code)
                                                                                                 get claim data (claim id. provider id)
       get invoice id from claim
                                                                                                 get prescription for the fraudster
       get invoice (diagnosis code)
                                                                                                  get drugs from prescriptions
       invDiagnosis= diagnosis code from invoice
       claimDiagnosis = diagnosis code from claim
if onvDiagnosis!=claimDiagnosis
                                                                                                  get list of approved and labeled drugs
                                                                                                  for each drug in the list
             return "fraud"
                                                                                                       if drug! exist in list
             end if
                                                                                                        return "fraud"
11
12
       else
                                                                                            10
                                                                                                       end for
             return " not fraud"
                                                                                                  return " not fraud
             end else
                                                                                            11
       end
Algorithm 9: UnwantedCare
       // Providing unwanted care to the patients
      increasing service hours in the bill, duplicate
      claims, phantom billing, or replacing code of
      diseases with ones with more price
      get claim data (claim id. invoice id. provider id)
      check if claim exists with same data
 4
      CheckClaim(id)
      get invoices for the fraudster
      get diagnosis
       ask for another doctor opinion
      if doctor replay positive
            return "fraud'
      return " not fraud'
```

### References

- [1] Ismail, L., & Zeadally, S. (2021). Healthcare insurance frauds: Taxonomy and blockchain-based detection framework (Block-HI). *IT professional*, 23(4), 36-43.
- [2] Chen, I. Y., Pierson, E., Rose, S., Joshi, S., Ferryman, K., & Ghassemi, M. (2021). Ethical machine learning in healthcare. *Annual review of biomedical data science*, 4, 123-144.
- [3] Ismail, L., Materwala, H., & Hennebelle, A. (2021). A scoping review of integrated blockchain-cloud (BcC) architecture for healthcare: applications, challenges and solutions. *Sensors*, 21(11), 3753.
- [4] Ismail, L., Hennebelle, A., Materwala, H., Kaabi, J.A., Ranjan, P. and Janardhanan, R., 2022. Secure and Privacy-Preserving Automated End-to-End Integrated IoT-Edge-Artificial Intelligence-Blockchain Monitoring System for Diabetes Mellitus Prediction. arXiv preprint arXiv:2211.07643.
- [5] Ismail, L., Materwala, H., & Khan, M. A. (2020, July). Performance evaluation of a patient-centric blockchain-based healthcare records management framework. In *Proceedings of the 2020 2nd International Electronics Communication Conference* (pp. 39-50).
- [6] Ismail, L., & Materwala, H. (2020, June). BlockHR: a blockchain-based framework for health records management. In Proceedings of the 12th International Conference on Computer Modeling and Simulation (pp. 164-168).
- [7] Ismail, L., Materwala, H., & Sharaf, Y. (2020, October). BlockHR-A Blockchain-based Healthcare Records Management Framework: Performance Evaluation and Comparison with Client/Server Architecture. In 2020 International Symposium on Networks, Computers and Communications (ISNCC) (pp. 1-8). IEEE.
- [8] Mershad, K., Cheikhrouhou, O., & Ismail, L. (2021). Proof of accumulated trust: A new consensus protocol for the security of the IoV. *Vehicular Communications*, 32, 100392.
- [9] Ismail, L., Hameed, H., AlShamsi, M., AlHammadi, M., & AlDhanhani, N. (2019, March). Towards a blockchain deployment at UAE University: Performance evaluation and blockchain taxonomy. In *Proceedings of the 2019 International Conference on Blockchain Technology* (pp. 30-38).
- [10] Liu, W., Yu, Q., Li, Z., Li, Z., Su, Y., & Zhou, J. (2019, December). A blockchain-based system for anti-fraud of healthcare insurance. In 2019 IEEE 5th International Conference on Computer and Communications (ICCC) (pp. 1264-1268). IEEE.
- [11] Saldamli, G., Reddy, V., Bojja, K. S., Gururaja, M. K., Doddaveerappa, Y., & Tawalbeh, L. (2020, April). Health care insurance fraud detection using blockchain. In 2020 Seventh International Conference on Software Defined Systems (SDS) (pp. 145-152). IEEE.
- [12] Mackey, T. K., Miyachi, K., Fung, D., Qian, S., & Short, J. (2020). Combating health care fraud and abuse: Conceptualization and prototyping study of a blockchain antifraud framework. *Journal of medical Internet research*, 22(9), e18623.
- [13] Farshidi, S., Jansen, S., España, S., & Verkleij, J. (2020). Decision support for blockchain platform selection: Three industry case studies. *IEEE Transactions on Engineering Management*, 67(4), 1109-1128.
- [14] Hyperledger Fabric, "Whitepaper," [Online]. Available: https://www.hyperledger.org/wp-content/uploads/2020/03/hyperledger\_fabric\_whitepaper.pdf.
- [15] NEO. [Online]. https://neo.org/
- [16] Hyperledger Caliper. [Online]. Available: https://hyperledger.github.io/caliper/v0.5.0/getting-started/.
- [17] Neo-bench, "Neo Blockchain Benchmarking Tool," [Online]. Available: https://github.com/nspcc-dev/neo-bench