

IMPROVING MUSIC GENRE CLASSIFICATION FROM MULTI-MODAL PROPERTIES OF MUSIC AND GENRE CORRELATIONS PERSPECTIVE

Ganghui Ru[‡], Xulong Zhang[‡], Jianzong Wang^{*}, Ning Cheng, Jing Xiao

Ping An Technology (Shenzhen) Co., Ltd., China

ABSTRACT

Music genre classification has been widely studied in past few years for its various applications in music information retrieval. Previous works tend to perform unsatisfactorily, since those methods only use audio content or jointly use audio content and lyrics content inefficiently. In addition, as genres normally co-occur in a music track, it is desirable to capture and model the genre correlations to improve the performance of multi-label music genre classification. To solve these issues, we present a novel multi-modal method leveraging audio-lyrics contrastive loss and two symmetric cross-modal attention, to align and fuse features from audio and lyrics. Furthermore, based on the nature of the multi-label classification, a genre correlations extraction module is presented to capture and model potential genre correlations. Extensive experiments demonstrate that our proposed method significantly surpasses other multi-label music genre classification methods and achieves state-of-the-art result on Music4All dataset.

Index Terms— music genre classification, multi-label, multi-modal, symmetric cross-modal attention, contrastive loss

1. INTRODUCTION

With the growing prosperity of digital music market, how to correctly classify music genres has become an urgent problem. In various tasks of music information retrieval (MIR), music genre classification (MGC) is one of the oldest and most important tasks, and has become a research hotspot due to its wide application prospects. However, since the complex nature and diverse expressions of music tracks, music usually has more than one genre category, characterizing a multi-label classification problem. Compared with conventional MGC task, multi-label MGC is more challenging due to the combinatorial nature of the output space.

Early studies [1, 2] on MGC task were based on digital signal processing and traditional machine learning methods, which use some hand-crafted features as inputs. Limited by the ability of representation, it is difficult for these methods

to extract deep and abstract information. Recently, methods based on deep learning gradually become mainstream, showing great potential. Some studies [3, 4, 5] contributed to MGC task using CNN or RNN. These methods usually used single information (uni-modal) such as audio or lyrics, thus leading to prone to performance bottlenecks. With the rapid development of computing resources, many MIR tasks have evolved from uni-modal to multi-modal. Some studies [6, 7, 8] utilized both audio content and text content of a music track for music genre classification. Especially, [9] proposed a multi-modal method with the hierarchical cross-attention network for music emotion recognition. In [10], Vatolkin et al. analyzed the impact of six different modalities on the MGC task, including audio signals, lyric texts, album cover images, audio semantic tags, playlist co-occurrences, and symbolic MIDI representations. Although the methods mentioned above have achieved certain success by simple fusion of multi-modal features, they ignore that features from different modalities are inherently heterogeneous and misaligned. To address this issue, we propose a novel multi-modal method leveraging audio-lyrics contrastive loss and two symmetric cross-modal attention, to align and fuse the features from audio and lyrics.

In order to improve the performance of multi-label MGC, in addition to using the multi-modality nature of music, we can also start from the nature of the multi-label problem. To address the multi-label classification problem, the easiest way is to treat each genre individually. However, this approach is inherently limited because it ignores the potential genre correlations which can be approximated as co-occurrence and mutual exclusion. As this correlation is essentially a topological structure, we design a genre correlations extraction module to capture and model it.

This paper has the following main contributions: 1) we propose a novel multi-modal approach leveraging audio-lyrics contrastive loss and two symmetric cross-modal attention, to align and fuse the features from audio and lyrics; 2) based on the nature of the multi-label classification problem, we design a genre correlations extraction module which can capture and model the potential genre correlations. 3) our proposed method significantly surpasses the previous methods and achieves state-of-the-art performance on Music4All dataset.

[‡]These authors contributed equally to this work.

^{*}Corresponding author: Jianzong Wang, jzwang@188.com.

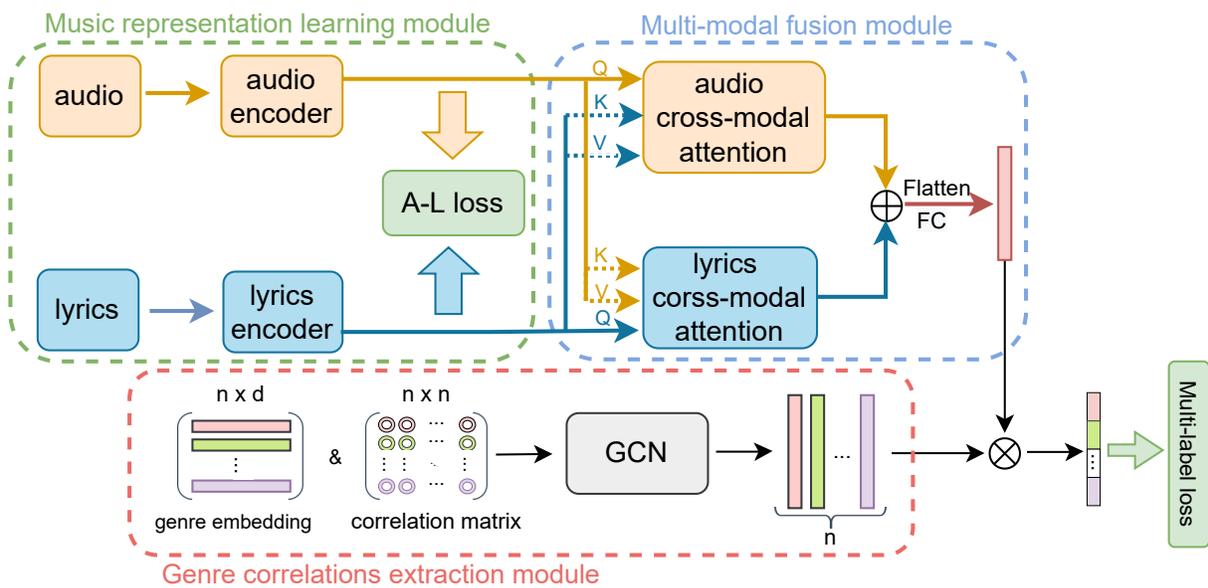


Fig. 1. Architectures of our proposed model, which consists of three modules: music representation learning module, multi-modal fusion module, and genre correlations extraction module.

2. METHOD

As illustrated in Figure 1, our model consists of three main modules: music representation learning module, multi-modal fusion module, and genre correlations extraction module. The music representation learning module extracts features from audio and lyrics modalities respectively. Furthermore, an audio-lyrics contrastive loss (A-L loss) is applied to align features obtained from different modalities before sending them into the multi-modal fusion module. The multi-modal fusion module is composed of two symmetrical mechanisms and efficiently fuses different features. The genre correlations extraction module starts from the nature of the multi-label problem and uses a graph convolutional network (GCN) to model potential correlations between genres. Finally, a classifier takes the dot-product of the fused feature representation and the embeddings of genre categories as input to predict genres.

2.1. Music Representation Learning Module

The music representation learning module consists of an audio encoder and a lyrics encoder, which takes audio and lyrics as input and outputs corresponding features respectively. According to the pre-processing procedure adopted in [11], the audio is cropped to 30 seconds and preprocessed to a Mel-spectrogram with 22050HZ sampling rate, 512 hop-size, and 128 Mel-filters. Compared with waveform audio, Mel-spectrogram has two advantages: 1) it is designed based

on the theory of human aural perception and instrument frequency range; 2) it can significantly reduce the amount of data that the network needs to process.

Considering the powerful feature extraction capabilities of convolutional neural networks, we refer to [9] to develop the audio encoder that consists of five convolutional blocks, whose input is the preprocessed Mel-spectrogram and output is the abstract audio features.

As we all know, BERT model [12] has a strong ability to extract text information, which has been confirmed in many NLP tasks. Therefore, BERT model is used as the lyrics encoder and its structure is not changed or improved. Considering that BERT model requires a large amount of text corpus for training, we directly use the pre-trained BERT model and freeze its parameters.

2.2. Multi-modal Fusion Module

It is crucial to effectively fuse features from different modalities in multi-modal approaches. Since it is difficult for methods based on concatenation or element addition to make the information interaction between different modalities, we design a novel multi-modal fusion module which consists of two symmetric cross-modal attention to effectively fuse multi-modal features. The cross-modal attention is an extended application of self-attention [13] on multi-modal tasks, which emphasizes important parts of features by computing similarity between different features. The calculation

formula of cross-modal attention is:

$$\text{Attention}(Q_\alpha, K_\beta, V_\beta) = \text{softmax}\left(\frac{Q_\alpha K_\beta^T}{\sqrt{d}}\right)V_\beta \quad (1)$$

where α and β denote different modalities. Considering that both audio and lyrics contribute significantly to genre classification, our proposed two symmetric cross-modal attention consists of audio cross-modal attention and lyrics cross-modal attention. In audio cross-modal attention, *Query* is obtained from audio feature, and both *Key* and *Value* are obtained from lyrics feature. It is the opposite in lyrics cross-modal attention.

2.3. Genre Correlations Extraction Module

How to effectively capture and model the correlations between genres to improve the classification performance is especially important for multi-label MGC task. Considering that this correlation is essentially a topological structure, we design a graph convolution network [14] which is well suited to handle discrete topological data to model the genre correlations. The graph convolution network takes a set of nodes and the corresponding adjacency matrix as inputs, and outputs the updated nodes. A pre-trained BERT [12] model is used to encode genre names as semantic embedding and treat them as genre node features. The correlation matrix is obtained by calculating the co-occurrence conditional probability, and its calculation formula is:

$$A_{ij}^{(1)} = P(L_j|L_i) = \frac{N(L_i L_j)}{N(L_j)} \quad (2)$$

where $N(L_j)$ is the number of occurrences of genre j , and $N(L_i L_j)$ denotes the concurring times of genre i and genre j . However, this statistical conditional probability is determined by the distribution of samples in the training set, which can be influenced significantly by noise and class imbalance. Genre names have inherent textual information because they are summed up based on musical and cultural understandings. Therefore, we utilise the similarity matrix to alleviate the shortcomings of the co-occurrence conditional probability matrix. The similarity matrix is obtained by computing the cosine similarity between node features, which represents the proximity of genre names in the semantic space. The calculation formula of similarity matrix is as follows:

$$A_{ij}^{(2)} = \text{cos}(F_i, F_j) = \frac{F_i * F_j}{\|F_i\|_2 \cdot \|F_j\|_2} \quad (3)$$

where F_i and F_j denote the feature of node i and node j , and $\text{cos}(\cdot)$ is the cosine similarity function. The correlation matrix is then defined as $A = \frac{1}{2}(A^{(1)} + A^{(2)})$.

2.4. Contrastive Audio-lyrics Alignment

In MGC task, existing multi-modal methods directly fuse features obtained from different modalities without consider-

ing the alignment between these modalities. However, These methods lead to less satisfactory fusion because they ignore that features from different modalities are inherently heterogeneous and misaligned. To address this issue, we propose an audio-lyrics contrastive loss to align features obtained from different modalities. Specifically, given the embedding of audio and lyrics, we optimize a similarity function $s(\cdot)$ between audio A and lyrics L :

$$s(A, L) = g_a(E_a) \cdot g_l(E_l) \quad (4)$$

where $g_a(\cdot)$ and $g_l(\cdot)$ are linear projection layers which transform the embedding E_a and E_l to a low-dimensional space. Following [15, 16, 17], for each input audio-lyrics pair $\langle A_i, L_i \rangle$, the audio-lyrics contrastive loss is composed of two symmetric terms, audio-to-lyrics term:

$$\mathcal{L}_{A \rightarrow L} = -\log \frac{\exp(s(A_i, L_i)/\tau)}{\sum_{j=1}^B \exp(s(A_i, L_j)/\tau)} \quad (5)$$

and lyrics-to-audio term:

$$\mathcal{L}_{L \rightarrow A} = -\log \frac{\exp(s(L_i, A_i)/\tau)}{\sum_{j=1}^B \exp(s(L_i, A_j)/\tau)} \quad (6)$$

where B is the batch size and τ is a adaptive parameter. The audio-lyrics contrastive loss is then defined as $\mathcal{L}_{A-L} = \frac{1}{2}(\mathcal{L}_{A \rightarrow L} + \mathcal{L}_{L \rightarrow A})$.

To enable the whole model to be trained end-to-end, we also adopted the commonly used BCE loss as the multi-label loss. The final training loss is the weighted sum of \mathcal{L}_{A-L} and \mathcal{L}_{BCE} , which can be defined as:

$$\mathcal{L} = \lambda \mathcal{L}_{A-L} + (1 - \lambda) \mathcal{L}_{BCE} \quad (7)$$

where λ is a hyperparameter that is used to balance \mathcal{L}_{A-L} and \mathcal{L}_{BCE} .

3. EXPERIMENTS

3.1. Experimental Setup

We use Music4All dataset [18] to train and test our model. Considering that Music4All dataset is noisy and contains multiple languages in music lyrics, we filtered out music tracks with missing information or non-English lyrics in our experiment. 43650 samples with 87 genre categories are finally selected and are split into 3 subsets with approximately 70%, 10%, and 20% samples respectively. In the experiment, we set the learning rate to 0.0001 and decays by half every 50 epochs, and set the batch size to 16. Following [11, 18], accuracy and F-measure are adopted to evaluate our proposed model.

Table 1. Comparison with other multi-modal methods on Music4All dataset.

Method	Accuracy	F-measure
Santana’s model [18]	0.354	0.419
Pandeya’s model [11]	0.387	0.442
Our proposed model	0.456	0.534

Table 2. Ablation studies on three components. A-L loss, SCMA, and GCEM denote audio-lyrics contrastive loss, two symmetric cross-modal attention, and genre correlations extraction module respectively.

A-L loss	SCMA	GCEM	Accuracy	F-measure
			0.372	0.438
✓			0.396	0.475
	✓		0.408	0.491
		✓	0.403	0.487
✓	✓		0.425	0.513
✓		✓	0.419	0.508
	✓	✓	0.437	0.515
✓	✓	✓	0.456	0.534

3.2. Results and Analysis

In order to compare fairly with other multi-label MGC methods, we reproduced Pandeya’s model [11] and Santana’s model [18] on the filtered dataset with the same experimental settings. The comparison results with other multi-modal methods are shown in Table 1. Our model achieves 0.456 in accuracy and 0.534 in F-measure, which significantly outperforms previous models by a large margin. Santana’s model achieves the worst results because it only used audio information, which indicates that multi-modal information is crucial for improving the classification performance of multi-label MGC methods. Pandeya’s model uses both audio information and lyrics information as input and shows the state-of-art performance in multi-label MGC task. However, this method does not achieve substantial performance gains (only from 0.354 to 0.387) in accuracy. This is mainly because it simply concatenates the features from different modalities, and does not consider the differences between modalities.

3.3. Ablation Study

1) *three key components:* We conducted a set of ablation experiments to evaluate three key components: audio-lyrics contrastive loss (A-L loss), symmetric cross-modal attention (SCMA), and genre correlations extraction module (GCEM).

Table 2 reports the ablation results. We find that the baseline model without any components shows the worst performance, only achieving 0.372 in accuracy and 0.438 in F-measure. In contrast, no matter which component is added, the performance of the model increases accordingly, indicating that all three components contribute to the model’s

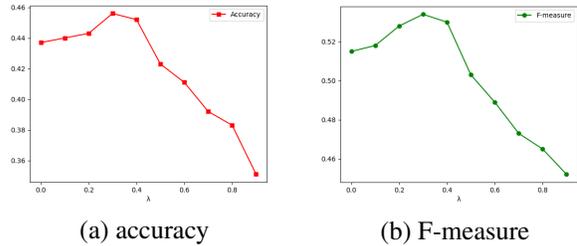


Fig. 2. The accuracy and F-measure of our proposed model when using different λ . The horizontal and vertical coordinates represent the value of λ and the performance of the model, respectively.

performance. Interestingly, we observe that adding A-L loss or SCMA achieves 0.396 or 0.408 in accuracy respectively, which both surpass the baseline model. This implies that both feature alignment and effective fusion strategies help to eliminate disparity. In addition, it is notable that additional GCEM brings considerable improvement in the relevant ablation experiments, justifying the exploration of the correlation between genres. In all ablation experiments, we find that the most complete model achieves the best results, indicating that the three components can be combined flexibly without conflict.

2) *different λ in training loss:* Figure 2 shows the performance of our proposed model when using different λ in Eq. 7. We find that with the change of λ , both accuracy and F-measure increased first and then decreased, and achieved the maximum value when $\lambda=0.3$. This demonstrates that proper A-L loss can help improve the performance of classification. It is notable that the model fails to converge when $\lambda=1.0$, which shows that the multi-label loss is crucial to the convergence of the model.

4. CONCLUSION

In this paper, we improve multi-label music genre classification from multi-modal properties of music and genre correlations perspective and have presented a novel multi-modal method leveraging audio-lyrics contrastive loss and two symmetric cross-modal attention, to align and fuse features from audio and lyrics. Furthermore, a graph convolution network is proposed to capture and model potential genre correlations. Extensive experiments demonstrate that our proposed method significantly surpasses other multi-label MGC methods and achieves state-of-the-art result on Music4All dataset.

5. ACKNOWLEDGEMENT

Supported by the Key Research and Development Program of Guangdong Province (grant No. 2021B0101400003) and Corresponding author is Jianzong Wang (jzwang@188.com).

6. REFERENCES

- [1] Michael I. Mandel and Daniel P. W. Ellis, “Song-level features and support vector machines for music classification,” in *International Society for Music Information Retrieval Conference*, 2005.
- [2] James Bergstra, Norman Casagrande, Dumitru Erhan, Douglas Eck, and Balázs Kégl, “Aggregate features and adaboost for music classification,” *Machine learning*, vol. 65, no. 2, pp. 473–484, 2006.
- [3] Chia-Hung Yeh, Wen-Yu Tseng, Chia-Yen Chen, Yu-Dun Lin, Yi-Ren Tsai, Hsuan-I Bi, Yu-Ching Lin, and Ho-Yi Lin, “Popular music representation: chorus detection & emotion recognition,” *Multimedia tools and applications*, vol. 73, no. 3, pp. 2103–2128, 2014.
- [4] Nikki Pelchat and Craig M Gelowitz, “Neural network music genre classification,” *Canadian Journal of Electrical and Computer Engineering*, vol. 43, no. 3, pp. 170–173, 2020.
- [5] Zain Nasrullah and Yue Zhao, “Music artist classification with convolutional recurrent neural networks,” in *2019 International Joint Conference on Neural Networks (IJCNN)*. IEEE, 2019, pp. 1–8.
- [6] Sergio Oramas, Francesco Barbieri, Oriol Nieto Caballero, and Xavier Serra, “Multimodal deep learning for music genre classification,” *Transactions of the International Society for Music Information Retrieval*. 2018; 1 (1): 4-21., 2018.
- [7] Rafael B Mangolin, Rodolfo M Pereira, Alceu S Britto, Carlos N Silla, Valéria D Feltrim, Diego Bertolini, and Yandre MG Costa, “A multimodal approach for multi-label movie genre classification,” *Multimedia Tools and Applications*, pp. 1–26, 2020.
- [8] Wanglei Shi and Shuang Feng, “Research on music emotion classification based on lyrics and audio,” in *2018 IEEE 3rd Advanced Information Technology, Electronic and Automation Control Conference (IAEAC)*. IEEE, 2018, pp. 1154–1159.
- [9] Jiahao Zhao, Ganghui Ru, Yi Yu, Yulun Wu, Dichucheng Li, and Wei Li, “Multimodal music emotion recognition with hierarchical cross-modal attention network,” in *2022 IEEE International Conference on Multimedia and Expo (ICME)*. IEEE, 2022, pp. 1–6.
- [10] Igor Vatulkin and Cory McKay, “Multi-objective investigation of six feature source types for multi-modal music classification,” *Transactions of the International Society for Music Information Retrieval*, vol. 5, no. 1, 2022.
- [11] Yagya Raj Pandeya, Jie You, Bhuwan Bhattarai, and Joonwhoan Lee, “Multi-modal, multi-task and multi-label for music genre classification and emotion regression,” in *2021 International Conference on Information and Communication Technology Convergence (ICTC)*. IEEE, 2021, pp. 1042–1045.
- [12] Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova, “Bert: Pre-training of deep bidirectional transformers for language understanding,” *arXiv preprint arXiv:1810.04805*, 2018.
- [13] Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin, “Attention is all you need,” *Advances in neural information processing systems*, vol. 30, 2017.
- [14] Thomas Kipf and Max Welling, “Semi-supervised classification with graph convolutional networks,” *ArXiv*, vol. abs/1609.02907, 2016.
- [15] Pin Jiang and Yahong Han, “Reasoning with heterogeneous graph alignment for video question answering,” in *Proceedings of the AAAI Conference on Artificial Intelligence*, 2020, vol. 34, pp. 11109–11116.
- [16] Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, et al., “Learning transferable visual models from natural language supervision,” in *International Conference on Machine Learning*. PMLR, 2021, pp. 8748–8763.
- [17] Dongxu Li, Junnan Li, Hongdong Li, Juan Carlos Niebles, and Steven CH Hoi, “Align and prompt: Video-and-language pre-training with entity prompts,” in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2022, pp. 4953–4963.
- [18] Igor André Pegoraro Santana, Fabio Pinhelli, Juliano Donini, Leonardo Catharin, Rafael Biazus Mangolin, Valéria Delisandra Feltrim, Marcos Aurélio Domingues, et al., “Music4all: A new music database and its applications,” in *2020 International Conference on Systems, Signals and Image Processing (IWSSIP)*. IEEE, 2020, pp. 399–404.