On the rise of fear speech in online social media

Punyajoy Saha^a, Kiran Garimella^b, Narla Komal Kalyan^a, Saurabh Kumar Pandey^a, Pauras Mangesh Meher^a, Binny Mathew^a, and Animesh Mukherjee^a

^aDepartment of Computer Science and Engineering, Indian Institute of Technology, Kharagpur, India – 721302; ^bSchool of Communication and Information, Rutgers University, N.I 08901

This manuscript was compiled on March 21, 2023

Recently, social media platforms are heavily moderated to prevent the spread of online hate speech (1) which is usually fertile in toxic words and is directed toward an individual or a community. Owing to such heavy moderation newer and more subtle techniques are being deployed. One of the most striking among these is fear speech (2). Fear speech, as the name suggests, attempts to incite fear about a target community (3). Although subtle, it might be highly effective often pushing communities toward a physical conflict (2). Therefore, understanding their prevalence in social media is of paramount importance. This article presents a large-scale study to understand the prevalence of 400K fear speech over 700K hate speech posts collected from Gab. com. Remarkably, users posting large number of fear speech accrue more followers and occupy more central positions in the social network compared to users posting large number of hate speech. They are also able to reach out to the benign users far more effectively than hate speech users through the replies, re-posts and mentions. This has connections to the fact that unlike hate speech, fear speech has almost zero toxic content which makes it look plausible. Moreover, while topics of fear speech posts mostly portray a community as a perpetrator using a (fake) chain of argumentation, hate speech topics hurl direct multi-target insults thus pointing to why general users could be more gullible to fear speech. Our findings transcend even to other platforms (Twitter and Facebook) and thus necessitates using sophisticated moderation policies and mass awareness to combat fear speech.

Fear speech | Hate speech | Gab | Classification |

Content moderation plays an important role in removing harmful and irrelevant posts (spam), thereby keeping the platforms safe. Social media companies like Facebook* and Twitter[†] have detailed guidelines as what is considered hateful in their platforms. These companies use such guidelines to appoint manual and automatic moderators to delete hateful posts/suspend the hateful users[‡]. Subsequently, the research community has started putting consolidated efforts to automate and, thereby, scale up this moderation creating better datasets and machine learning models to accurately detect hate speech. The datasets span across different platforms including Twitter (4, 5), Gab (6), Reddit (7) etc. Further, the models also range from simple ones like mSVM (8) to complex AI architectures like transformers (9).

While these advances are indeed encouraging, newer and more subtle forms of harmful content are inflicting the online world which most often go unnoticed. One such form of malicious content is *fear speech* which involves spreading *fear* about one or more target communities in the online, and eventually, the physical world. In this context, we note that existential fear can bias peaceful people toward extremism. In

a controlled experiment (10), a group of Iranian students were found to support doctrines related to the understanding of the value of human life as opposed to a jihadist call for suicide bombing. However, when they were frightened about death, they subscribed toward the bomber, even expressing desire to become a martyr themselves. From time to time, mortality salience polarizes an individual or a group to stick firmly to their own beliefs while demonizing others with opposing beliefs. This arises from the fear of endangerment of their own clan. For instance, while the fear that was generated due to the 9/11incident was real, it also made Americans more vulnerable to psychological manipulation. In this context, Florette Cohen notes that "fear tactics have been used by politicians for years to sway votes". In a survey (11) conducted by Cohen and her colleagues, the authors asked the participants to think about the fear of death and then gave them statements from three fictitious political personalities. One of them was a charismatic who stressed on ingroup favoritism, the second, a technocrat presenting practical solutions to realistic problems and the third preaching democratic values. When primed with the fear of death, the support for the fictional charismatic leader went up by eightfolds. With the advent of social media it has become easier to propel the prevalence of such fear tactics.

In real life, elements of fear are often found associated with events of violence. The posts of the alleged attacker who shot worshippers at the Pittsburgh synagogue in October 2018, portrayed the HIAS¶ as an organisation supporting refugee invasion (3). Similarly, the shooter of the Christchurch

Significance Statement

Existential fear has always been a concern across human history, and even transcends to the rest of the animal world. This fear is so deeply ingrained that even the slightest 'knock' to it could spark a violent conflict among different groups. Here we demonstrate how social media platforms are used to extensively mediate elements of existential fear as *fear speech* posts. Their non-toxic and argumentative nature make them appealing to even benign users who in turn contribute to their wide prevalence by resharing, liking and replying to them. Remarkably, this prevalence is far stronger than the more well-known hate speech posts. Our work necessitates consolidated moderation efforts and awareness campaigns to mitigate the harmful effects of fear speech.

P.S., K.G., B.M. and A.M. designed research; P.S., S.K.P., N.K.K. and P.M.M performed research and contributed analytical tools; P.S., K.G., B.M. and A.M. wrote the paper.

The authors declare no conflict of interest.

^{*} https://transparency.fb.com/en-gb/policies/community-standards/hate-speech/

[†]ttps://help.twitter.com/en/rules-and-policies/hateful-conduct-policy

[†] https://about.fb.com/news/2021/02/update-on-our-progress-on-ai-and-hate-speech-detection/

[§] https://www.psychologicalscience.org/news/releases/the-political-effects-of-existential-fear.html \$\ \frac{1}{2}\$ https://www.hias.org/, a non profit organisation that provides aids to the refugees.

 $^{^2\}mbox{To}$ whom correspondence should be addressed. E-mail: punyajoys@iitkgp.ac.in

event in 2019 released a manifesto - 'Great Replacement'. This manifesto contained elements of fear in the form of 'non-whites' replacing 'whites' in the future (12). A recent mass shooting in Buffalo shooting (13) also denotes another such racially motivated attack. Such association is also well grounded in the literature of inter-group conflicts (2).

Fear is also used by politicians and media figures. Politicians in the United States (14) and European nations (15) portray immigration as an invasion and asylum seekers as dangerous. A viral poster in The Brexit campaign - 'Breaking point', shows non-whites as invaders and as a danger to the British resources (16). Media figures like Tucker Carlson often cite low birth rates among Americans as a threat to cultural identity. Previous work on 'fear speech' (17) also find similar themes in public political WhatsApp groups in India during the general elections of 2019.

One of the representative messages from our study reproduced below shows the intricate structure of fear speech.

Hundreds of South Americans are marching through Mexico, aiming to cross the US Border and demand asylum in the US. No one in Mexico is stopping them. This is a national security threat and should be dealt with by force if necessary. What else is our military good for if they can't stop an invading force?

Note that this message has no toxic words and is weaved into a series of arguments citing evidences, establishing a case of nationwide fear and finally inciting users to take an action. Such views often resonate with the opinions of the 'common' audience and they in turn contribute to spread the message deeper and farther into the network.

The central objective of this article is to investigate the prevalence of fear speech See this section) in a loosely moderated social media platform like Gab.com. Since no known dataset is available for such a study, we devise an algorithmic pipeline to first build a dataset of 400,000 fear speech posts to be contrasted with another 700,000 hate speech posts. Based on the analysis of this dataset, the central result that we arrive at demonstrates how users posting a large number of fear speech are successful in garnering significantly more followers compared to the users posting large number of hate speech (See this section) The former are also more effective in reaching out to the general users through re-posts, replies and mentions (See this section). We elucidate that this is because of the non-toxic and argumentative nature of the posts that make them look more plausible and thus widely accepted. Some such prevailing arguments in fear speech correspond to violence by the Muslim community (10% of all fear speech posts), Jews controlling media and culture (10% of all fear speech posts), white genocide in South Africa (7% of all fear speech posts), etc. In contrast to this, the traditional hate speech (posts mostly correspond to hurling insulting remarks or calling for deportation of the target community (See this section for popular topics and this section for definitions). The seemingly benign nature makes fear speech more credulous to the users than hate speech facilitating its increased prevalence in the network.

We stress that such forms of highly destructive speech should not go unnoticed and call for more sophisticated moderation mechanisms along with mass awareness. We believe that this article can lay the foundation stone for such an initiative.

Dataset

There is no data available in the literature that allows for the study of prevalence of fear speech (See Materials and Methods section) in social media. Therefore we had to setup an end-to-end pipeline to build our dataset. We make use of the Gab platform for data collection. Gab is a social media platform alternative to Twitter and was launched in May, 2016. It has 100,000 estimated active and 4 million total users. Unlike Twitter, it has a 'lax' moderation policy for harmful content and presents itself as a champion of 'freedom of speech'. It came under scrutiny in the Pittsburgh shooting case where the sole suspect posted a message on Gab indicating an immediate intent to cause harm before the shooting and also had a history of antisemitic posts (18). Recently, Gab was one of the platforms used to plan the storming of the United States Capitol on January 6, 2021 (19). Given these facts, we reasoned that Gab should be a breeding ground for the type of data we wanted for our investigation.

The site allows anyone to read and write posts up to 3,000 characters called "gabs". In Gab, posts can be re-posted, quoted, and used as replies to other posts. Similar to Twitter, Gab also supports mentions and hashtags and users can follow one another. We started off with a huge dump already crawled from Gab in a previous study (20). This contains all the posts and their metadata from October 2016 to July 2018. In total there are 21 million posts. Further it has the re-post and reply information for each post. In addition the dump also hosts user bios and the follower/followee information per month. In total, there are $\sim 280,000$ users having at least one post**

In order to prepare the dataset for our study, we annotate 10K posts from Gab using a hybrid set of annotators. A group of four expert annotators and 103 crowd workers from Amazon Mechanical Turk were chosen based on a rigorous test of their annotation performance (see Methods for details). The task was to mark each post as (a) fear speech, (b) hate speech or (c) normal. Further, a post could have both fear and hate components and thus these were annotated with multiple labels.

The annotators were asked to strictly adhere to the operational definitions of fear speech and hate speech as follows - fear speech is an expression aimed at instilling (existential) fear of a target group based on attributes such as race, religion, ethnic origin, sexual orientation, disability, or gender (17), and hate speech is a language used to express hatred towards a targeted individual or group or is intended to be derogatory, to humiliate, or to insult the members of the group, based on attributes such as race, religion, ethnic origin, sexual orientation, disability, or gender (23). In addition the crowd workers were given a number of examples and multiple rounds of training to enable them to perform the annotations as accurately as possible. The annotation went in 24 rounds with a small number of samples annotated in each round so as to reduce the overall mental toll faced by the annotators. In each round the sample posts were chosen based on the presence of a set of manually

https://en.wikipedia.org/wiki/Gab_(social_network) as of March 2021

^{*}Out of these users only 2% have a following/follower ratio higher than 10 (21) and around 1.2% users post more than 3 messages per day (22). Thus the number of users that can be classified as bots based on the above two measures is negligible.

Table 1. This table shows the example of fear and hate speech in the Gab dataset.

Fear speech	Hate speech
Germany is no longer German. German media celebrates school where	You are a camel piss drinking goat f**ing imbecile now get off my timeline
80% of class is non-German #GabFam #Politics #Europe #Merkel #Relo-	you disgusting piece of s**t.
cation #Muslims #BanIslam #Invasion #StopRelocation #WhiteGenocide	
TILL White people won't protest for their SAFETY. Hell, it's not just Whites.	I hear Botswana is lovely in the spring. All ni**ers should go there. And
Asian & Middle Eastern shopkeepers are frequent victims. Young Black	stay.
Males are a DANGER to society. SOME are ok, but we don't know who	
is who. We need PROTECTION & the RIGHT NOT to race mix!	
Jewish poison pouring out of our media and Hollywood is destroying	Because Jews are lying pigs. I'm really thinking this is a genetic thing
Christianity	

prepared keywords which increases the possibility of gathering such samples that are susceptible to be fear or hate speech. All rounds of annotation were closely monitored by the experts and corrective steps were taken as and when necessary (see Methods for full details of the annotation process).

After this elaborate process we arrived at a dataset consisting of $\sim 10,000$ annotated posts. Out of these, around 1800 were fear speech and 4000 were hate speech. The interannotator agreement values were as follows – Krippendorff's $\alpha=0.30$ and Fleiss $\kappa=0.34$. These agreement values are comparable with such complex tasks in similar domain and settings (17, 24, 25). Some examples of fear vs hate speech are noted in Table 1. Note the use of various arguments in the fear speech posts such as the target community (a) replacing indigenous population (first instance), (b) being a physical danger to the society (second instance), and (iii) causing cultural threat (third instance).

Scaled up dataset. Our objective was to study the large-scale prevalence of fear speech and compare the same with that of hate speech. Therefore we needed to scale up the annotated data. One easy way to achieve this would be to use standard toxicity classifiers over the whole dataset. We verify if this is possible using one of the state-of-the-art tools — the Perspective API (26). If we pass our base dataset through this classifier we observe that the average toxicity score of the fear speech posts returned by the API is 0.51 as opposed to 0.69 for the hate speech posts. This difference is also statistically significant with $p < 1e^{-6}$ as per the M-W U test (27). The normal posts have a toxicity score of 0.47 and is very close to that of the fear speech post. Thus distinguishing fear speech from normal speech using such classifiers would be very difficult if not impossible. Hence we develop a sophisticated BERT based architecture to perform multi-label classification of an input post. We train and test the model using the base dataset and obtain a macro-F1 score of 0.63 (see Methods for the detailed description of the model). We next ran this model to classify all the 2 million posts in our dataset. For fear speech if we consider only those machine generated labels as correct where the confidence of the classifier is > 0.7, our results are > 70%accurate (confirmed by a second round of expert annotation of a small number of samples). For hate speech, a similar accuracy is obtained if the decision confidence of the classifier is > 0.9. We manually observe that increasing the threshold further did not improve the score further. Therefore we empirically fix these two decision confidence levels to finally obtain a scaled up dataset comprising \sim 400K fear speech and \sim 700K hate speech posts (see Methods for more details). All our analysis that follow in this article are performed on this

dataset.

Prevalence of fear speech

The prevalence of a particular entity in any social network can be directly attributed to its users and fear speech is no exception. Therefore the first task is to identify users who have a strong propensity to post fear speech. Similarly, for comparison we also need to select users posting hate speech.

User selection. Out of 280K users we observe that as high as 9200 users have posted at least 10 fear/hate speech posts. However, we were interested in the extreme behaviour, i.e., we wanted to identify those users who have extreme propensity to post fear speech or hate speech. To this purpose, we find users falling in the top 10 percentile in terms of the number of fear speech or hate speech posted by them. We remove those common users that belong to both these sets^{††}. We end up with 479 extreme fear speech (ExFear) and 483 extreme hate speech (ExHate) users^{‡‡}. The choice of these set of users is motivated by the fact that they would be the central actors responsible for the prevalence of fear/hate speech.

User characterisation. In this section, we compare the ExFear users with the ExHate users. In total, ExFear users posted 2.6 millon posts, out of which 104k were fear speech and 26k were hate speech. Similarly, ExHate users posted 2 million posts out of which 184k were hate speech and 18k were fear speech. We consider three different aspects – their position in the social network, their overall reach of the normal users and temporal trends.

Position in the social network. We construct the social network based on all the follower-followee relationship among the users till the end of the timeline (i.e., June 2018) (28). This network consists of 279,961 nodes and 1960,869 edges.

The first quantities that we compare are the number of followers and followings for each type of user. The plot in Figure 1 shows that both the number of followers and the followings of ExFear users are larger than that of the ExHate users. The results are statistically significant with p < 0.0001 (M-W U test).


Next we compute the *betweenness* and the *eigen-vector* centrality of the nodes from the undirected version of this network. These metrics are known to express the positional importance of the nodes; while eigenvector centrality indicates the influence of the nodes, betweenness centrality indicates the


 $^{^{\}dagger\dagger}$ We perform a separate analysis on this set of users in SI text in section S5.


^{‡‡}Out of this set, 476 users matched in term of propensity score based matching. See SI text in section B for more details.


Table 2. Examples of fear speech which are popular in terms of likes/replies/reposts. The bold number per row shows the engagement factor based on which the specific post is cited.

Post	Likes	Reposts	Replies
It's the future. I was promised flying cars and cured cancer. Instead I got "hate speech," a	920	361	41
third world invasion, and an internet controlled by the ADL and SPLC. I'll be damned if I let			
this be the "future" my kids grow up in.			
PUBLIC SERVICE ANNOUNCEMENT FROM IDENTITY EVROPA San Francisco is a dan-	593	205	16
gerous sanctuary city where the law does not apply to illegal invaders. Enter at your own			
risk!			
This family lost a mother. She was killed by a Sudanese migrant in church yesterday in	625	268	0
Antioch, Tennessee. Media silence is deafening.#MelanieSmith			
80K whites dead in South Africa in an ongoing genocide = Silence. 30 dead in a highly	588	282	15
suspicious unconfirmed G-S attack in the Middle East = World War 3			
It's not too late. A Charlottesville 2 could feature a memorial for Heather Heyer blaming	0	0	77
antifa for jostling a land whale with an explosive heart. That'd probably get attention, and			
it'd probably be hard to separate from the message that the Alt-Right were innocent victims			
just trying to speak before jewish domestic terrorists started killing Whites.			
I had an uber driver telling me this recently, after me going on about niggers (We in oz have	9	1	85
a SMALL population of niggers per capita) he finally came clean they slashed his seats			
with knives and they SMELL particularly bad, Again this is in Australia where I see Africans			
maybe 10 a year. So far one tried to rob me and my uber driver had that happen! Imagine			
the US!!			









(a) Average number of followers for different groups of users.

(b) Average number of followings for different groups of users.

(a) Eigenvector centrality of users.

significant at p < 0.0001 using Mann-Whitney U test.

(b) Betweenness centrality of users.

Fig. 1. Plots denoting follower-following properties for ExFear (F) and ExHate (H) users.The results are significant at p<0.0001 using Mann-Whitney U test.

degree to which a node stands in between other nodes. From Figure 2a we observe that, in terms of eigenvector centrality, the ExFear users are more central compared to the ExHate users. Once again the results are statistically significant with p < 0.001 (M-W U test). The observations remain same for the betweenness centrality with the ExFear users far more central compared to the ExHate users (see Figure 2b).

These results together show that the ExFear users are far more strategically placed in the network compared to the ExHate users. Such advantageous positions of the ExFear users is a natural source for higher prevalence of fear speech in the network.

Reach of the normal users. We label users who never post fear or hate speech (decision confidence of the model < 0.5) as normal users. Here we investigate how the ExFear and ExHate users interact with the normal users. First, we find that the average percentage of normal followers out of all followers for ExFear users (21%) is higher than for ExHate users (18%). This difference is statistically significant with $p < 1e^{-6}$ (M-W U test).

The number of posts made by ExFear and that by ExHate users are both of the tune of two million each, i.e., their posting activity is quite similar. Therefore, we plot the number of

The results in Figure 3a show that larger number of normal users re-post the posts of ExFear users compared to that of ExHate users ($p < 1e^{-6}$ (M-W U test)). Further, the total number of reposts by normal users to the posts made by ExFear users is larger than posts of ExHate users (see Figure 3b). The same trend persists for both mentions and replies. ExFear users mention more number of normal users in their posts (Figure 4a) compared to ExHate users. Moreover, the total number of posts by the former having normal users mentioned is also higher (Figure 4b). The number of normal users replying to the posts of ExFear uses is higher than that of ExHate users (Figure 5a). Finally the number of replies

obtained from the normal users by the ExFear users is larger

than that of ExHate users (Figure 5b). Hence, we show that

ExFear users impacts the normal users more.


Fig. 2. Centrality measures of ExFear (F) and ExHate (H) users. The results are


normal users re-posting the posts of ExFear vs ExHate users.

We also analyse the impact on normal users based on the posts they receive. Since, it is not possible to know if someone received a post directly, we assumed that an user 'A' would receive a post from a particular user 'B' if he/she is following that user 'B'. We consider the top 500 normal users based on their number of posts. An additional constraint was that they should have at least one ExFear and one ExHate user in their following. This resulted in 179 users. We find that these users

receive around 1.5% fear speech and 2% hate speech posts from their followings. Surprisingly, although the percentage of fear speech received by them is less, they end up reposting the fear speech almost four times more (average of 1.10 posts) compared to hate speech (average of 0.28 posts). The results are statistically significant (p < 0.001, M-W U test).


In our final experiment in this section we go a step forward to assess the perception about fear vs hate speech among in-the-wild users. We recruit human judges from Amazon Mechanical Turk for this experiment. We create a survey by posing pairs of fear and hate speech and ask human judges to select the post they believed in more. Each pair of posts is judged by nine random judges. All these judges have high approval rates (> 95%) and high approved hits (> 1000). We got the posts judged in three batches, with incremental number of post pairs in each batch - precisely, 25, 30 and 45 pairs in the three successive batches. Each batch is further divided into pages of three pairs each. We make sure that the judges in successive batches do not overlap to ensure diversity of opinions. In total, 246 unique judges participated in the task (68 in the first batch, 82 in the second and 96 in the third). For each pair, we select that post between fear and hate speech to be believable which receives majority of the votes. We find that out of 100 pairs, in as many as 69 pairs (i.e., 69%), fear speech posts were voted to be the more believable out of the two.






- (a) # of normal reposters per user.
- (b) # of reposts from normal users per

Fig. 3. Distribution of reposts from normal users for ExFear (F) and ExHate (H) users. The results are significant at $p < 1e^{-6}$ using Mann-Whitney U test.







- (a) # of normal mentioned users per user
- (b) # of normal mentions per user.

Fig. 4. Distribution of normal mentions for ExHate (H) and ExFear (F) users. The results are significant at $p < 1e^{-6}$ using Mann-Whitney U test.

Overall, we observe that the ExFear users are far more well connected with the normal users compared to the ExHate users. Manual analysis reveals that the top reposted/replied/liked ¶¶https://time.com/charlottesville-white-nationalist-rally-clashes.





(a) # of normal repliers per user.

(b) # of replies from normal users per


Fig. 5. Distributions of replies from normal users for ExFear (F) and ExHate (H) users.The results are significant at $p < 1e^{-6}$ using Mann-Whitney U test.

fear speech posts contain emotionally loaded language and/or urgent tone with the occasional usage of capital letters as shown in Table 2. Often the posts pretend to narrate real incidents, foretell how bleak the future could be and cite (fake) statistics to make the content look realistic and convincing. We also obtain the top 10 normal users mentioned by ExFear users and find that they usually have a large number of followers (\sim 1200) and followings (\sim 1700) but have less number of posts (~ 17). Manually analysing their profiles from Gab we find that their posts are generally on benign topics but they repost a lot of controversial topics which might be the reason why they get mentioned more by the ExFear users.


Temporal trends. In this section we deep dive into the results obtained earlier to investigate the temporal evolution of different observables of interest.

As a first step we investigate how the ExFear and Ex-Hate users move in the follower-followee network over time. To this purpose, for each month we construct an undirected follower-followee network and perform the standard k-core decomposition (29). Such a decomposition is known to segregate the network into 'shells' with the innermost few shells containing the most influential nodes. We divide the nodes into 10 buckets in terms of the percentile ranks based on their k-core values, i.e., top 10 percentile nodes in the first bucket, next 10 percentile nodes in the second bucket and so on. Note that therefore the first bucket consists of the most influential nodes while the last contains the least influential ones. Next we observe how the users move from one bucket to the other over time since they had joined the network. The temporal movement of the ExFear and ExHate users across the different buckets over time are shown in Figure 6. Both the ExFear and ExHate users are predominantly in the outer shell of the network at the time of their joining. However, as time progresses they accelerate steadily to the inner shells with the maximum influx happening in Oct 2016 for ExFear users and in August 2017 for the ExHate users §§. The maximum influx for ExHate users coincides with the Unite the Right rally, Charlottesville while for ExFear users we see a jump toward the initial time period. This possibly indicates that a fraction of the ExFear users have remained all through in the core of the network from the very beginning. On average, ExFear users take lesser time (2.83 months) to reach the in-

 $^{\$\$}_{\mbox{Here}}$ the maximum influx is defined as the maximum users jumping to a inner core considering their current core



(a) Extreme fear speech (ExFear) user movement



(b) Extreme hate speech (ExHate) user movement

Fig. 6. Alluvial diagram to show the core transition for the users. The stubs represent dynamic graph state with the first stub indicating October 2016. A lower core value represents that a node is situated deeper in the network. 'NA' denotes the set of users who are yet to join the networks each month from the total set of users. We show only the transitions among the three innermost cores for better visualisation. The dark blue band shows the month with the maximum influx for each graph. Maximum influx means during that month maximum number of users have jumped to an inner core with respect to their core.

nermost core of the network compared to the ExHate users (3.32 months).

Next, we investigate the temporal evolution of the engagement to the posts made by ExFear or ExHate users. When considering replies by normal users, we observe that while for the first 2-3 months the trajectories are similar, after January 2017, the replies to ExFear users keep increasing while replies to ExHate users suffer a dip. The replies to ExFear users have a sudden peak around June 2017. After this, the replies to ExFear users dip below ExHate users possibly due to the influence of external event in the form of Unite the Right rally, Charlottesville. This might also suggest that many normal users started to subscribe to the hateful notions. If we consider the reposts by normal users***, we find that here the distributions are similar with the peaks occurring at similar time (March 2018). Considering the normal users' mentions by the two groups of users temporally, we find a significant difference in the two curves. While ExHate users use very less mentions of normal users, ExFear users heavily use the same with the peak occurring (60 times per mentioned users) at December 2017. Manual analysis revealed many of the fear speech posts had a comment about a target community followed by mentions of several users, social media influencers and news media sources etc. For e.g. "Muslims want to double the number of mosques in France < link> @MichelOsef @Isleofcarl @Bill Murray @SatanIsAllah @Brea @HEDGE @PigtownGrump @Zucotic @TaratheLeo @kingmack @Psnow @TwoPats @MaryJane @TupacZaday @Reef".

Overall, this section demonstrates that fear speech has a significantly larger prevalence in the social network compared to hate speech (more analysis with larger set of users can be found in the SI text). In the next section we investigate the content structure of fear speech which undoubtedly plays the central role in its wider prevalence.

Content structure

In this section, we investigate the differences in the content structure of the fear speech posts from those of the hate speech posts. These differences rooted in their content plays a key role in shaping their prevalence.

Fear speech is presented as topical arguments. We analyze the text present in the fear speech post and compare them with the hate speech posts using widely popular NLP tools as follows.

Topic modelling. We use the LDA model (30) to extract the topics in the fear and hate speech posts (More details in the SI text section S6). Next for each month, we plot their normalized distribution considering the total posts in that month. Overall we notice one very important difference between fear speech (see Figure 7) and hate speech topics (see Figure 8). Topics in the fear speech mostly portrayed other communities as perpetrators in a subtle and argumentative style, while topics in the hate speech were dehumanizing or insulting the target communities.

Some of the illustrative examples of fear speech topics are – 'America needs to wake up' and 'Ideology of Islam is dangerous' which are prevalent across all the months. Here the topic 'America needs to wake up' makes implicit calls to Americans to see the atrocities by other communities. The topic 'violence by Muslim communities' notes the various unconfirmed violent activities by the Muslim communities. It had a tiny share initially (October & November 2016) but increased to a significant ratio afterward. On the other hand, the topic – 'immigrants manipulating elections' was prominent during the initial time periods but died out after April 2017. Another interesting topic was 'jews controlling media' - which points out how Jews control media platforms. Apart from that, illegal immigration as a problem was portrayed in topics like 'illegal immigration in Europe', 'illegal immigration in the USA' etc.

Among the hate speech topics, three of the most consistent ones are 'multi-target insults' — where a single hate post targeted multiple communities, 'women being projected as prostitutes', and hate against voters from different demography. Other topics like insults of Muslims and Canadians occur rarely and have smaller ratios. Insults of the Jewish community rose after August 2017. This might be an effect of the influx of a lot of new users during that time period. The topic, which has posts targeting both homosexuals and Muslims reduced after March 2017 since it possibly merged with the multi-target insults. The ratio of posts under topics like 'support for Nazi', 'insulting and blaming Africans' increased significantly after August 2017.

We have the reposts information from August 2017 in the dataset.

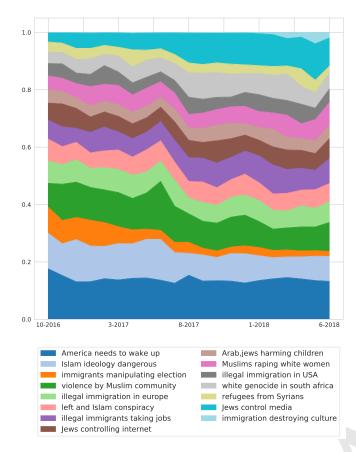


Fig. 7. Top 10 topics and their normalised distribution per month for fear speech posts.

Reaction of normal users. A careful observations of the topics extracted from the fear speech posts shows that the arguments presented in these topics most often look quite acceptable and amenable to the normal users resulting in their direct involvement in re-posting of and replying to the messages corresponding to these topics. The topics in the fear speech category receive around 1000 reposts from normal users with the highest average reposts being received by the topic 'violence by Muslim community' (~ 2500). On the other hand, for the topics extracted from the hate speech posts hurling direct attacks on different communities are usually found to be repulsive by normal users and are much less frequently re-posted or replied to. Average number of reposts per topic is about 500 for hate speech topics with the highest average reposts being received by the topic 'deport illegal immigrants' (~ 1100). Note that, in general the average number of reposts for any post on the platform is around 2 per posts.

Hashtags and web domains.

Hashtags. Hashtags are an important component of the overall content of any social media post. We investigate how fast a hashtag originating from one form of speech is adopted to scribe another form of speech. A hashtag is considered to have originated in fear/hate/normal speech, if a fear/hate/normal user uses it for the first time in one of their posts. One of the most surprising findings is how fast hashtags originating from ††† http://www.aclj.org as accessed on Mar 7, 2022 normal speech gets adopted to fear speech (~ 83 days); this **** https://sputnik.com/ is significantly less compared to the time needed by hashtags \$\finstyle{1}\text{significantly less compared to the time needed by hashtags \$\frac{\finstyle{1}\text{significantly less compared to the time needed by hashtags \$\frac{\finstyle{1}\text{significantly less compared to the time needed by hashtags \$\frac{\finstyle{1}\text{significantly less compared to the time needed by hashtags \$\frac{\finstyle{1}\text{significantly less compared to the time needed by hashtags \$\frac{\finstyle{1}\text{significantly less compared to the time needed by hashtags \$\frac{\finstyle{1}\text{significantly less compared to the time needed by hashtags \$\frac{\finstyle{1}\text{significantly less compared to the time needed by hashtags \$\frac{\finstyle{1}\text{significantly less compared to the time needed by hashtags \$\frac{\finstyle{1}\text{significantly less compared to the time needed by hashtags \$\frac{\finstyle{1}\text{significantly less compared to the time needed by hashtags \$\frac{\finstyle{1}\text{significantly less compared to the time needed by hashtags \$\frac{\finstyle{1}\text{significantly less compared to the time needed by hashtags \$\frac{\finstyle{1}\text{significantly less compared to the time needed by hashtags \$\frac{\finstyle{1}\text{significantly less compared to the time needed by hashtags \$\frac{\finstyle{1}\text{significantly less compared to the time needed by hashtags \$\frac{\finstyle{1}\text{significantly less compared to the time needed by hashtags \$\frac{\finstyle{1}\text{significantly less compared to the time needed by hashtags \$\frac{\finstyle{1}\text{significantly less compared to the time needed by hashtags \$\frac{\finstyle{1}\text{significantly less compared to the time needed by hashtags \$\frac{\finstyle{1}\text{significantly less compared to the time needed by hashtags \$\frac{\finstyle{1}\text{significantly less compared to the time needed by hashtags \$\frac{\finstyle{1}\text{significantly less compared to the time needed by hashtags \$\frac{\finstyle{1}\text{significantly less compared to th

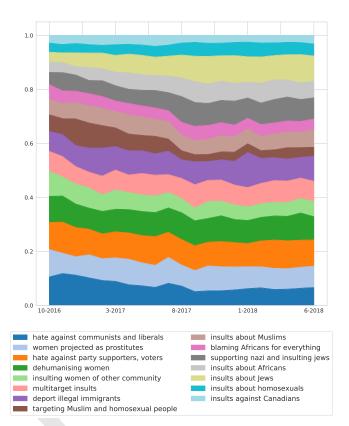


Fig. 8. Top 10 topics and their normalised distribution per month for hate speech

originating from normal speech and getting adopted to hate speech ($\sim 124 \text{ days}$) ($p < 1e^{-6}$, M-W U test, one-sided). This suggests that users posting fear speech carefully craft their messages to include hashtags mainly used by normal users. Consequently, the visibility of the corresponding fear speech post gets enhanced among the normal users. In addition, another observation is that the median time for a hate speech hashtag to get adopted into a fear speech post (~ 73 days) is significantly $(p < 1e^{-6}, \text{ M-W U test, one-sided})$ lower than a fear speech hashtag to get adopted into a hate speech post ($\sim 88 \text{ days}$). This once again shows that fear speech users cleverly include hashtags used by hate speech users in their

Web domains. We investigate the popular domains shared by the fear and hate speech users. Around ~ 6000 unique URLs were shared by each of these type of users. We manually inspected some of the most frequent domains (top 20) that were shared (see Table 3). Many of the fear speech posts shared URLs of unconfirmed blogs on atrocities by the Muslim community — islamexposedblog.blogspot.com, thereligionofpeace.com and counterjihad.com. Few domains were right biased media having low credibility like American Center for Law and Justice and Sputnik news and Another website portrays the unconfirmed atrocities on the white community - whitenationnetwork §§§. In fact, this website has been currently shut down. Other forms of conspiracy

theories like coronavirus is a hoax also showed up on some of these websites. Overall, majority of the URLs shared by the fear speech users have fake/unconfirmed content which, most often, make them highly believable to the benign social media users.

Popular domains in hate speech posts are quite different in nature. We find pagesix , an entertainment news website and towleroad¹⁷ an entertainment website for Gay and LGBTQ+ community which are both authentic. Both these websites are benign in nature, but the hate speech posts referred to them to insult the celebrities mentioned in these platforms. We also find dailystormer¹⁸, godhatefags¹⁹ etc. which are popular far-right websites.

Table 3. Some of top relevant URLs along with the number of fear/hate speech posts.

Fearspeech	Hatespeech
aclg (243)	pagesix (65)
whitenationnetwork (54)	towleroad (68)
islamexposedblog (72)	dailystormer (63)
thereligionofpeace (40)	weaselzippers (45)
sputniknews (37)	godhatesfags (28)
counterjihad (33)	thesmokinggun (20)

Interaction of the users with the content. Interaction with a post can be an essential indicator of how the audience engages with the post. We measure this using the re-posts, replies, and likes frequency. Here, we compare these interactions for fear and hate speech posts. As a baseline, we also compare these with the overall level of interaction with all posts.

#Likes. Fear and hate speech posts taken together receive \sim 65% of likes while at the overall level, less than $\sim 60\%$ posts receive one or more likes. As illustrated Figure 9a we find that the average number of likes for fear speech is around ~ 7 per post, which is significantly more ($p < 1e^{-6}$, M-W U, one-sided) than that of hate speech. We have shown the examples of the highly liked fear speech posts in Table 2.

#Replies. Fear and hate speech posts taken together receive one or more replies in $\sim 16\%$ cases while at the overall level, less than $\sim 10\%$ posts receive one or more replies. Once again, as shown in Figure 9b the mean number of replies per post is higher for fear speech as compared to hate speech $(p < 1e^{-6})$ M-W U, one-sided). We have shown the examples of the highly replied fear speech posts in Table 2. Manual analysis revealed interestingly the post receiving higher reposts usually had less replies and likes. Further, around 0.3% of the replies of the fear speech are from normal users, whereas 0.2\% of the replies of the hate speech are from normal users.

#Reposts. In terms of reposts, we observe that more number fear speech posts ($\sim 18\%$) are reposted as compared to hate speech and overall posts ($\sim 11\text{-}13\%$). The average number of reposts per post is significantly ($p < 1e^{-6}$, M-W U, one-sided) higher for fear speech (5 per post) than hate speech (3 per post (see Figure 9c). We have shown the examples of the highly reposted fear speech posts in Table 2. Further, around 6% of

the reposts of the fear speech are from normal users, whereas 3% of the reposts of the hate speech are from normal users.

In summary, we observe that the average level of engagement of users with fear speech posts is much higher than hate speech posts which we believe is another reason for their prevalence.




Fig. 9. Interaction of users with posts. Here in the x-axis, we show the type of posts where F, H and T denotes fear speech, hate speech and total(overall) posts.

Pervasive impact of fear speech transcending to other social **media platforms.** In this section, we demonstrate that the problem of fear speech is of significant general interest as it also prevails in other extensively moderated social media platforms, e.g., Twitter and Facebook. Note that the choice of these two platforms is motivated by the fact that both of them have their own strict hate speech policies in place and are constantly vigilant to remove harmful contents. We crawl large chunks of data from both these platforms and classify them as fear, hate or normal speech using our prediction model discussed earlier. Once again, we use the same confidence value based thresholding as used for the Gab dataset to designate a post to be fear/hate speech.

Twitter. For Twitter, we use the topical keywords (the exact list will be shared in the repository) from the topics in Figure 7 and the academic research API to search through the history of tweets having those keywords. This way, we collect around 4,103,145 tweets over six years (2016-2022). We find that out of the entire dataset of around 4 million tweets, there are around 400k tweets ($\sim 10\%$) were marked as fear speech by our model (examples in Table 4). We further plot the timeline of the posts and find that there is an increasing trend in the number of fear speech posts (see in Figure 10) over time. The presence of such a huge volume of fear speech and its increasing temporal trend is alarming and should be analyzed by moderation policy experts. Not surprisingly, our model could only predict around 31,000 posts as hate speech which shows Twitter is quite active in moderating such hateful content.

Facebook. For Facebook, we use the historical search of Crowd-Tangle²⁰ and use 73 public white supremacist pages used in

 $^{20} {\rm crowdtangle.com}$




Fig. 10. This figure shows the percentage of posts that were fear speech per month in the Twitter data

^{¶¶¶} https://pagesix.com/ accessed on March 10, 2022 17 https://www.towleroad.com/

 $^{^{18}}$ https://en.wikipedia.org/wiki/The_Daily_Stormer

 $^{^{19} {\}it https://en.wikipedia.org/wiki/Westboro_Baptist_Church}$

Text	Date
@AmosPosner Christians left tons of time for Jews to control	5/12/2016
media in th silence b/w the beat & amp; when ppl yell "Santa	
Claus is comin to town"	
MIGRANT SCANDAL: 200 illegals a DAY caught sneaking into	10/2/2017
UK - and that's in just https://t.co/avZNtrJyXk by #rvaidya2000	
via @c0nvey	
@JudgeJeanine QUESTION PATRIOTS? ARE OUR OFFI-	10/4/2019
CIALS BREAKING THE LAW BY NOT UPHOLDING THE	
LAWS THEY WROTE, ALLOWING ILLEGAL IMMIGRATION	
TO OVERRUN OUR COUNTRY? IF YOU THINK SO SCREW	
BEING FIRED! HOW ABOUT CITIZENS ARREST?	
@FBI San Diego Antifa leader calling for the killing of white men	28/6/2020
and raping white women. https://t.co/rqHhL5pxD2	

Table 4. This table shows some examples of fear speech from the data collected from Twitter along with their dates.

Text	Date
Have you noticed Islam is growing stronger? The "girl next door"	18/5/2017
is even jumping on the jihad train.	
#Turkey says its released 47,000 migrants into #Europe.	29/2/2020
That us 47,000 on a #hijrah most are men of mili-	
tary age. https://www.trtworld.com/turkey/number-of-migrants-	
leaving-turkey-reaches-47-113-minister-34211	
(Bangladesh: Muslims threaten to murder atheist blogger for crit-	26/8/2020
icizing political Islam, defending Buddhists) has been published	
on Jihad Watch	
Most attention goes to illegal aliens crossing by land, but data	14/1/2021
shows rising numbers trying to come by water.	

Table 5. This table shows some examples of fear speech from the data collected from Facebook along with their dates.

the previous literature. We collect all the posts from these pages (31). This way, we obtain around 191,666 posts over six years (2016-2022). Our model predicts around 10k posts (around 4%) are marked as fear speech (examples in Table 5). We plot the timeline of the posts and find that there is a slightly decreasing trend in the number of fear speech posts (See in Figure 11). This decrease could possibly be because of the overall moderation of the white supremacist pages and not specifically the individual fear speech posts. Once again our model marked only 196 posts as hate speech pointing toward the strict hateful content moderation on Facebook.

We believe that these results together point to the pervasive nature of the problem and the necessity for special all-round attention from the community.

Discussion

In this study, we aimed to understand what role fear plays in the polarized conversations and how it differs from the traditional form of polarized content — hate speech. We find significant difference in how extreme hate speech (ExHate)




Fig. 11. This figure shows the percentage of posts that were fear speech per month in the Facebook data.

and fear speech users (ExFear) exist and interact with other users in the network. ExFear users have more followers and can effectively interact with the general audience than the ExHate users. This indicates out that even within a polarized, hateful context, fear has a different reach in the audience. In the correct context, such type of polarized content may act as tipping points (2, 32) during some event. This is especially so when there are groups of coordinated actors who are interested in propagating an agenda (17). Hence, it becomes important for the research community to understand how to moderate such different forms of extreme content. It is also interesting to think about some prioritization when moderating different forms of extreme content.

One of the main reasons why these difference exists is the language of the text used. While fear speech uses arguments and subtle ways to show some community as a threat, hate speech (33) uses slurs, insults to dehumanize the community. There is a huge body of work for how hate speech spreads in social media and can be analysed (34-36), detected in monolingual (23, 37–39) and multilingual scenarios (9, 40–42) and mitigated using suspension (43) and counter speech (44–46). The presence of fear speech will create problem while deciding about the moderation policies because we might not be able to directly ban or suspend fear speech. The paper introducing the 'fear speech' concept (2) suggests creation of alternative arguments to the arguments given in fear speech. These alternative arguments should aim at diffusing the violence potential of fear speech. Since many instances of fear speech may also contain misinformation to exaggerate their arguments, researchers in misinformation (47) domain, news media and fact-checking organisations can play an important role. However, even such measures might not be effective unless the end user is aware. Hence, awareness events, similar to the ones done for hate speech (48), should be conducted to make the users question the content they are receiving.

Past research in this community has focused on the role of social media in polarization (49, 50) and the role of user accounts in spreading such content (51). Our research takes a step back and tries to understand the types in which polarization happens and whether there exists a difference in the audience using/perceiving it.

One limitation of our study is that our detection model is trained on Gab data. Further, most of the prevalence analysis is also based on the Gab data. Our choice of Gab as a social media platform is motivated by its unmoderated nature, which makes studying hate speech easier. Further obtaining certain nuanced data such as the time-varying structure of the followership network is easily possible for Gab. To compliment this study further, we perform some basic prevalence analysis on Twitter and Facebook as well and find significant amount of fear speech in these platforms. Our study renders hope that the investigation of fear speech can be easily extended to other platforms. Nevertheless, it seems as these platforms continue moderating hate speech, actors spreading such content might shift to more subtle ways like fear speech. Moreover, the content on 'fringe' platforms does not stay only on those platforms anymore, and we have seen instances of seemingly fringe platforms affect main stream conversations (52). Second, in an effort to scale up our findings to millions of posts, our study relies on the performance of automated classifiers on an inherently difficult task. While we have taken additional care

while deciding the category of the posts, we might be missing some form of fear speech/hate speech. Section S3 provides robustness checks on our models.

Materials and Methods

This section provides details on data collection, annotation and labeling, and user-level classification. Statistical tools used in this analysis are noted in section S1.

Data Annotation. There are different forms of toxic speech on social media. In this work, we primarily target hate speech and fear speech. For each post shown to the annotators, the annotator has to mark whether the speech is fear speech or hate speech, or normal. Further, they also need to mark the target communities towards which the particular posts are targeted. See SI text in section S2 for more details.

To annotate the posts, we follow a hybrid strategy comprising both expert and crowd annotators. The expert annotators are a group of 4 undergraduate students who were trained using gold label annotations and detailed discussion sessions. The crowd workers were recruited from Amazon Mechanical Turk. We use a multi-label annotation framework, where a post can be assigned to both fear speech and hate speech.

To finalize the annotation guidelines and difficulty of the annotations, we first annotated a set of 1000 posts using the expert annotators. The expert annotators achieve a set of 0.51 Krippendorff's alpha. Next, we created using a pilot study to select the crowd workers. The pilot study is a set of 15 gold annotated posts from these 1000 data points used to test the Mechanical Turk workers who agreed to take part in our study. Out of 400 interested crowd workers, we selected 192 annotators. Of these annotators, 103 participated in the study.

The annotation process comprised 24 rounds. In each round, we gave a fixed number of posts to annotate. The number of posts per round was kept low, around 150 initially and finally increased to 500 as the annotators became more familiar with the task at hand. For sampling the posts, we employed different strategies. Initially, our strategy revolved around using community-based keywords. In each round, we removed the keywords that gave more normal samples in order to retrieve more fear speech/hate speech posts.

Post classification. We develop a bunch of classification models for this task. As baselines, we use three different feature extraction techniques - bag of words vectors (BoW), GloVe word embeddings (WE) and TF-IDF features. We then use two one-vs-rest classifier - logistic regression (LR), support vector classifier (SVC) as well as XGBoost. Additional details of the baseline models are noted in section S3.

Transformers are a recent NLP architecture formed using a stack of self-attention blocks having superior performance across a lot of benchmarks. We use several variations of the transformer models (i) pretrained models like bert-base-uncased, roberta-base (ii) models which are fine-tuned using data from hate speech related tasks like HateXplain (23), Twitter-roberta-hate (53) etc. (iii) models which are pretrained using social media dataset - [Updated: HateBERT (54)]. In the category (iii), we also use a filtered out version of the Gab dataset to pretrain a bert-base-uncased model further and name it Gab-BERT ²¹. All these models are added with a classification head. Gab-BERT is the best model among all others with a macro F1 score of 0.62 (the full set of results for all the models are presented in section S3).

We further hypothesize that hate speech and fear speech might show different forms of emotions. We use an emotion vector predicted using the model used in previous research work (55). This additional input vector increases the performance of the Gab-BERT model by 1 point for F1 score and 4 points for accuracy.

User analysis. To conduct the user analysis, we wanted to understand the characteristics of the extreme fear and extreme hate users. To do this we find the users in the top 10% percentile in terms of number of fear speech posts and hate speech posts separately.

We remove the intersection of the users in both these sets. Finally, we end with 476 extreme fear speech (ExFear) and 478 extreme hate speech users (ExHate). We further perform the study on an extended set of users as well (noted in SI text section S4).

Temporal movement of users. To understand the temporal influence of the users over the entire timeline, we utilise the follower-followee network per month which was referred to in (56). Then for each month we calculate the k-core or coreness metric (29) to identify the influential users in the undirected version of the follower-followee network. Next we subdivide the nodes into 10 buckets based on their percentile ranks in terms of k-core value, i.e., the bottom 10% percentile to the top 10% percentile. Following this, we measure the time in months for a user to reach the inner core (core-0) in the network (further referred to as time-to-reach-core) from the time they join the network.

Data Availability Statement. A repository of the data necessary to reproduce, analyze, and interpret all findings in this paper is available https://osf.io/dc7vu/?view_only=8144833546e54a399ab883f0b0e3e7f7. The code (including software information) for all studies and the analysis is available https://github.com/punyajoy/Fearspeech-project.

- 1. Hate speech wikipedia (https://en.wikipedia.org/wiki/Hate_speech) (year?) (Accessed on 06/20/2022).
- 2. A Buyse, Words of violence: Fear speech, or how violent conflict escalation relates to the freedom of expression. Hum. Rts. Q. 36, 779 (2014).
- The radicalizing language of fear and threat | dangerous speech project (https:// dangerousspeech.org/the-radicalizing-language-of-fear-and-threat/) (year?) (Accessed on 03/27/2022).
- 4. V Basile, et al., Semeval-2019 task 5: Multilingual detection of hate speech against immigrants and women in twitter in 13th International Workshop on Semantic Evaluation. (Association for Computational Linguistics), pp. 54-63 (2019).
- 5. Z Waseem, D Hovy, Hateful symbols or hateful people? predictive features for hate speech detection on twitter in Proceedings of the NAACL student research workshop. pp. 88-93 (2016).
- 6. B Kennedy, et al., The gab hate corpus: A collection of 27k posts annotated for hate speech. PsyArXiv (2018).
- R Hada, et al., Ruddit: Norms of offensiveness for English Reddit comments in Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 1: Long Papers). (Association for Computational Linguistics, Online), pp. 2700-2717 (2021).
- 8. S MacAvaney, et al., Hate speech detection: Challenges and solutions. PloS one 14, e0221152 (2019).
- SS Aluru, B Mathew, P Saha, A Mukherjee, A deep dive into multilingual hate speech classification in Machine Learning and Knowledge Discovery in Databases. Applied Data Science and Demo Track: European Conference, ECML PKDD 2020, Ghent, Belgium, September 14-18, 2020, Proceedings, Part V. (Springer-Verlag, Berlin, Heidelberg), p. 423-439 (2020).
- 10. T Pyszczynski, et al., Mortality salience, martyrdom, and military might: the great satan versus the axis of evil. Pers Soc Psychol Bull 32, 525-537 (2006).
- 11. Fatal attraction: the effects of mortality salience on evaluations of charismatic, task-oriented, and relationship-oriented leaders. Psychol Sci. 15, 846-851 (2004).
- 12. A Iftikhar, Christchurch anniversary: The islamophobic ment' theory bridge initiative (https://bridge.georgetown.edu/research/ christchurch-anniversary-the-islamophobic-great-replacement-theory/) (year?) (Accessed on 03/27/2022).
- 13. M Morales, K Squeglia, Buffalo mass shooting suspect to be arraigned thursday on 25 counts, including murder - cnn (https://edition.cnn.com/2022/06/02/us/ buffalo-mass-shooting-suspect-indictment/index.html) (2022) (Accessed on 07/01/2022).
- 14. Trump and others stoke migrant caravan conspiracy theories (https://www.yahoo.com/news/ trump-republican-lawmakers-stoke-migrant-caravan-conspiracy-theories-224959187.html) (year?) (Accessed on 04/06/2022).
- 15. Wilders parliament refugee crisis is 'islamic invasion' tells dutch (https://www.reuters.com/article/us-europe-migrants-netherlands/ reuters wilders-tells-dutch-parliament-refugee-crisis-is-islamic-invasion-idUSKCN0RA0WY20150910) (year?) (Accessed on 04/06/2022).
- A Reid, Buses and breaking point: Freedom of expression and the 'brexit'campaign. Ethical Theory Moral Pract. 22, 623-637 (2019).
- P Saha, B Mathew, K Garimella, A Mukherjee, "short is the road that leads from fear to hate": Fear speech in indian whatsapp groups in Proceedings of the Web Conference 2021. pp. 1110-1121 (2021).
- 18. 'screw the optics, i'm going in': Alleged synagogue shooter posts on social media moments before massacre - abc news (https://abcnews.go.com/US/ pittsburgh-synagogue-alleged-mass-shooter-told-swat-officers/story?id=58803485) (year?) (Accessed on 03/31/2022).
- 19. Social media site gab surging, even as critics blame capitol (https://www.npr.org/2021/01/17/957512634/ Npr social-media-site-gab-is-surging-even-as-critics-blame-it-for-capitol-violence)
- 20. B Miroglio, D Zeber, J Kaye, R Weiss, The effect of ad blocking on user engagement with the web in Proceedings of the 2018 World Wide Web Conference, WWW '18. (International

 $^{^{21}\}mbox{We}$ shall release this model upon acceptance of the paper

- World Wide Web Conferences Steering Committee, Republic and Canton of Geneva, CHE), p. 813–821 (2018).
- 21. N Schaffer, Twitter followers vs following: What is the ideal ratio? Wind. Netw. (2009).
- Y Mohammad, How many tweets per day 2022 (number of tweets per day) (https://www.renolon.com/number-of-tweets-per-day/) (2022) (Accessed on 10/21/2022).
- B Mathew, et al., Hatexplain: A benchmark dataset for explainable hate speech detection in *Proceedings of the AAAI Conference on Artificial Intelligence*. Vol. 35, pp. 14867–14875 (2021).
- F Del Vigna12, A Cimino23, F Dell'Orletta, M Petrocchi, M Tesconi, Hate me, hate me not: Hate speech detection on facebook in *Proceedings of the First Italian Conference on Cybersecurity (ITASEC17)*, pp. 86–95 (2017).
- N Ousidhoum, Z Lin, H Zhang, Y Song, DY Yeung, Multilingual and multi-aspect hate speech analysis in Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP). (Association for Computational Linguistics, Hong Kong, China), pp. 4675– 4684 (2019).
- 26. Perspective api (https://www.perspectiveapi.com/) (year?) (Accessed on 03/12/2022).
- R Shier, Statistics: 2.3 the mann-whitney u test. Math. Learn. Support. Centre. Last accessed 15, 2013 (2004).
- P Mishra, M Del Tredici, H Yannakoudakis, E Shutova, Abusive language detection with graph convolutional networks in *Proceedings of NAACL-HLT*. pp. 2145–2150 (2019).
- V Batagelj, M Zaveršnik, Fast algorithms for determining (generalized) core groups in social networks. Adv. Data Analysis Classif. 5, 129–145 (2011).
- M Hoffman, F Bach, D Blei, Online learning for latent dirichlet allocation. advances neural information processing systems 23 (2010).
- S Phadke, T Mitra, Many faced hate: A cross platform study of content framing and information sharing by online hate groups in *Proceedings of the 2020 CHI Conference on Human Factors in Computing Systems*, CHI '20. (Association for Computing Machinery, New York, NY, USA), p. 1–13 (2020).
- MW Macy, M Ma, DR Tabin, J Gao, BK Szymanski, Polarization and tipping points. Proc. Natl. Acad. Sci. 118, e2102144118 (2021).
- T Davidson, D Warmsley, M Macy, I Weber, Automated hate speech detection and the problem of offensive language in Proceedings of the 11th International AAAI Conference on Web and Social Media, ICWSM '17. pp. 512–515 (2017).
- B Mathew, R Dutt, P Goyal, A Mukherjee, Spread of hate speech in online social media in Proceedings of the 10th ACM conference on web science. pp. 173–182 (2019).
- AM Founta, et al., Large scale crowdsourcing and characterization of twitter abusive behavior in Twelfth International AAAI Conference on Web and Social Media. (2018).
- MH Ribeiro, PH Calais, YA Santos, VA Almeida, W Meira Jr, Characterizing and detecting hateful users on twitter in Twelfth international AAAI conference on web and social media. (2018).
- T Caselli, V Basile, J Mitrović, M Granitzer, HateBERT: Retraining BERT for abusive language detection in English in *Proceedings of the 5th Workshop on Online Abuse and Harms (WOAH 2021)*. (Association for Computational Linguistics, Online), pp. 17–25 (2021).
- A Koufakou, EW Pamungkas, V Basile, V Patti, HurtBERT: Incorporating lexical features with BERT for the detection of abusive language in *Proceedings of the Fourth Workshop on Online Abuse and Harms*. (Association for Computational Linguistics, Online), pp. 34–43 (2020).
- T Davidson, D Warmsley, M Macy, I Weber, Automated hate speech detection and the problem of offensive language in *Proceedings of the international AAAI conference on web and* social media. Vol. 11, pp. 512–515 (2017).
- K Wang, D Lu, C Han, S Long, J Poon, Detect all abuse! toward universal abusive language detection models in *Proceedings of the 28th International Conference on Computational Linguistics*. (International Committee on Computational Linguistics, Barcelona, Spain (Online)), pp. 6366–6376 (2020).
- N Ousidhoum, Z Lin, H Zhang, Y Song, DY Yeung, Multilingual and multi-aspect hate speech analysis in Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP), pp. 4675–4684 (2019).
- T Ranasinghe, M Zampieri, Multilingual offensive language identification with cross-lingual embeddings in Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP). (Association for Computational Linguistics, Online), pp. 5838– 5844 (2020).
- S Ali, et al., Understanding the effect of deplatforming on social networks in 13th ACM Web Science Conference 2021. pp. 187–195 (2021).
- YL Chung, E Kuzmenko, SS Tekiroglu, M Guerini, CONAN COunter NArratives through nichesourcing: a multilingual dataset of responses to fight online hate speech in *Proceedings* of the 57th Annual Meeting of the Association for Computational Linguistics. (Association for Computational Linguistics, Florence, Italy), pp. 2819–2829 (2019).
- J Qian, A Bethke, Y Liu, E Belding, WY Wang, A benchmark dataset for learning to intervene in online hate speech in *Proceedings of the 2019 Conference on Empirical Methods in Nat*ural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP). pp. 4755–4764 (2019).
- 46. M Fanton, H Bonaldi, SS Tekiroğlu, M Guerini, Human-in-the-loop for data collection: a multi-target counter narrative dataset to fight online hate speech in Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 1: Long Papers). pp. 3226–3240 (2021).
- S Muhammed T, SK Mathew, , et al., The disaster of misinformation: a review of research in social media. Int. journal data science analytics pp. 1–15 (2022).
- 48. Raising awareness on hate speech in the republic of moldova news (https://www.coe.int/en/web/inclusion-and-antidiscrimination/-/raising-awareness-on-hate-speech-in-the-republic-of-moldova) (year?) (Accessed on 0.7/106/2022)
- N Asimovic, J Nagler, R Bonneau, JA Tucker, Testing the effects of facebook usage in an ethnically polarized setting. Proc. Natl. Acad. Sci. 118, e2022819118 (2021).

- F Huszár, et al., Algorithmic amplification of politics on twitter. Proc. Natl. Acad. Sci. 119, e2025334119 (2022).
- A Simchon, WJ Brady, JJ Van Bavel, Troll and divide: the language of online polarization. PNAS Nexus 1, pgac019 (2022).
- S Zannettou, et al., The web centipede: understanding how web communities influence each other through the lens of mainstream and alternative news sources in *Proceedings of the* 2017 internet measurement conference. pp. 405–417 (2017).
- F Barbieri, J Camacho-Collados, L Espinosa-Anke, L Neves, TweetEval:Unified Benchmark and Comparative Evaluation for Tweet Classification in *Proceedings of Findings of EMNLP*. (2020).
- T Caselli, V Basile, J Mitrović, M Granitzer, Hatebert: Retraining bert for abusive language detection in english in *Proceedings of the 5th Workshop on Online Abuse and Harms (WOAH* 2021). pp. 17–25 (2021).
- D Demszky, et al., GoEmotions: A dataset of fine-grained emotions in *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*. (Association for Computational Linguistics, Online), pp. 4040–4054 (2020).
- B Mathew, et al., Hate begets hate: A temporal study of hate speech. Proc. ACM Hum.-Comput. Interact. 4 (2020).
- 57. J Devlin, MW Chang, K Lee, K Toutanova, BERT: Pre-training of deep bidirectional transformers for language understanding in Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers). (Association for Computational Linguistics, Minneapolis, Minnesota), pp. 4171–4186 (2019).
- Y Shibata, et al., Byte pair encoding: A text compression scheme that accelerates pattern matching. Tech. Rep. DOI-TR-161, Dep. Informatics, Kyushu Univ. (1999).
- M ElSherief, et al., Latent hatred: A benchmark for understanding implicit hate speech in Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing. (Association for Computational Linguistics, Online and Punta Cana, Dominican Republic), pp. 345–363 (2021).
- 60. B Vidgen, T Thrush, Z Waseem, D Kiela, Learning from the worst: Dynamically generated datasets to improve online hate detection in Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 1: Long Papers). (Association for Computational Linguistics, Online), pp. 1667–1682 (2021).
- B Kennedy, et al., Introducing the gab hate corpus: defining and applying hate-based rhetoric to social media posts at scale. Lang. Resour. Eval. pp. 1–30 (2022).
- WL Taylor, "cloze procedure": A new tool for measuring readability. Journalism quarterly 30, 415–433 (1953).
- 63. JM Hilbe, Negative binomial regression. (Cambridge University Press), (2011).
- J Gill, JM Gill, M Torres, SMT Pacheco, Generalized linear models: a unified approach. (Sage Publications) Vol. 134, (2019).
- 65. R Řehůřek, P Sojka, Software Framework for Topic Modelling with Large Corpora in Proceedings of the LREC 2010 Workshop on New Challenges for NLP Frameworks. (ELRA, Valletta, Malta), pp. 45–50 (2010) http://is.muni.cz/publication/884893/en.
- M Röder, A Both, A Hinneburg, Exploring the space of topic coherence measures in Proceedings of the eighth ACM international conference on Web search and data mining. pp. 399–408 (2015).

S1. Statistical tools

- **A. Mann-Whitney U (MW U) test.** Mann-Whitney U test is a non-parametric test which is an alternative to the independent sample t-test. It compares two sample means that come from the same population, and is used to test whether the two sample means are equal or not. Usually, the Mann-Whitney U test is used when the data is ordinal or when the assumptions of the t-test are not met. For our purpose we use a python package (27) with two-sided hypothesis and 'asymptomatic' method.
- **B. Matching users.** To understand if the distinction between fear vs. hate is the sole reason for the results rather than some other confounding factor, we perform matching between ExFear and ExHate users using propensity score matching. Propensity score based matching (PSM) (20) is a quasi-experimental method in which we use statistical techniques to construct an artificial group by matching treated unit with a non treated unit of similar characteristics. For this, we use a python library ²² to obtain the propensity score-based matching. To this purpose, we use the average number of messages per month, the standard deviation of the number of messages per month, and the number of months they were

 $^{^{22} {\}it https://github.com/benmiroglio/pymatch}$

active (how many months they had at least one post). Next we calculate the propensity scores using logistic regression. Using these scores the users were matched using 0.0005 as threshold between the matched propensity scores. After matching, we measure significance with M-W U test between the propensity scores of the treatment and the matched control set and find the differences in the propensity of the two sets to be non significant at p = 0.499. We find 476 matched users out of 479 ExHate and 483 ExFear users. Since the fraction of matched users is close to 100%, our results remain unaffected by whether we choose only the matched users or all the users in both the sets.

S2. Additional details for annotation

Hate speech: is a language used to express hatred toward a targeted individual or group, or is intended to be derogatory, to humiliate, or to insult the members of the group, on the basis of attributes such as race, religion, ethnic origin, sexual orientation, disability, or gender (23). A post is a hate speech if one or more of the following are true -

- it is targeted against a person or group of persons,
- it uses derogatory or racial slur words within the post
- it makes use of disparaging terms with the intent to harm or incite harm,
- it refers to and supports other hateful facts, hate posts and organization,
- it refers to the other group as inferior as cultural superi-
- it makes use of idiomatic, metaphorical, collocation or any other indirect means of expressions that are harmful or may incite harm,
- it expresses violent communications.

Fear speech is an expression aimed at instilling (existential) fear of a target group on the basis of attributes such as race, religion, ethnic origin, sexual orientation, disability, or gender (2).

A post is a fear speech if it creates fear about a target group using one of the following notions.

- Something done by the target group in the past (and the possibility of that happening again) - historical domination.
- Some tradition of the target group which is shown to take precedence over in-groups - cultural domination.
- The target group taking over jobs or education institutes - economic domination.
- The target group taking over land/living places geographic domination.
- The target group killing people of the in-group existential domination.
- Speculation that the target group would take over and dominate in the future over the in group - future domination.

Normal speech will be the label of the posts which are neither hate speech nor fear speech. Note that this class is not equivalent to unbiased or polite language. There may be political propaganda, use of slur words but since our aim is to identify fear and hate speech we should annotate them as normal class.

In addition to the above definition, we further add specific guidelines so that the annotators avoid some common mistakes. These are noted below.

- The presence of certain words does not justify a text being hateful or fearful. The annotators should look into the context of the post.
- Since some of the fear speech heavily used common news sources, we asked the annotators to look into the post if it is a news headline or if it is trying to create or spread
- A post might be both partially hateful and partially fearful. The annotator should carefully read the whole post before finalising the labels.
- Fear and hate speech both should be about some target community (explicit or implicit). Fear/hate speech about media or government institutions are not considered in this task. Such cases should be marked as normal.
- Finally, the annotators should mark the targets present in the posts.

Some of the annotated examples from our dataset are shown in Table S1.

Table S1. This table notes the annotation for some of the sample posts

Example	Class	Targets
I call bullshit on Google.How does a search	Normal	Other
for "white parents with white children" return		
these images?		
Thousands of Americans have been killed	Hate	Refugee
by illegal aliens. Illegals break up American	Speech,	
families forever. Go home. Stay home. Stop	Fear	
breeding out of control.	Speech	
Toledo Tree-Dweller Guns Down White Man	Fear	African
After an Argument at a Bar. Blacks routinely	speech	
use homicide as their go-to for conflict reso-		
lution.		
@user Wouldn't you save a dog before	Hate	Islam,
you'd save an illegal or a Muslim? Or Hel-	speech	Refugee
lary? Every sentient being with a central		
nervous system feels pain. Animals don't		
build mosques or vote Demonrat. They re-		
ally ARE better than a lot of people!		
Today, do something for the environment	Hate	Homosexual
and kill your local queer	Speech	
Don't really care if a fighters black, white,	Normal	African,
yellow or Dalmatian. If he is good he is		Asian,
good.		Caucasian
"I call BS! NO muslim woman would ever	Fear	Islam,
accept gays, any other form of religion, free	speech	Women
speech (she has no clue what it is after all)		
or ever adapt yo the way of life of the country		
her family invaded!"		

S3. Models

In this section we present additional details about the classification models we utilised in this paper.

A. Baseline models. Baseline models can be categorised based on what kind of feature extractor and classifier model are being used. We note three different types of features and classifications and report the performance of all of their combinations in Table S2.

Feature extraction: In case of BOW vectors, we create a vocabulary vector of all unique words in the training set and for each post a binary vector is created based on the presence of words (1 if a word is found in the vocabulary else 0). In case of GloVe word embeddings, it takes into consideration local as well as global context of words and we use a word vector pretrained with 840B tokens, 2.2M vocab, cased, 300 dimensional vectors using common crawl. In case of TF-IDF feature extraction method, we use tfidf-vectorizer module from scikit-learn which initializes a vectorizer and uses its fit_transform method which gives us the product of term-frequency and inverse-document frequency of each word in the text.

Classification model: Logistic regression is a machine learning method used to predict the outcome of a dependent variable based on previous observations. Support vector machines (SVMs) are a set of supervised learning methods used for classification and regression problems and they are effective in high dimensional spaces. XGBoost (extreme gradient boosting) is a library for developing fast and high performance gradient boosting tree models.

- **B.** Transformer model variations. Transformers are a recent architecture in the NLP literature (57) which utilises self-attention blocks to create contextual embeddings in a self-supervised manner. These embeddings are further used with a classification head in this task. Here, we detail the different forms of transformer models used and the results are noted in Table S3.
- **B.1. Pretrained models.** These models are pretrained on a huge corpus collected from web using various pretrained strategies. With these models, we add a linear layer to classify the posts into fear speech, hate speech and normal class in a multilabel fashion. We note the models below.

BERT base (bert-base-uncased): BERT is a transformer model pretrained in a self-supervised fashion on a large corpus of raw English data including the entire Wikipedia (2,500 million words) and Book Corpus (800 million words), with no human labelling.

RoBERTa base (roberta-base-uncased): RoBERTa is a transformer model in which the texts are tokenized using a byte version of byte-pair encoding (BPE) (58) and a vocabulary size of 50,000 for training it. Unlike BERT, the masking is done dynamically during pretraining (e.g., it changes at each epoch and is not fixed).

B.2. Fine-tuned models. These models are variants of the pre-trained models which are further fine-tuned using a classification head on some related task, i.e., offensive post detection, hate speech detection. Fine-tuning on a related dataset can help the model learn additional semantic features required for the task. We describe the models below.

HateXplain model (bert-hatexplain): This model is used for classifying a text as abusive (hate speech and offensive) or normal. The model is trained using data from Gab and Twitter and human rationales were included as part of the training data to boost the performance (23). The model also has a rationale predictor head that can predict the rationales given an abusive sentence.

BERT latent hatred (bert-latent-hatred): While many hate speech datasets are highly explicit and overt, this model is used for understanding implicit hate speech. This model was fine-tuned on implicit hate data (59) which contains 22,056 tweets from the most extremist groups in the US where 6,346 of these tweets contain implicit hate speech. We train a bert-base-uncased model to fine-tune on this dataset considering train (8): val (1): test (1) stratification. The model reaches a macro F1-score of 0.60 and an accuracy of 0.74 for the test dataset.

BERT dynamic hate (bert-dynamic-hate): Here a bert-base-uncased model is fine-tuned on a dataset (60) of nearly 40,000 entries, generated and labelled by trained annotators over four rounds of dynamic data creation. In specific, we train a bert-base-uncased model to fine-tune on this dataset considering train (8): val (1): test (1) stratification. The model reaches a macro F1-score of 0.80 and accuracy of 0.80 for the test dataset.

BERT Gab hate (bert-gab-hate): The model used is bert-base-uncased fine-tuned on Gab hate speech corpus (61), consisting of 27,665 posts from the social network service gab.ai, each annotated by a minimum of three trained annotators. Once again we train a bert-base-uncased model to fine-tune on this dataset considering train (8): validatopm (1): test (1) stratification. The model reaches a macro F1score of 0.32 and accuracy of 0.94 for the test dataset. The lower performance is due to the huge imbalance in the dataset. Twitter base RoBERTa hate (twi-rob-hate): This is a RoBERTa-base model trained on 58M tweets and fine-tuned for hate speech detection using 2 labels - hate/non hate with the TweetEval benchmark (53). For hate speech detection task, a popular dataset (4) was used with 9000, 1000, 2970 as train, validation and test dataset. The model achieves a macro-F1 score of 0.46 with the RoBERTa-base model and a score of 0.52 with the RoBERTa-base model (retrained on Twitter) on the test dataset.

Twitter base RoBERTa offensive (twi-rob-offensive): This is also a RoBERTa-base model trained on 58M tweets and fine-tuned for offensive language identification with the TweetEval benchmark (53). For hate speech detection task, a popular dataset (4) was used with 11,916, 1,324 and 860 as train, validation and test dataset. It achieves a macro F1-score of 0.78 with the RoBERTa-base model and a score of 0.81 with the RoBERTa-base model (retrained on Twitter) on the test dataset.

B.3. MLM pretrained models. These models are essentially pretrained models which are further pretrained using the masked language modelling framework (MLM) (62). In this framework, we randomly mask 15% of the words in the input, the model has to then predict the masked words. We describe the two models used here.

HateBERT (hatebert): HateBERT (37) is an English pretrained BERT model obtained by further training the English bert-base-uncased model with more than 1 million

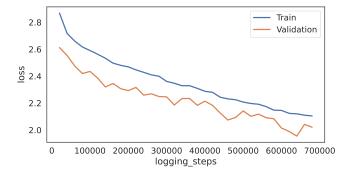


Fig. S1. Cross entropy loss for train and validation set.




Fig. S2. Perplexity for train and validation set.

posts from banned communities from Reddit considering train 1,478,348 and 149,274 as train and test data points respectively.

Gab-BERT (gab_bert): We further collect posts from the Gab data using a filtered set of keywords ²³. Our total dataset for pretraining contains 1,393,504 posts; we pretrain the bert-base-uncased model further on this dataset considering 1,392,504 and 1,000 as train and test data points respectively. We use block size of 128, batch size of 10 and 5 as the number of epochs for the continued pretraining. We note the loss and perplexity curve in the Figures S1 and S2. Here, we observe that the final perplexity is around 7.54 and we get a final loss of 2.02 on the validation set.

After pretraining with this dataset we add a classification head to train it on the labeled dataset. We further calculate an emotion vector using the model trained with an emotion classification data (55). We consider 28 different emotions each representing one unit of the emotion vector. Later this emotion vector is appended to the end of the pooled output for the forward direction and the training continues similar to a generic transformer model. This model is referred to as gab_bert+emotion in the Table S3.

C. Performance comparison across model. We use all the models from former sections and train them to classify the posts into fear speech, hate speech and normal. We split our dataset of ~ 10000 points into train, validation and test in the ratio of 8:1:1. We report results on the test dataset as shown in table S2 and S3. We find that among the baseline models in table S2, the highest macro F1 score (0.56) is achieved by

the XGBoost and BOW vectors. The highest accuracy (0.42) is achieved by the SVM with TFIDF vectors.

Among the transformers models as shown in S3, the highest accuracy (0.56) is achieved by twi-rob-hate. In terms of macro F1 score, gab_bert+emotion achieves the highest F1 score. Interestingly, the same model is either highest or second highest across all the different metrics used. Hence, we use this model for the large scale dataset extraction.

Table S2. This table shows the evaluation of the baseline models. The first column shows the machine learning models and second columns shows the features used. The rest of the columns represents Accuracy (Acc), Macro F1 score (F1), Precision (Pre), Recall (Rec) and Hamming score (Ham)

Model	Features	Acc	F1	Pre	Rec	Ham(↓)
LR		0.40	0.51	0.52	0.50	0.32
SVM	BOW	0.38	0.51	0.50	0.53	0.34
XGBoost		0.10	0.56	0.42	0.82	0.43
LR		0.39	0.53	0.50	0.57	0.34
SVM	TFIDF	0.42	0.47	0.52	0.51	0.32
XGBoost		0.13	0.54	0.42	0.76	0.42
LR	WE	0.36	0.54	0.49	0.64	0.36
SVM	(google)	0.37	0.55	0.50	0.64	0.35
XGBoost	(google)	0.35	0.48	0.47	0.51	0.34

Table S3. This table shows the evaluation of the transformers models. The first column shows the different variation of transformers models. Here, the input is text, except the last row where we also pass a emotion vector along with the text. The rest of the columns represents Accuracy (Acc), Macro F1 score (F1), Precision (Pre), Recall (Rec) and Hamming score (Ham)

Model	Acc	F1	Pre	Rec	Ham(↓)
bert-base-uncased	0.51	0.60	0.61	0.59	0.27
roberta-base-uncased	0.51	0.60	0.60	0.62	0.28
twi-rob-offensive	0.54	0.61	0.60	0.63	0.27
twi-rob-hate	0.56	0.61	0.61	0.61	0.26
bert-gab-hate	0.51	0.61	0.63	0.58	0.26
bert-hatexplain	0.52	0.58	0.59	0.58	0.28
bert-dynamic-hate	0.54	0.59	0.60	0.60	0.27
bert-latent-hatred	0.51	0.59	0.61	0.57	0.27
hatebert	0.47	0.57	0.59	0.56	0.29
gab_bert	0.51	0.62	0.65	0.60	0.25
gab_bert + emotions	0.55	0.63	0.65	0.62	0.25

S4. Large scale user analysis

To perform user analysis at a larger scale, we first select the users posting at least 10 fear/hate speech posts. This was considered to remove the confounding users from the dataset. Consequently, we have around 9,200 users. Next, we study the correlation of the number of fear speech posts, number of hate speech posts, and total posts (as a baseline) with several variables. For each variable, we build a generalized linear regression model, which is shown in equation 1. When the dependent variables are counting variables, we use negative binomial regression (63). Otherwise, the default setting is considered (64). We note the α, β and γ for different dependent variables in Table S4.

$$var = \alpha * (\#fearspeech) + \beta * (\#hatespeech) + \gamma * (\#total)$$
 [1]

At first, we inspect the coefficients of the linear regression model as described in the Materials and Methods section. We

²³ https://www.dropbox.com/s/gjhs4s6bfa9l4i0/slur_keywords.json

Table S4. This table notes the coefficient values for number of hate speech, number of fear speech and number of total posts per user for different dependent variables. We also note the number of observations and average value of the dependent variable for the entire dataset.

Variable	Coeff of #fear	Coeff of #hate	Coeff of #total	Obs	Mean Dep Var
Basic network properties					
Eigenvector	4.12e-06***	-1.743e-06***	4.319e-07***	9245	0.004
Betweenness	1.668e-07***	-2.019e-07*	2.442e-08***	9245	5.27e-05
Followers	0.0012***	-0.0006***	0.0002***	9245	1012
Following	0.0010***	-0.0005***	0.0002***	9245	926
Time to reach core 0	-8.849e-05	0.0002**	-5.117e-05***	6700	3.52
	Effec	t on normal users	3		
# normal followers	0.0009***	-0.0008***	0.0002***	9170	204
unique normal reposters	0.0030***	-0.0009***	0.0003***	8772	25
# reposts by normal users	0.0036***	-0.0013***	0.0003***	8772	43
unique normal mentions	-0.0004***	-0.0013***	0.0003***	8756	9
# mentions of normal users	0.0022***	-0.0015***	0.0004***	8756	24
unique normal repliers	0.0013***	-0.0008***	0.0003***	9233	13
# replies of normal users	0.0007***	-0.0008***	0.0003***	9237	19

note the coefficients in the Table S4. In terms of position in the follower-followee network, we find that number of fear speech posts shows a slight positive correlation with the centrality measures. In contrast, the number of hate speech posts shows a slight negative correlation. The correlation trend is similar for followers and following, although the coefficients are larger. In terms of time to reach the core, we notice a positive correlation with the number of hate speech posts.

In terms of the number of normal followers, we find the number of fear speech posts correlates positively while the number of hate speech posts correlate negatively. Next, we consider the interaction with the normal followers. We find that the number of fear speech posts positively correlates with the number of normal reposters and total interaction with normal users per user. In contrast, the number of hate speech has a negative correlation. Similar results are found for replies from normal users. We see a negative correlation between normal users mentioned and the number of hate speech as well as fear speech posts. The total number of normal mentions per user is again positively correlated with the number of hate speech posts and negatively correlated with the number of hate speech posts.

S5. Common users

We perform a separate analysis on the users who were common in the initial ExFear and ExHate set and were removed. We have around 445 users in this set (say ExCommon). perform the same set of user-level analysis for the ExCommon users as have been done for the other two sets of users. In terms of the position in the network, we find that average eigen vector centrality of the ExCommon users are similar to that of the ExFear users; the betweenness centrality of the ExCommon users are however larger than that of the ExFear users. Further the ExCommon users are similar to the ExFear users in terms of the average number of followers and percentage of normal followers. ExCommon users have even better interaction with the normal users than the ExFear users, i.e., they get more reposted, mention more normal users and get replied by more normal users. All the results are statistically significant (p < 0.01 M-W U test).

S6. Topic modelling

Topic modeling is a type of statistical modeling for discovering the abstract 'topics' that a collection of documents contain.




Fig. S3. Coherence score vs number of topics for topic modelling in hate speech

Latent Dirichlet Allocation (LDA) is an example of topic model and is used to classify text in a document to a particular topic. Topic modelling is carried out separately for hate and fear speech posts. The posts are preprocessed to remove website links, stop words etc. The posts are then tokenized into list of words. A bag of words corpus is created using the dictionary generated by GENSIM library on the preprocessed posts (65). We use the multicore LDA model from the same repository to create the topics for fear speech and hate speech posts.

We decide the number of topics based on the coherence scores (66). We vary the number of topics ranging from 5 to 30 topics at intervals of 5. For topics of both fear speech and hate speech posts, we find that the highest coherence score is achieved with 15 topics (see Figures S3 and S4). For the LDA model with 15 topics, we note the topic representing words and their abbreviation in Table S5 and S6 respectively. The abbreviations were manually ascribed by seeing topic words associated with a particular topic and 20 random sample posts which had that topic.




Fig. S4. Coherence score vs number of topics for topic modelling in fear speech posts.

Table S5. Topic words and the abbreviated topic names for fear speech posts.

Topic name	Topic words
Jews control media	jews, jewish, israel, people, world
illegal immigration in eu-	europe, invasion, immigration, middle, muslim
rope	
Arab, Jews harming chil-	kids, children, school, people, schools
dren	
illegal immigration in USA	state, illegal, aliens, california, police
violence by Muslim commu-	muslim, attack, attacks, police, muslims
nity	¥ .
left and Islam conspiracy	islam, left, refuse, society, admit
white genocide in South	white, whites, black, genocide, people
Africa	
Muslims raping white	rape, women, children, muslim, girls
women	
Islam ideology dangerous	islam, muslims, religion, sharia, people
immigration destroying cul-	world, western, population, crime, immigra-
ture	tion
refugees from Syrians	israel, syria, isis, terrorist, terrorists
immigrants manipulating	trump, maga, news, speak, america
election	
America needs to wake up	people, country, going, know, time
Jews controlling internet	evil, global, agenda, world, elite
illegal immigrants taking	people, country, like, illegals, need
jobs	

Table S6. Topic words and the abbreviated topic names for hate speech posts.

Topic Name	Topic words
multitarget insults	f*ggot, c*nt, f*cking, asshole, know
insults about Africans	n*ggers, africa, white, whites, hang
insults about Muslims	sh*t, piece, kill, f*cking, hole
insults about Jews	jews, hate, white, k*kes, race
insults about homosexuals	f*ggot, twitter, moron, nazi, f*cking
dehumanising women	like, good, time, know, look
hate against party support-	f*ck, b*tch, f*cking, little, dumb
ers, voters	
hate against communists	trump, traitor, president, obama, vote
and liberals	
insults against Canadians	deport, illegal, b*stards, f*ckers, goat
deport illegal immigrants	country, want, send, need, sh*thole
blaming Africans for every-	white, black, people, free, racist
thing	
insulting women of other	scum, disgusting, wh*re, tr*nny, ugly
community	
targeting Muslim and ho-	muslim, muslims, islam, maga, news
mosexual people	
supporting nazi and insult-	k*ke, f*ggots, right, people, hitler
ing jews	
women projected as prosti-	women, like, d*ck, filthy, mouth
tutes	