Extracting Incidents, Effects, and Requested Advice from MeToo Posts

Vaibhav Garg, Jiaqing Yuan, Rujie Xi and Munindar P. Singh vgarg3@ncsu.edu, jyuan23@ncsu.edu, rxi@ncsu.edu, mpsingh@ncsu.edu

March 21, 2023

Abstract

Warning: This paper may contain trigger words for some readers, especially survivors of sexual harassment.

Survivors of sexual harassment frequently share their experiences on social media, revealing their feelings and emotions and seeking advice. We observed that on Reddit, survivors regularly share long posts that describe a combination of (i) a sexual harassment incident, (ii) its effect on the survivor, including their feelings and emotions, and (iii) the advice being sought. We term such posts MeToo posts, even though they may not be so tagged and may appear in diverse subreddits. A prospective helper (such as a counselor or even a casual reader) must understand a survivor's needs from such posts. But long posts can be time-consuming to read and respond to.

Accordingly, we address the problem of extracting key information from a long MeToo post. We develop a natural language based model to identify sentences from a post that describe any of the above three categories. On ten-fold cross-validation of a dataset, our model achieves a macro F1 score of 0.82.

In addition, we contribute METHREE, a dataset comprising 8,947 labeled sentences extracted from Reddit posts. We apply the LIWC-22 toolkit on METHREE to understand how different language patterns in sentences of the three categories can reveal differences in emotional tone, authenticity, and other aspects.

1 Introduction

In the United States, 81% of women and 43% of men have reported some form of sexual harassment or assault in their lifetime.¹ In 2006, Tarana Burke, an activist, coined the *MeToo* phrase for survivors to share their experiences of sexual harassment. This led to what's known as the MeToo movement, which seeks to report sexual harassment and help survivors know they are not alone. Reddit

¹https://www.nsvrc.org/statistics

is a popular social media platform that hosts multiple forums called subreddits $(r/meToo^2, r/SexualHarassment^3, and r/sexualassault^4)$ for survivors to share their MeToo posts.

Prior studies on MeToo posts (Karlekar and Bansal, 2018; Hassan et al., 2020; Khatua et al., 2018; Ghosh Chowdhury et al., 2019a) focus on classification. For instance, Ghosh Chowdhury et al. (2019a) identify posts describing MeToo personal stories, Karlekar and Bansal (2018) identify the type of sexual harassment, and Hassan et al. (2020) detect the type of sexual violence. All these existing studies identify relevant MeToo posts from a massive stream of social media text. The expectation is that a prospective helper (e.g., the concerned authority) can provide support to the survivor of identified post. However, merely identifying relevant posts is not enough. A prospective helper must understand (i) what happened, (ii) how sexual harassment has affected the survivor, including the feelings and emotions they are going through Field-Springer et al. (2021), and (iii) the advice that the survivor is seeking Andalibi et al. (2016).

Reddit allows a higher number of characters (40k per post) than platforms such as Twitter (250 per post). The MeToo-related subreddits too see long posts (with mean and maximum of 1,881 and 33,432 characters, respectively). For a prospective helper (e.g., the concerned authority), reading long posts that regularly appear on multiple subreddits O'Neill (2018) can be demanding and time consuming. To facilitate this process, we built a natural language model that extracts (from a MeToo post) sentences describing a sexual harassment incident, its effects on the survivor, and the advice requested. We describe these three sentence categories as follows:

- **Sexual harassment incident:** Sentences describing unwelcome sexual advances, sexual behavior, requests for sexual favors, verbal or physical acts of sexual nature, offensive jokes or remarks that are either sexual or based on someone's gender.⁵
- **Effects on the survivor:** Survivors describe how they are affected by revealing their feelings and emotions that arise during or after the harassment incident. Examples of effects include the survivor feeling uncomfortable due to the abuser's actions, or being angry or upset due to the harassment.
- **Requested advice:** Sentences in which survivors seek advice from other platform users. Some examples of advice include asking if the survivor's experience is harassment, how to pursue a legal case, and how to confront the abuser.

Example 1 shows a MeToo $post^6$ and the three categories of sentences that

²https://www.reddit.com/r/meToo/

³https://www.reddit.com/r/SexualHarassment/

⁴https://www.reddit.com/r/sexualassault/

⁵https://www.eeoc.gov/sexual-harassment

 $^{^6\}mathrm{Due}$ to space limitations, we have shown a short MeToo post.

Example 1: Incident, effects, and request for advice

Categories: Sexual harassment incident, Effects, Requested advice

At *<job-location>*, I was appointed as *<job-title>* a month ago. In my office, this one *<person>* pats my shoulder and I feel his hand has lingered a little too long a couple times. Because of my big history around sexual harassment, I feel extremely uncomfortable with his behavior. I keep thinking if I am considering his behavior inappropriate because of my history? I understand that he wants to be friendly and build rapport, but my body thinks his behavior is little off. Reddit, am I overthinking?

Extracted sentences

- In my office, this one <person> pats my shoulder and I feel his hand has lingered a little too long a couple times.
- Because of my big history around sexual harassment, I feel extremely uncomfortable with his behavior.
- I keep thinking if I am considering his behavior inappropriate because of my history?
- Reddit, am I overthinking?

we extract from it.⁷ The extracted text describes inappropriate touching and the survivor's uncomfortable feeling. Moreover, it reveals that the survivor is confused and asks if they are overthinking the incident.

In other cases, survivors may ask for advice such as how to report harassment, how to deal with trauma, and so on. Prior research (Field-Springer et al., 2021; Andalibi et al., 2016) shows that it's important to understand and address the effects and the requested advice.

1.1 Research Questions

Accordingly, we address the following research questions.

RQ_{extract}: How can we extract sentences describing the harassment incident, its effects on the survivor, and the requested advice from a MeToo post?

 $RQ_{extract}$ is important because automatically extracting the three categories of sentences will help a prospective helper understand the incident, the effects on the survivor, and the requested advice without having to read the whole post. Hence, the prospective helper (e.g., the concerned authority) may timely

 $^{^7\}mathrm{The}$ extremely personal MeToo post is paraphrased so that it's not identifiable or searchable.

address the survivor and provide some advice or support. Traditional text summarization models are trained or evaluated on specific tasks but not on MeToo corpora (Jadhav and Rajan, 2018; Cheng and Lapata, 2016; See et al., 2017; Li et al., 2011; Zhang et al., 2012).

RQ_{psycholinguistic}: How do sentences in three categories differ in psychological aspects?

While writing sentences of different categories, the survivor may choose different set of words representing distinct language patterns. RQ_{psycholinguistic} is important to understand how such patterns can reveal psychological aspects such as emotional tone, authenticity, and type of emotion.

1.2 Contributions and Novelty

We make the following contributions.

- To address both questions, we curate METHREE, a dataset containing 8,947 sentences, labeled for the three categories. Constructing a sufficiently natural and precise dataset turns out to be nontrivial. We leverage active learning for labeling with tractable manual effort.
- To address RQ_{extract}, we train a natural language model to extract these three categories of sentences from long MeToo posts. Our approach incorporates modern Natural Language Processing (NLP) techniques to achieve strong results.
- To address RQ_{psycholinguistic}, we apply the LIWC-22 toolkit Boyd et al. (2022) on METHREE, analyze aspects (such as emotional tone, authenticity, type of emotion) for three sentence categories, and compare their LIWC-22 scores (Section 4). This analysis provides a psychological understanding of the essential parts of MeToo posts.

Existing summarization tools are domain-specific and can't be applied on the MeToo corpora. To the best of our knowledge, we are the first ones to study sentence level extraction from long MeToo posts. Moreover, we conduct a comparative study for sentences of the three categories (not done before), based on psychological aspects.

1.3 Key Findings

Our model for extracting three categories of sentences yields a macro F1 score of 82%.

Our psycholinguistic analysis on METHREE reveals the following: (1) sentences describing effects are more negative and emotional than sentences describing incidents and requested advice, (2) the requested advice sentences express a more positive tone than the sentences in the other two categories, and (3) within the effects category, anxiety is prominent, followed by sadness and positive emotion.

A small qualitative study provides additional validation for our contributions (Section 3). For 17 of 20 randomly selected MeToo posts, the extracted text is coherent to understand incident, effects, and requested advice. For 16 of 17 posts, we can construct a helpful response without missing out on any crucial information about the survivor's situation.

2 The METHREE Dataset and Classifier

We consider the problem of extracting three categories of sentences as multilabel classification task. From a post, the sentences predicted as any of the three categories are extracted.

In our adopted active learning approach, the preparation of the dataset and the development of a classifier happen hand-in-hand. For classification, we follow a pool-based active learning approach which is known for training robust models while reducing effort on manual labeling Hanneke (2014). We curate METHREE, a dataset comprising 8,947 labeled sentences (from subreddits: r/meToo, r/sexualassault, and r/SexualHarassment), and train an XLNet model on METHREE.

Pool-based active learning Settles (2012) starts with an initial dataset (denoted by L) that we curated by selecting and labeling sentences, most of which contain certain keywords (Section 2.1). After curating L, in the active learning process, four steps shown in Figure 1 are followed and repeated multiple times. First, a model (denoted by M) is trained on the set L. To do so, we compared the performance of multiple models on the curated L and chose the best-performing one as model M (Section 2.2). Second, an unlabeled dataset U is labeled by the predictions of the trained model M. In our case, since most of the sentences in L contained certain keywords, to avoid bias, we selected U from sentences without those keywords and labeled U through M's predictions. Third, from U, data points whose risk of being mispredicted is sufficiently high are queried (using a query method) and labeled manually. Fourth, U is added to L. For the last two steps, we queried misclassified sentences from the set U and labeled them manually (Section 2.3). We also selected an appropriate query method for our approach (Section 2.4). We repeated the active learning cycle five times to curate the final dataset of 8,947 labeled sentences. We called this dataset as METHREE. In the end, we trained the final model on METHREE to extract sentences (from a long post) that are classified as the incident, its effects, and the requested advice.

2.1 Initial Training Data for Active Learning

To curate our initial training data (set L) for the active learning approach, we followed four steps. First, we scraped MeToo posts from subreddits. Second, we filtered relevant posts from them. Third, we found candidate sentences for




Figure 1: Active learning involves four iterative steps.

each category. Fourth, we labeled a sample of candidate sentences along with other sentences.

Collecting MeToo Posts

We scraped MeToo posts from three subreddits: r/meToo, r/sexualassault, and r/SexualHarassment, for the period 2016-01-01 to 2021-07-18, using Reddit's Pushshift API.⁸ In this process, we collected a total of 9,140 posts. Of these 9,140 posts, there were 263 posts whose content was deleted by the time of our scraping. That's how we were left with 8,877 MeToo posts.

Filtering Relevant MeToo Posts

Some MeToo posts don't share survivors' experiences but share news articles, seek opinions about allegations against celebrities, or promote other platforms. Such posts are irrelevant to our study. We applied the following heuristics to focus on posts containing survivors' personal experiences:

- First-person pronouns: Many survivors while describing their personal experiences, use first-person pronouns in the title of the post. For example, "I started to do something about **my** past assault, but instead of feeling better, it actually gets worse" and "**My** mom's boyfriend tried to get **me** to do things to him". Thus, we checked the presence of first-person pronouns: *i*, *me*, *my*, and *mine* in the title to extract relevant MeToo posts.
- Advice-related keywords: We observed that survivors also use advicerelated keywords in the title. For example, "Need **advice**, or support" and "pls someone read this and **help** me figure out if i was assaulted or not". We used the keyword, *advice*, as seed and queried its synonyms from the Oxford dictionary. We obtained 25 synonyms and manually filtered four of them based on their relevance to our problem. The final list

⁸https://psaw.readthedocs.io/en/latest/

contained help, suggestion, advice, guide, and counsel. We referred to this list of keywords as *advice keywords*. To filter relevant posts, we checked the presence of these keywords in the title. For extracting synonyms, we also explored other corpora such as WordNet Miller (1995) but did not find synonyms that were commonly used.

• Advice-related questions: We observed that many relevant posts ask a question (related to sexual harassment) in the title. For example, "Was this rape?" and "Is this sexual harassment?". Such questions are seeking advice without mentioning any of the advice keywords. Using Part-Of-Speech (POS) tagging Manning (2011), the titles that have an interrogation form and include rape, harassment, assault, and abuse as the object, were filtered.

Posts with titles satisfying one of the above rules were filtered out. We checked random 50 filtered posts for relevancy. Of 50 posts, 47 (94%) were relevant because they either sought support or advice related to their case of sexual harassment. Among these 47 posts, we also found one post written by the survivor's friend but the post still expressed the effects on the survivor and sought advice.

In total, we obtained 4,933 relevant posts using the above heuristics. We might have missed some relevant posts, but the objective here is to filter posts with high precision. This is because high precision (94% in our case) means we can build a dataset of relevant sentences without further pruning. Similar heuristics are used in other studies too Hassan et al. (2020). In this study, out of 4,933 filtered posts, 74.29% (3,665) are from r/sexualassault, followed by r/meToo (17.23%; 850) and r/SexualHarassment (8.47%; 418).

Finding Candidate Sentences

We split each of the 4,933 relevant posts into sentences, using sentence tokenizer of Natural Language Toolkit (NLTK) library⁹. That's how we obtained 102,204 sentences. However, a random sample of these sentences was inefficient in getting sentences that describe incidents, or its effects, or requested advice. Thus, we first found candidate sentences of each category using following keywords:

• Sexual harassment incident: Hassan et al. (2020) create a list of 27 MeToorelated verbs (such as molest, touch, rape, masturbate). We expanded the list by querying synonyms of these verbs through the Oxford dictionary. The resulting list contained 652 verbs. We manually checked them and found 539 relevant verbs, of which only 313 were unique. We called this final set of 313 verbs as harassment keywords. We identified candidate sentences by the presence of one or more harassment keywords in them. That's how we found 30,927 candidate sentences for the incident category.

⁹https://www.nltk.org/api/nltk.tokenize.html

- Effects on the survivor: For identifying candidate sentences in this category, we leveraged two types of keywords. First, we leveraged the NRC word emotion lexicon (Mohammad and Turney, 2013, 2010), which contained a list of words associated with eight emotions. We considered four emotions: anger, disgust, fear, and sadness, that a survivor can express, and use lexicons associated with them. In this process, we found 37,271 emotional candidate sentences. Second, we leveraged synonyms of the word, feel, that are extracted from the Oxford dictionary. We identified 14 synonyms, out of which, eight were relevant to the survivor's feelings. We referred to the final set of keywords (feel, perceive, sense, experience, undergo, bear, endure, suffer) as feel keywords. We found 8,617 candidate sentences containing one or more feel keywords.
- Requested advice: We observed that many questions in MeToo posts are advice seeking. For example, "Was it actually just a mistake and should I forgive him?" and "Am I blowing it out of proportion?". Hence, we considered all questions as candidates for advice seeking sentences. We found 6,354 such candidates. Moreover, we leveraged advice keywords to find an additional 2,678 candidates.

We extracted synonyms from the Oxford dictionary. To find such synonyms, we tried corpora such as WordNet Miller (1995) and PyDictionary¹⁰ but did not find many keywords. For example, while creating the feel keywords, PyDictionary produced no synonyms, and WordNet produced one word, *palpate*, which was uncommon to describe feelings. Thus, we leveraged the Oxford dictionary to extract relevant and commonly used keywords.

Labeling Sentences

Due to presence of keywords (such as harassment keywords, feel keywords, and so on), the candidate sentences are likely to be relevant to the three categories. However, only including candidate sentences can make the training set (set L) biased toward the chosen keywords. Thus, for labeling at this step, we included random 500 sentences not having any keywords, along with 6,900 sampled candidate sentences (including sentences from all sources: harassment keywords, feel keywords, and so on). After discarding duplicates, we were left with 5,947 sentences.

Since a majority of 5,947 sentences still contained chosen keywords, labeling them could still form a biased dataset. Note that this was only the initial training data (set L) in the active learning approach. Later, to mitigate bias, we kept including sentences without any keywords (set U) through multiple repetitions of active learning cycle, as described in Section 2.3.

For 5,947 sentences, three of the authors of this paper were the annotators. Before labeling, they were aware of the uncomfortable and disturbing text present in these sentences. For each sentence, the annotators were asked the following questions:

¹⁰https://pypi.org/project/PyDictionary/

- 1. Does this sentence describe a sexual harassment incident?
- 2. Does this sentence describe the effects of the incident on the survivor?
- 3. Does this sentence ask for any advice?

The annotators read each sentence and answered the above questions as either yes or no. Initially, two annotators labeled 200 sentences as per their understanding of the problem statement. Later, they discussed their disagreements and defined the final labeling instructions for all the annotators to follow. The final labeling instructions are described below:

- 1. Sexual harassment incident: We followed the definition given by the United States Equal Employment Opportunity Commission (EEOC).¹¹ Any unwelcome sexual advances, sexual behavior, requests for sexual favors, verbal or physical acts of sexual nature, offensive jokes, or remarks that were either sexual or based on someone's gender were labeled as sexual harassment. Sexual harassment is not limited to, and we considered harassment cases with all genders.
- 2. Effects on the survivor: We considered survivors' feelings and emotions that arose during or after the incident. Examples range from feeling uncomfortable (due to the abuser's actions) to being afraid (emotion: fear) of reporting sexual harassment.
- 3. Requested advice: We considered sentences in which survivors asked for suggestions on topics related to harassment, e.g., whether to report the incident, where to get therapy from, and how to face the abuser again.

Table 1 illustrates examples of each category.¹² The first example describes inappropriate physical behavior and is considered sexual harassment. The second example describes that the survivor is sexually exploited (sexual harassment) and suffers from depression and anxiety (effects). In the third example, the survivor expresses fear (by mentioning "freak out") and seeks advice about dealing with it. In the last example, the survivor seeks advice relating to the legal process.

All 5,947 sentences were divided among the three annotators (let's denote them by A_1 , A_2 , and A_3) such that two of the annotators labeled each sentence. After labeling all the sentences, we obtained Cohen's kappa scores Cohen (1960) of 0.772 (for sexual harassment incident), 0.774 (for effects), and 0.865 (for requested advice). These scores indicated that we achieved substantial agreement for two categories: sexual harassment incident and effects, and almost perfect agreement for the requested advice category. Table 2 also shows Cohen's kappa scores for each pair of annotators. Moreover, the first author resolved all the disagreements. The labeled 5,947 sentences form the initial training data (set L) for active learning.

¹¹https://www.eeoc.gov/sexual-harassment

¹²For anonymity, we have masked abusers' details.

Table 1: Relevant examples according to labeling instructions.

Sentence	Incident	Effects	Requested advice
he slid his hand up my leg and into my shorts.	\checkmark		
I was sexually used by <abuser> on many occasions I am in a constant battle with major depression, crippling real event OCD (I ruminate for 16 hours/day) & debilitating anxiety.</abuser>	~	~	
I'm freaking out and have no one to talk to because no one knows about him or what hap- pened What do I do?		~	~
Does anyone know how a legal advocate works and what you ex- perienced with them?			 ✓

Table 2: Cohen's kappa scores for each pair of annotators.

Annotators	Incident	Effects	Requested advice
A_1, A_2	0.798	0.793	0.891
A_2, A_3	0.720	0.725	0.843
A_3, A_1	0.795	0.801	0.861
Total	0.772	0.774	0.865

2.2 Initial Model to Extract Sentences

After set L is curated, the next step is to train model M. We consider our problem as a multilabel classification task in which each sentence is an input to the model and the output has three binary labels (one label for each category). We trained and evaluated multiple methods on 5,947 labeled sentences (set L) as described below.

For each of 5,947 sentences, we computed embeddings such as Sentence-BERT Reimers and Gurevych (2019), TF-IDF Cahyani and Patasik (2021), GloVe,¹³ Pennington et al. (2014) Word2Vec¹⁴ Mikolov et al. (2013), and Uni-

 $^{^{13}\}mathrm{We}$ used Stanford's GloVe model trained on the Wikipedia dataset, which returns a 100-dimension word vector.

 $^{^{14}\}mathrm{We}$ used Word2Vec trained on the Google News dataset and returns a 300-dimension vector.

versal Sentence Encoder (USE) Cer et al. (2018). For each embedding, the sentence vector was used as an input to a multilabel classifier. For GloVe and Word2Vec, we averaged word vectors to form the sentence vector. For classification, we tried Logistic Regression (LR) Dreiseitl and Ohno-Machado (2002), Support Vector Machine (SVM) Cervantes et al. (2020), and Random Forest (RF), and report the best method.

In addition to embedding-based methods, we also applied transformer-based approaches such as RoBERTa Liu et al. (2019a) and XLNet Yang et al. (2019). We fine-tuned RoBERTa and XLNet on set L by adding an output layer in the forward direction. The output layer contained three units, one dedicated to each category. Both the models minimized binary cross entropy over five epochs. Moreover, the training batch size and tokenizer length were set to 32 and 256, respectively.

We computed average F1, precision, and recall scores for the approaches described above over ten-folds of set L. We also test keywords approach in which we search sentences by category-wise keywords (keywords used in Section 2.1). The sentences containing keywords were predicted 1 for that category and others were predicted 0.

TF-IDF, GloVe, Word2Vec, Keyword search, and USE underperform as compared to other methods.

Sentence-BERT followed by SVM achieves the highest macro precision (0.84). However, it shows lower macro recall (0.66) than RoBERTa (0.84) and XLNet (0.87). Overall, XlNet outperforms all other methods by achieving the highest macro F1 score (0.82). Thus, we choose XLNet as our active learning model (model M).

2.3 Completing Active Learning Cycles

After model M is trained, it's time to make predictions on the set U and label it. To mitigate the risk of a biased dataset, we chose the set U to be a random sample of 500 sentences not containing any keywords. The already trained model M labeled set U through its predictions. From U, we queried potentially misclassified sentences for manual labeling, using a query method described in Section 2.4. Further, the first active learning cycle (Figure 1) was completed by adding labeled U to L. We repeated this for four more cycles that involves the training XLNet on the new L, predicting on new U, labeling new U (through M's predictions and manually labeling the queried sentences), and adding new U to L. Overall, a total of five cycles added total 2500 labeled sentences (each time U having 500 sentences without keywords) to the initially 5,947 labeled ones. As a result, the final L became to be of size 8,447. Moreover, while selecting appropriate query method for our approach, as discussed in Section 2.4, we labeled additional 500 sentences without keywords. By including all these labeled sentences, we formed the final dataset, METHREE, of size 8,947.

In METHREE, there are 4,331 (48.4%) sentences that belong to at least one category, and 4,616 (51.6%) others. Figure 2 shows the Venn distribution of 4,331 sentences among three categories.

Finally, we trained XLNet on METHREE which is used to extract sentences from long posts. Over ten cross validation of METHREE, the model achieved 0.82 macro F1 score (0.78 for incident, 0.79 for effects, and 0.89 for requested advice), 0.86 macro recall (0.82 for incident, 0.83 for effects, and 0.92 for requested advice), and 0.78 macro precision (0.74 for incident, 0.76 for effects, and 0.85 for requested advice).




Figure 2: Venn diagram showing the distribution of sentences across the three categories.

2.4 Selecting Query Method

Uncertainty sampling (Culotta and McCallum, 2005; Dagan and Engelson, 1995), a widely used querying method, finds uncertain predictions based on the model's prediction probability on the set U. Such uncertain data points are queried for manual labeling. However, uncertainty sampling methods (such as least confidence and entropy) did not work in our case. This is because in the first active learning cycle, model M (XLNet trained on 5,947 sentences; Section 2.2) predicted low probabilities on the sentences without any keywords (set U). We validated this by predicting on 100 such sentences, where the mean prediction probability was 0.08 (deviation= 0.23) for incident category, 0.10 (deviation= 0.27) for effects, and 0.05 (deviation= 0.21) for requested advice. Due to most of the probabilities being low, uncertainty sampling methods (such as least confidence and entropy) could not discriminate between misclassified and other sentences.




Figure 3: 0.038177.

ROC curve Figure 4: ROC curve Figure 5: incident sentences under effects sentences under requested-advice positive class. The area positive class. The area tences 0.008476.

ROC curve showing true positive and showing true positive and showing true positive and false positive rates, while false positive rates, while false positive rates, while considering misclassified considering misclassified considering misclassified senunder positive under the curve is 0.84. under the curve is 0.83. class. The area under the The best threshold is The best threshold is curve is 0.98. The best threshold is 0.007874.

To select an appropriate query method, we found a threshold on the prediction probability, using which we could query from U. To find that threshold, we used a set U', another random sample of 500 sentences not having any keywords. On U', we plotted the Receiver Operating Characteristic (ROC) curve and computed Youden's J-statistic Youden (1950) as described below. Since this query method was selected during the first active learning cycle, the model M referred below is XLNet trained on 5.947 sentences (Section 2.2).

- 1. The first author labeled the set U'. On 5.947 initially labeled sentences (Section 2.1), we achieved substantial agreement for the incident and effects category and almost perfect agreement for the requested advice. Hence, we assumed that all the annotators (three authors of this paper) stick to the same labeling definitions and used one of the annotators (the first author) for this small task.
- 2. The model M made predictions on the set U'.
- 3. We split the set U' into a set of 400 sentences (set V) and another set containing remaining 100 sentences (set T).
- 4. We leveraged the set V to fine-tune the threshold. For each category, we considered the misclassified sentences in set V and found a threshold (on the predictions' probability) that could retrieve them. We found that out of 400 sentences, model M misclassified 28 sentences for the incident category, 38 for effects, and 9 for the requested advice category. Since we needed to retrieve these sentences, for each category, we considered misclassified sentences under positive class and others under negative class, while plotting true positive and false positive rates in ROC. Figures 3-5 show ROC and the area under the curve for each category. From

each ROC curve, we found the best threshold (using Youden's J-statistic Youden (1950)) that maximized recall (for positive class) and minimized false positive rate.

For the incident category, we found 0.038177 as the threshold, above or equal to which sentences can be queried. Similarly, we found a threshold of 0.008476 for the effects category and 0.007874 for the requested advice category. We also tried combining these three thresholds into a single threshold but that did not query more misclassified sentences than the individual threshold case.

5. For each category, to ensure that we did not miss out on the misclassified sentences, we also queried 30 sentences below the threshold for every 100 predictions. For example, the model M predicted on the set V which has 400 sentences (4 times 100), we also queried 4*30 = 120 sentences below the threshold for each category.

To sum up, our query method is: for each category, query (i) sentences with prediction probability above or equal to the threshold, and (ii) 30 sentences below the threshold for every 100 predictions.

Using the above query method, we could query the following number of misclassified sentences from V: 25 (89.28%) of 28 for the incident, 35 (92.10%) of 38 for effects, and 9 (100%) of 9 for requested advice. Since set V was used for fine-tuning, we also tested our query method on the unseen set T.

6. We leveraged the set T to test our query method. In the set T, M misclassified 10 sentences in the incident category, 4 in the effects, and 3 in the requested advice. Our query method retrieved 9 (90%) misclassified incident sentences and all misclassified cases (100%) in the other two categories.

For each time the active learning cycle was repeated (discussed in Section 2.3), we used the above query method to retrieve potential misclassified sentences from U and manually labeled retrieved sentences. For manual labeling, each of the three annotators (authors of this paper) labeled retrieved sentences for a category.

3 Qualitative Analysis

We applied the final XLNet model (trained on METHREE as described in Section 2.3) on random 20 posts (containing at least a thousand characters) and followed the below steps for each post.

First, we split the post into multiple sentences, using the sentence tokenizer of the NLTK library.¹⁵. Second, we provided all the sentences as input to model M and arranged the extracted sentences in the order they were present in the

¹⁵https://www.nltk.org/api/nltk.tokenize.html

post. Third, along with the post title, we read the extracted sentences in the arranged order and checked if extracted sentences are coherent to understand the incident, effects, and requested advice. For 17 out of 20 posts, the extracted text was coherent.

Further, we divide 17 posts and their extracted text among three annotators (the same authors A_1 , A_2 , and A_3) such that each post was read by one annotator and its extracted text was read by the other. Each annotator was asked to construct a supportive or advice-offering response based on details present in the given text. Providing such responses is one kind of help to the survivor Schneider and Carpenter (2019); Andalibi et al. (2016). For each post, the first author analyzed the difference between the response to the post (R_p) and the response to the extracted text (R_e). Only in 1 of 17 cases, a crucial detail (about the survivor's situation) was missed by R_e that was part of R_p . This was because that detail was also missing from the extracted text. However, for 16 of 17 cases, R_e did not miss out any crucial details that were part of R_p . Our model can potentially be used to understand the essential details (without reading long posts) and construct a helpful response based on the extracted text. In turn, this can speed up the process of providing help on a large scale.

4 Psycholinguistic Analysis

LIWC-22 toolkit Boyd et al. (2022) contains 100 in-build dictionaries, where each dictionary consisted of lexicons, emoticons, and other verbal constructs to identify the psychological aspects from a post. We applied LIWC-22 on METHREE dataset and compared the sentences of the three categories on two types of scores: (i) summary and (ii) affect scores. We show our analysis below.

4.1 LIWC-22 Summary Analysis

For a sentence, LIWC-22 Boyd et al. (2022) yielded four types of summary scores: analytic (depicting analytical and logical thinking patterns), clout (depicting social status, confidence, or leadership), authentic (depicting how much people reveal about themselves, without any filter), and tone (depicting the emotional tone. The lower the score, the more negative the tone). On METHREE, we computed these summary scores (using the LIWC-22 toolkit) for each sentence that belongs to the incident, effects, and advice categories. Further, for each category, we averaged these scores. Figure 6 shows category-wise average summary scores. All three categories of sentences have low average scores for analytic and clout. This indicates less leadership, confidence, and logical thinking patterns in all such sentences. The same low trend is visible for the tone variable, meaning that all three categories of sentences possess negative tone. Moreover, the most negative tone is observed in the effects category, leading to the lowest tone score.

However, the three categories have high average scores for authenticity. We deduced that the survivors share their MeToo experiences without

any filter. They are open to reveal about themselves, especially through the effects sentences (having the highest authenticity score). Through effects sentences, survivors reveal their feelings and emotions, which can be the reason for the highest authenticity score. Some examples of effects sentences having high authenticity include: "I feel worthless," "I'm livid," and "I'm scared."

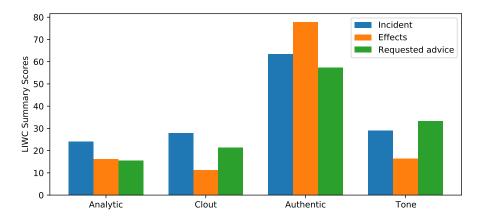


Figure 6: LIWC average summary scores for the incident, effects, and requested advice categories. Analytic and clout scores are low for each category. The low trend is also present in tone, indicating a negative tone in all three categories. However, high scores for authenticity indicate that the survivors openly share their experiences, especially through effects sentences.

4.2 LIWC-22 Affect Analysis

For a sentence, LIWC-22 Boyd et al. (2022) yielded four types of affect scores: tone_pos (positive tone), tone_neg (negative tone), emotion, and swear. Figure 7 shows average affect scores for all three categories. It is evident that effects sentences are more negative ($\mu = 7.16$) and emotional ($\mu = 5.56$) than incident (tone_neg $\mu = 2.50$ and emotion $\mu = 1.27$) and requested advice (tone_neg $\mu = 4.06$ and emotion $\mu = 2.01$). Also, note that requestedadvice sentences show a more negative tone than incident sentences. In such negative and advice seeking sentences, the survivors sometimes blame themselves and seek validation from others. For example, "Is it my fault for drinking too much?". Despite such negative cases, the same category shows many other positive tone cases. As a result, in terms of positive tone, sentences requesting advice ($\mu = 4.54$) are ahead of incident ($\mu = 2.01$) and effects sentences ($\mu = 1.84$). Moreover, we found that all three categories, in general, don't contain swear words, as depicted by their low swear scores.

As effects sentences are more emotional than the other two categories, we delved into what types of emotions are reflected by effects sentences. For a

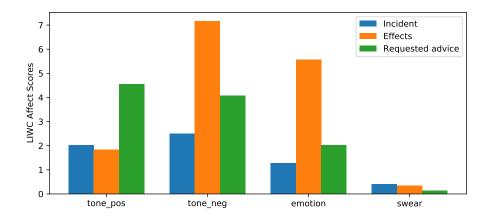


Figure 7: LIWC average affect scores. Effects sentences are more negative and emotional than incidents and requested advice. In terms of a positive tone, sentences requesting advice are ahead of incidents and effects. In general, all three categories of sentences don't contain swear words.

sentence, LIWC-22 yielded four types of emotional scores: emo_pos (positive emotion), emo_anx (anxiety), emo_anger (anger), and emo_sad (sadness). We found that effects sentences show more anxiety ($\mu = 1.53$), followed by sadness ($\mu = 0.70$), anger ($\mu = 0.43$), and positive emotion ($\mu = 0.39$).

5 Related Work

There has been extensive research in analyzing MeToo posts and finding useful insights (Manikonda et al., 2018; Gautam et al., 2020; Deal et al., 2020; Field et al., 2019; Reyes-Menendez et al., 2020). However, only a few studies have looked MeToo experiences from classification perpective. Karlekar and Bansal (2018) leverage the MeToo experiences posted on the SafeCity website¹⁶, an online forum to report sexual harassment. They collect 9,892 MeToo experiences that convey one of the three types of harassment: (i) groping or touching, (ii) staring or ogling, and (iii) commenting. Further, they train a deep neural network to identify the type of harassment experienced by the survivor. Yan et al. (2019) improve the performance of this classification by proposing a quantuminspired density matrix encoder. Liu et al. (2019b) leverage the same dataset and annotate it for attributes such as the abuser's age (below 30 or older), the abuser's relation with the survivor (for example, relative or teacher), location of harassment (for example, park or street). They propose a framework to identify these attributes from a MeToo experience. Bauer et al. (2020) also leverage the SafeCity dataset and build a chatbot system to help survivors. The SafeCity

¹⁶https://www.safecity.in/

dataset contains concise experiences (typically 3-4 sentences long) and is unfit to extract sentences in our case.

Moreover, Hassan et al. (2020) train a model on $520,761 \ \#MeToo$ hashtag tweets to identify tweet level attributes, such as the category of sexual violence reported, the survivor's identity (tweeter or not), the survivor's gender. They also achieve 80.4% precision and 83.4% recall in identifying sexual violence reports. Ghosh Chowdhury et al. (2019b) label 5,119 tweets for types: (i) disclosure and (ii) nondisclosure. The tweets that include a survivor's personal experience are annotated as disclosure and others as non-disclosure. Out of 5,119, they find 1,126 (22%) tweets under disclosure category. Moreover, they propose a language model to classify tweets into two types. Moreover, other studies such as Khatua et al. (2018) and Ghosh Chowdhury et al. (2019a) also focus on similar classification tasks. All these works perform classification tasks on each MeToo post. However, our work focuses on sentence-level extraction of sexual harassment incident, its effects on the survivor, and requested advice.

Traditional text summarization works (Jadhav and Rajan, 2018; Cheng and Lapata, 2016; See et al., 2017; Li et al., 2011; Zhang et al., 2012) are trained or evaluated on other domain specific datasets such as news datasets but are not built for MeToo context. Our work is the first attempt to extract text from long MeToo posts to the best of our knowledge.

6 Discussion

We now discuss our conclusion, our work's limitations, and possible future directions.

6.1 Conclusion

The survivors of sexual harassment frequently share their long MeToo posts on subreddits. Using the active learning approach, we trained XLNet model to extract sentences describing (i) the sexual harassment incident, (ii) the effects on the survivor, and (iii) the requested advice, from such posts. We also curated METHREE, a dataset of 8,947 sentences labeled for the three categories, and conducted psycholinguistic analysis on it. On ten-fold cross-validation of METHREE, our model achieved a macro F1 score of 0.82. The sentences extracted by our model can help a prospective helper understand essential details without having to read the entire post. As a result, it can potentially speed up the process of providing help to the survivors.

6.2 Limitations and Future Work

Our work suffers from some limitations, and a few of them also motivate future directions of improvement. First, sometimes the extracted sentences may not be coherent or miss some details about the survivor's situation. That's why we don't claim our model to be a summarization tool. However, according to our analysis in Section 3, non coherent cases and the cases requiring details beyond the extracted text are only a few (4 of 20). In the future, our work could be extended to extract other important sentences which can summarize the whole post. Second, our model is trained on the sentences scraped from only three subreddits. We expect the nature of sentences in METHREE to be similar to sentences present on other MeToo-related subreddits. However, we plan to fine-tune the model before applying it on the other subreddits.

We can also extend our work to generate an automated response based on the extracted incidents, effects, and requested advice. The automated response after slight corrections by human interventions can offer support and advice to the survivor. Moreover, the similarity between the advice-seeking sentences and users' responses can assess how relevant each response is. This way platform will be able to show highly relevant responses above the less helpful ones.

7 Broader Perspective and Ethical Considerations

Although we extracted text from long posts to help survivors, we acknowledge some limitations and possible misinterpretations that may occur, especially with the data on such a sensitive topic. We discuss them below.

- 1. **Consent:** Our data was scraped from the public Reddit posts. Hence, we did not take the consent of the survivors writing such posts. Moreover, as described by Ghosh Chowdhury et al. (2019b), some survivors may get uncomfortable if they are reached out for consent.
- 2. Anonymity: We did not save survivors' personal information such as usernames, or users' history of posts. For the example sentences presented in this paper, we also removed potentially identifying information, such as the survivor's age, job title, and location. Moreover, we paraphrased the example MeToo post. We don't plan to release METHREE publicly.
- 3. Labeling disturbing text: The sentences from MeToo posts can be disturbing to read, especially for people who have gone through a similar experience. Therefore, we didn't hire crowd workers or volunteers to for any labeling task. Instead, the three authors of this paper did it.
- 4. **Potential misinterpretation:** We were extremely aware of the sensitivity of this research before labeling sentences. However, we may have misinterpreted some MeToo experiences. That's why we don't claim that our labeling is fully accurate.

References

N. Andalibi, O. Haimson, M. Choudhury, and A. Forte, "Understanding social media disclosures of sexual abuse through the lenses of support seeking and anonymity," in *Proceedings of the 2016 CHI Conference on Human Factors*

in Computing Systems. San Jose, California: Association for Computing Machinery, May 2016, pp. 3906–3918.

- T. Bauer, E. Devrim, M. Glazunov, W. L. Jaramillo, B. Mohan, and G. Spanakis, "#metoomaastricht: Building a chatbot to assist survivors of sexual harassment," in *Machine Learning and Knowledge Discovery in Databases.* Cham: Springer International Publishing, Sep. 2020, pp. 503–521.
- R. L. Boyd, A. Ashokkumar, S. Seraj, and J. W. Pennebaker, "The development and psychometric properties of liwc-22," 2022.
- D. E. Cahyani and I. Patasik, "Performance comparison of tf-idf and word2vec models for emotion text classification," *Bulletin of Electrical Engineering and Informatics*, vol. 10, no. 5, pp. 2780–2788, 2021.
- D. Cer, Y. Yang, S. Kong, N. Hua, N. Limtiaco, R. S. John, N. Constant, M. Guajardo-Cespedes, S. Yuan, C. Tar, Y. Sung, B. Strope, and R. Kurzweil, "Universal sentence encoder," *CoRR*, vol. abs/1803.11175, pp. 1–7, 2018.
- J. Cervantes, F. Garcia-Lamont, L. RodrAguez-Mazahua, and A. Lopez, "A comprehensive survey on support vector machine classification: Applications, challenges and trends," *Neurocomputing*, vol. 408, pp. 189–215, 2020.
- J. Cheng and M. Lapata, "Neural summarization by extracting sentences and words," in *Proceedings of the 54th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*. Berlin, Germany: Association for Computational Linguistics, Aug. 2016, pp. 484–494.
- J. Cohen, "A coefficient of agreement for nominal scales," *Educational and Psy*chological Measurement, vol. 20, no. 1, pp. 37–46, 1960.
- A. Culotta and A. McCallum, "Reducing labeling effort for structured prediction tasks," in AAAI, vol. 5, 2005, pp. 746–751.
- I. Dagan and S. P. Engelson, "Committee-based sampling for training probabilistic classifiers," in *Machine Learning Proceedings*. Elsevier, 1995, pp. 150–157.
- B.-E. Deal, L. S. Martinez, B. H. Spitzberg, and M.-H. Tsou, ""i definitely did not report it when i was raped...# webelievechristine# metoo": A content analysis of disclosures of sexual assault on twitter," *Social Media+ Society*, vol. 6, no. 4, p. 2056305120974610, 2020.
- S. Dreiseitl and L. Ohno-Machado, "Logistic Regression and Artificial Neural Network Classification Models: a Methodology Review," *Journal of Biomedical Informatics*, vol. 35, no. 5, pp. 352–359, 2002.
- A. Field, G. Bhat, and Y. Tsvetkov, "Contextual affective analysis: A case study of people portrayals in online #metoo stories," in *Proceedings of the* 13th International AAAI Conference on Web and Social Media, vol. 13, 2019, pp. 158–169.

- K. Field-Springer, H. Draut, F. Babrow, and M. Sandman, "(re)claiming stories in the #metoo movement: Righting epistemic wrongs of physical, mental, and emotional harms of sexual violence," *Health Communication*, vol. 0, no. 0, pp. 1–10, Feb. 2021.
- A. Gautam, P. Mathur, R. Gosangi, D. Mahata, R. Sawhney, and R. R. Shah, "#metooma: Multi-aspect annotations of tweets related to the metoo movement," in *Proceedings of the International AAAI Conference on Web and* Social Media, vol. 14, 2020, pp. 209–216.
- A. Ghosh Chowdhury, R. Sawhney, P. Mathur, D. Mahata, and R. Ratn Shah, "Speak up, fight back! detection of social media disclosures of sexual harassment," in *Proceedings of the 2019 Conference of the North American Chapter* of the Association for Computational Linguistics: Student Research Workshop. Minneapolis, Minnesota: Association for Computational Linguistics, Jun. 2019.
- A. Ghosh Chowdhury, R. Sawhney, R. R. Shah, and D. Mahata, "#YouToo? detection of personal recollections of sexual harassment on social media," in *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*. Florence, Italy: Association for Computational Linguistics, Jul. 2019, pp. 2527–2537.
- S. Hanneke, "Theory of active learning," Foundations and Trends in Machine Learning, vol. 7, no. 2–3, 2014.
- N. Hassan, A. Poudel, J. Hale, C. Hubacek, K. T. Huq, S. K. Karmaker Santu, and S. I. Ahmed, "Towards automated sexual violence report tracking," in *Proceedings of the 14th International AAAI Conference on Web and Social Media*, Georgia, USA, Jun. 2020, pp. 250–259.
- A. Jadhav and V. Rajan, "Extractive summarization with SWAP-NET: Sentences and words from alternating pointer networks," in *Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*. Melbourne, Australia: Association for Computational Linguistics, Jul. 2018, pp. 142–151.
- S. Karlekar and M. Bansal, "SafeCity: Understanding diverse forms of sexual harassment personal stories," in *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*. Brussels, Belgium: Association for Computational Linguistics, Oct. 2018, pp. 2805–2811.
- A. Khatua, E. Cambria, and A. Khatua, "Sounds of silence breakers: Exploring sexual violence on twitter," in *Proceedings of the 2018 IEEE/ACM International Conference on Advances in Social Networks Analysis and Mining.* Barcelona: IEEE Press, 2018, pp. 397–400.
- P. Li, Y. Wang, W. Gao, and J. Jiang, "Generating aspect-oriented multidocument summarization with event-aspect model," in *Proceedings of the*

2011 Conference on Empirical Methods in Natural Language Processing. Edinburgh, Scotland, UK.: Association for Computational Linguistics, Jul. 2011.

- Y. Liu, Q. Li, X. Liu, Q. Zhang, and L. Si, "Sexual harassment story classification and key information identification," in *Proceedings of the 28th ACM International Conference on Information and Knowledge Management*. New York, NY, USA: Association for Computing Machinery, Nov. 2019, pp. 2385– 2388.
- Y. Liu, M. Ott, N. Goyal, J. Du, M. Joshi, D. Chen, O. Levy, M. Lewis, L. Zettlemoyer, and V. Stoyanov, "Roberta: A robustly optimized bert pretraining approach," arXiv preprint arXiv:1907.11692, 2019.
- L. Manikonda, G. Beigi, S. Kambhampati, and H. Liu, "#metoo through the lens of social media," in *Proceedings of the 11th International Conference* on Social, Cultural, and Behavioral Modeling. Washington, USA: Springer Verlag, Nov. 2018, pp. 104–110.
- C. D. Manning, "Part-of-speech tagging from 97% to 100%: Is it time for some linguistics?" in *Proceedings of the Computational Linguistics and Intelligent Text Processing*. Berlin: Springer, Feb. 2011, pp. 171–189.
- T. Mikolov, I. Sutskever, K. Chen, G. Corrado, and J. Dean, "Distributed representations of words and phrases and their compositionality," in *Proceedings of the 26th International Conference on Neural Information Processing Systems Volume 2*, ser. NIPS. Lake Tahoe, Nevada: Neural Information Processing Systems Foundation, Dec. 2013, pp. 3111–3119.
- G. A. Miller, "Wordnet: A lexical database for english," Communications of the ACM, vol. 38, no. 11, pp. 39–41, Nov. 1995.
- S. Mohammad and P. Turney, "Emotions evoked by common words and phrases: Using mechanical turk to create an emotion lexicon," in *Proceedings of the* NAACL HLT 2010 Workshop on Computational Approaches to Analysis and Generation of Emotion in Text. Los Angeles, California: Association for Computational Linguistics, Jun. 2010, pp. 26–34.
- S. M. Mohammad and P. D. Turney, "Crowdsourcing a word-emotion association lexicon," *Computational Intelligence*, vol. 29, no. 3, pp. 436–465, 2013.
- T. O'Neill, "'today i speak': Exploring how victim-survivors use reddit," International Journal for Crime, Justice and Social Democracy, vol. 7, no. 1, p. 44, 2018.
- J. Pennington, R. Socher, and C. Manning, "GloVe: Global vectors for word representation," in *Proceedings of the Conference on Empirical Methods in Natural Language Processing (EMNLP)*. Doha, Qatar: Association for Computational Linguistics, Oct. 2014, pp. 1532–1543.

- N. Reimers and I. Gurevych, "Sentence-BERT: Sentence embeddings using Siamese BERT-networks," in Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP). Hong Kong, China: Association for Computational Linguistics, Nov. 2019, pp. 3982–3992.
- A. Reyes-Menendez, J. R. Saura, and S. B. Thomas, "Exploring key indicators of social identity in the #metoo era: Using discourse analysis in ugc," *International Journal of Information Management*, vol. 54, p. 102129, 2020.
- K. T. Schneider and N. J. Carpenter, "Sharing# metoo on twitter: Incidents, coping responses, and social reactions," *Equality, Diversity and Inclusion: An International Journal*, 2019.
- A. See, P. J. Liu, and C. D. Manning, "Get to the point: Summarization with pointer-generator networks," in *Proceedings of the 55th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*. Vancouver, Canada: Association for Computational Linguistics, Jul. 2017, pp. 1073–1083.
- B. Settles, "Active learning," Synthesis Lectures on Artificial Intelligence and Machine Learning, vol. 6, no. 1, pp. 1–114, 2012.
- P. Yan, L. Li, W. Chen, and D. Zeng, "Quantum-inspired density matrix encoder for sexual harassment personal stories classification," in 2019 IEEE International Conference on Intelligence and Security Informatics, ISI. Shenzhen, China: Institute of Electrical and Electronics Engineers Inc., Jul. 2019, pp. 218–220.
- Z. Yang, Z. Dai, Y. Yang, J. Carbonell, R. R. Salakhutdinov, and Q. V. Le, "Xlnet: Generalized autoregressive pretraining for language understanding," *Advances in Neural Information Processing Systems*, vol. 32, 2019.
- W. J. Youden, "Index for rating diagnostic tests," *Cancer*, vol. 3, no. 1, pp. 32–35, 1950.
- R. Zhang, W. Li, and D. Gao, "Generating coherent summaries with textual aspects," in *Proceedings of the 26th AAAI Conference on Artificial Intelligence*. Toronto, Ontario, Canada: AAAI Press, Jul. 2012, pp. 1727–1733.