

cTBLS: Augmenting Large Language Models with Conversational Tables

Anirudh S Sundar, Larry Heck
AI Virtual Assistant (AVA) Lab
The Georgia Institute of Technology
{asundar34, larryheck}@gatech.edu

Abstract

An open challenge in multimodal conversational AI requires augmenting large language models with information from textual and non-textual sources for multi-turn dialogue. To address this problem, this paper introduces Conversational Tables (cTBLS), a three-step encoder-decoder architecture to retrieve tabular information and generate dialogue responses grounded on the retrieved information. cTBLS uses Transformer encoder embeddings for Dense Table Retrieval and obtains up to 5% relative improvement in Top-1 and Top-3 accuracy over sparse retrieval on the HYBRIDIALOGUE dataset. Additionally, cTBLS performs tabular knowledge retrieval using encoder and decoder models, resulting in up to 46% relative improvement in ROUGE scores and better human evaluation for response generation on HYBRIDIALOGUE.

1 Introduction

Equipping conversational AI with multimodal capabilities expands the scope of conversations humans have with such systems. An ongoing challenge in multimodal conversational AI is the development of systems that generate conversationally coherent responses grounded in textual and non-textual modalities (Sundar and Heck, 2022).

Though large language models store real-world information in their parameters (Roberts et al., 2020; Heinzerling and Inui, 2021), augmenting them with conversation-dependent extrinsic knowledge to generate accurate responses is an open research problem. While humans can process tables by looking up contextual information based on rows and columns, large language models struggle to retrieve relevant information in the presence of conversationally plausible distractors. To address this problem, this paper introduces Conversational Tables (cTBLS), a three-step encoder-decoder architecture to augment large language models with tabular information for conversations.

In the first step, cTBLS uses a dual-encoder Transformer-based (Vaswani et al., 2017) Dense Table Retriever (DTR) to retrieve the correct table from the entire corpus based on the user’s query. The second step consists of a fine-tuned dual-encoder Transformer to track system state and rank cells in the retrieved table based on their relevance to the conversation. Finally, cTBLS prompts GPT-3.5 with the ranked cells to generate a natural language response. Figure 1 provides an overview of the system architecture.

While prior work separates knowledge retrieval and response generation between encoder and decoder models, this paper shows that large language model decoders can jointly perform knowledge retrieval and response generation over ranked knowledge sources. cTBLS uses a Transformer encoder to rank knowledge sources conditioned on an input query, existing dialogue context, and a retrieved table. Following the ranking process, cTBLS uses a Transformer decoder to filter out irrelevant information and retrieve knowledge for generating the correct response.

HYBRIDIALOGUE (Nakamura et al., 2022), a dataset of conversations grounded on structured and unstructured knowledge from tables and text, introduces the task of responding to messages by utilizing information from external knowledge and prior dialogue turns. cTBLS builds on the baseline HYBRIDIALOGUE model for table retrieval, system state tracking, and response generation. Resulting experiments demonstrate up to 5% relative improvement in table retrieval and up to 46% improvement in ROUGE scores on generated responses. Additionally, human evaluation shows that cTBLS is preferred over previous methods.

Our contributions are as follows:

1. We introduce Conversational Tables (cTBLS), a Transformer-based model addressing the problem of response generation grounded on tabular knowledge.

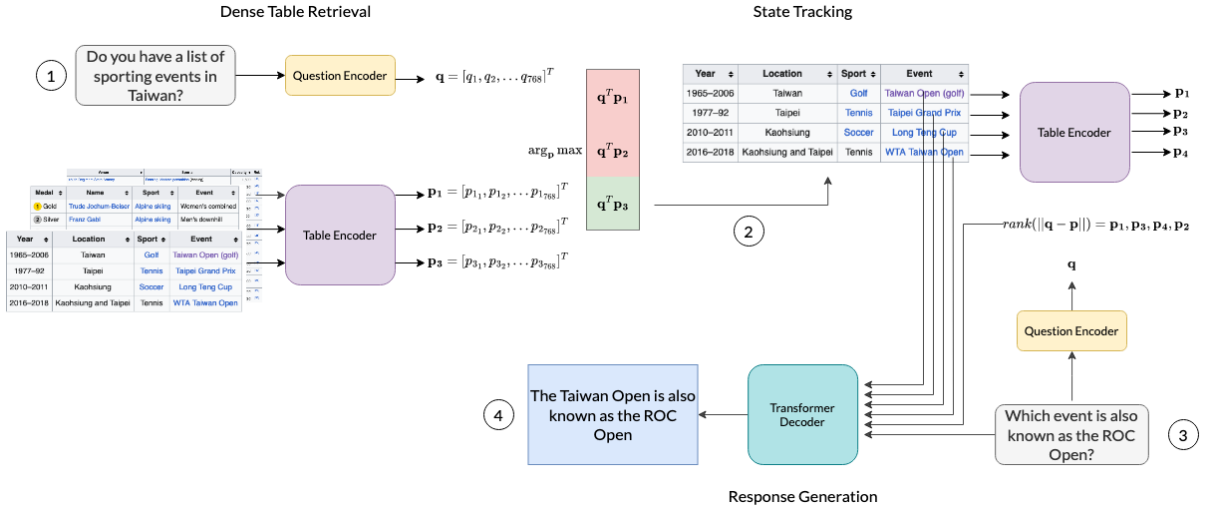


Figure 1: cTBLS System Architecture Overview. Dense Table Retrieval identifies the table most relevant to the initial query. The retrieved table is provided to the state tracker for follow-up queries. State tracking ranks cells in the table based on their ability to answer a follow-up query. Response Generation utilizes a Transformer Decoder provided with the ranked cell information and the follow-up query to convert tabular data into a natural language response and continue the conversation.

2. We experimentally demonstrate that Dense Table Retrieval using neural models fine-tuned with a summary of tabular information outperforms keyword-matching-based sparse techniques for table retrieval.
3. We show that augmenting state-of-the-art large language model decoders using knowledge sources ranked by encoder language models yields better results on automatic (ROUGE) and human (Coherence, Fluency, and Informativeness) evaluation for knowledge-grounded response generation while limiting the number of API calls to these models.

In this paper, we introduce the cTBLS system and demonstrate its application to the HYBRIDIALOGUE dataset. In Section 2, we discuss prior work in the fields of Table Question Answering and Knowledge Grounded Response Generation. Section 3 details the various components of cTBLS as outlined in Figure 1. In Section 4, we evaluate cTBLS to previous methods for conversations over tables and provide experimental results from automatic and human evaluation. Finally, Section 5 concludes the paper and discusses future work.

2 Related Work

2.1 Table Question Answering

A well-studied precursor to conversations over tables is Table Question Answering. In WIKITABLE-QUESTIONS, Pasupat and Liang (2015) transform HTML tables into a knowledge graph and retrieve the correct answer by converting natural language questions into graph queries. FRETs (Jauhar et al., 2016) uses a log-linear model conditioned on alignment scores between cells in tables and individual QA pairs in the training set. NEOP (Cho et al., 2018) uses a multi-layer sequential network with attention supervision to answer queries conditioned on tables. MANYMODALQA (Hannan et al., 2020) uses a modality selection network along with pre-trained state-of-the-art text-based QA, Table-based QA, and Image-based QA models to jointly answer questions over text, tables, and images. HYBRIDER (Chen et al., 2020c) performs multi-hop QA over tables by using keyword-matching for cell linking followed by BERT (Devlin et al., 2019) for reasoning. OTT-QA (Chen et al., 2020a) uses a fusion retriever to identify relevant tables and text and a cross-block reader based on a long-range Sparse Attention Transformer (Ainslie et al., 2020) to choose the correct answer. Visual Slot (Heck and Heck, 2020) performs multi-task fine-tuning of Transformer encoders by modeling slot filling as question answering over tabular and visual information. TAPAS (Herzig et al., 2020) and TaBERT

(Yin et al., 2020) extend BERT (Devlin et al., 2019) for Table Question Answering by pre-training a masked language model over text-table pairs. More recent work building off of the Transformer architecture for Table Question Answering include (Eisenschlos et al., 2021; Li et al., 2021; Herzig et al., 2021; Zayats et al., 2021; Zhao et al., 2022; Huang et al., 2022; Yang et al., 2022). Jin et al. (2022) provides a detailed survey of advances in Table Question Answering.

2.2 Knowledge Grounded Response Generation

Early work concerning grounding responses generated by language models in real-world knowledge were inspired by solutions to improve priors for open-domain dialogue (Heck et al., 2013; Hakkani-Tür et al., 2014; Hakkani-Tür et al., 2014; Huang et al., 2015; Jia et al., 2017). More recently, knowledge grounded response generation has been applied to mitigate the hallucination problem (Maynez et al., 2020; Shuster et al., 2021) in Large Language Models (LLMs). RAG (Lewis et al., 2020) fine-tunes LLMs using Dense Passage Retrieval (Karpukhin et al., 2020) over a Wikipedia dump to ground responses for Open Domain Question Answering. KGPT (Chen et al., 2020b) and SKILL (Moiseev et al., 2022) pre-train a Transformer encoder (Vaswani et al., 2017) with English Wikidump for Natural Language Generation. Fusion-in-Decoder (Izacard and Grave, 2021) fine-tunes decoder models based on evidence obtained using Dense Passage Retrieval. Recent work has also seen a dual-stage approach where LLMs generate knowledge sources based on prompts (Yu et al., 2022; Bonifacio et al., 2022; Jeronimo et al., 2023). Closest to our work, Wizard of Wikipedia (Dinan et al., 2018) jointly optimizes an encoder-decoder Transformer to produce dialogue responses conditioned on retrieved knowledge and dialogue context but does not extend their approach to the multiple modalities. REPLUG (Shi et al., 2023) ensembles output responses generated by prompting large language models with inputs from a dense retriever in a zero-shot setting. However, this requires multiple API calls to state-of-the-art LLMs. A survey of knowledge fusion in LLMs is available in Colon-Hernandez et al. (2021) and Richardson and Heck (2023).

In contrast to prior work that focuses on either Table Question Answering or Knowledge

Grounded Response Generation, CTBLS solves the problem of response generation grounded on tabular knowledge. Furthermore, while CTBLS is fine-tuned for table retrieval and filtering out incorrect references, it leverages the power of large pre-trained language models for dialogue generation. Additionally, filtering out incorrect references by fine-tuning open-source table and knowledge retrievers results in CTBLS limiting the number of API calls to LLMs.

3 Method

The challenge of conversations grounded in tabular information consists of three tasks - table retrieval, system state tracking, and response generation. Table retrieval involves identifying the correct table in the dataset given a natural language query. System state tracking requires ranking the cells in the table to answer a follow-up query. Finally, response generation is concerned with converting the ranked cells into a natural language response.

3.1 Retrieval

The first step in responding to queries related to tabular information requires selecting the correct table from a large corpus. CTBLS formulates table retrieval as document retrieval, where the goal is to assign a score to each table based on its relevance to the natural language query. Following Karpukhin et al. (2020), CTBLS consists of a dual-encoder-based Dense Table Retrieval (DTR) model. The DTR model pre-computes a vectorized embedding of all tables in the corpus. Given a question at inference, the retrieved table is closest to the question in the embedded space, indicated by the upper-left portion of Figure 1.

The DTR model consists of a table encoder and a question encoder, initialized from RoBERTa-base (Liu et al., 2019). The input to the table encoder contains the table’s title, section text from the Wikipedia page on which the table occurs, and text that appears in the article’s introduction on Wikipedia as shown in Figure 2. The input to the question encoder is the current query from the first turn of conversation.

Averaging the last hidden state at the table and question encoder produces 768-dimensional embeddings of the table information and the query.

The DTR model is fine-tuned using a contrastive prediction task to maximize the similarity between embeddings of a query q and the correct table to

Year	Winner	Result	Runners-up	Finals MVP	TV
1997	Houston Comets ^(A)	1-0	New York Liberty	Cynthia Cooper	NBC
1998	Houston Comets	2-1	Phoenix Mercury ^(B)	Cynthia Cooper	Game 1 and 3: ESPN Game 2: NBC
1999	Houston Comets	2-1	New York Liberty	Cynthia Cooper	Game 1: Lifetime Game 2 and 3: NBC
2000	Houston Comets	2-0	New York Liberty	Cynthia Cooper	Game 1: Lifetime Game 2: NBC
2001	Los Angeles Sparks	2-0	Charlotte Sting	Lisa Leslie	Game 1: ESPN Game 2: NBC
2002	Los Angeles Sparks	2-0	New York Liberty	Lisa Leslie	Game 1: ESPN Game 2: NBC

Figure 2: The input to the DTR text-encoder includes the title of the page, the introduction to the article, and the section title and introduction paragraph associated with the table.

retrieve p while minimizing the similarity to incorrect tables $\{n_i\}_{i=1}^N$. Following Karpukhin et al. (2020), normalized embedding vectors are used to optimize the objective in Equation 1:

$$\min L(q, p, n_1, \dots, n_N) = \min \left(-\log \frac{e^{q^T p}}{e^{q^T p} + \sum_{i=1}^N e^{q^T n_i}} \right) \quad (1)$$

Given a batch B of d -dimensional query embeddings Q and table embeddings P , the DTR model computes the similarity $QP^T (\in \mathbb{R}^{B \times B})$ between every query and table in the batch. This allows sampling negatives as tables from other query-table pairs and creates B^2 training samples in each batch (B positive pairs along the diagonal and $B^2 - B$ negatives).

3.2 Coarse System State Tracking

The next task, system state tracking, involves ranking cells in the retrieved table by their relevance to a follow-up query. CTBLS splits system state tracking into two sub-tasks - coarse and fine system state tracking. Coarse system state tracking involves ranking cells in the table, while fine system state tracking identifies fine-grained information in the most relevant cell to answer the query.

CTBLS uses a RoBERTa-base dual-encoder architecture for coarse system state tracking. The table encoder embeds all cells and associated hyperlinked information while the question encoder embeds the dialogue history (consisting of queries and responses from previous turns) and the current query.

The question and table encoders are optimized using the triplet loss configuration to rank cells by their relevance to the follow-up query, indicated by the upper-right section of Figure 1. The objective function minimizes the distance between the anchor a and positive p , while pushing the negative n further away from a up to a margin m (Equation 2).

$$\min L(a, p, n) = \min(\max\{d(a_i, p_i) - d(a_i, n_i) + m, 0\}) \quad (2)$$

$$d(x, y) = \|x - y\|_p \quad (3)$$

The anchor consists of the entire dialogue history (queries and responses on previous turns) concatenated with the current query, and the positive is the correct cell. We use other cells from the same table that do not answer the query as negatives. The distance function $d(\cdot)$ is the 2-norm.

3.3 Fine System State Tracking and Response Generation

In contrast to coarse system state tracking, fine system state tracking involves identifying the correct cell and exact phrase that answers the query from a ranked subset. The extracted phrase is converted into a natural language response that is conversationally coherent.

CTBLS uses GPT-3.5 (Brown et al., 2020) to perform fine system state tracking and response generation jointly. GPT-3.5 is prompted to generate a natural language response to a follow-up query conditioned on cells of the table ranked by their relevance to the query as obtained from the coarse state tracker. The bottom-right section of Figure 1 outlines this process.

4 Experiments

4.1 HYBRIDIALOGUE

The HYBRIDIALOGUE dataset (Nakamura et al., 2022) consists of 4800 natural language conversations grounded in text and tabular information from Wikipedia. Crowd workers decompose multi-hop questions from the OTT-QA dataset (Chen et al., 2020a) into natural questions and conversational responses about tabular data. Dialogues in the dataset average 4-5 conversation turns, with a total of 21,070 turns in the dataset. Example conversations are available in Table 7.

	MRR @10	Top 1 Acc	Top 3 Acc
BM25	0.800	0.740	0.855
cTBLS - DTR	0.846	0.777	0.901

Table 1: BM25 vs cTBLS-DTR for retrieval on first turn of conversation, results on HYBRIDIALOGUE testing dataset. cTBLS-DTR obtains up to 5% relative improvement over sparse table retrieval

4.2 Table Retrieval

The first conversation turn requires selecting the correct table based on the input query. The Dense Table Retriever is fine-tuned for 20 epochs using Adam (Kingma and Ba, 2014) with a learning rate of $1e-6$ and a linear learning schedule with five warmup steps. The loss function is a modification of the contrastive loss implementation from ConVIRT (Zhang et al., 2022), with image embeddings replaced by table embeddings. The baseline table retriever implementation is the BM25Okapi Retriever (Trotman et al., 2014) from rank-bm25. Results from Table 1 indicate that cTBLS-DTR achieves better Mean Reciprocal Rank (MRR), Top-1 Accuracy, and Top-3 Accuracy than BM25 on HYBRIDIALOGUE.

4.3 Coarse State Tracking

Coarse state tracking ranks cells from a table based on their relevance to queries from later conversation turns. As before, the dual-encoder coarse state tracker of cTBLS consists of RoBERTa-base fine-tuned using Adam with a learning rate of $1e-6$ and a linear learning schedule with five warmup steps. In contrast to Table Retrieval, the state tracker uses the triplet margin loss with a margin of 1.0 instead of contrastive loss. Fine-tuning RoBERTa-base beats SentenceBERT (Reimers and Gurevych, 2019) and nearly achieves the same MRR @10 as TaPas (Herzig et al., 2020) fine-tuned on the SQA dataset (Iyyer et al., 2017) and HYBRIDIALOGUE, as indicated by results in Table 2. In addition, Table 3 reports the Top-1, Top-3, and Top-10 accuracy of cTBLS. The correct cell is retrieved in approximately 56% of conversations at inference and ranks among the Top-3 and Top-10 retrievals about 78% and 93% of the time, respectively.

	MRR@10
SentenceBERT (Reimers and Gurevych, 2019)	0.603
TaPas (Herzig et al., 2020)	0.689
cTBLS - RoBERTa-base	0.683

Table 2: System state tracking results on HYBRIDIALOGUE. cTBLS achieves nearly the same MRR@10 as TaPas, without additional table pretraining on SQA (Iyyer et al., 2017)

Top-1	0.559
Top-3	0.778
Top-10	0.925

Table 3: Top-k accuracy for cTBLS on coarse system state tracking. cTBLS ranks the correct cell as the top reference in 56% of follow-up queries on HYBRIDIALOGUE.

4.4 Fine State Tracking and Response Generation

cTBLS uses GPT-3.5 (text-davinci-003) with the existing dialogue context, the current query, and the retrieved references from coarse state tracking to obtain a natural language response. Since fine-tuning the best available version of the model is cost prohibitive, we opt to prompt GPT-3.5 to generate responses instead.

Motivated by the results from Table 3, the fine state tracker of cTBLS is evaluated in two different configurations by prompting GPT-3.5 augmented with the Top-1 and Top-3 knowledge references retrieved by the coarse state tracker (cTBLS Top-1 and cTBLS Top-3). Due to limits on token length associated with the OpenAI API, stopwords are removed from the knowledge provided in the prompt. Since LLMs store factual information in their weights (Roberts et al., 2020; Heinzerling and Inui, 2021), the baseline is few-shot prompting (using two examples) with no knowledge sources (cTBLS-NoK). In addition, cTBLS is measured against fine-tuned DialoGPT-medium (Zhang et al., 2019) with Top-1 knowledge for a better comparison with prior work (Nakamura et al., 2022).

Table 4 reports ROUGE-1, ROUGE-2, and ROUGE-L precision (Lin, 2004) for all evaluated models. Results indicate that using additional knowledge improves n-gram overlap with the ground truth reference, indicated by the fact that cTBLS Top-1 scores higher than the baseline no-knowledge model. Furthermore, cTBLS Top-3 achieves the best performance on all auto-

	CTBLS NoK	CTBLS Top-1	CTBLS Top-3	HYBRIDIALOGUE
ROUGE-1 Precision	0.487	0.603	0.642	0.438
ROUGE-2 Precision	0.229	0.304	0.322	0.212
ROUGE-L Precision	0.422	0.517	0.548	0.375

Table 4: Automatic Evaluation Metrics - CTBLS No Knowledge (NoK), Top-1 Knowledge, Top-3 Knowledge, and DialoGPT

matic metrics, indicating the advantages of splitting knowledge retrieval into coarse and fine state tracking. All three configurations of CTBLS outperform HYBRIDIALOGUE.

4.5 Human Evaluation

We also perform human evaluation to better understand the performance of CTBLS using metrics presented in Nakamura et al. (2022) - Coherence, Fluency, and Informativeness.

Coherence and Fluency are measured using crowd workers from Amazon Mechanical Turk (AMT), while measuring Informativeness is divided among the paper’s authors. Crowd workers evaluate the Coherence and Fluency of responses from DialoGPT and GPT-3.5 with the top-3 knowledge references for 50% of the testing data.

Borrowing from Nakamura et al. (2022), the conversationally coherent response is defined as one that best continues the conversation given prior context. Crowdworkers choose the response that is better at answering the last question of the context and continuing dialogue flow. The absence of grammatical and spelling errors and the appropriate use of parts of speech defines a response’s fluency. To ensure response quality, we recruit Turkers with the Masters qualification on AMT and from English-speaking countries (USA, Canada, Australia, New Zealand, or Great Britain). The median time to complete a task is 30 seconds, and workers are paid \$0.05 per task. Two crowd workers evaluate each response. A model’s response is considered more coherent or fluent only if there is an agreement between both evaluations. Based on the results from Table 5, the response generated by CTBLS Top-3 is more coherent than fine-tuned DialoGPT from HYBRIDIALOGUE in 84.2% of cases. It is more fluent 82.7% of the time.

To evaluate informativeness, we identify whether generated responses are semantically identical to the ground truth response. Two annotators evaluate each response, and a model is considered more informative only if there is inter-annotator agreement.

	CTBLS Top-3 vs HYBRIDIALOGUE
Coherence	0.842
Fluency	0.827

Table 5: Coherence and Fluency - CTBLS Top-3 is more conversationally coherent than the best performing HYBRIDIALOGUE system 84.2% of the time and is more fluent 82.7% of the time

	Informativeness
HYBRIDIALOGUE	0.215
CTBLS - NoK	0.264
CTBLS Top-1	0.488
CTBLS Top-3	0.540

Table 6: Human Evaluation Metrics - Fraction of cases where model response is semantically identical to ground truth response. Using more knowledge sources results in responses that are more informative

The lack of demonstrative examples in the prompting process causes responses generated by CTBLS Top-1 and Top-3 to be longer than the ground truth response. Therefore, the knowledge-augmented CTBLS responses are said to be informative if all the information provided in the ground truth response is captured in the model response, even if CTBLS includes additional information. The results in Table 6 indicate that CTBLS Top-3 contains the same information as the ground truth response 54% of the time, higher than CTBLS Top-1 at 48.8%, demonstrating the advantages of splitting retrieval into coarse and fine state tracking. Based on these results, we hypothesize that the attention mechanism in decoder models allows for additional knowledge retrieval. CTBLS NoK produces the correct response 26.4% of the time, indicating that HYBRIDIALOGUE consists of questions and answers based on general world knowledge stored in the weights of LLMs. Fine-tuning DialoGPT-medium performs close to CTBLS NoK, indicating that fine-tuning a smaller parameter model (345M) yields similar results to prompting a much larger model (175B).

Context	Knowledge	Response
<p>Q1: Can you give me a list of transfer in to the D.C. United season? R1: Here is a list of transfer in to the D.C. United season. Q2: Who was born on July 7, 1989? R2: Casey Townsend was born July 7,1989. Q3: What number does Casey Townsend wear? R3: Casey Townsend wore the number 16.</p>	<p>K1: [CELL] Fee/Notes is 2014 MLS SuperDraft</p> <p>K2: [CELL] No is 16</p> <p>K3: [CELL] Date is January 25 , 2013</p>	<p>CTBLS NoK: Casey Townsend wears the number 31 for D.C. United.</p> <p>CTBLS Top-1: Casey Townsend was drafted in the 2014 MLS SuperDraft and wears the number 9 for D.C. United.</p> <p>CTBLS Top-3: Casey Townsend wears number 16, and he was drafted by D.C. United in the 2014 MLS SuperDraft on January 25, 2013</p>
<p>Q1: Can you show me a list of teams from that season. R1: Here's a list of teams and the stadiums they play in. Q2: Thanks. Which stadium has the lowest capacity? R2: That would be Við Margáir, which has a capacity of 1,000. Q3: Which club plays there? R3: EB/Streymur plays there.</p>	<p>K1: [CELL] Stadium is Við Margáir</p> <p>K2: [ROW] Team is GÍ Gøta, City is Norðragøta, Stadium is Sarpugerði, Capacity is 2000</p> <p>K3: [CELL] Team is EB/Streymur</p>	<p>CTBLS NoK: B68 Toftir plays their home matches at Við Margáir stadium.</p> <p>CTBLS Top-1: Við Margáir is the home stadium of B36 Tórshavn.</p> <p>CTBLS Top-3: GÍ Gøta plays at the Sarpugerði Stadium which has a capacity of 2,000. EB/Streymur plays at the Við Margáir stadium which has the lowest capacity of 1,000.</p>
<p>Q1: Tell me about publicly traded companies? R1: Publicly traded companies having the greatest market capitalization. This list is primarily based on the Financial Times Global 500. Q2: How many Publicly traded companies in 2002? R2: There are 10 Publicly traded companies in 2002. Q3: How many Oil and gas industry? R3: There are 3 Oil and Gas Industry</p>	<p>K1: [ROW] Rank is 3 ; Name is Exxon Mobil ; Headquarters is United States ; Primary industry is Oil and gas ; USD is 241,037</p> <p>K2: [ROW] Rank is 8 ; Name is Royal Dutch Shell ; Headquarters is The Netherlands ; Primary industry is Oil and gas ; USD is 149,034 ;</p> <p>K3: [PARAGRAPH] BP plc (formerly The British Petroleum Company plc and BP Amoco plc) is a multinational oil and gas company headquartered in London , England</p>	<p>CTBLS NoK: There are about 60 publicly traded companies in the oil and gas industry, with BP being one of the largest in the UK.</p> <p>CTBLS Top-1: In 2002, there were 10 publicly traded companies, with BP from the UK being one of them.</p> <p>CTBLS Top-3: There were 10 publicly traded companies in 2002.</p>

Table 7: Analysis of responses by CTBLS NoK, Top-1, and Top-3. CTBLS NoK generates responses conditioned on the Context alone, CTBLS Top-1 generates responses conditioned on the context and K1, and CTBLS Top-3 generates responses conditioned on the Context, K1, K2, and K3. In green is the ground truth response from HYBRIDIALOGUE.

Table 7 compares responses generated by the different configurations of cTBLS on HYBRIDIALOGUE. The Context represents the dialogue history, with the last question representing the follow-up query to be answered. The green text denotes the ground truth response. Knowledge K1, K2, and K3 represent cells of the table retrieved during state tracking. cTBLS NoK generates a response based on the context alone, cTBLS Top-1 generates a response conditioned on K1, and cTBLS Top-3 generates a response conditioned on K1, K2, and K3. In the first two examples, when K1 cannot answer the question, cTBLS NoK and cTBLS Top-1 hallucinate a response. In contrast, cTBLS Top-3 can generate the correct response since K2 or K3 contains necessary knowledge, representing the advantages of augmenting response generation with additional relevant knowledge. The third example illustrates a failure case where the state tracker module correctly retrieves three rows of the table corresponding to oil and gas industries. Still, the response generation module fails to utilize this information when converting the retrieved state into a response. In general, cTBLS struggles with counting, which we hope to address in future work.

5 Conclusion

In this paper we introduce Conversational Tables (cTBLS), a system addressing multi-turn dialogue grounded in tabular information. cTBLS splits tabular dialogue into three tasks, table retrieval, system state tracking, and response generation. cTBLS’s dense table retrieval system yields up to 5% relative improvement in Top-1 Accuracy and Mean Reciprocal Rank @ 10 over keyword-matching based techniques on the HYBRIDIALOGUE dataset. Additionally, cTBLS performs system state tracking in a two-step process shared between encoder and decoder models. This approach results in natural language responses with up to 46% relative improvement in ROUGE scores and is preferred by human annotators to prior work.

References

Joshua Ainslie, Santiago Ontanon, Chris Alberti, Václav Cvicek, Zachary Fisher, Philip Pham, Anirudh Ravula, Sumit Sanghai, Qifan Wang, and Li Yang. 2020. [ETC: Encoding long and structured inputs in transformers](#). In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 268–284, Online. Association for Computational Linguistics.

Luiz Bonifacio, Hugo Abonizio, Marzieh Fadaee, and Rodrigo Nogueira. 2022. [Inpars: Data augmentation for information retrieval using large language models](#). *arXiv preprint arXiv:2202.05144*.

Tom Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared D Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, et al. 2020. [Language models are few-shot learners](#). *Advances in neural information processing systems*, 33:1877–1901.

Wenhu Chen, Ming-Wei Chang, Eva Schlinger, William Wang, and William W Cohen. 2020a. [Open question answering over tables and text](#). *arXiv preprint arXiv:2010.10439*.

Wenhu Chen, Yu Su, Xifeng Yan, and William Yang Wang. 2020b. [Kgpt: Knowledge-grounded pre-training for data-to-text generation](#). *arXiv preprint arXiv:2010.02307*.

Wenhu Chen, Hanwen Zha, Zhiyu Chen, Wenhan Xiong, Hong Wang, and William Yang Wang. 2020c. [HybridQA: A dataset of multi-hop question answering over tabular and textual data](#). In *Findings of the Association for Computational Linguistics: EMNLP 2020*, pages 1026–1036, Online. Association for Computational Linguistics.

Minseok Cho, Reinald Kim Amplayo, Seung-won Hwang, and Jonghyuck Park. 2018. [Adversarial tableqa: Attention supervision for question answering on tables](#). In *Asian Conference on Machine Learning*, pages 391–406. PMLR.

Pedro Colon-Hernandez, Catherine Havasi, Jason Alonso, Matthew Huggins, and Cynthia Breazeal. 2021. [Combining pre-trained language models and structured knowledge](#). *arXiv preprint arXiv:2101.12294*.

Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2019. [BERT: Pre-training of deep bidirectional transformers for language understanding](#). In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pages 4171–4186, Minneapolis, Minnesota. Association for Computational Linguistics.

Emily Dinan, Stephen Roller, Kurt Shuster, Angela Fan, Michael Auli, and Jason Weston. 2018. [Wizard of wikipedia: Knowledge-powered conversational agents](#). *arXiv preprint arXiv:1811.01241*.

Julian Martin Eisenschlos, Maharshi Gor, Thomas Müller, and William W Cohen. 2021. [Mate: multi-view attention for table transformer efficiency](#). *arXiv preprint arXiv:2109.04312*.

Dilek Hakkani-Tür, Malcolm Slaney, Asli Celikyilmaz, and Larry Heck. 2014. [Eye gaze for spoken language understanding in multi-modal conversational](#)

- interactions. In *Proceedings of the 16th International Conference on Multimodal Interaction, ICMI '14*, page 263–266, New York, NY, USA. Association for Computing Machinery.
- Dilek Hakkani-Tür, Asli Celikyilmaz, Larry Heck, Gokhan Tur, and Geoff Zweig. 2014. [Probabilistic enrichment of knowledge graph entities for relation detection in conversational understanding](#). In *Proceedings of Interspeech*.
- Darryl Hannan, Akshay Jain, and Mohit Bansal. 2020. Manyodalqa: Modality disambiguation and qa over diverse inputs. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 34, pages 7879–7886.
- Larry Heck, Dilek Hakkani-Tür, Madhu Chinthakunta, Gokhan Tur, Rukmini Iyer, Partha Parthasarathy, Lisa Stifelman, Elizabeth Shriberg, and Ashley Fidler. 2013. Multimodal conversational search and browse. *First Workshop on Speech, Language and Audio in Multimedia Marseille, France*.
- Larry Heck and Simon Heck. 2020. Zero-shot visual slot filling as question answering. *arXiv preprint arXiv:2011.12340*.
- Benjamin Heinzerling and Kentaro Inui. 2021. [Language models as knowledge bases: On entity representations, storage capacity, and paraphrased queries](#). In *Proceedings of the 16th Conference of the European Chapter of the Association for Computational Linguistics: Main Volume*, pages 1772–1791, Online. Association for Computational Linguistics.
- Jonathan Herzig, Thomas Müller, Syrine Krichene, and Julian Eisenschlos. 2021. [Open domain question answering over tables via dense retrieval](#). In *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 512–519, Online. Association for Computational Linguistics.
- Jonathan Herzig, Pawel Krzysztof Nowak, Thomas Müller, Francesco Piccinno, and Julian Eisenschlos. 2020. [TaPas: Weakly supervised table parsing via pre-training](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 4320–4333, Online. Association for Computational Linguistics.
- Hongzhao Huang, Larry Heck, and Heng Ji. 2015. Leveraging deep neural networks and knowledge graphs for entity disambiguation. *arXiv preprint arXiv:1504.07678*.
- Junjie Huang, Wanjun Zhong, Qian Liu, Ming Gong, Daxin Jiang, and Nan Duan. 2022. Mixed-modality representation learning and pre-training for joint table-and-text retrieval in openqa. *arXiv preprint arXiv:2210.05197*.
- Mohit Iyyer, Wen-tau Yih, and Ming-Wei Chang. 2017. [Search-based neural structured learning for sequential question answering](#). In *Proceedings of the 55th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 1821–1831, Vancouver, Canada. Association for Computational Linguistics.
- Gautier Izacard and Edouard Grave. 2021. [Leveraging passage retrieval with generative models for open domain question answering](#). In *Proceedings of the 16th Conference of the European Chapter of the Association for Computational Linguistics: Main Volume*, pages 874–880, Online. Association for Computational Linguistics.
- Sujay Kumar Jauhar, Peter Turney, and Eduard Hovy. 2016. [Tables as semi-structured knowledge for question answering](#). In *Proceedings of the 54th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 474–483, Berlin, Germany. Association for Computational Linguistics.
- Vitor Jeronimo, Luiz Bonifacio, Hugo Abonizio, Marzieh Fadaee, Roberto Lotufo, Jakub Zavrel, and Rodrigo Nogueira. 2023. Inpars-v2: Large language models as efficient dataset generators for information retrieval. *arXiv preprint arXiv:2301.01820*.
- Robin Jia, Larry Heck, Dilek Hakkani-Tür, and Georgi Nikolov. 2017. [Learning concepts through conversations in spoken dialogue systems](#). In *2017 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pages 5725–5729.
- Nengzheng Jin, Joanna Siebert, Dongfang Li, and Qingcai Chen. 2022. A survey on table question answering: Recent advances. In *Knowledge Graph and Semantic Computing: Knowledge Graph Empowers the Digital Economy*, pages 174–186, Singapore. Springer Nature Singapore.
- Vladimir Karpukhin, Barlas Oguz, Sewon Min, Patrick Lewis, Ledell Wu, Sergey Edunov, Danqi Chen, and Wen-tau Yih. 2020. [Dense passage retrieval for open-domain question answering](#). In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 6769–6781, Online. Association for Computational Linguistics.
- Diederik P Kingma and Jimmy Ba. 2014. Adam: A method for stochastic optimization. *arXiv preprint arXiv:1412.6980*.
- Patrick Lewis, Ethan Perez, Aleksandra Piktus, Fabio Petroni, Vladimir Karpukhin, Naman Goyal, Heinrich Küttler, Mike Lewis, Wen-tau Yih, Tim Rocktäschel, Sebastian Riedel, and Douwe Kiela. 2020. [Retrieval-augmented generation for knowledge-intensive nlp tasks](#). In *Advances in Neural Information Processing Systems*, volume 33, pages 9459–9474. Curran Associates, Inc.

- Alexander Hanbo Li, Patrick Ng, Peng Xu, Henghui Zhu, Zhiguo Wang, and Bing Xiang. 2021. [Dual reader-parser on hybrid textual and tabular evidence for open domain question answering](#). In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, pages 4078–4088, Online. Association for Computational Linguistics.
- Chin-Yew Lin. 2004. [ROUGE: A package for automatic evaluation of summaries](#). In *Text Summarization Branches Out*, pages 74–81, Barcelona, Spain. Association for Computational Linguistics.
- Yinhan Liu, Myle Ott, Naman Goyal, Jingfei Du, Mandar Joshi, Danqi Chen, Omer Levy, Mike Lewis, Luke Zettlemoyer, and Veselin Stoyanov. 2019. Roberta: A robustly optimized bert pretraining approach. *arXiv preprint arXiv:1907.11692*.
- Joshua Maynez, Shashi Narayan, Bernd Bohnet, and Ryan McDonald. 2020. [On faithfulness and factuality in abstractive summarization](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 1906–1919, Online. Association for Computational Linguistics.
- Fedor Moiseev, Zhe Dong, Enrique Alfonseca, and Martin Jaggi. 2022. [SKILL: Structured knowledge infusion for large language models](#). In *Proceedings of the 2022 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 1581–1588, Seattle, United States. Association for Computational Linguistics.
- Kai Nakamura, Sharon Levy, Yi-Lin Tuan, Wenhui Chen, and William Yang Wang. 2022. [HybriDialogue: An information-seeking dialogue dataset grounded on tabular and textual data](#). In *Findings of the Association for Computational Linguistics: ACL 2022*, pages 481–492, Dublin, Ireland. Association for Computational Linguistics.
- Panupong Pasupat and Percy Liang. 2015. [Compositional semantic parsing on semi-structured tables](#). In *Proceedings of the 53rd Annual Meeting of the Association for Computational Linguistics and the 7th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, pages 1470–1480, Beijing, China. Association for Computational Linguistics.
- Nils Reimers and Iryna Gurevych. 2019. [SentenceBERT: Sentence embeddings using Siamese BERT-networks](#). In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, pages 3982–3992, Hong Kong, China. Association for Computational Linguistics.
- Christopher Richardson and Larry Heck. 2023. Commonsense reasoning for conversational ai: A survey of the state of the art. *Workshop on Knowledge Augmented Methods for NLP, (KnowledgeNLP-AAAI’23)*.
- Adam Roberts, Colin Raffel, and Noam Shazeer. 2020. [How much knowledge can you pack into the parameters of a language model?](#) In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 5418–5426, Online. Association for Computational Linguistics.
- Weijia Shi, Sewon Min, Michihiro Yasunaga, Minjoon Seo, Rich James, Mike Lewis, Luke Zettlemoyer, and Wen-tau Yih. 2023. Replug: Retrieval-augmented black-box language models. *arXiv preprint arXiv:2301.12652*.
- Kurt Shuster, Spencer Poff, Moya Chen, Douwe Kiela, and Jason Weston. 2021. [Retrieval augmentation reduces hallucination in conversation](#). In *Findings of the Association for Computational Linguistics: EMNLP 2021*, pages 3784–3803, Punta Cana, Dominican Republic. Association for Computational Linguistics.
- Anirudh Sundar and Larry Heck. 2022. [Multimodal conversational AI: A survey of datasets and approaches](#). In *Proceedings of the 4th Workshop on NLP for Conversational AI*, pages 131–147, Dublin, Ireland. Association for Computational Linguistics.
- Andrew Trotman, Antti Puurula, and Blake Burgess. 2014. [Improvements to bm25 and language models examined](#). In *Proceedings of the 2014 Australasian Document Computing Symposium, ADCS ’14*, page 58–65, New York, NY, USA. Association for Computing Machinery.
- Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. 2017. Attention is all you need. *Advances in neural information processing systems*, 30.
- Jingfeng Yang, Aditya Gupta, Shyam Upadhyay, Luheng He, Rahul Goel, and Shachi Paul. 2022. [Tableformer: Robust transformer modeling for table-text encoding](#). *arXiv preprint arXiv:2203.00274*.
- Pengcheng Yin, Graham Neubig, Wen-tau Yih, and Sebastian Riedel. 2020. [TaBERT: Pretraining for joint understanding of textual and tabular data](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 8413–8426, Online. Association for Computational Linguistics.
- Wenhao Yu, Dan Iter, Shuohang Wang, Yichong Xu, Mingxuan Ju, Soumya Sanyal, Chenguang Zhu, Michael Zeng, and Meng Jiang. 2022. [Generate rather than retrieve: Large language models are strong context generators](#). *arXiv preprint arXiv:2209.10063*.

- Vicky Zayats, Kristina Toutanova, and Mari Ostendorf. 2021. [Representations for question answering from documents with tables and text](#). In *Proceedings of the 16th Conference of the European Chapter of the Association for Computational Linguistics: Main Volume*, pages 2895–2906, Online. Association for Computational Linguistics.
- Yizhe Zhang, Siqi Sun, Michel Galley, Yen-Chun Chen, Chris Brockett, Xiang Gao, Jianfeng Gao, JJ (Jingjing) Liu, and Bill Dolan. 2019. [Dialogpt: Large-scale generative pre-training for conversational response generation](#). In *arXiv:1911.00536*.
- Yuhao Zhang, Hang Jiang, Yasuhide Miura, Christopher D Manning, and Curtis P Langlotz. 2022. Contrastive learning of medical visual representations from paired images and text. In *Machine Learning for Healthcare Conference*, pages 2–25. PMLR.
- Yilun Zhao, Yunxiang Li, Chenying Li, and Rui Zhang. 2022. [MultiHiertt: Numerical reasoning over multi hierarchical tabular and textual data](#). In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 6588–6600, Dublin, Ireland. Association for Computational Linguistics.