

XWikiGen: Cross-lingual Summarization for Encyclopedic Text Generation in Low Resource Languages

Dhaval Taunk, Shivprasad Sagare, Anupam Patil, Shivansh Subramanian,
Manish Gupta and Vasudeva Varma

Information Retrieval and Extraction Lab, IIIT Hyderabad, India

{dhaval.taunk,shivprasad.sagare,shivansh.s}@research.iiit.ac.in,anupampatil44@gmail.com

{manish.gupta,vv}@iiit.ac.in

Abstract

Lack of encyclopedic text contributors, especially on Wikipedia, makes automated text generation for *low resource (LR) languages* a critical problem. Existing work on Wikipedia text generation has focused on *English only* where English reference articles are summarized to generate English Wikipedia pages. But, for low-resource languages, the scarcity of reference articles makes monolingual summarization ineffective in solving this problem. Hence, in this work, we propose XWIKI-GEN, which is the task of cross-lingual multi-document summarization of text from multiple reference articles, written in various languages, to generate Wikipedia-style text. Accordingly, we contribute a benchmark dataset, XWIKIREF, spanning ~69K Wikipedia articles covering five domains and eight languages. We harness this dataset to train a two-stage system where the input is a set of citations and a section title and the output is a section-specific LR summary. The proposed system is based on a novel idea of neural unsupervised extractive summarization to coarsely identify salient information followed by a neural abstractive model to generate the section-specific text. Extensive experiments show that multi-domain training is better than the multi-lingual setup on average. We make our code and dataset publicly available¹.

1 Introduction

Although Wikipedia has been the primary choice of encyclopedic reference for millions of users, unfortunately, Wikipedia is extremely sparse for low-resource (LR) languages. English Wikipedia exhibits abundance with ~6.56M articles expressed in 54.2 GB of text, low resource Wikipedia is poor with only ~90K articles expressed using 7.5 GB of text on average across seven low resource languages as shown in Fig. 2. Further, as illustrated

¹<https://doi.org/10.5281/zenodo.7604438>

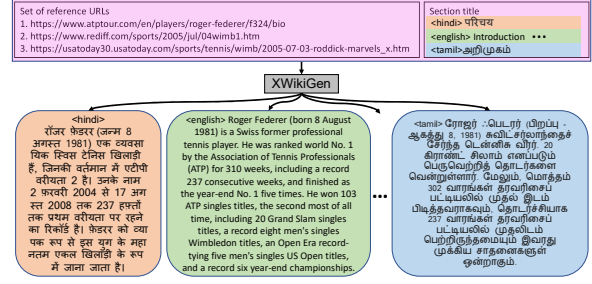


Figure 1: XWIKI-GEN examples: Generating Hindi, English, and Tamil text for the Introduction section from cited references.

in Fig. 3, manual efforts towards enriching LR Wikipedia over the years have also not been as encouraging as in the case of English. These observations indicate that automated text generation for low-resource Wikipedia is critical.

A possible naïve approach for automated generation for low-resource Wikipedia is to translate text from equivalent English Wikipedia articles. Unfortunately, several low-resource entities of interest tend to be local in nature, leading to a lack of equivalent English Wikipedia pages for ~42.1% entities on average across seven low-resource languages. In particular, following are percentages of Wikipedia entities with no equivalent English Wikipedia page: Hindi (50.60%), Tamil (46.70%), Bengali (31.50%), Malayalam (36.30%), Marathi (42.00%), Punjabi (38.70%), Oriya (39.40%). Thus, we need to explore other inputs for LR Wikipedia text generation.

Another approach is to leverage generic Web content for LR Wikipedia text generation. A challenge to this approach is that such web content is itself very sparse in low-resource languages, as can be observed in publicly available large dumps like CommonCrawl (Raffel et al., 2020). Further, we analyzed the language of cited references on existing Wikipedia pages for eight languages and five domains of our interest using langdetect li-

Domain	bn	hi	ml	mr	or	pa	ta	en
books	16.5	14.9	9.9	12.3	0.0	5.2	28.2	94.8
films	21.5	10.4	21.0	6.5	0.0	1.2	10.9	96.8
politicians	21.4	31.2	8.4	25.0	0.0	1.9	8.7	90.0
sportsmen	1.4	1.7	1.2	2.5	0.0	0.2	1.1	87.2
writers	11.0	18.3	4.6	27.2	0.0	6.0	7.7	94.7

Table 1: Percentage of cited references with language same as Wikipedia article language (for 8 languages and 5 domains which are a part of our XWIKIREF dataset).

brary². From Table 1, we observe that while English Wikipedia pages have more than 85% references in English, the numbers are minuscule for most (domain, LR language) pairs. This motivates us to propose a novel problem of cross-lingual Wikipedia text generation using references, which we call XWIKIGEN in short.

As shown in Fig. 1, the input for XWIKIGEN is a set of reference URLs, a target section title, and a target output language. The expected output is then the text suitable for that Wikipedia section in the target language. Analogous to generic summarization versus query-based summarization, XWIKIGEN involves section-wise text generation rather than the generation of the entire Wikipedia page. Unlike existing work on monolingual (English-only) Wikipedia text generation, XWIKIGEN is cross-lingual in nature. Lastly, unlike some existing work that generates cross-lingual text using English Wikipedia pages, XWIKIGEN focuses on generating cross-lingual text using reference URLs in multiple languages.

Our first contribution is a novel dataset, XWIKIREF towards the XWIKIGEN task. The dataset is obtained from Wikipedia pages corresponding to eight languages and five domains. Languages include Bengali (bn), English (en), Hindi (hi), Malayalam (ml), Marathi (mr), Oriya (or), Punjabi (pa) and Tamil (ta). Domains include books, films, politicians, sportsmen, and writers. The dataset spans ~69K Wikipedia articles with ~105K sections. Each section has 5.44 cited references on average.

XWIKIGEN is an extremely challenging task because it involves long text generation, and that too in a cross-lingual manner. Handling long text input is difficult. Hence, we follow a two-stage approach. The first extractive stage identifies important sentences across several reference documents. The second abstractive stage generates the section text. Both stages involve neural models. We experiment

²<https://pypi.org/project/langdetect/>

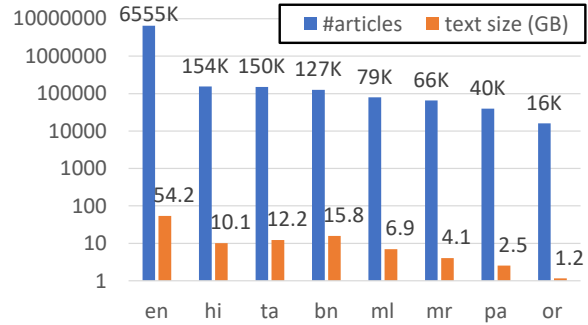


Figure 2: Number of Wikipedia articles and text size in GBs across eight languages, using 20220926 Wikipedia dump. Note that the Y axis is in log scale.

with unsupervised methods like salience (Yasunaga et al., 2021) and hiporank (Dong et al., 2020) for the extractive stage, and mT5 (Xue et al., 2021) and mBART (Liu et al., 2020) for the abstractive stage. We experiment with several training setups like (1) multi-lingual, (2) multi-domain, and (3) multi-lingual-multi-domain. We report results using standard text generation metrics like ROUGE-L, METEOR, and chrF++. We make our code and dataset publicly available.

Overall, we make the following contributions in this paper.

- We motivate and propose the XWIKIGEN problem where the input is (set of reference URLs, section title, language) and the output is a text paragraph.
- We contribute a large dataset, XWIKIREF, with ~105K instances covering eight languages and five domains.
- We model XWIKIGEN as a multi-document cross-lingual summarization problem and propose a two-stage extractive-abstractive system.

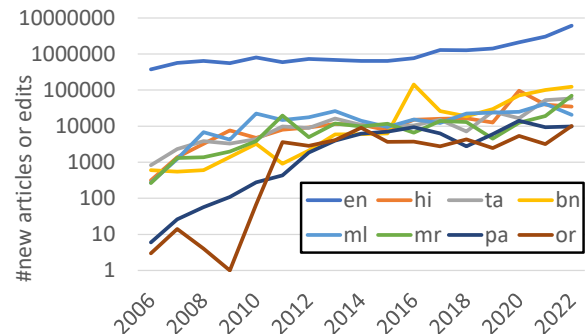


Figure 3: Number of new articles or edits on Wikipedia across eight languages from 2006 to 2022. This is obtained using a publication date from the 20220926 Wikipedia dump. Note that the Y axis is in the log scale.

Our multi-lingual-multi-domain models using HipoRank (extractive) and mBART (abstractive) lead to the best results.

2 Related Work

In this section, we discuss related work on generating both short and long Wikipedia text. We also briefly discuss work on multi-lingual and cross-lingual summarization.

2.1 Generating Short Wikipedia Text

Automated generation of Wikipedia text has been a problem of interest for the past 5–6 years. Initial efforts in the fact-to-text (F2T) line of work focused on generating short text, typically the first sentence of Wikipedia pages using structured fact tuples.

Training F2T models require aligned data with adequate content overlap. Some previous studies like WebNLG (Gardent et al., 2017) collected aligned data by crowdsourcing, while others have performed automatic alignment by heuristics like TF-IDF. Seq-2-seq neural methods (Lebret et al., 2016; Mei et al., 2016) have been popularly used for F2T. These include vanilla LSTMs (Vougiouklis et al., 2018), LSTM encoder-decoder model with copy mechanism (Shahidi et al., 2020), LSTMs with hierarchical attentive encoder (Nema et al., 2018), pretrained Transformer based models (Ribeiro et al., 2021) like BART (Lewis et al., 2020) and T5 (Raffel et al., 2020).

Most of the previous efforts on F2T focused on English fact-to-text only. Only recently, the Cross-lingual F2T (XF2T) problem was proposed in (Abhishek et al., 2022) and (Sagare et al., 2022). Compared to all of these pieces of work which have focused on short text generation, the focus of the current paper is on generating longer text. Unlike F2T literature, where the input is structured, the input is a set of reference URLs in our case.

2.2 Generating Long Wikipedia Text

Besides generating short Wikipedia text, there have also been efforts to generate Wikipedia articles by summarizing long sequences (Liu et al., 2018; Ghalandari et al., 2020; Hayashi et al., 2021; Antognini and Faltings, 2020; Giannakopoulos et al., 2015; Tikhonov and Malykh, 2022) as shown in Table 2. For all of these datasets, the generated text is either the full Wikipedia article or text for a specific section. Most of these studies (Liu et al., 2018; Hayashi et al., 2021; Antognini and Faltings, 2020;

Ghalandari et al., 2020) have been done on English only. Further, these studies use different kinds of input: single document (existing Wikipedia article in the same or another language) or multi-document (set of citation URLs, review pages).

Most of these works fail to include the section-specific intent during summarization and generate an article on the whole. Hence, to capture the section-specific intent while summarizing, Hayashi et al. (Hayashi et al., 2021) introduced section-specific summarization, which recognizes the main topics in the input text and then creates a summary for each. Although authors rely on the model to figure out the latent subtopics, the content selection step is challenging. We tackle this challenge by providing section-specific citations as input in our dataset, which avoids the noisy references belonging to other sections, and allows us to study the summarization capabilities of the model better.

Interestingly, none of the existing datasets perform cross-lingual multi-document summarization for Wikipedia text. However, as motivated in the previous section, this setup is critical for Wikipedia text generation for LR languages. Hence, we fill this gap in this paper by proposing the XWIKIREF dataset.

2.3 Multi-lingual and cross-lingual summarization

Recently there has been a lot of work on multi-lingual and cross-lingual NLG tasks like machine translation (Chi et al., 2021; Liu et al., 2020), question generation (Chi et al., 2020; Mitra et al., 2021), news title generation (Liang et al., 2020), blog title generation (Bhatt et al., 2023), and summarization (Zhu et al., 2019; Jhaveri et al., 2019) thanks to models like XNLG (Chi et al., 2020), mBART (Liu et al., 2020), mT5 (Xue et al., 2021), etc.

Limited work has been done in the past on summarization for low-resource languages. MultiLing’15 (Giannakopoulos et al., 2015) introduced a novel task for multi-lingual summarization in 30 languages. In the past 2–3 years, a few datasets have been proposed for cross-lingual summarization mainly in the news domain: XL-Sum (Hasan et al., 2021b), MLSum (Scialom et al., 2020), CrossSum (Hasan et al., 2021a), Global Voices (Nguyen and Daumé III, 2019), WikiLingua (Ladhak et al., 2020), WikiMulti (Tikhonov and Malykh, 2022). XL-Sum (Hasan et al., 2021b) comprises ~ 1.35 million professionally annotated

Dataset	#Summaries	XL?	ML?	#Langs	MD?	SS?	Input	Output
WikiSum (Liu et al., 2018)	~2.3M articles	No	No	1	Yes	No	Set of citation URLs	Whole Wiki article
WikiAsp (Hayashi et al., 2021)	~400K sections	No	No	1	Yes	Yes	Set of citation URLs	One section in same language
GameWikiSum (Antognini and Faltings, 2020)	~26K gameplay Wikipedia sections	No	No	1	Yes	No	Professional video game reviews	Gameplay Wikipedia sections
Wiki Current Events Portal (WCEP) (Ghalandari et al., 2020)	~10.2K WCEP event summaries	No	No	1	Yes	No	Set of news articles	WCEP Summary
MultiLing'15 (Gianakopoulos et al., 2015)	~1.5K paragraphs	No	Yes	38	No	No	Whole Wikipedia article	First few Wikipedia sentences in same language
WikiMulti (Tikhonov and Malykh, 2022)	~150K intro paragraph	Yes	Yes	15	No	No	Whole Wikipedia article	Intro paragraph in other language
XWikiRef (Ours)	~105K sections	Yes	Yes	8	Yes	Yes	Set of citation URLs	One section in another language

Table 2: Statistics of popular Wikipedia Summarization datasets. XL=Cross-lingual. ML=Multi-Lingual. MD=Multi-document. SS=Section-specific.

article-summary pairs from BBC, extracted using a set of carefully designed heuristics. It covers 44 languages ranging from low to high resource. Hasan et al. (Hasan et al., 2021a) extend the multi-lingual XL-Sum dataset by releasing CrossSum, a cross-lingual summarization dataset with ~1.7 million instances. However, both XL-Sum and CrossSum are specific to the news domain only. WikiLingua (Ladhak et al., 2020) is a multi-lingual dataset with ~770K summaries where the article and summary pairs are extracted in 18 languages from WikiHow. MLSum and GlobalVoices are also cross-lingual summarization datasets based on news articles with around ~1.5M and ~300K summaries covering 5 and 15 languages, respectively. We enrich this line of work by contributing a new cross-lingual multi-document summarization dataset, XWIKIREF, and also proposing a two-stage system for the associated XWIKIGEN task.

3 XWIKIREF: Data Collection, Pre-processing and Analysis

In this section, we first discuss the procedure for XWIKIREF data collection and pre-processing. Then we present detailed analysis.

3.1 Data Collection and Pre-processing

XWIKIREF contains Wikipedia sections related to five distinct domains (books, films, politicians, sportsmen, writers) spanning across eight languages (bn, en, hi, ml, mr, or, pa, ta). We start by using Wikidata API³ to filter the domains of interest initially and further fetch the entities that have

Wikipedia pages in our set of languages. Later, we use Wikipedia language-specific 20220926 XML dumps to extract the Wikipedia pages of filtered entities. Sections and subsections follow a standard structure in Wikipedia text. We extract sections and subsections from the text. Text in containers with a depth greater than two is merged into parent sub-sections.

We also extract the citation URLs in each section using wiki markup. We use the MediaWikiParserFromHell⁴ module in Python to clean all the wiki markup in a particular section and gather clean section text. We filter the URLs to remove file formats other than HTML and pdf. For each reference URL, we use BeautifulSoup⁵ in Python to scrape the `<p>` paragraph text from the corresponding webpages, and pdfminer⁶ to extract the text from pdf. Finally, we tokenize the scraped text into individual sentences using a universal sentence tokenizer in IndicNLP (Kakwani et al., 2020). We retain only those sections as part of the dataset which has at least one (crawlable) reference URL with non-empty text.

Overall, each sample in the dataset consists of the domain, language, section title, set of reference URLs, and Wikipedia section text. This dataset is then split into train, validation, and test in the 60:20:20 ratio, stratified by domain and language. We make this standard splits publicly available as part of the dataset.

⁴<https://pypi.org/project/mwparserfromhell/>

⁵<https://pypi.org/project/beautifulsoup4/>

⁶<https://pypi.org/project/pdfminer/>

³<https://query.wikidata.org/>

3.2 Data Analysis

We analyze our prepared dataset across several parameters, the details of which are in the following tables. Table 3 shows the total number of articles per domain per language in the XWIKIREF dataset. By the nature of spread of Wikipedia articles across domains, the number of articles differ across domains per language. Overall, there are ~69K articles from which we extract sections for the dataset.

Next, Table 4 shows the distribution of number of sections across various (domain, language) pairs in the XWIKIREF dataset. Further, as mentioned earlier, XWIKIREF is a multi-document summarization dataset. Table 5 shows the average number of references per section for each (domain, language) pair. As can be seen from the table, the dataset contains at least two references on average for every (domain, language) pair, although a large percent of these references are not in the LR language.

Fig. 4 shows the distribution of the number of reference URLs across domains in the dataset. The figure shows that there are several samples where the number of reference URLs is 5+ across all domains showing that multi-document summarization is essential.

Finally, we show word clouds of the most frequent Wikipedia section titles for each of the five domains in Fig. 5. Each word cloud contains the five most frequent titles per language. Section titles for one language are shown using a single color. Font size indicates relative frequency. The word clouds show the variety of section titles per (language, domain) pair.

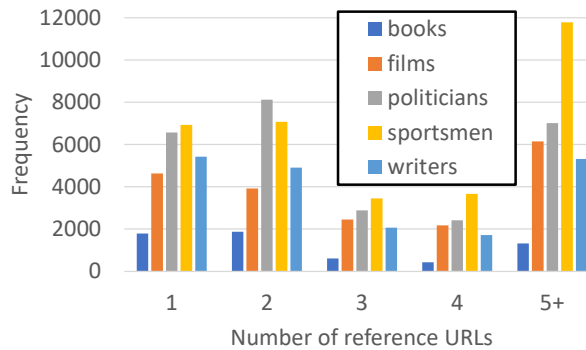


Figure 4: Distribution of number of reference URLs across domains in our XWIKIREF dataset

4 Two-Stage Approach for XWIKIGEN

In this section, we first motivate the need for proposing a two-stage approach for the cross-lingual multi-document summarization task, XWIKIGEN. Next, we discuss the details of the two stages: extractive and abstractive. Finally, we present multiple training setups.

Table 6 shows the average number of sentences in references of a section for each domain and language in our dataset. Combined with the number of references per section as shown in Table 5, the overall text input is very large. Given the quadratic complexity of Transformer-based methods, it is infeasible to feed such long inputs to an encoder-decoder model and expect it to be able to output reasonable summaries. Transformers sub-quadratic complexity is an active area of research with models like Longformer (Beltagy et al., 2020), Reformer (Kitaev et al., 2019), etc. But we plan to explore them as part of future work.

In order to address the long input problem, we propose a two-stage system where the first stage identifies promising candidate sentences across all the reference citations for a sample. The highest scoring candidate sentences are passed as input to the second stage which generates an abstractive summary. In the following, we will discuss the two stages in detail.

4.1 Extractive Summarization Stage

Given a set of reference URLs, the extractive stage aims at selecting a subset of sentences from these URLs which best represents a summary of the set of URLs. While earlier methods for extractive summarization were position based, or lexical chains based, neural methods have become popular in the past decade. We experiment with two different extractive summarization-based techniques: Salience and HipoRank. For both methods, the input consists of the section title and a set of reference URLs. Both the methods output a summary worthiness score for every sentence in these reference URLs.

Salience based extractive summarization: The main idea of salience based extractive summarization is to find the top-K salient sentences from the input references based on the relevance of that sentence relative to a particular section title. Our salience method is inspired by the relevance scoring method in (Yasunaga et al., 2021), where a language model was used to calculate the relevance score of each answer entity relative to the QA

Domain/Lang	bn	hi	ml	mr	or	pa	ta	en	Total
Books	313	922	458	87	73	221	493	1467	4034
Film	1501	1025	2919	480	794	421	3733	1810	12683
Politicians	2006	3927	2513	988	1060	1123	4932	1628	18177
Sportsmen	5470	6334	1783	2280	319	1975	2552	919	21632
Writers	1603	2024	2251	784	498	2245	1940	714	12059
Total	10893	14232	9924	4619	2744	5985	13650	6538	68585

Table 3: XWIKIREF: Total #articles per domain per language

Domain/Lang	bn	hi	ml	mr	or	pa	ta	en	Total
Books	434	987	557	111	88	238	598	2972	5985
Film	2139	1363	3737	676	1351	476	4781	4766	19289
Politicians	3261	4478	3719	1384	1404	1524	6431	4780	26981
Sportsmen	9485	8118	2642	3056	485	2624	3769	2698	32877
Writers	2598	2743	3435	1166	896	3034	3113	2409	19394
Total	17917	17689	14090	6393	4224	7896	18692	17625	104526

Table 4: XWIKIREF: Total #sections per domain per language

Domain/Lang	bn	hi	ml	mr	or	pa	ta	en
Books	3.62	2.61	2.59	2.07	3.46	2.30	2.40	6.34
Film	4.85	7.14	3.34	2.96	3.81	4.10	3.83	12.74
Politicians	4.98	4.09	3.75	3.87	2.07	3.59	3.91	14.21
Sportsmen	6.37	8.30	6.96	4.20	3.93	4.49	6.38	21.88
Writers	5.20	5.46	4.16	3.74	2.85	3.34	4.20	17.61

Table 5: XWIKIREF: Average number of references per section for each domain and language



Books

Films

Politicians



Sportsmen

Writers

Figure 5: Word clouds of most frequent Wikipedia section titles per domain. Each word cloud contains titles across all languages. Section titles for one language are shown using a single color. Font size indicates relative frequency.

Domain	bn	hi	ml	mr	or	pa	ta	en
Books	200.2	117.9	1232.0	225.8	51.9	246.7	302.7	940.8
Films	223.9	320.6	91.9	105.6	345.9	172.6	192.5	1253.6
Politicians	1318.3	467.1	513.3	394.0	54.5	255.4	614.1	1540.9
Sportsmen	335.7	1166.3	406.9	167.5	724.0	253.5	714.0	1535.0
Writers	643.2	2032.5	800.1	385.5	118.5	351.0	1279.0	2061.3

Table 6: Average number of sentences in references of a section for each domain and language in XWIKIREF.

(question-answer) context. For extracting the top-K sentences, we first split the reference text into sentences. Each sentence is then prepended with a section title and passed as input to a pretrained XLM-RoBERTa(Conneau et al., 2019) language model. We score each sentence based on the likelihood from the language model. Top-K sentences with the highest relevance scores are passed on as output to the next stage.

Note that we use a pretrained language model for this method. The model is used in probe mode only.

HipoRank based extractive summarization: Hierarchical and Positional Ranking model (HipoRank) (Dong et al., 2020) is an unsupervised graph-based model for the extractive summarization of long documents. Given a document with multiple sections, it creates a directed hierarchical graph with sentence and section nodes and sentence-sentence and sentence-section edges with asymmetrically weighted edges. Score for a sentence node is then computed based on a weighted sum of edges incident on the node.

We compute sentence node representations using mBERT (Devlin et al., 2018). We take the mean of all the sentence representations within a section to compute the representation for every section node.

Each sentence node is connected to other nodes via intra-sectional and inter-sectional edges. Intra-sectional connections are between all sentences of the same section, meant to model the local importance of the sentence. The key idea is that sentences similar to most sentences within a section are more important. On the other hand, inter-sectional connections are between sentences and section nodes, meant to model the global importance of the sentences. Here, the idea is that sentences most similar to other sections are the most important. For efficiency, edges are not allowed between two sentences in different sections.

Cosine similarity between node embeddings is used to compute edge weights. Based on the hypothesis that important sentences are near the boundaries (start or end) of a text, intra-sectional edges have higher weight if they are incident on a

boundary sentence. Similarly, important sections are near the boundaries of the document. This hypothesis is used to weigh inter-sectional edges appropriately. Finally, the importance score for a sentence node is computed based on a weighted sum of edges (both intra-sectional as well as inter-sectional) incident on the node. We then sort these sentences in descending order based on the importance score and greedily select the top-K sentences as our extractive summary.

4.2 Abstractive Summarization Stage

Note that the output from the extractive stage is in the reference text language itself. Also, since these sentences have been obtained across several documents, they often form an incoherent extractive summary. We need an abstractive stage to generate coherent summaries in the target language. For the abstractive stage, we use two state-of-the-art multi-lingual natural language generation models viz. mBART-large(Liu et al., 2020) and mT5-base(Xue et al., 2021). mT5 and mBART are both multi-lingual encoder-decoder Transformer models and have been shown to be very effective across multiple such NLP tasks like question answering, natural language inference, named entity recognition, etc. Both these models contain 24 layers (12 layers encoder + 12 layers decoder). For both models, we pass the target language id, article title, section title, and top-k sentences from the extractive stage (descending sorted based on score) as input.

mT5 (Xue et al., 2021) was pretrained on mC4 dataset⁷ comprising of web data in 101 different languages and leverages a unified text-to-text format. mBART (Liu et al., 2020) was pretrained on CommonCrawl corpus using the BART objective where the input texts are noised by masking phrases and permuting sentences, and a single Transformer model is learned to recover the texts. Specifically, our mT5-base model is an encoder-decoder model with 12 layers each for the encoder and decoder. It has 12 heads per layer, a feed-forward size of 2048,

⁷https://www.tensorflow.org/datasets/catalog/c4#c4multi-lingual_nights_stay

keys and values are 64 dimensional, $d_{model}=768$, and a vocabulary size of 250112. Overall the model has 582.40M parameters. Our mBART-large-50 model (Liu et al., 2020) also has 12 layers each for encoder as well as decoder. It has 16 heads per layer, a feed-forward size of 4096, $d_{model}=1024$, and a vocabulary size of 250054. Overall the model has 610.87M parameters. Note that the two models have almost the same size.

Using the training part of our XWIKIREF dataset, we fine-tune both these models on the extractive stage output.

4.3 Multi-lingual, Multi-domain, and Multi-lingual-Multi-domain setups

XWIKIREF contains data for eight languages and five domains. We could perform training in various ways. We could train one model per (language, domain) pair. Given five domains and eight languages, we would need to train, maintain and deploy 40 models. Also, the amount of training data per (language, domain) pair is not very large. Thus, such individual models may not be able to benefit from cross-language or cross-domain knowledge.

Another way of training models is multi-lingual. This means that we train one model per domain using training data across all languages. Thus, there will be five models. A third way is to training models in a multi-domain manner. Thus, we will have one model per language using training data across all domains, leading to eight models.

One last approach is to train a multi-lingual-multi-domain model. We collate training data across all languages and domains and train a single model. This model can exploit cross-language cross-domain clues and learn robust representations.

Previous literature in multi-lingual cross-lingual natural language generation has shown that multi-lingual models tend to be better than individual ones, especially for low-resource languages. Since this work is focused on LR languages, we experiment with multi-lingual, multi-domain, and multi-lingual-multi-domain setups.

5 Experiments

5.1 Training Configuration

The two stages in our approach have different compute requirements. We performed extractive step on a machine with one NVIDIA 2080Ti with 12GB of GPU RAM. For the abstractive stage, we fine-

tuned the model on a machine having NVIDIA V100 having 32GB of GPU RAM with CUDA 11.0 and PyTorch 1.7.1.

For the salience based extractive stage, we used XLM-RoBERTa-base (Conneau et al., 2019) model for extracting the sentence representation with 512 as the maximum input length. For HipoRank, we used the multi-lingual BERT (mBERT (Devlin et al., 2018)) model to get the sentence representation for building the graph with 512 as maximum input length. We took a maximum of 50 sentences per sample as output from the extractive stage.

For the abstractive stage, we fine-tuned mBART (Liu et al., 2020) and mT5 (Xue et al., 2021) models for 20 epochs keeping a batch size of 4. We initialize using google/mt5-base and facebook/mbart-large-50 huggingface checkpoints. We kept the maximum input and output length as 512 across all of our experiments. We used AdamW optimizer with a learning rate of 1e-5. We perform greedy decoding.

5.2 Metrics

We evaluate our models using standard Natural Language Generation (NLG) metrics like ROUGE-L (Lin, 2004), METEOR (Banerjee and Lavie, 2005) and chrF++ (Popović, 2017). Another popular NLG metric is PARENT. But PARENT (Dhingra et al., 2019) relies on the word overlap between input and the prediction text. Since the input and prediction in XWIKIGEN are in different languages, we cannot compute PARENT scores.

1. **ROUGE-L**: ROUGE-L, or Recall-Oriented Understudy LCS is based on statistics using the longest common subsequence (LCS). The longest common subsequence task automatically determines the longest co-occurring n-grams given a reference sequence and a machine-generated sequence, while taking sentence-level structure similarities into account.
2. **chrF++**: In addition to adding word n-grams, chrF++ is an evaluation measure that uses the F-score statistic for character n-gram matches.
3. **METEOR**: METEOR, an automated metric evaluation, is based on a generalized idea of unigram matching between the text generated by the machine and the reference text created by a human. Based on their meanings, surface

	Extractive	Abstractive	ROUGE-L	chrF++	METEOR
Multi-lingual	Saliency	mBART	15.59	17.20	10.98
	Saliency	mT5	14.66	15.45	8.92
	HipoRank	mBART	16.96	19.11	12.19
	HipoRank	mT5	15.98	17.11	10.08
Multi-domain	Saliency	mBART	19.88	22.82	15.00
	Saliency	mT5	12.13	13.66	7.27
	HipoRank	mBART	18.87	20.79	14.10
	HipoRank	mT5	12.29	13.93	7.36
Multi-lingual-multi-domain	Saliency	mBART	20.50	22.32	14.81
	Saliency	mT5	17.31	18.77	11.57
	HipoRank	mBART	21.04	23.44	15.35
	HipoRank	mT5	17.65	19.04	11.74

Table 7: XWIKIGEN Results across multiple training setups and (extractive, abstractive) methods on test part of XWIKIREF. Best results per block are highlighted in bold. Overall best results are also underlined.

forms, and stemmed forms, unigrams can be matched.

6 Results

Table 7 shows results across two extractive methods (saliency, HipoRank), two abstractive methods (mBART, mT5), three training setups (multi-lingual, multi-domain, multi-lingual-multi-domain), and three metrics (ROUGE-L, METEOR, and chrF++) computed as a micro-average across all test instances in XWIKIREF.

From the table, we observe that best results are obtained using the multi-lingual-multi-domain training setup. Also, in this setup, the combination of HipoRank with mBART provides the best overall results. These results are statistically significantly better compared to other rows in the table. The supremacy of the multi-lingual-multi-domain training setup is expected given that it combines learning across all languages and domains in the dataset. Also, HipoRank was expected to perform better since it combines the knowledge of the pretrained (mBERT) model with the hierarchical document structure. Even for the multi-lingual setup, best results are obtained using the HipoRank+mBART combination. However, for the multi-domain setup, we observe that Saliency+mBART performs better. Mann-Whitney U-Test shows that, amongst the best block (Multi-lingual-multi-domain), our best model (HipoRank+mBART) is better than the second best (Saliency+mBART) with p-values of $5.47e-07$ (ROUGE-L), $2.76e-26$ (chrF++), and $6.76e-09$ (METEOR). Also HipoRank+mBART is better than the worst model in the block (Saliency+mT5) with p-values of $3.16e-143$ (ROUGE-L), $1.69e-268$ (chrF++) and $8.67e-201$ (METEOR). Also, note that Saliency uses XLM-RoBERTa (270M parameters); HipoRank uses mBERT (110M parameters).

mT5 and mBART contain 580M and 610M parameters resp. Finally, Average output length is 221 words for our best model.

Further, we wish to drill deeper into the performance of the best models for each of the training setups. Hence, for these three models, we show micro-averaged metrics per language and per domain for the test set in Tables 8 and 9 respectively. We make the following observations from Table 8: (1) Multi-domain training is much better than multi-lingual training except for Tamil (ta). (2) Interesting relatively richer languages like en and hi seem to benefit most when we move from multi-lingual to multi-lingual-multi-domain setup. (3) When comparing multi-domain training with multi-lingual-multi-domain, we observe gains across most languages except for losses in mr and or. From Table 9, we observe that across all domains, results improve as we move from multi-lingual training to multi-domain training to multi-lingual-multi-domain setup (except for minor drop for sportsmen in the multi-lingual-multi-domain case).

Finally, we present the most detailed per (domain, language) level results for our best model in Table 10. We observe that best results are obtained for the hi-books combination. Overall, the model works best for Hindi across all domains. The model also performs reasonably for mr and or. But more work needs to be done to improve the model for Bengali and Malayalam.

For a qualitative analysis of our best model outputs, we show some sample outputs in Table 11. In general, our model generates fluent text to a certain length. But, as the length of the output grows, we see the repeated patterns in the text, breaking the sentence structure. Pretrained language models usually present this problem of repeating n-grams, and increasing the training dataset size has been

	bn	en	hi	mr	ml	or	pa	ta
ROUGE-L	14.49	7.46	29.01	20.67	12.25	25.54	16.89	17.09
chrF++	18.58	10.55	28.38	20.41	15.30	27.31	13.49	21.90
METEOR	9.71	5.90	25.24	13.72	6.42	22.69	10.12	9.87
Multi-lingual HipoRank+mBART								
	bn	en	hi	mr	ml	or	pa	ta
ROUGE-L	15.30	12.07	36.16	31.25	14.22	29.53	16.91	15.00
chrF++	19.40	17.41	34.34	32.50	18.34	32.20	14.10	21.65
METEOR	10.34	9.59	31.02	24.86	8.89	26.86	10.01	9.29
Multi-domain Saliency+mBART								
	bn	en	hi	mr	ml	or	pa	ta
ROUGE-L	15.21	16.32	36.38	22.71	15.50	27.41	18.64	18.87
chrF++	19.50	21.34	34.55	21.93	18.65	28.83	16.27	23.99
METEOR	10.24	12.74	31.24	14.88	8.84	23.93	11.6	11.26
Multi-lingual-multi-domain HipoRank+mBART								

Table 8: Detailed per-language results on test part of XWIKIREF, for the best model per training setup.

	writers	books	sportsmen	politicians	films
ROUGE-L	10.12	3.65	20.61	22.01	14.60
chrF++	10.76	3.58	22.94	24.34	18.36
METEOR	5.77	1.93	14.66	17.61	10.04
Multi-lingual HipoRank+mBART					
	writers	books	sportsmen	politicians	films
ROUGE-L	14.21	20.17	20.65	22.77	20.82
chrF++	17.24	21.86	22.75	26.14	24.30
METEOR	10.06	16.26	14.71	18.88	14.81
Multi-domain Saliency+mBART					
	writers	books	sportsmen	politicians	films
ROUGE-L	14.67	22.03	20.44	23.70	21.60
chrF++	16.65	22.81	21.57	25.75	24.51
METEOR	9.81	17.55	13.84	18.92	15.11
Multi-lingual-multi-domain HipoRank+mBART					

Table 9: Detailed per-domain results on test part of XWIKIREF, for the best model per training setup.

shown to alleviate it. Further, we observe the faithfulness of content between the generated text and reference text. Despite generating correct sentence structure, the model is seen to predict value strings incorrectly, like that of date of birth, names of persons, and related entities. This issue of hallucination is also common in pretrained language models and finetuning on more training data should help.

7 Conclusion

We motivated the need for cross-lingual multi-document summarization for generating Wikipedia text for low-resource languages. Toward this XWIKIGEN task, we contribute a novel dataset spanning five domains, eight languages and $\sim 105K$ summaries. We also proposed a two-stage extractive-abstractive system and experimented with multiple training setups. We observed that our multi-lingual-multi-domain model using HipoRank (extractive) and mBART (abstractive) led to the best results. We make our code and dataset publicly available and hope that the community will use it as a benchmark to work further in this critical area.

References

- Tushar Abhishek, Shivprasad Sagare, Bhavyajeet Singh, Anubhav Sharma, Manish Gupta, and Vasudeva Varma. 2022. Xalign: Cross-lingual fact-to-text alignment and generation for low-resource languages. In *The World Wide Web Conference*, pages 171–175.
- Diego Antognini and Boi Faltings. 2020. Gamewikisum: a novel large multi-document summarization dataset. In *Proceedings of the 12th Language Resources and Evaluation Conference*, pages 6645–6650.
- Satanjeev Banerjee and Alon Lavie. 2005. **METEOR: An automatic metric for MT evaluation with improved correlation with human judgments**. In *Proceedings of the ACL Workshop on Intrinsic and Extrinsic Evaluation Measures for Machine Translation and/or Summarization*, pages 65–72, Ann Arbor, Michigan. Association for Computational Linguistics.
- Iz Beltagy, Matthew E Peters, and Arman Cohan. 2020. Longformer: The long-document transformer. *arXiv preprint arXiv:2004.05150*.
- Sahil Manoj Bhatt, Sahaj Agarwal, Omkar Gurjar, Manish Gupta, and Manish Shrivastava. 2023.

	ROUGE-L					chrF++					METEOR				
	writers	books	sportsmen	politicians	films	writers	books	sportsmen	politicians	films	writers	books	sportsmen	politicians	films
bn	10.61	9.43	15.78	17.46	15.75	14.72	14.19	20.28	21.21	20.03	6.13	5.66	10.56	12.99	10.39
en	13.04	15.62	18.53	13.32	20.15	19.71	18.90	22.80	20.00	24.13	10.65	11.62	13.89	11.47	15.09
hi	33.23	58.71	28.48	53.18	21.46	31.05	51.99	26.99	52.05	19.64	28.49	53.78	21.46	51.65	15.30
mr	15.37	17.00	26.77	20.06	24.15	14.68	16.24	26.84	18.12	21.82	7.40	9.50	20.14	10.74	14.30
ml	8.96	10.93	12.97	14.36	24.19	13.35	12.18	15.42	18.01	26.51	3.92	4.77	6.14	7.73	16.16
or	13.15	12.31	9.38	43.76	26.66	14.44	15.16	10.51	44.17	29.27	5.67	9.14	5.28	40.89	23.30
pa	14.96	12.35	24.54	16.59	17.15	13.42	12.39	21.32	14.02	13.82	8.59	7.48	16.54	9.80	9.63
ta	10.62	11.85	18.94	19.18	24.90	16.43	17.63	23.98	23.77	29.94	4.89	6.29	10.03	11.24	17.05

Table 10: Detailed results for every (domain, language) partition of the test set of our XWIKIREF dataset, for our best XWIKIGEN model: Multi-lingual-multi-domain HipoRank+mbART.

Domain	Reference URLs	Entity/Section	Lang	Reference Text	Generated Summary
Films	http://www.thehindu.com/features/cinema/cinema-columns/blast-from-the-past-chandra-mohana-or-samooga-thodu-1936/article5668076.ece	சந்திரமோகனா (திரைப்படம்)/அறிமுகம்	ta	சந்திரமோகனா என்பது 1936 ஆம் ஆண்டு வெளிவந்த தமிழ்த் திரைப்படமாகும். முதுரை மோகன் மூவிடோன் நிறுவனத்தினரின் தயாரிப்பில் வெளிவந்த இத்திரைப்படத்தில் எம். கே. ராதா, எஸ். வி. வெங்கட்ராமன் மற்றும் பலரும் நடித்துள்ளனர். இப்படமானது கொத்தமங்கலம் எஸ். எம். சுப்ரமணியம் என்று அப்போது அழைக்கப்பட்ட கொத்தமங்கலம் சுப்பு எழுதிய சந்திரமோகனா அல்லது சமுதாயத் தொண்டு என்ற புதினத்தை அடிப்படையாகக் கொண்டு எடுக்கப்பட்டது.	சந்திர மோகனா (Chandra Mohana) 1947 ஆம் ஆண்டு வெளிவந்த தமிழ்த் திரைப்படமாகும். எஸ். எஸ். வாசன் இயக்கத்தில் வெளிவந்த இத்திரைப்படத்தில் எம். கே. ராதா, டி. ஆர். ராமச்சந்திரன் மற்றும் பலரும் நடித்திருந்தனர்.
Sportsmen	https://www.icc-cricket.com/news/1939383 https://www.icc-cricket.com/media-releases/1212091 http://www.espn.com/story/_/id/25033717/associates-pathway-2023-world-cup-undergoes-major-revamp	2021 पापुआ न्यू गिनी क्रिकोणी सीरीज (मई)/परिचय	hi	2021 पापुआ न्यू गिनी क्रिकोणी सीरीज 2019-2023 आईसीसी क्रिकेट विश्व कप लीग 2 क्रिकेट टूर्नामेंट का 8 वां दौर होने वाला था, जो मई 2021 में पापुआ न्यू गिनी में खेला जाना था। यह नामीबिया, पापुआ न्यू गिनी और संयुक्त राज्य अमेरिका की क्रिकेट टीमों के बीच एक त्रिकोणीय राष्ट्र श्रृंखला होती, जिसमें मैच एक दिवसीय अंतर्राष्ट्रीय (वनडे) जुड़नार के रूप में खेले जाते थे। आईसीसी क्रिकेट विश्व कप लीग 2 2023 क्रिकेट विश्व कप के लिए योग्यता मार्ग का हिस्सा है। हालाँकि, 12 फरवरी 2021 को, कोविड-19 महामारी के कारण श्रृंखला को स्थगित कर दिया गया था।	2021 पापुआ न्यू गिनी ट्राई-नेशन सीरीज एक क्रिकेट टूर्नामेंट था जो सितंबर 2021 में पापुआ न्यू गिनी में खेला गया था। यह पापुआ न्यू गिनी क्रिकेट टीम और पापुआ न्यू गिनी क्रिकेट बोर्ड (पीएनसीबी) के बीच एक त्रिकोणीय राष्ट्र श्रृंखला थी, जिसमें पापुआ न्यू गिनी और संयुक्त राज्य अमेरिका के बीच एक दिवसीय अंतर्राष्ट्रीय (वनडे) मैच खेला गया था। यह श्रृंखला सितंबर 2021 में होने वाली थी, लेकिन कोविड-19 महामारी के कारण इसे स्थगित कर दिया गया था।

Table 11: Some examples of XWIKIGEN using our best model. More examples are in Appendix.

- Tourismnlg: A multi-lingual generative benchmark for the tourism domain. In *ECIR*, page To appear.
- Z Chi, L Dong, S Ma, S Huang, X-L Mao, H Huang, and F Wei. 2021. [Mt6: Multilingual pretrained text-to-text transformer with translation pairs](#).
- Z Chi, L Dong, F Wei, W Wang, X-L Mao, and H Huang. 2020. Cross-lingual natural language generation via pre-training. In *AAAI*, volume 34, pages 7570–7577.
- Alexis Conneau, Kartikay Khandelwal, Naman Goyal, Vishrav Chaudhary, Guillaume Wenzek, Francisco Guzmán, Edouard Grave, Myle Ott, Luke Zettlemoyer, and Veselin Stoyanov. 2019. Unsupervised cross-lingual representation learning at scale. *arXiv preprint arXiv:1911.02116*.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2018. Bert: Pre-training of deep bidirectional transformers for language understanding. *arXiv preprint arXiv:1810.04805*.
- Bhuvan Dhingra, Manaal Faruqui, Ankur Parikh, Ming-Wei Chang, Dipanjan Das, and William Cohen. 2019. Handling divergent reference texts when evaluating table-to-text generation. In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 4884–4895.
- Yue Dong, Andrei Mircea, and Jackie CK Cheung. 2020. Discourse-aware unsupervised summarization of long scientific documents. *arXiv preprint arXiv:2005.00513*.
- C Gardent, A Shimorina, S Narayan, and L Perez-Beltrachini. 2017. The webnlg challenge: Generating text from rdf data. In *INLG*, pages 124–133.
- Demian Gholipour Ghalandari, Chris Hokamp, John Glover, Georgiana Ifrim, et al. 2020. A large-scale multi-document summarization dataset from the wikipedia current events portal. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 1302–1308.
- George Giannakopoulos, Jeff Kubina, John Conroy, Josef Steinberger, Benoit Favre, Mijail Kabadjov, Udo Kruschwitz, and Massimo Poesio. 2015. Multiling 2015: multilingual summarization of single and multi-documents, on-line fora, and call-center conversations. In *Proceedings of the 16th Annual Meeting of the Special Interest Group on Discourse and Dialogue*, pages 270–274.
- Tahmid Hasan, Abhik Bhattacharjee, Wasi Uddin Ahmad, Yuan-Fang Li, Yong-Bin Kang, and Rifat Shahriyar. 2021a. Crosssum: Beyond english-centric cross-lingual abstractive text summarization for 1500+ language pairs. *arXiv preprint arXiv:2112.08804*.
- Tahmid Hasan, Abhik Bhattacharjee, Md Saiful Islam, Kazi Samin, Yuan-Fang Li, Yong-Bin Kang, M Sohel Rahman, and Rifat Shahriyar. 2021b. Xl-sum: Large-scale multilingual abstractive summarization for 44 languages. *arXiv preprint arXiv:2106.13822*.
- Hiroaki Hayashi, Prashant Budania, Peng Wang, Chris Ackerson, Raj Neervannan, and Graham Neubig. 2021. Wikiasp: A dataset for multi-domain aspect-based summarization. *Transactions of the Association for Computational Linguistics*, 9:211–225.
- Nisarg Jhaveri, Manish Gupta, and Vasudeva Varma. 2019. clstk: The cross-lingual summarization toolkit. In *Proceedings of the Twelfth ACM International Conference on Web Search and Data Mining*, pages 766–769.
- Divyanshu Kakwani, Anoop Kunchukuttan, Satish Golla, NC Gokul, Avik Bhattacharyya, Mitesh M Khapra, and Pratyush Kumar. 2020. Indicnlp suite: Monolingual corpora, evaluation benchmarks and pre-trained multilingual language models for indian languages. In *Findings of the Association for Computational Linguistics: EMNLP 2020*, pages 4948–4961.
- Nikita Kitaev, Lukasz Kaiser, and Anselm Levskaya. 2019. Reformer: The efficient transformer. In *International Conference on Learning Representations*.
- Faisal Ladhak, Esin Durmus, Claire Cardie, and Kathleen McKeown. 2020. Wikilingua: A new benchmark dataset for cross-lingual abstractive summarization. *arXiv preprint arXiv:2010.03093*.
- R Lebre, D Grangier, and M Auli. 2016. Neural text generation from structured data with application to the biography domain. In *EMNLP*, pages 1203–1213.
- M Lewis, Y Liu, N Goyal, M Ghazvininejad, A Mohamed, O Levy, V Stoyanov, and L Zettlemoyer. 2020. Bart: Denoising sequence-to-sequence pre-training for natural language generation, translation, and comprehension. In *ACL*, pages 7871–7880.
- Y Liang, N Duan, Y Gong, N Wu, F Guo, W Qi, M Gong, L Shou, D Jiang, G Cao, et al. 2020. Xglue: A new benchmark dataset for cross-lingual pre-training, understanding and generation. *arXiv:2004.01401*.
- Chin-Yew Lin. 2004. [ROUGE: A package for automatic evaluation of summaries](#). In *Text Summarization Branches Out*, pages 74–81, Barcelona, Spain. Association for Computational Linguistics.
- Peter J Liu, Mohammad Saleh, Etienne Pot, Ben Goodrich, Ryan Sepassi, Lukasz Kaiser, and Noam Shazeer. 2018. Generating wikipedia by summarizing long sequences. *arXiv preprint arXiv:1801.10198*.
- Yinhan Liu, Jiatao Gu, Naman Goyal, Xian Li, Sergey Edunov, Marjan Ghazvininejad, Mike Lewis, and Luke Zettlemoyer. 2020. Multilingual denoising pre-training for neural machine translation. *Transactions of the Association for Computational Linguistics*, 8:726–742.

- H Mei, M Bansal, and M R Walter. 2016. What to talk about and how? selective gen. using lstms with coarse-to-fine alignment. In *NAACL-HLT*, pages 720–730.
- Rajarshee Mitra, Rhea Jain, Aditya Srikanth Veerubhotla, and Manish Gupta. 2021. Zero-shot multilingual interrogative question generation for” people also ask” at bing. In *Proceedings of the 27th ACM SIGKDD Conference on Knowledge Discovery & Data Mining*, pages 3414–3422.
- P Nema, S Shetty, P Jain, A Laha, K Sankaranarayanan, and M M Khapra. 2018. Generating descriptions from structured data using a bifocal attention mechanism and gated orthogonalization. In *NAACL-HLT*, pages 1539–1550.
- Khanh Nguyen and Hal Daumé III. 2019. Global voices: Crossing borders in automatic news summarization. In *Proceedings of the 2nd Workshop on New Frontiers in Summarization*, pages 90–97.
- Maja Popović. 2017. chrF++: words helping character n-grams. In *Proceedings of the second conference on machine translation*, pages 612–618.
- Colin Raffel, Noam Shazeer, Adam Roberts, Katherine Lee, Sharan Narang, Michael Matena, Yanqi Zhou, Wei Li, Peter J Liu, et al. 2020. Exploring the limits of transfer learning with a unified text-to-text transformer. *J. Mach. Learn. Res.*, 21(140):1–67.
- L F R Ribeiro, M Schmitt, H Schütze, and I Gurevych. 2021. [Investigating pretrained language models for graph-to-text generation](#).
- Shivprasad Sagare, Tushar Abhishek, Bhavyajeet Singh, Anubhav Sharma, Manish Gupta, and Vasudeva Varma. 2022. Xf2t: Cross-lingual fact-to-text generation for low-resource languages. *arXiv preprint arXiv:2209.11252*.
- Thomas Scialom, Paul-Alexis Dray, Sylvain Lamprier, Benjamin Piwowarski, and Jacopo Staiano. 2020. Mlsun: The multilingual summarization corpus. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 8051–8067.
- H Shahidi, M Li, and J Lin. 2020. Two birds, one stone: A simple, unified model for text generation from structured and unstructured data. In *ACL*, pages 3864–3870.
- Pavel Tikhonov and Valentin Malykh. 2022. Wiki-multi: a corpus for cross-lingual summarization. *arXiv preprint arXiv:2204.11104*.
- P Vougiouklis, H Elsahar, L-A Kaffee, C Gravier, F Laforest, J Hare, and E Simperl. 2018. Neural wikipedia: Generating textual summaries from knowledge base triples. *J. Web Semantics*, 52:1–15.
- Linting Xue, Noah Constant, Adam Roberts, Mihir Kale, Rami Al-Rfou, Aditya Siddhant, Aditya Barua, and Colin Raffel. 2021. mt5: A massively multilingual pre-trained text-to-text transformer. In *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 483–498.
- Michihiro Yasunaga, Hongyu Ren, Antoine Bosselut, Percy Liang, and Jure Leskovec. 2021. Qa-gnn: Reasoning with language models and knowledge graphs for question answering. In *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 535–546.
- J Zhu, Q Wang, Y Wang, Y Zhou, J Zhang, S Wang, and C Zong. 2019. Ncls: Neural cross-lingual summarization. In *EMNLP-IJCNLP*, pages 3054–3064.

A More Examples for Qualitative Analysis

For a qualitative analysis of our best model outputs, we show more sample outputs in Tables 12 and 13. In general, our model generates fluent text to a certain length. But, as the length of the output grows, we see the repeated patterns in the text, breaking the sentence structure. Pretrained language models usually present this problem of repeating n-grams, and increasing the training dataset size has been shown to alleviate it. Further, we observe the faithfulness of content between the generated text and reference text. Despite generating correct sentence structure, the model is seen to predict value strings incorrectly, like that of date of birth, names of persons, and related entities. This issue of hallucination is also common in pretrained language models and finetuning on more training data should help.

Domain	Reference URLs	Entity/Section	Lang	Reference Text	Generated Summary
Books	https://www.nytimes.com/books/97/07/13/reviews/970713.13polkl.html	কোশল মুদ্রা	ml	কোশল মুদ্রা ১৯৯৭ সালে প্রকাশিত একটি উপন্যাস। এটি কোশল মুদ্রার জীবনের একটি চিত্র। এটি কোশল মুদ্রার জীবনের একটি চিত্র। এটি কোশল মুদ্রার জীবনের একটি চিত্র।	এটি কোশল মুদ্রার জীবনের একটি চিত্র। এটি কোশল মুদ্রার জীবনের একটি চিত্র। এটি কোশল মুদ্রার জীবনের একটি চিত্র।
Politicians	https://timesofindia.indiatimes.com/city/patna/all-eyes-on-4-seats-in-khagaria-district/articleshow/78939785.cms https://web.archive.org/web/20201204042405/https://www.jansatta.com/lifestyle/bihar-election-ljp-khagaria-candidate-renu-kumari-kushwaha-spent-24-and-half-lakhs-on-jewelry-and-cars-owns-this-much-property/1564879/ http://164.100.47.194/loksabha/Members/memberbioprofile.aspx?mpsn=537&lastls=13	রেনু কুমারী কুশওয়াহ	pa	রেনু কুমারী কুশওয়াহ (জন্ম ১৯৬৫) হলেন ভারতীয় রাজনীতিবিদ। তিনি ২০১৫ সালে লোকসভায় নির্বাচিত হন।	রেনু কুমারী কুশওয়াহ (জন্ম ১৯৬৫) হলেন ভারতীয় রাজনীতিবিদ। তিনি ২০১৫ সালে লোকসভায় নির্বাচিত হন।

Table 12: More examples of XWIKIGEN using our best model.

Domain	Reference URLs	Entity/Section	Lang	Reference Text	Generated Summary
Writers	http://www.columbia.edu/itc/mealac/pritchett/00ambedkar/timeline/graphics/youth.html http://www.columbia.edu/itc/mealac/pritchett/00ambedkar/timeline/1890s.html http://www.columbia.edu/itc/mealac/pritchett/00ambedkar/txt_ambedkar_waiting.html	ভীমরাও রামজী শাকপাল	bn	ভীমরাও রামজী শাকপাল (মহা) (Mhow) অঞ্চলের (বর্তমান মধ্য প্রদেশ) এবং কেন্দ্রীয় সামরিক সেনানিবাসে ব্রিটিশ কর্তৃক স্থাপিত শহরে আশ্রয় গ্রহণ করেছিলেন। তিনি ছিলেন রামজী মালোজী শাকপাল (Ramji Maloji Sakpal) এবং ভীমাবাইর (Bhimabai) ১৪তম ভগ্না সর্বকনিষ্ঠ পুত্র। তার পরিবার ছিলেন মারাঠী অধ্যুষিত বর্তমান কালের "মহারাষ্ট্র"-এর রমজির জেলার "আমবাদের" (Ambavade) শহরে। তারা হিন্দু সম্প্রদায়ের অধিবাসী ছিলেন (মহারাষ্ট্র), যারা অশ্বশাস্ত্র জাতি হিসেবে এবং প্রচুর আর্থ-সামাজিক বৈষম্যের শিকার হত। আশ্রয় গ্রহণের পূর্বপুরুষেরা ছিলেন ব্রিটিশ ইস্ট - ইন্ডিয়া কোম্পানির সেনা এবং তার পিতা "রামজী শাকপাল" (মহা) সেনানিবাসের ভারতীয় সেনা হিসেবে নিযুক্ত ছিলেন, তিনি সেকালের গণবাধা শিক্ষাসম্মতিতে মারাঠী এবং ইংরেজিতে ডিগ্রি লাভ করেছিলেন এবং সেইসাথে তিনি প্রাথমিক বিদ্যালয়ের শিক্ষা লাভে কঠোর পরিশ্রমে সন্তানদের উত্থাপন করেন। কবির পাতের মতে, রামজী শাকপাল তার সন্তানদের হিন্দু সংস্কৃতি সম্পর্কে অধ্যয়ন করতে উত্থাপন করেন। যদিও আশ্রয় গ্রহণের বিদ্যালয়ে যেতেন, তাকে অন্যান্য অশ্বশাস্ত্র শিশুর ন্যায় আলাদা করে দেয়া হত। শিক্ষকগণ তাদের প্রতি অমনোযোগী ছিলেন এবং কোনোরূপ সহযোগিতাপূর্ণ মনোভাব পোষণ করতেন না। তাদের প্রেরণার ভেতরে বসার অনুমতি ছিলো না, এমনকি তাদের যদি ভূষা পেতো উচ্চবর্ণের কোনো একজন এমন উচ্চতা হতে সেই পানি ঢেলে পান করতো, যাতে নিচুজাতের শিক্ষার্থীরা বা পানি বা পানির পাত্র স্পর্শ না করতে পারে। এই কাজটি সাধারণত আশ্রয় গ্রহণের জন্য করতো বিদ্যালয়ের চাপরাসী (Peon) এবং যদি পিওন না থাকত বা না আসত, তখন সরাদিন পানি ছাড়াই কাটাতে হতো, আশ্রয় গ্রহণের এই অবস্থাকে এভাবে আখ	ভীমরাও রামজী আশ্রয় গ্রহণের ১৯৪০ সালের ২৪শে নভেম্বর কলকাতায় জন্মগ্রহণ করেন। তার পিতার নাম রামজী আশ্রয় গ্রহণের এবং মাতার নাম অঞ্জলি আশ্রয় গ্রহণের। তিনি কলকাতা বিশ্ববিদ্যালয় থেকে স্নাতক ডিগ্রি অর্জন করেন। এরপর তিনি কলকাতা বিশ্ববিদ্যালয়ে অধ্যাপনা শুরু করেন। এরপর তিনি কলকাতা বিশ্ববিদ্যালয় থেকে স্নাতকোত্তর ডিগ্রি অর্জন করেন।
Films	https://www.rogerebert.com/reviews/stranger-than-paradise-1984	Stranger Than Paradise/ introduction	en	Stranger Than Paradise is a 1984 American black-and-white absurdist deadpan comedy film, co-written, directed and co-edited by Jim Jarmusch, and starring jazz musician John Lurie, former Sonic Youth drummer-turned-actor Richard Edson, and Hungarian-born actress and violinist Eszter Balint. It features a minimalist plot in which the main character, Willie, is visited by Eva, his cousin from Hungary. Eva stays with him for ten days before going to Cleveland. Willie and his friend Eddie go to Cleveland to visit her, and the three then take a trip to Florida. The film is shot entirely in single long takes with no standard coverage.	Stranger Than Paradise is a 1984 American drama film directed and co-written by Roger Ebert and starring John Lurie and John Travolta. The film tells the story of Willie (Lurie) and his cousin Eva (Travolta) traveling from Hungary to New York City in search of a place to stay. The film received positive reviews from critics, with praise for Lurie's performance, his direction, and the film's screenplay. It was nominated for the Academy Award for Best Original Screenplay.

Table 13: More examples of XWIKIGEN using our best model.