Pre-training Transformers for Knowledge Graph Completion

Sanxing Chen^{*} Hao Cheng[‡] Xiaodong Liu[‡] Jian Jiao[†] Yangfeng Ji* Jianfeng Gao[‡]

Duke University [‡] Microsoft Research [†]Microsoft Bing Ads University of Virginia

sanxing.chen@duke.edu

{chehao, xiaodl, jiajia, jfgao}@microsoft.com

yangfeng@virginia.edu

Abstract

Learning transferable representation of knowledge graphs (KGs) is challenging due to the heterogeneous, multi-relational nature of graph structures. Inspired by Transformerbased pretrained language models' success on learning transferable representation for texts, we introduce a novel inductive KG representation model (iHT) for KG completion by large-scale pre-training. iHT consists of a entity encoder (e.g., BERT) and a neighboraware relational scoring function both parameterized by Transformers. We first pre-train iHT on a large KG dataset, Wikidata5M. Our approach achieves new state-of-the-art results on matched evaluations, with a relative improvement of more than 25% in mean reciprocal rank over previous SOTA models. When further fine-tuned on smaller KGs with either entity and relational shifts, pre-trained iHT representations are shown to be transferable, significantly improving the performance on FB15K-237 and WN18RR.

Introduction 1

As a fundamental component of human intelligence, relational knowledge plays a crucial role in imitating human cognitive abilities with machine learning (Halford et al., 2010). Knowledge graphs (KGs) are the most widely used representation of relational knowledge, with well-known examples such as Freebase (Bollacker et al., 2008), YAGO (Suchanek et al., 2007), and Wikidata (Vrandečić and Krötzsch, 2014). KG is also a key ingredient for many natural language understanding tasks, such as language modeling (Peters et al., 2019), question answering (Sun et al., 2018a), and commonsense reasoning (Bosselut et al., 2019). Despite significant human efforts in constructing KGs, they are still far from being complete, which

motivates the development of automatic KG completion models.

A long line of past work has tried to explore generalizable representation for KG completion. Conventional embedding approaches focus on transductive generalizability, i.e., learning entity representation from the structure of KGs to infer new facts among existing entities (Wang et al., 2017). On the other hand, inductive approaches have also been studied to accommodate new entities that are not present in the training KGs, e.g., by building compositional representation of entities based on their textual descriptions (Wang et al., 2014; Xie et al., 2016). However, as the research in both direction only leverages in-domain data, the knowledge obtained is limited within a fixed body of KG data that are available in the domain of interest.

Inspired by the success of transfer learning in natural language processing (NLP), recent work exploits knowledge stored in large amount of unstructured texts, leveraging large-scale pre-trained language models (LMs) to improve the performance of KG completion models (Yao et al., 2019; Clouatre et al., 2021). Co-training LMs and KG completion models has been shown to be effective in improving the performance of downstream knowledgeintensive NLP tasks, but not so much for the KG completion task itself (Wang et al., 2021; Yasunaga et al., 2022). Despite the progress on transferring knowledge between structured KGs and unstructured texts, the generalization from one KG to another is still an open problem that is rarely studied (Kocijan and Lukasiewicz, 2021).

In this paper, we propose to pre-train a Transformer-based inductive KG representation model for KG completion. Our goal is to learn transferable knowledge representations with richer semantics from both unstructured texts (by initialization from pre-trained LMs) and structured KGs (by pre-training on a large-scale KG, Wikidata5M). We first introduce iHT as our pre-training

^{*}Part of this work was done during an internship at Microsoft Research.

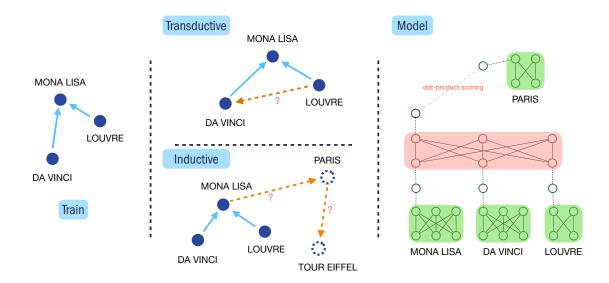


Figure 1: Inductive KG completion requires relation prediction involving unseen entities (e.g., *Paris* and *Tour Eiffel*). iHT employs an entity Transformer (bottom green blocks) to encode entity surface forms to entity representations and a context Transformer (top red blocks) to model (optional) multi-relational graph contexts and relational queries. Large-scale pre-trained iHT can be continually trained on other KGs.

backbone. iHT employs the typical Transformer encoder for processing entity surface forms and is augmented with a Transformer-based relational scoring module (Chen et al., 2021), which is proven to be more expressive and versatile than conventional approaches, to capture various KG contexts. The hope is, via a unified Transformer architecture that underlies recent successes in transfer learning, the pre-trained model can be continually adapted to different KGs and downstream tasks.

We pre-train iHT on the Wikidata5M dataset, which is an encyclopedic KG containing millions of entities and triplets for KG completion and show that iHT outperforms previous state-of-the-art approaches by more than 25% relatively in terms of MRR. Upon further analysis, we carefully examine several critical design choices and discuss important factors such as model parameterization and negative sample size in building large-scale knowledge representation models for pre-training. We then test iHT on two standard KG completion benchmarks (FB15K-237 and WN18RR) by continual training the pre-trained model and show that large-scale pre-training significantly improves the performance of iHT on KGs of different domains.

2 iHT

Similar to conventional knowledge graph embedding (KGE) approaches, we train iHT on the KG completion task. Given a KG representing as a set of fact triplets ($\mathcal{G} = \{(e_s, r_p, e_o), \dots\}$), where each triplet consists of two entities (subject entity e_s and object entity e_o) and a predicate r_p , the task basically holds out one of the entities and requires the model to recover it based on the rest information. For example, without loss of generality, when e_o is missing the model will be using $(e_s, r_p,)$ as input to recover it in the output.

Our proposed model has two major components, i.e., an entity encoder to map the surface form of an entity to a continuous embedding space; and a context encoder to contextualize the entity embedding with a relational query and the entity's graph neighborhood. We implement both encoders using the Transformer architecture with the hope to take advantage of the architecture's scalability and transferability as shown in pretrained language models. We detail their design in this section.

2.1 Entity Transformer

Conventional knowledge embedding approaches treat an entity as the atomic unit. As a result, the parameter size increases linearly with the number of entities. Scaling up to large-scale KGs with millions of entities in this way is challenging and computationally inefficient. Moreover, due to this transductive setting assuming all entities are seen during training, such approaches can not adapt to new entities.

However, entities in KGs of common domains

such as encyclopedia are often associated with surface forms (e.g., entity description, name and alias). These textual representations leverage compositional semantics to depict any entity with a small vocabulary (typically tens of thousands) in natural language, connecting the textual semantics of an entity to its symbolic representation. If we can learn an entity encoder to uniquely identify an entity based on its surface forms, we can not only solve the scalability problem but also can potentially enable compositional knowledge sharing across entities. Our entity Transformer is designed to achieve this goal with a BERT-like encoder.

Specifically, we follow the same input format as specified in Devlin et al. (2019), we tokenize the entity's surface form into subwords $e = (e^1, \ldots, e^L)$ and pad the subword sequence with special tokens.¹

$$\operatorname{Seq}_{\operatorname{BERT}}(e) = [\operatorname{CLS}]e[\operatorname{SEP}] \qquad (1)$$

We take the final hidden state corresponding to the [CLS] token from the entity Transformer as the entity embedding.

$$\mathsf{Embed}_{\mathsf{ENT}}\left(e\right) = \mathsf{ET}_{\mathsf{[CLS]}}\left(\mathsf{Seq}_{\mathsf{BERT}}\left(e\right)\right)$$
 (2)

As our entity Transformer shares the same architecture with BERT-like language models, it is natural to use pretrained language model weights to initialize the entity Transformer.

2.2 Context Transformer

Recent Transformer-based approaches for KG completion often employ relational scoring functions from conventional KG embedding approaches, such as TransE (Bordes et al., 2013) and Dist-Mult (Yang et al., 2015). However, these simple and often non-trainable scoring functions can only incorporate the relational query, ignoring rich graph contexts in KGs and leaving all the heavy lifting in learning and storing relational knowledge to the entity encoder. We instead draw on recent successes in using Transformer as both contextualizer and relational scorer (Chen et al., 2021) to build our context Transformer.

There are two major types of contexts that we want to incorporate, i.e., the relational query r_p and a set of directly linked entities $N_G(e_s) = \{(r_1, e_{n_1}), \ldots, \}$ in the neighborhood of the source entity, where r_i is the relation type between e_s and

 e_{n_i} . We use the summation of the embeddings of neighborhood entity $\text{Embed}_{\text{ENT}}(e_{n_i})$ and the embeddings of the corresponding relation type as a relation-dependent entity representation for each neighborhood entity.² These relation-dependent entity representations are concatenated with the relational query r_p , the source entity, and a special [GCLS] token as the inputs to the context Transformer. We also add type embeddings to distinguish different types of inputs, which eliminates the need for additional position embeddings. The output corresponding to the [GCLS] token can be seen as a context-dependent entity embedding for the source entity $\text{Embed}_{\text{CTX}}(e_s)$.

2.3 Link Prediction

We train the iHT model with a link prediction objective. Given the positive (e_s, r_p, e_o) triplet, we sample a set of target entities uniformly to construct negative triplets. Empirically we find that model performance improves with the increasing number of negative samples. In order to achieve the largest possible negative sample size under memory constraints, we use in-batch negative sampling where negative targets are shared across all examples in the same batch and encoded only once. We reuse the entity Transformer to get the embeddings of every negative target entity and the only positive target entity e_o . We then compute the dot-product similarity between each of them and $\text{Embed}_{\text{CTX}}(e_s)$. The loss is defined as the cross entropy between the softmax normalized distribution and the ground truth one-hot distribution. During the inference stage, such link prediction task is performed over all possible triplets.

3 Experiments

In this section, we examine the ability of iHT to handle a large-scale KG and generalize *in-domain* to unseen facts of known entities (transductive setting) and unseen facts with unseen entities (inductive setting).

3.1 Datasets

Table 1 shows the statistics of the three datasets used in our experiments. The experiments of this section are conducted on the Wikidata5M dataset (Wang et al., 2021), which is the largest

¹Position embeddings and type embeddings (one type) are also added as in BERT.

 $^{^{2}}$ As noted in Wang et al. (2021), the relation descriptions in Wikidata5M are unspecific, which leads to worse performance, thus we use lookup embeddings for relation types. Future work can replace them with compositional representations.

		1	Transductive		Inductive			
		Wikidata5M	FB15K-237	WN18RR	Wikidata5M	FB15K-237	WN18RR	
Train	relation	822	237	11	822	237	11	
ITam	entity	4,594,485	14,505	40,559	4,579,609	11,633	32,755	
	triplet	20,614,279	272,115	86,835	20,496,514	215,082	69,585	
Dev	relation	822	223	11	199	225	10	
	entity	4,594,485	9,809	5,173	7,374	8,965	9,736	
	triplet	5,163	17,535	3,034	6,699	42,164	11,381	
	relation	822	224	11	201	232	10	
Test	entity	4,594,485	10,348	5,323	7,475	10,645	10,223	
	triplet	5,133	20,466	3,134	6,894	52,870	12,037	

Table 1: Statistics of three knowledge graph completion datasets. Numbers of entities in inductive training sets are generally smaller than those under the transductive setting, meaning more unseen entities in their dev and test sets.

of the three. The dataset, based on Wikidata and the English Wikipedia, consists of nearly five million entities and twenty million triplets covering a wide range of encyclopedic knowledge, mostly about people, places, and things such as movies.

Wikidata5M has two versions of dataset splits, i.e., a transductive split where models are evaluated for their performance in predicting missing links between known nodes (entities) that have been seen during training, and an inductive split where nodes for evaluation are unseen during training. Conventional KGE approaches are generally designed for transductive evaluation, thus unsuitable for inductive evaluation. As Wikidata5M is much larger than standard KG completion datasets (e.g., FB15K-237 and WN18RR in Table 1), a prohibitive increase in parameter size limits those traditional approaches to be applicable for the transductive setting here.

We report results of ranking metrics, i.e., mean reciprocal rank (MRR) and Hits@k, $k \in 1, 3, 10$ under the standard filtered setting (Bordes et al., 2013). When there are ties during ranking, we treat the ground truth as the last in the tie, which is the worst-case ranking result as done in Sun et al. (2020b).³

3.2 Experimental Settings

We adopt a nine-layer entity Transformer and a three-layer context Transformer. Each layer is parameterized in the same way of BERT_{BASE} (Devlin et al., 2019). We use the entity descriptions released with Wikidata5M as the entity surface forms, tokenized by BERT's uncased subword tokenizer, with a maximum length of 27. We randomly sam-

ple five neighbor nodes of the source entity from the training graph as the graph context for the transductive setting. In the inductive setting, we cannot make use of this graph context because the nodes used in evaluation are disconnected to the training graph. Although we observe that including such context can help for the transductive case, we leave how to incorporate graph neighborhood for the inductive setting to future work.⁴ To distinguish the two iHT models trained with and without graph contexts, we call the former $iHT_{\mathcal{G}}$ and the latter single-entity model $iHT_{\mathcal{E}}$.

We use the AdamW (Loshchilov and Hutter, 2019) optimizer with a learning rate of 5e-4. For models initialized with pre-trained BERT weights, we set a lower learning rate of 3e-5 for the loaded weights. Learning rates linearly warm up for the first 10% of total steps, then decay to zero. We allocate a batch of 128 examples to each GPU with an effective total batch size of 2048 on 16 GPUs. The in-batch negative sample size for each GPU is set to 1000. We run each model once with a fixed set of seeds. Training for 10 epochs usually takes about 60 hours on 16 NVIDIA Tesla V100 GPUs using PyTorch's DDP trainer. Evaluation is done with the last epoch checkpoints in an RTX 2080. Details of hyperparameter tuning are described in Appendix B.

3.3 Experimental Results

We compare our iHT model against two groups of baselines: (1) conventional KGE methods such as

³Ties are rare (fewer than 5%) in our model predictions.

⁴Markowitz et al. (2022) sample a set of nodes from the test graph as the graph context during evaluation. We do not adopt this practice since it is not standard and cannot compare to results in other works.

Model	Params	MRR ↑	Hits↑		
	i ui ui iii	, in the second se	@1	@3	@10
TransE (Bordes et al., 2013)	2.4T	.253	.170	.311	.392
DistMult (Yang et al., 2015)	2.4T	.253	.208	.278	.334
ComplEx (Trouillon et al., 2016)	2.4T	.281	.228	.310	.373
SimpIE (Kazemi and Poole, 2018)	2.4T	.296	.252	.317	.377
RotatE (Sun et al., 2018b)	2.4T	.290	.234	.322	.390
KEPLER (Wang et al., 2021)	110M	.210	.173	.224	.277
MLMLM (Clouatre et al., 2021)	355M	.223	.201	.232	.264
KGT5 (Saxena et al., 2022)	60M	.300	.267	.318	.365
KGT5-ComplEx Ensemble (Saxena et al., 2022)	674M	.336	.286	.362	.426
$iHT_{\mathcal{G}}$ (Ours)	110M	.377	.332	.398	.456

Table 2: Comparison between the proposed method and baseline methods on Wikidata5M under the transductive setting. Results of transductive KGE methods (first section) are taken from Wang et al. (2021). Numbers in **bold** represent the best results.

Model	MRR↑	Hits↑			
			@3	@10	
MLMLM (Clouatre et al., 2021)	.284	.226	.285	.348	
KEPLER (Wang et al., 2021)	.402	.222	.514	.730	
BLP-SimplE (Daza et al., 2021)	.493	.289	.639	.866	
$iHT_{\mathcal{E}}$ (Ours)	.634	.517	.703	.871	

Table 3: Link prediction results on the inductive split of Wikidata5M. Numbers in **bold** represent the best results.

TransE (Bordes et al., 2013), DistMult (Yang et al., 2015). These methods store entity embeddings in a large lookup table and use simple relation-aware scoring functions to compute the similarity between entities. As mentioned earlier, the size of the lookup table accounts for the large parameter size of these methods, and they only work for the transductive setting; (2) compositional knowledge representation approaches, including KEPLER (Wang et al., 2021), MLMLM (Clouatre et al., 2021), and KGT5 (Saxena et al., 2022). These methods all use a Transformer to encode entity surface forms, but they differ in the way they decode target entities. MLMLM and KGT5 both leverage distribution of the language modeling objective to estimate the likelihood of target entities, while KEPLER uses a TransE-like scoring function. In contrast, we use the context Transformer as a decoder to directly predict the target entity.

Our iHT model outperforms all prior methods by a large margin, under both the transductive (Table 2) and inductive (Table 3) settings on Wikidata5M, establishing a new state-of-the-art result. In the transductive setting, we see a clear advantage of compositional knowledge representation approaches over traditional KGE methods in terms of model size. However, previous compositional knowledge representation approaches are still on par with best performing KGE methods such as SimpIE in terms of link prediction performance, demonstrating the difficulty in building compositional representation from entity surface forms. iHT surpasses all baselines and even beats the ensemble of a T5-like Transformer model and transductive ComplEx embeddings.

3.4 Ablations and Analyses

To better understand the design choices we made and what contributes to the performance, we further provide ablations and analyses. Due to computational resource constraints, all ablation and analytical experiments are run for five epochs with other training details the same as in the main experiments. As shown in Table 4, the full models retrained for five epochs are only slightly worse.

Support Set Support sets consist of a source entity's neighbors in the training graph. This compositional feature relieves the model from the burden of memorizing the local graph context of the source entity (Chen et al., 2021), and could help the model identify entities when their surface forms are ambiguous. The superior performance of $iHT_{\mathcal{G}}$ over $iHT_{\mathcal{E}}$ on the transductive setting demonstrates the helpfulness of support sets. More evidence will be

Model	Indu	uctive	Transductive			
1110401	MRR H@10		MRR	H@10		
iHT _G	-	-	36.4	44.1		
$\mathrm{iHT}_{\mathcal{E}}$	61.2	84.4	34.6	42.0		
Early fusion	62.9	85.0	36.9	44.8		
Random init	52.5	78.0	33.3	40.7		
Entity name	25.0	40.1	29.0	36.6		

Table 4: Results of different model variants on dev sets of Wikidata5M. Models trained under the inductive setting do not have a support set of neighbor entities.

provided in Section 4 on the transfer experiments. Since the entities in the inductive setting are disconnected from the training graph, we cannot use support sets in the inductive setting.

Entity Transformer Initialization To better utilize the compositional information of entity surface forms, we initialize the entity Transformer with pretrained BERT weights. As anticipated, the model performance improves when using pretrained BERT weights compared to random initialization.

Early/Late Fusion of Relation Embeddings Recall that in iHT design, all the relation embeddings (either from predicate or neighbors) are directly fed into the context Transformer, skipping the entity Transformer. It is possible that the entity Transformer could benefit from the relational information. The ablation results show that this is indeed the case, but the improvement is not significant. We view this as a trade-off between the expressive power of the entity Transformer and computational efficiency as the entity Transformer has a much larger input size than the context Transformer and thus adding one more token to the input would increase the $O(N^2)$ computation cost more.

Entity Surface Forms When replacing conventional lookup entity embeddings with compositional entity embeddings produced from entity surface forms, the choice of the type of surface forms and the corresponding encoder is conceivably important for modeling meaningful representations of entities. As we can see in Table 4, when using entity names, the model performance on link prediction decreases drastically. Since entity names are generally shorter, more memorization and less generalization of the model are expected. This also coincides with the observation that entity names

Model	MRR	H@10
T6B6	59.4	83.4
T5B7	60.1	83.8
T4B8	61.1	84.2
NS 100	52.4	78.2
NS 400	58.7	83.1
NS 700	60.3	84.0
$\mathrm{iHT}_\mathcal{E}$	61.2	84.4

Table 5: Results of the Shallow Entity Transformer and Negative Sample Size experiments on the dev set of Wikidata5M's inductive split. TnBm stands for iHT with a n-layer context Transformer and a m-layer entity Transformer.

are not as harmful in the transductive setting, where the model can see and memorize all entity names in the training graph.

Shallow Entity Transformer From Table 5, we can see consistent improvements coming from increasing the proportion of bottom entity Transformer layers in the overall architecture, backing our design choice of the deep entity Transformer, and shallow context Transformer architecture.⁵ This further suggests that encoding entity surface forms requires non-trivial modeling expressiveness.

Negative Sample Size Negative sampling is widely adopted in KG representation learning to distinguish the right target entity from others in the intractable entity space during training. It has been shown to have a huge impact on the quality of learned representations (Kotnis and Nastase, 2017). The bottom part of Table 5 shows that increasing the number of negatives from 100 to 1000 consistently improves link prediction results and further improvements seem to be marginal.

4 Transfer Experiments

In this section, we transfer Wikidata5M pre-trained models to two other KGs by continual training and evaluate the *out-of-distribution* adaptability of iHT.

⁵Further increases of entity Transformer size are difficult due to GPU memory constraint as entity Transformer usually has a much larger input size than that of the context Transformer.

	Transductive			Inductive				
	FB15K-237		WN18RR		FB15K-237		WN18RR	
Model	MRR	H@10	MRR	H@10	MRR	H@10	MRR	H@10
HittER (Chen et al., 2021) BLP-TransE (Daza et al., 2021)	37.3	55.8 -	50.3	58.4 -	- 19.5	- 36.3	- 28.5	- 58.0
$\begin{array}{c} \mathrm{iHT}_{\mathcal{E}} \\ \mathrm{iHT}_{\mathcal{E}} \mathrm{-WD} \end{array}$	34.5 37.6	53.0 56.2	44.8 52.1	67.5 74.0	23.0 27.5	39.1 44.7	30.9 39.5	51.4 60.5
$\operatorname{HT}_{\mathcal{G}}$ $\operatorname{HT}_{\mathcal{G}}$ -WD	34.4 37.4	52.8 56.3	50.0 55.0	71.0 74.9	-	-	-	-

Table 6: Our test results on two regular-scale datasets for transductive and inductive KG completion. The first part of the table presents the results of the state-of-the-art models from previous work, while the second/third parts show the results of our iHT models using different initialization methods. WD stands for Wikidata5M pretraining.

4.1 Datasets

We use the FB15K-237 dataset (Toutanova and Chen, 2015) and the WN18RR dataset (Dettmers et al., 2018) as the target KGs. As another encyclopedic KG, FB15K-237 comes from arguably the same domain as Wikidata5M, 94% of the entities in FB15K-237 are also in Wikidata5M, but they focus on different relation sets. We observe that about 80% of the unique (e_s, e_o) pairs in FB15K-237 are not present in Wikidata5M, suggesting a distributional shift. WN18RR is a subset of Word-Net (Miller, 1995) that contains facts about word relations, such as synonyms, antonyms, hypernyms, etc., which presents a much larger domain shift than FB15K-237. Besides the difference in domains, we also want to evaluate the ability of iHT to deal with entities unseen in the training graph. To this end, we additionally adopt inductive versions of the two datasets (Daza et al., 2021), where all triplets in the dev and test sets contain at least one novel entity. Details of the datasets are provided in Table 1.

4.2 Experimental Settings

The experimental settings are mostly the same as in the previous section with the following exceptions. Here, besides using an initialization with pre-trained BERT weights, we have another option to initialize the model with iHT model pretrained on Wikidata5M. When using this option, all weights are initialized with the pre-trained iHT model, except for the relation embeddings, which are randomly initialized. We denote this model iHT-Wiki to distinguish it from the model initialized with BERT weights. The entity surface forms for FB15K-237 and WN18RR are provided by Daza et al. (2021), used by both inductive and transductive settings. As the entity surface forms for WN18RR are generally shorter than those for encyclopedic knowledge, we cap the maximum number of subwords to 12 for WN18RR, which consequently allows us to use a larger negative sampling size of 1500. We train the model for five epochs.

4.3 Experimental Results

As we can see from the results in Table 6, models initialized with Wikidata5M pre-trained checkpoints consistently outperform models initialized with pre-trained BERT weights across the board.

For both datasets, we observe more pronounced improvements for models initialized from pretrained iHT under the inductive setting, which is likely more challenging than the transductive one. In section 3.4, we have seen the benefit of support sets under the transductive setting of Wikidata5M. Here we can see that the support sets are also help-ful for the transductive setting of WN18RR but not FB15K-237, which is consistent with the observation in Chen et al. (2021). We also note that randomly initialized models are hard to converge for these two datasets, suggesting that a good initialization is critical for smaller datasets given the instability of large Transformer models.

To investigate the transferability of iHT in lowresource scenarios, we further conduct experiments on the standard transductive setting of FB15K-237 and WN18RR with different training data sizes. From Figure 2, we can see that the performance of the model scales almost logarithmically with the




Figure 2: Transfer performance of $iHT_{\mathcal{E}}$ -WD (large-scale pretrained) and $iHT_{\mathcal{E}}$ (BERT initialized) trained on FB15K-237 (top) and WN18RR (bottom) with different training data sizes.

training data size. The pre-training on Wikidata5M (inductive split) provides consistent improvements over the model initialized with only BERT weights. With only 10% of the training data, the Wikidata5M pre-trained model is able to achieve 70-86% of the performance of the BERT-initialized model trained on the full training set, suggesting that the large-scale pre-training helps to reduce the need for more training data.

5 Related Work

Conventional approaches to KG completion focus on learning a low-dimensional embedding for each entity and relation based purely on the structure of KGs (Wang et al., 2017; Ji et al., 2021). The generalizability of such transductive approaches is limited within learning new relations between a pre-defined set of entities that appear during training. Moreover, as they heavily rely on the embeddings of entities to store relational knowledge, they are not scalable to large-scale KGs without excessive memory consumption and engineering efforts (Lerer et al., 2019), which further limits the amount of knowledge they can access.

To address the above limitations, inductive approaches abandon the notion of entity embeddings and instead represent entities with their textual information (Wang et al., 2014; Xie et al., 2016) or rely purely on the multi-relational structure of KGs to perform rule induction (Teru et al., 2020), thus enabling the generalization to new entities that are not connected to the training graph. Nevertheless, the extended generalizability is still limited to a

single KG.

Inspired by the success of Transformer in transfer learning (Devlin et al., 2019), Transformerbased KG completion models are proposed to capture the compositional semantics of entities and utilize the transferable knowledge in pre-trained LMs (Yao et al., 2019; Bosselut et al., 2019; Daza et al., 2021; Clouatre et al., 2021). A long line of work considers jointly training a Transformer model with both KG completion and language modeling objectives (Wang et al., 2021; Yasunaga et al., 2022). iHT keeps the notion of entity representation for relational scoring as opposed to modified token-based scoring (Clouatre et al., 2021; Saxena et al., 2022) to facilitate potential application with entity representations. iHT can be initialized with pre-trained LMs like BERT but further training is only performed on the KG completion task.

Transferring knowledge between different KGs is less explored in literature, largely focused on KGs with shared components that can be aligned (Sun et al., 2020a), such as multilingual KGs (Chen et al., 2020). Most closely related to the concept of large-scale pre-training on KGs, Kocijan and Lukasiewicz (2021) adopts an RNN to encode textual representations of entities and conventional relational scoring functions such as Balazevic et al. (2019, TuckER) for KG completion. Their encoder is first pre-trained on a large knowledge base, and then fine-tuned to generate entity representations on target knowledge bases. The pre-training improves model performance on small-scale OKBC datasets but not on standard KG completion datasets such as FB15K-237 and WN18RR. iHT employs a much more expressive Transformer model and offers consistent improvements.

6 Conclusion

We present iHT, a Transformer model for compositional knowledge graph representation learning. When evaluated on the KG completion task, iHT achieves state-of-the-art results on Wikidata5M for both inductive and transductive settings. Even given such a large-scale knowledge graph containing millions of entities and triplets, iHT can be successfully trained with regular memory footprints. We further show that iHT learns transferable representations from Wikidata5M, which is able to boost the model performance on other knowledge graphs from different domains.

7 Limitations

As an inductive approach, iHT relies on the textual information of entities to learn their representations. Despite the wide availability of textual representations for popular KGs such as encyclopedic ones like Wikidata, iHT is not applicable to KGs that do not have textual information for entities and it can suffer from poor quality of textual information as demonstrated in the ablation study replacing entity descriptions with shorter entity names (Table 4). iHT keeps the notion of entity representation to support potential entity-centric applications, but it is consequently slower during inference than the token-based scoring methods (Clouatre et al., 2021; Saxena et al., 2022) that do not encode entities separately at all. Future work is needed to explore iHT's effectiveness in a more diverse set of KGs and downstream tasks beyond KG completion.

References

- Ivana Balazevic, Carl Allen, and Timothy Hospedales. 2019. TuckER: Tensor factorization for knowledge graph completion. In Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP), pages 5185–5194, Hong Kong, China. Association for Computational Linguistics.
- Kurt Bollacker, Colin Evans, Praveen Paritosh, Tim Sturge, and Jamie Taylor. 2008. Freebase: a collaboratively created graph database for structuring human knowledge. In *Proceedings of the 2008 ACM SIGMOD international conference on Management of data*, pages 1247–1250.
- Antoine Bordes, Nicolas Usunier, Alberto Garcia-Duran, Jason Weston, and Oksana Yakhnenko. 2013. Translating embeddings for modeling multirelational data. In Advances in neural information processing systems, pages 2787–2795.
- Antoine Bosselut, Hannah Rashkin, Maarten Sap, Chaitanya Malaviya, Asli Celikyilmaz, and Yejin Choi. 2019. COMET: Commonsense transformers for automatic knowledge graph construction. In Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics, pages 4762–4779, Florence, Italy. Association for Computational Linguistics.
- Sanxing Chen, Xiaodong Liu, Jianfeng Gao, Jian Jiao, Ruofei Zhang, and Yangfeng Ji. 2021. HittER: Hierarchical transformers for knowledge graph embeddings. In Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing,

pages 10395–10407, Online and Punta Cana, Dominican Republic. Association for Computational Linguistics.

- Xuelu Chen, Muhao Chen, Changjun Fan, Ankith Uppunda, Yizhou Sun, and Carlo Zaniolo. 2020. Multilingual knowledge graph completion via ensemble knowledge transfer. In *Findings of the Association for Computational Linguistics: EMNLP 2020*, pages 3227–3238, Online. Association for Computational Linguistics.
- Louis Clouatre, Philippe Trempe, Amal Zouaq, and Sarath Chandar. 2021. MLMLM: Link prediction with mean likelihood masked language model. In *Findings of the Association for Computational Linguistics: ACL-IJCNLP 2021*, pages 4321–4331, Online. Association for Computational Linguistics.
- Daniel Daza, Michael Cochez, and Paul Groth. 2021. Inductive entity representations from text via link prediction. In *Proceedings of the Web Conference* 2021, pages 798–808.
- Tim Dettmers, Pasquale Minervini, Pontus Stenetorp, and Sebastian Riedel. 2018. Convolutional 2d knowledge graph embeddings. In *Proceedings of the Thirty-Second AAAI Conference on Artificial Intelligence*.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2019. BERT: Pre-training of deep bidirectional transformers for language understanding. In Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers), pages 4171–4186, Minneapolis, Minnesota. Association for Computational Linguistics.
- Graeme S Halford, William H Wilson, and Steven Phillips. 2010. Relational knowledge: The foundation of higher cognition. *Trends in cognitive sciences*, 14(11):497–505.
- Shaoxiong Ji, Shirui Pan, Erik Cambria, Pekka Marttinen, and S Yu Philip. 2021. A survey on knowledge graphs: Representation, acquisition, and applications. *IEEE Transactions on Neural Networks and Learning Systems*, 33(2):494–514.
- Seyed Mehran Kazemi and David Poole. 2018. Simple embedding for link prediction in knowledge graphs. *Advances in neural information processing systems*, 31.
- Vid Kocijan and Thomas Lukasiewicz. 2021. Knowledge base completion meets transfer learning. In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pages 6521–6533, Online and Punta Cana, Dominican Republic. Association for Computational Linguistics.
- Bhushan Kotnis and Vivi Nastase. 2017. Analysis of the impact of negative sampling on link prediction in knowledge graphs. *arXiv preprint arXiv:1708.06816*.

- Adam Lerer, Ledell Wu, Jiajun Shen, Timothee Lacroix, Luca Wehrstedt, Abhijit Bose, and Alex Peysakhovich. 2019. Pytorch-biggraph: A large scale graph embedding system. *Proceedings of Machine Learning and Systems*, 1:120–131.
- Ilya Loshchilov and Frank Hutter. 2019. Decoupled weight decay regularization. In International Conference on Learning Representations.
- Elan Markowitz, Keshav Balasubramanian, Mehrnoosh Mirtaheri, Murali Annavaram, Aram Galstyan, and Greg Ver Steeg. 2022. StATIK: Structure and text for inductive knowledge graph completion. In *Findings of the Association for Computational Linguistics: NAACL 2022*, pages 604–615, Seattle, United States. Association for Computational Linguistics.
- George A Miller. 1995. Wordnet: a lexical database for english. *Communications of the ACM*, 38(11):39– 41.
- Adam Paszke, Sam Gross, Francisco Massa, Adam Lerer, James Bradbury, Gregory Chanan, Trevor Killeen, Zeming Lin, Natalia Gimelshein, Luca Antiga, et al. 2019. Pytorch: An imperative style, high-performance deep learning library. *Advances in neural information processing systems*, 32.
- Matthew E. Peters, Mark Neumann, Robert Logan, Roy Schwartz, Vidur Joshi, Sameer Singh, and Noah A. Smith. 2019. Knowledge enhanced contextual word representations. In Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP), pages 43–54, Hong Kong, China. Association for Computational Linguistics.
- Daniel Ruffinelli, Samuel Broscheit, and Rainer Gemulla. 2020. You can teach an old dog new tricks! on training knowledge graph embeddings. In International Conference on Learning Representations.
- Apoorv Saxena, Adrian Kochsiek, and Rainer Gemulla. 2022. Sequence-to-sequence knowledge graph completion and question answering. In Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers), pages 2814–2828, Dublin, Ireland. Association for Computational Linguistics.
- Fabian M Suchanek, Gjergji Kasneci, and Gerhard Weikum. 2007. Yago: a core of semantic knowledge. In Proceedings of the 16th international conference on World Wide Web, pages 697–706.
- Haitian Sun, Bhuwan Dhingra, Manzil Zaheer, Kathryn Mazaitis, Ruslan Salakhutdinov, and William Cohen. 2018a. Open domain question answering using early fusion of knowledge bases and text. In Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing, pages 4231–4242,

Brussels, Belgium. Association for Computational Linguistics.

- Zequn Sun, Qingheng Zhang, Wei Hu, Chengming Wang, Muhao Chen, Farahnaz Akrami, and Chengkai Li. 2020a. A benchmarking study of embedding-based entity alignment for knowledge graphs. *Proceedings of the VLDB Endowment*, 13(11).
- Zhiqing Sun, Zhi-Hong Deng, Jian-Yun Nie, and Jian Tang. 2018b. Rotate: Knowledge graph embedding by relational rotation in complex space. In *International Conference on Learning Representations*.
- Zhiqing Sun, Shikhar Vashishth, Soumya Sanyal, Partha Talukdar, and Yiming Yang. 2020b. A reevaluation of knowledge graph completion methods. In Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics, pages 5516–5522, Online. Association for Computational Linguistics.
- Komal K Teru, Etienne Denis, and William L Hamilton. 2020. Inductive relation prediction by subgraph reasoning. In *Proceedings of the 37th International Conference on Machine Learning*.
- Kristina Toutanova and Danqi Chen. 2015. Observed versus latent features for knowledge base and text inference. In *Proceedings of the 3rd Workshop on Continuous Vector Space Models and their Compositionality*, pages 57–66, Beijing, China. Association for Computational Linguistics.
- Théo Trouillon, Johannes Welbl, Sebastian Riedel, Éric Gaussier, and Guillaume Bouchard. 2016. Complex embeddings for simple link prediction. International Conference on Machine Learning (ICML).
- Denny Vrandečić and Markus Krötzsch. 2014. Wikidata: a free collaborative knowledgebase. Communications of the ACM, 57(10):78–85.
- Quan Wang, Zhendong Mao, Bin Wang, and Li Guo. 2017. Knowledge graph embedding: A survey of approaches and applications. *IEEE Transactions on Knowledge and Data Engineering*, 29(12):2724–2743.
- Xiaozhi Wang, Tianyu Gao, Zhaocheng Zhu, Zhengyan Zhang, Zhiyuan Liu, Juanzi Li, and Jian Tang. 2021. KEPLER: A Unified Model for Knowledge Embedding and Pre-trained Language Representation. *Transactions of the Association for Computational Linguistics*, 9:176–194.
- Zhen Wang, Jianwen Zhang, Jianlin Feng, and Zheng Chen. 2014. Knowledge graph and text jointly embedding. In Proceedings of the 2014 Conference on Empirical Methods in Natural Language Processing (EMNLP), pages 1591–1601, Doha, Qatar. Association for Computational Linguistics.

- Thomas Wolf, Lysandre Debut, Victor Sanh, Julien Chaumond, Clement Delangue, Anthony Moi, Pierric Cistac, Tim Rault, Remi Louf, Morgan Funtowicz, Joe Davison, Sam Shleifer, Patrick von Platen, Clara Ma, Yacine Jernite, Julien Plu, Canwen Xu, Teven Le Scao, Sylvain Gugger, Mariama Drame, Quentin Lhoest, and Alexander Rush. 2020. Transformers: State-of-the-art natural language processing. In Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing: System Demonstrations, pages 38–45, Online. Association for Computational Linguistics.
- Ruobing Xie, Zhiyuan Liu, Jia Jia, Huanbo Luan, and Maosong Sun. 2016. Representation learning of knowledge graphs with entity descriptions. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 30.
- Bishan Yang, Wen-tau Yih, Xiaodong He, Jianfeng Gao, and Li Deng. 2015. Embedding entities and relations for learning and inference in knowledge bases. In *International Conference on Learning Representations*.
- Liang Yao, Chengsheng Mao, and Yuan Luo. 2019. Kgbert: Bert for knowledge graph completion. *arXiv preprint arXiv:1909.03193*.
- Michihiro Yasunaga, Antoine Bosselut, Hongyu Ren, Xikun Zhang, Christopher D Manning, Percy Liang, and Jure Leskovec. 2022. Deep bidirectional language-knowledge graph pretraining. In Advances in Neural Information Processing Systems.

A Dataset Details

The FB15K-237 dataset (Toutanova and Chen, 2015) is under a Microsoft Research Data License Agreement which allows uses for noncommercial or research purposes. The WN18RR dataset (Dettmers et al., 2018) is under an MIT The inductive versions⁶ of the two License. datasets (Daza et al., 2021) are also under an MIT License. Wikidata5M⁷ (Wang et al., 2021) is publicly available but not clearly licensed. Our research use of these datasets are aligned with their intended purposes. Datasets derived from Freebase and Wikidata contain information directly associated with public figures. Such information is largely non-private and moderated by the Wikimedia community.

B Experimental Setting Details

We implement our proposed iHT model with PyTorch (Paszke et al., 2019). We follow Devlin et al. (2019) to configure each of our Transformer layers and initialize the bottom entity transformer with pretrained BERT weights (bert-base-uncased) from huggingface's transformers library (Wolf et al., 2020). KG completion evaluation is performed with the LibKGE (Ruffinelli et al., 2020).

We perform simple hyperparameter tuning on

- the number of negative samples used: { 100, 400, 700, 1000 }
- layer combinations of the two Transformer blocks: { T6B6, T5B7, T4B8, T3B9 }

These results are present in Table 5. Other hyperparameters such as learning rates, learning rate scheduler, batch size, random seeds are manually determined without tuning.

⁶https://github.com/dfdazac/blp

⁷https://deepgraphlearning.github.io/project/wikidata5m