

Seeding with Differentially Private Network Information

M. Amin Rahimian¹, Fang-Yi Yu², Carlos Hurtado¹

¹Industrial Engineering, University of Pittsburgh ²Computer Science, George Mason University

rahimian@pitt.edu, fangyiyu@gmu.edu, cah259@pitt.edu

When designing interventions in public health, development, and education, decision makers rely on social network data to target a small number of people, capitalizing on peer effects and social contagion to bring about the most welfare benefits to the population. Developing new methods that are privacy-preserving for network data collection and targeted interventions is critical for designing sustainable public health and development interventions on social networks. In a similar vein, social media platforms rely on network data and information from past diffusions to organize their ad campaign and improve the efficacy of targeted advertising. Ensuring that these network operations do not violate users’ privacy is critical to the sustainability of social media platforms and their ad economies. We study privacy guarantees for influence maximization algorithms when the social network is unknown, and the inputs are samples of prior influence cascades that are collected at random. Building on recent results that address seeding with costly network information, our privacy-preserving algorithms introduce randomization in the collected data or the algorithm output, and can bound each node’s (or group of nodes’) privacy loss in deciding whether or not their data should be included in the algorithm input. We provide theoretical guarantees of the seeding performance with a limited sample size subject to differential privacy budgets in both central and local privacy regimes. Simulations on synthetic and empirical network datasets reveal the diminishing value of network information with decreasing privacy budget in both regimes.

Key words: social network interventions, differential privacy, influence maximization, sample complexity, approximation algorithms, peer influence and social contagion, public health interventions

1. Introduction

When designing interventions in public health, development, and education decision-makers rely on social network data to target a small number of people, capitalizing on peer effects and social contagion to bring about the most welfare benefits to the population. Many of these seeding methods are implemented without complete knowledge of social network structures — e.g., by targeting nominated friends of random individuals (Kim et al. 2015) or random pairs of friends

(Alexander et al. 2022) — and they enhance adoption of public health interventions by driving indirect treatment effects among people who were affected by spillovers from others’ treatment (even though they were not part of the initial treatment group). However, even without complete network information, network participants (and in particular minority members) who contribute to partial social network data collection endure privacy risks. This is especially important when engaging with vulnerable populations to record sensitive or stigmatizing behavior, e.g., in design of public health interventions among the homeless youth for HIV or suicide prevention (Wilder et al. 2021). Developing new methods that are privacy-preserving for network data collection and targeted interventions is critical for responsible design of public health interventions on social networks and maintaining community engagements that sustain such interventions.

In this paper we propose randomization techniques based on the differential privacy formalism to provide social network participants with plausible deniability. Under these schemes the network participants can make a credible claim that their associates are targeted (e.g., recruited into treatment) by random choice, irrespective of their associations. We investigate how the targeting efficacy is affected by decreasing the privacy budget that entails more noise in the collected data (with local privacy mechanisms) or the targeting algorithm’s output (with central privacy mechanisms).

After summarizing our main contributions in Section 1.1 and providing detailed comparisons with related works in Section 1.2, in Section 2 we provide preliminaries including hardness results that demonstrate the inadequacy of mainstream approaches to social network data privacy for seeding interventions and motivate our proposed notion of “influence sample differential privacy”. In Section 3, we provide privacy mechanisms for seeding in both central (Section 3.1) and local (Section 3.2) regimes. In Section 4, we discuss and contextualize the nature of our privacy protections for social network data collection and intervention design applications. In Section 5, we test the performance of our privacy mechanisms on synthetic and real social network datasets. We end with a discussion of limitations, future directions and concluding remarks in Section 6. Complete proofs and supplementary results are provided in several appendices at the end.

1.1. Summary of the main results

Differential privacy (DP) offers an information-theoretic foundation for privacy by focusing on protecting input data against revelations of algorithmic outputs (Dwork et al. 2014). In mathematical formulation, a randomized mechanism \mathcal{M} is ϵ -DP if for any two adjacent input datasets D and D' in its input domain and any subset A in its output range we have:

$$\frac{\Pr[\mathcal{M}(D) \in A]}{\Pr[\mathcal{M}(D') \in A]} \leq e^\epsilon. \quad (1)$$

The ϵ -DP criterion in Equation (1) limits inferences of any observer/adversary about the input data based on the algorithm output. The adjacency notion between datasets is typically defined such that neighboring datasets differ in contributions of an individual entity, and thus ϵ -DP protects individuals’ contributions from ramification of an adversarial inference. Hence, different notions of adjacency will imply different protections for the individuals. In the sequel, we explain our proposed notion of adjacency for seeding with randomized contagion data (which we term “influence samples”), and the nature of privacy protections that it offers. Throughout this paper we use DP to signify any of the phrases “differentially private”, “differentially privately”, and “differential privacy” with or without hyphen between the words as appropriate by the language function that these words play in the context that DP is used.

Seeding with partial and private network information. We study a classical, NP-hard network optimization problem, known as “influence maximization”, which asks to select k nodes on a graph of size n such that the expected spread size from seeding those k nodes is maximum under a randomized model of network diffusion, whereby each edge passes on the influence (or “infection”) with an independent cascade probability p . Given the social network graph \mathcal{G} and an integer $k \geq 1$, we denote the expected spread size from infecting the nodes in S by $I_{\mathcal{G}}(S)$ and write $\text{OPT} = \max_{S: |S| \leq k} I_{\mathcal{G}}(S)$ for the optimum solution to the k -influence maximization problem. It is an example of a cardinality-constrained combinatorial optimization on a graph with a monotone, submodular objective that admits a tight $(1 - 1/e)$ approximation guarantee using the greedy node selection algorithm. This problem has occupied a central place in graph and social networks algorithms literature since its introduction by Kempe et al. (2003). There is a wealth of literature (spanning almost two decades) on efficient approximations of this problem (Kempe et al. 2003, 2005, 2015, Chen et al. 2009, Wang et al. 2012, Borgs et al. 2014). However, the graph structure of the input data has stunned the design of DP influence maximization algorithms. Common operationalizations of DP for graph algorithms, such as node- or edge-DP define adjacent inputs in Equation (1) based on neighboring graphs differing in a node or an edge. This adjacency criteria is often too stringent for graph problems whose solutions are extremely sensitive to existence of nodes and edges (see Section 1.2 for detailed citations and comparisons). Our main hardness results indicate that it is impossible to obtain useful performance guarantees for influence maximization subject to node- or edge-DP constraints (see Section 2.2, Propositions 2.5 and 2.6, summarized in Informal Main Results 1 below).

Informal Main Results 1 *Given $n \geq 1$ and $\epsilon > 0$, there can be no ϵ -node-DP or ϵ -edge-DP seeding algorithms that give an approximation guarantee better than $(1 - 1/e)\text{OPT} - \alpha_{\epsilon}n$ for $\alpha_{\epsilon} \geq \frac{1}{1000\epsilon}$.*

A new privacy notion for social network data collection and intervention design. Our main contribution here is to formulate a new differential privacy notion with guarantees for influence maximization when the social network is unknown and the algorithm inputs are samples of prior influence cascades that are collected at random, i.e., “influence samples” — rather than the entire social network graph. Our results build on recent work about seeding with costly network information (Eckles et al. 2022), and more broadly sample complexity of influence maximization (Sadeh et al. 2020, Borgs et al. 2014). Our algorithm input is a set of m influence samples, i.e., m independent cascade samples that are collected on the social network graph each starting from a random, initially-infected node. We denote this input dataset by a binary matrix $\mathbf{x} \in \{0, 1\}^{n \times m}$, where each row represents a node and each column represents the status of the node in an influence sample: $[\mathbf{x}]_{ij} = 1$ if node i is infected in the j -th influence sample and $[\mathbf{x}]_{ij} = 0$ otherwise. Our privacy notion is with respect to the contribution of individual network participants to the influence samples, hence, we define the adjacent input datasets in Equation (1) as $\mathbf{x}, \mathbf{x}' \in \{0, 1\}^{n \times m}$ which differ in a single binary entry:

Influence Sample Differential Privacy (ISDP) *We define “ ϵ influence sample differential privacy (ϵ -ISDP)” by controlling the odds ratio of the output of the seeding algorithm on adjacent influence samples, i.e., those differing in participation of a single node in a single influence cascade.*

We follow the formulation of influence maximization by Eckles et al. (2022) where the social network is unknown and influential nodes need to be estimated from costly samples of past spreads. Our privacy guarantees are with respect to influence samples, controlling information leakage about the cascade data. For example, Apple Inc. uses a randomized response mechanism to collect the users’ daily usage of emojis with a fixed privacy budget ($\epsilon = 4$). This setup maps naturally to our formulation of ISDP as the usage of each emoji can be modeled as an influence sample. We make no assumptions about adversary’s knowledge of the network and focus on differential privacy guarantees for influence maximization according to the ISDP formulation above.

We analyze both central and local privacy under the ISDP framework. In central differential privacy (CDP), the mechanism designer is trustworthy and has direct access to the private data (influence samples). For local differential privacy (LDP), the data can be aggregated by some (not necessarily trustworthy) third party. Our CDP mechanism only protects (adds noise to) the output of seed selection. In contrast, our LDP mechanism adds noise to the influence samples directly.

Sample complexity with differential privacy and approximation guarantees. By introducing randomization at the input or output of seeding algorithms, we are able to bound each node’s privacy loss in deciding whether or not their data should be included in the influence samples — as opposed to the social network graph. Of note, this is critically different from DP analysis of graphs that is defined with respect to neighboring graphs in the algorithm input. In our approach, each node’s decision to appear in the input does not affect the data generation process (DGP) of the input sample or the underlying diffusion process; the network graph remains the same and the privacy implications are studied with respect to the construction

of the samples on a fixed network. This allows us to meaningfully bound the effect of the removal of a node’s data on the algorithmic performance and to use those bounds to tradeoff the privacy risks against improved performance. To mitigate privacy risks, DP uses randomization to provide plausible deniability certificates to those contributing to the input data. This is achieved in one of the two ways: (i) using exponential mechanism (McSherry and Talwar 2007) by randomizing the algorithm output, i.e., central DP, (ii) using the randomized response mechanism (Warner 1965) by injecting noise in the input data, i.e., local DP. Accordingly, we propose two efficient DP seeding algorithms and bound their performance in terms of the sample size m , network size n , seed set size k , and privacy budget ϵ , (See Section 3 Theorems 3.2 and 3.5):

Informal Main Results 2 *Consider a graph \mathcal{G} on $n \geq 2$ nodes and $k \leq n$, for any $0 < \alpha \leq 1$ and $\epsilon > 0$, we give a set of algorithms that are centrally or locally ϵ -ISDP and their outputs infect at least $(1 - 1/e)\text{OPT} - \alpha n$ nodes with high probability. Our central ϵ -ISDP algorithm uses exponential mechanism and requires at least $m = \max\{\frac{12}{\alpha\epsilon}, \frac{9}{\alpha^2}\}k \ln n$ influence samples and runs in $O(knm)$ time. Our local ϵ -ISDP algorithm uses randomized response to flip each node’s status in the influence samples with independent probabilities $\rho_\epsilon = 1/(1 + e^\epsilon)$. Compared to our central DP seeding algorithm, the local algorithm requires more (exponentially in k) influence samples: $m = O(k^3 V_{\rho_\epsilon, k}^2 \ln n / \alpha^2)$ with $O(nk^4 + kn^2m)$ run time, where $V_{\rho_\epsilon, k} = O(\max\{2, 1/\epsilon\}^{k^2})$.*

Given m influence samples, in Section 3.1 we use exponential mechanisms (McSherry and Talwar 2007) to choose high quality seeds with central DP guarantees. In Subsection 3.2, before accessing the data (influence samples), we use the randomized response mechanism (Warner 1965), to perturb the input data and protect privacy at the local level. However, these perturbations can introduce additional biased noise into the data, so we provide a closed-form characterization of the introduced noise and an algorithm to offset this bias. In Section 5, we thoroughly evaluate our algorithms on synthetic and real graphs of different sizes and verify our theoretical guarantees in simulations.

1.2. Comparisons with related work

Seeding network diffusions. A long line of literature, going back to the seminal works of Kempe et al. (2003, 2005, 2015) propose efficient approximation algorithms for this problem based on the submodularity of the influence function (Chen et al. 2009, Wang et al. 2012). This problem arise naturally in applications such as development economics and public health to facilitate adoption of welfare-enhancing technologies, e.g., microfinance (Banerjee et al. 2013), insurance (Cai et al. 2015), contraception (Behrman et al. 2002), water purification methods, and multivitamins (Kim et al. 2015); and to target localized social network interventions for spreading information about immunization camps (Banerjee et al. 2019), preventing misinformation about drug side effects (Chami et al. 2017), increasing HIV awareness among homeless youth (Yadav et al. 2017), and reducing bullying among adolescent youth (Paluck et al. 2016). Alexander et al. (2022) show that network-based targeting substantially increases population-level adoption of iron-fortified salt to prevent iron-deficiency anemia among female household heads in India. Kim et al. (2015) show similar results for a cluster-randomized trial in villages in Honduras, where they measure the efficacy of social network targeting strategies to promote adoption of chlorine for water purification and multivitamins for

micronutrient deficiencies. In all such settings, collecting complete social network connection (edge) data is difficult, costly, or impossible and comes with critical privacy and security risks to individuals in the social network. In this paper we focus on differential privacy guarantees for influence maximization when social network is unknown and influential nodes need to be estimated from costly samples of past spreads.

Social network data privacy. Much of the past work on social network data privacy focuses on identifiability of nodes from released graph data, with or without additional information on node attributes and their neighborhoods (Romanini et al. 2021). Classical anonymization techniques mask node attributes and perturb, modify, randomize or aggregate the graph structure to prevent re-identification of nodes within a confidence level — typically achieving k -anonymity (Wu et al. 2010, Zheleva and Getoor 2011, Abawajy et al. 2016). However, statistical disclosure control of collected data requires safeguarding data donor’s privacy against adversarial attacks where common anonymization techniques are shown to be vulnerable to various kinds of identification (Barbaro et al. 2006), linkage and cross-referencing (Narayanan and Shmatikov 2008, Sweeney 2015, 1997), statistical difference and re-identification attacks (Kumar et al. 2007). On the other hand while edge sampling at the data collection can somewhat mitigate the re-identification risk of nodes (Romanini et al. 2021, Jiang et al. 2021), the seeded nodes can reveal additional side information about who has contributed to network data collection. For example, once a community leader is chosen, his or her close contacts may suffer privacy leaks, even though no social network data are published. Our privacy guarantees for influence maximization follow the DP formalism to provide network participants and data donors with plausible deniability with regard to their contribution to the collected data or their role in shaping the algorithm output (the seeded nodes). DP is a gold standard for privacy-preserving data analysis and avoids the above drawbacks by abstracting away from the attack models and controlling the privacy leak at an information-theoretic level according to Equation (1).

DP analysis of graphs. Differential privacy (DP) is a versatile framework for developing privacy-preserving algorithms, and it has been impactful in large-scale and high-profile applications such as the U.S. decennial census Garfinkel (2022) and the tech industry Erlingsson (2014a), Apple Differential Privacy Team (2017). It have been successfully applied to a broad variety of problem classes, including, e.g., combinatorial (Gupta et al. 2010), submodular (Mitrovic et al. 2017, Sadeghi and Fazel 2021), and online submodular (Salazar and Cummings 2021) optimization problems. The existing literature on DP analyses of graphs, e.g., edge-DP Nissim et al. (2007) or node-DP (Kasiviswanathan et al. 2013, Raskhodnikova and Smith 2016), has devoted much attention to graph statistics and parameters such as average degree and various subgraph counts (Blocki et al. 2022), degree distribution (Hay et al. 2009) and the graph spectra (Wang et al. 2013), as well as community Mohamed et al. (2022) and densest subgraph detection (Nguyen and Vullikanti 2021). These techniques are not directly applicable to influence maximization, and our main hardness results indicate that node- or edge-DP are too stringent to render useful performance guarantees for influence maximization. Similar observations have been made about node- and edge-DP guarantees of other graph algorithms which are too sensitive to the presence of individual edges (and especially nodes) in their input graphs (Gupta et al. 2010, Li et al. 2022, Epasto et al. 2022, Blocki et al. 2013). In their analysis of differentially private combinatorial optimization, Gupta et al. (2010) consider several graph problems including

vertex and set cover. Their modified greedy algorithm for set cover is similar to our central DP mechanism in Section 3.1, though addressing a substantially different privacy environment, where the goal is to protect a private subset R while outputting a minimal collection that covers R . In both cases direct application of the exponential mechanism is inefficient and the greedy approach facilitates an efficient implementation.

In formulating our notion of “influence sample differential privacy” (ISDP), we move away from having the social network as the algorithm input. Instead, we focus on an input dataset of m cascades that are collected at random on the social network graph. ISDP allows us to limit the information leakage about contribution of individual nodes to the input cascades (with local ISDP), or contribution of individual nodes to the algorithm output through the input cascades (with central ISDP). It is worth noting that achieving local privacy under ISDP is easy by randomizing individual statuses of the nodes in the input cascades. However, in general it is challenging to coordinate randomization across nodes in a meaningfully decentralized manner that matches the problem context, and locally differentially private analysis of graphs has been limited so far to certain restricted settings (Imola et al. 2021, Dhulipala et al. 2022).

Privacy of network diffusions. The fundamental relationship between information flow and privacy is well noted, cf., contextual integrity (Nissenbaum 2009, Benthall and Cummings 2022). Notwithstanding, the privacy implications of information diffusion and algorithmic intervention on social networks is largely unexplored, with the exception of two studies (Rezaei et al. 2021, Liell-Cock et al. 2020). The existing work looks at this issue in specific, highly-stylized scenarios. One study shows that it is extremely hard to hide the existence of a giant, connected component of infected nodes under an independent cascade model and a simple inference attack can reveal the status of a good fraction of nodes (Rezaei et al. 2021). In another study, the authors propose a decaying pseudo-noise that is added locally to mask the influence structure against an external observer with access to the entire information flow under the Friedkin-Johnsen influence propagation model (Liell-Cock et al. 2020). With our formulation of DP for influence maximization we can focus on privacy leaks through information flow on the network rather than the underlying network structure. Our formulation of DP for influence samples (ϵ -ISDP in Informal Main Results 1) allows us to explicitly quantify information leaks from observation of random spreads on the network and for us to take a direct approach to the privacy risks that social network participants face from network diffusions.

2. Problem Setup and Preliminary Results

2.1. Influence sampling and maximization

Independent cascade model. In the independent cascade model, infections spread via an edge-weighted undirected graph $\mathcal{G} = (V, p)$ on n nodes. The set of nodes, V , is indexed by $[n] := \{1, \dots, n\}$ and $p: V \times V \rightarrow [0, 1]$ assigns probability weights to every edge in \mathcal{G} . An infection begins at a set S of seed nodes and spreads through the graph in rounds. Each infected node, once they become infected, has a single chance of passing the infection to their neighbors. Each undirected edge $e = (v, u)$ has a weight $p_e \in [0, 1]$ representing the probability that the process spreads along edge e to node u in the round immediately after v is first infected.

The above process has the following equivalent formulation: We first sample an undirected, unweighted graph g by independently realizing each edge e with probability p_e . We write $g \sim \mathcal{G}$ to denote that g is drawn

from the random graph distribution \mathcal{G} . Then we can construct the set of infected nodes in the independent cascade process, as the set of nodes that are reachable from seed set S in g . Now we define some notations. Given an undirected graph g and subsets of nodes S and T , we write $C_g(S)$ for the set of nodes that are reachable from (or infected by) S in g , and $C_g(S|T) := C_g(S) \setminus C_g(T)$ for the set of nodes that are reachable from S but not from T . Then the *influence function* $I_g(S) := |C_g(S)|$ is the number of nodes reachable (or infected) by S and $I_{\mathcal{G}}(S) := \mathbb{E}_{g \sim \mathcal{G}}[I_g(S)]$ is its expectation. Similarly, we define the *conditional influence function* $I_g(S|T) := |C_g(S|T)|$ and denote its expected value by $I_{\mathcal{G}}(S|T) := \mathbb{E}_{g \sim \mathcal{G}}[I_g(S|T)]$.

The influence maximization problem. Given graph \mathcal{G} and integer $k \geq 1$, the *k-influence maximization problem* is to find a set $S \subset V$ of at most k nodes maximizing the expected number of reachable nodes, $I_{\mathcal{G}}(S)$. We write $\text{OPT} = \max_{S: |S| \leq k} I_{\mathcal{G}}(S)$ for the maximum expected influence of any set of k nodes.

A huge literature developing fast algorithm for influence maximization with the knowledge of the contagion model $\mathcal{G} = (V, p)$. However, the knowledge of contagion model may be too costly or even impossible due to privacy consideration. To limit access of seeding algorithms, we use a query model of *influence sample* X which is a random set of nodes (indicator vector) that can influence a uniformly chosen target node u . Formally, we sample a target node $u \in V$ uniformly at random and $g \sim \mathcal{G}$, and set an influence sample as $x = (x_1, \dots, x_n)^\top \in \{0, 1\}^n = \{0, 1\}^V$ so that $x_v = \mathbf{1}[u \in C_g(v)]$. Alternatively, we can treat x as a subset of nodes $x \subseteq V$. The idea of influence samples can be seen as a reformulation of random, reverse, reachable sets proposed by Borgs et al. (2014) which yield state-of-the-art, quasilinear-time performance for influence maximization. We write a collection of m influence samples as $\mathbf{x} = (x^1, \dots, x^m) \in \{0, 1\}^{n \times m}$ where x^t is the t -th influence sample. Throughout this paper, we simplify our notations by identifying an influence sample x by its set of active nodes ($x \equiv \{v \in V : x_v = 1\}$) and (ab)using set operations directly on x , e.g., writing $S \cap x$ to mean $\{v \in S : x_v = 1\}$ for some $S \subset V$. Moreover, we will drop $\{\}$ when working with singletons and (ab)use set operations directly on nodes $v \in V$, e.g., writing $S \cap v$ to mean $S \cap \{v\}$.

Influence sample greedy seeding algorithm. How can we design a seeding algorithm M that takes m influence samples \mathbf{x} and outputs a set of k nodes, $M(\mathbf{x}) \in \mathcal{Y} := \{0, 1\}^V$? Here we present a seeding algorithm by Eckles et al. (2022). The core idea of Algorithm 1 is to estimate the influence function from the influence samples, and run the greedy algorithm. Specifically, given m realized influence samples \mathbf{x} and a subset of nodes S in \mathcal{G} , we define the *S-reachable influence samples* as: $C_{\mathbf{x}}(S) := \{t \in [m] : \exists v \in S, x_v^t = 1\}$, which is the set of influence samples whose activated nodes are reachable from the set S , and $C_{\mathbf{x}}(S|T) = C_{\mathbf{x}}(S) \setminus C_{\mathbf{x}}(T)$. Alternatively, if we treat \mathbf{x} a collection of m subset x^1, \dots, x^m , $C_{\mathbf{x}}(S) = \{t : S \cap x^t \neq \emptyset\}$. Finally, we define $I_{\mathbf{x}}(S) = \frac{n}{m} |C_{\mathbf{x}}(S)|$ and $I_{\mathbf{x}}(S|T) = \frac{n}{m} |C_{\mathbf{x}}(S|T)|$. The following proposition says the expectation of $I_{\mathbf{x}}$ is equal to $I_{\mathcal{G}}$. We will use v as $\{v\}$ for singleton sets to simplify the notation, e.g., $I_{\mathcal{G}}(v)$ as $I_{\mathcal{G}}(\{v\})$.

Proposition 2.1 (Observation 3.2. of Borgs et al. (2012) – cf. Borgs et al. (2014)) *Given a positive integer m , a graph $\mathcal{G} = (V, p)$ and sets of nodes $S, T \subseteq V$, if \mathbf{x} is the random variable of m influence sample, then $\mathbb{E}_{\mathbf{x}}[I_{\mathbf{x}}(S)] = I_{\mathcal{G}}(S)$, and $\mathbb{E}_{\mathbf{x}}[I_{\mathbf{x}}(S|T)] = I_{\mathcal{G}}(S|T)$. Additionally, by Hoeffding’s inequality, for all $\epsilon > 0$ we have: $\Pr[|I_{\mathbf{x}}(S) - I_{\mathcal{G}}(S)| \geq \epsilon n] \leq 2 \exp(-2\epsilon^2 m)$, where the probability is over the randomness in the generative model of influence samples x .*

With the above observation, Eckles et al. (2022) design a seeding algorithm that only uses influence samples and show that if the number of influence sample is of order $k^2(\log n/\alpha)/\alpha^3$, then Algorithm 1 is optimal up to αn additive error. Informally, Algorithm 1 is a greedy algorithm that sequentially query Algorithm 2 for the seed that maximizes the marginal improvement. In this paper, we will follow similar idea that combine greedy algorithm and an estimation algorithm for marginal improvement.

Algorithm 1 Influence sample greedy seeding algorithm

Input: m influence samples \mathbf{x} and total number of seeds k .

- 1: Set $S_0 = \emptyset$
 - 2: **for** i from 1 to k **do**
 - 3: $v_i = \mathcal{M}(\mathbf{x}, S_{i-1})$ by Algorithm 2
 - 4: $S_i = S_{i-1} \cup v_i$
 - 5: **end for**
 - 6: Return S_k
-

Algorithm 2 Single seed selection, $\mathcal{M}(\mathbf{x}, S)$

Input: m influence samples \mathbf{x} and a seed set S .

- 1: **for** $v \in [n] \setminus S$ **do** \triangleright Chooses the $|S| + 1$ -th seed.
 - 2: Compute $I_{\mathbf{x}}(v|S) = \frac{n}{m} |C_{\mathbf{x}}(S \cup v) \setminus C_{\mathbf{x}}(S)|$.
 - 3: **end for**
 - 4: Return $\arg \max_{v \in [n] \setminus S} I_{\mathbf{x}}(v|S)$
-

In Algorithm 1, we slightly modify the INF-SAMPLE(m, k) algorithm to sequentially call Algorithm 2 for selecting the next seed. Instead of collecting fresh influence samples at each greedy step, Algorithm 1 calls Algorithm 2 to reuse the influence samples and have much better influence sample complexity as a result. We formally show this improvement in Theorem 3.2.

Theorem 2.2 (Theorem 2 of Eckles et al. (2022)) *Given \mathcal{G} of $n \geq 2$ nodes and $k \leq n$, for any $0 < \alpha \leq 1$, the output of Algorithm 1 can infect $(1 - 1/e)\text{OPT} - \alpha n$ nodes using no more than $81k^2 \log(6nk/\alpha)/\alpha^3$ influence samples.*

It is well known that even with the full knowledge of the graph \mathcal{G} no efficient algorithm can perform better than $(1 - 1/e)\text{OPT}$ unless P equals NP. Eckles et al. (2022) show that without the knowledge of \mathcal{G} , Algorithm 1 can approach an optimal efficient algorithm when the number of influence samples is large enough. In this paper, we ask if we can achieve similar performance when privacy constraints are imposed. Eckles et al. (2022) also show that one cannot hope to provide a constant factor approximation guarantee using $o(n)$ influence samples.

Theorem 2.3 (Theorem 3 of Eckles et al. (2022)) *Let $0 < \alpha < 1$ be any constant. For any algorithm with $o(n)$ samples, there exists a weighted graph \mathcal{G} so that the output of the algorithm can only infect less than αOPT nodes.*

2.2. Influence Sample Differential Privacy

Intuitively, a differentially private (DP) algorithm ensures that the algorithm outputs on two *adjacent inputs* are close to each other, making them hard to distinguish. However, there are multiple alternative definitions of adjacency relation on graph-structured input data. One classical notion is *node DP* where two graphs are adjacent if they are different by one node’s connections. Another one is *edge DP* where two graphs are adjacent if they differ by one edge (Hay et al. 2009). In this paper, we would like to focus on DP seeding algorithms that use influence samples but not raw graph data. Instead of raw graph, we study algorithms that only use historical cascades data — i.e., influence samples — where two collections of m influences samples \mathbf{x} and \mathbf{x}' in $\{0,1\}^{n \times m}$ are (*influence sample*) *adjacent* if we can change one entry to convert \mathbf{x} to \mathbf{x}' , and write $\mathbf{x} \underset{is}{\sim} \mathbf{x}'$ if they are adjacent. Given the above adjacency relation on influence samples, we can define if a stochastic seeding algorithm M is DP.

Definition 2.4 (ISDP) *Given $\epsilon \geq 0$, $n, m \geq 1$, and $k \in [n]$, a function $M^k : \{0,1\}^{n \times m} \rightarrow \mathcal{Y}$ is ϵ -**influence sample differentially private** (ϵ -ISDP, in short) if for all outputs $\mathbf{y} \in \mathcal{Y}$ of k seeds, and all pairs of adjacent datasets (collection of influence samples), $\mathbf{x} \underset{is}{\sim} \mathbf{x}'$, we have: $\Pr[M^k(\mathbf{x}) = \mathbf{y}] \leq e^\epsilon \Pr[M^k(\mathbf{x}') = \mathbf{y}]$.*

Instead of *entry-level* adjacency, one may consider *individual-level* adjacency that two inputs are adjacent if they differ at one row (i.e., an individual can decide whether to report their whole history or not). Our analysis in the paper still holds after strengthening the privacy constraints from ϵ to ϵ/m ; please refer to Section 6 for a more detailed discussion.

We believe the study of influence sample DP is more natural and practical than conventional node and edge DP for seeding algorithms (Kasiviswanathan et al. 2013, Raskhodnikova and Smith 2016). First, the notion of node DP allows an agent to misreport her connection in the social networks. However, when collecting data on network cascades, a single agent can hardly modify her connection to change the dynamics of social contagion, but rather she can decide whether to misreport her previous contagion data. Therefore, we argue that defining adjacent datasets based on influence samples as the input, rather than the raw social network data, is more natural and realistic. Moreover, we show in Propositions 2.5 and 2.6 that node-DP and edge-DP are too strict for influence maximization and hardly admit any utility guarantees. In Section 4 we will elaborate on the nature of our privacy protections in social network data collection and intervention design contexts.

Give two edge-weighted undirected graphs $\mathcal{G} = (V, p)$ and $\mathcal{G}' = (V', p')$, we say \mathcal{G} and \mathcal{G}' are *node adjacent* if $V = V'$ and there exists $v \in V$, $p_e = p'_e$ for all $v \notin e$. Similarly, \mathcal{G} and \mathcal{G}' are *edge adjacent* if $V = V'$ and there exists $u, v \in V$ $p_e = p'_e$ for all $e \neq (u, v)$. For $k < n$, we say that a seeding algorithm M^k is ϵ -node (or edge) DP if for any k , node (or edge) adjacent graphs $\mathcal{G}, \mathcal{G}'$, and output \mathbf{y} , $\Pr[M^k(\mathcal{G}) = \mathbf{y}] \leq e^\epsilon \Pr[M^k(\mathcal{G}') = \mathbf{y}]$.

The following proposition (proved in Section A.1) shows no node DP seeding algorithm can output a high quality seed.

Proposition 2.5 (Hardness of Influence Maximization with Node-DP) *Given $n \geq 1$ and $\epsilon > 0$, for any ϵ -node-DP seeding algorithm $M^k(\mathcal{G})$, there exists \mathcal{G} of n nodes so that for $k = 1$ we have: $\max_{S:|S|=1} I_{\mathcal{G}}(S) - \mathbb{E}_{\mathbf{y} \sim M^{k=1}(\mathcal{G})}[I_{\mathcal{G}}(\mathbf{y})] \geq \frac{n}{4} - (e^\epsilon + 1)$.*

We use the fact that a star and a totally isolated graph are different by one node’s connection. A node-DP algorithm needs to output similar seed sets on these two graphs, and thus returns low quality seeds. Based on similar intuition, the following proposition (proved in Section A.2) shows no edge-DP seeding algorithm can output a high quality seed either. Both results can be strengthened to exclude the possibility of useful algorithms with “approximate” (ϵ, δ) -DP guarantees as well. The latter is a relaxation of the defining constraint in Equation (1) to allow for an additive term δ ; see Section A.2.

Proposition 2.6 (Hardness of Influence Maximization with Edge-DP) *For all $n \geq 1$ and $\epsilon > 0$, there exists $\alpha_\epsilon \geq \frac{1}{1000e^\epsilon}$ so that any ϵ -edge-DP seeding algorithm $M^k(\mathcal{G})$, there exists graph \mathcal{G} on n nodes so that for $k = 1$ we have: $(1 - 1/e) \max_{S:|S|=1} I_{\mathcal{G}}(S) - \mathbb{E}_{\mathbf{y} \sim M^{k=1}(\mathcal{G})}[I_{\mathcal{G}}(\mathbf{y})] \geq \alpha_\epsilon n$.*

Compared to Theorem 2.2, the above results show that no node-DP (or edge-DP) algorithm can perform close to $(1 - 1/e)\text{OPT}$ even with the full knowledge of \mathcal{G} . In Section A.2 (Proposition A.1), we show that similar lower bounds hold even if we consider an additive relaxation of the node- and edge-DP requirements, allowing the $\Pr[M^k(\mathcal{G}) = \mathbf{y}] \leq e^\epsilon \Pr[M^k(\mathcal{G}') = \mathbf{y}]$ condition to be violated up to a δ additive factor. In this paper, we will design influence sample DP algorithms that perform comparable to Algorithm 1. Finally, note that node-DP implies edge-DP, but influence sample DP is not comparable to node- or edge-DP because the algorithms take different inputs.

Two primitive DP algorithms. Our algorithms will make use of the following two general DP mechanisms (we use algorithm and mechanism interchangeably): exponential mechanism (McSherry and Talwar 2007, Dwork et al. 2014), and randomized respond mechanism (Warner 1965, Evfimievski et al. 2003). First, to achieve ϵ -DP, given a finite set (range), \mathcal{R} , the *exponential mechanism* is defined with respect to a scoring function $u : \{0, 1\}^{n \times m} \times \mathcal{R} \rightarrow \mathbb{R}$ and its sensitivity $\Delta(u) := \max_{r \in \mathcal{R}, \mathbf{x} \sim_{is} \mathbf{x}'} |u(\mathbf{x}, r) - u(\mathbf{x}', r)|$. The exponential mechanism $\mathcal{M}_E^\epsilon(\mathbf{x}, u, \mathcal{R})$ outputs an element $r \in \mathcal{R}$ with probability proportional to $\exp\left(\frac{\epsilon u(\mathbf{x}, r)}{2\Delta(u)}\right)$ as defined in Dwork et al. (2014). Moreover, as shown in the following theorem, for a fixed dataset \mathbf{x} exponential mechanism’s output almost maximizes the scoring function $u(\mathbf{x}, r)$ and can be interpreted as a DP soft max.

Theorem 2.7 (Theorem 3.11 of Dwork et al. (2014) — Exponential Mechanism) *Consider a dataset $\mathbf{x} \in \{0, 1\}^{n \times m}$, privacy budget $\epsilon > 0$, a finite set \mathcal{R} , and a scoring function $u : \{0, 1\}^{n \times m} \times \mathcal{R} \rightarrow \mathbb{R}$ with sensitivity $\Delta(u)$. The exponential mechanism $\mathcal{M}_E^\epsilon(\mathbf{x}, u, \mathcal{R})$ that outputs an element $r \in \mathcal{R}$ with probability proportional to $\exp\left(\frac{\epsilon u(\mathbf{x}, r)}{2\Delta(u)}\right)$ is ϵ -ISDP and for all $t > 0$, we have:*

$$\Pr \left[u(\mathbf{x}, \mathcal{M}_E^\epsilon(\mathbf{x}, u, \mathcal{R})) \leq \max_{r \in \mathcal{R}} u(\mathbf{x}, r) - \frac{2\Delta(u)}{\epsilon} (\ln |\mathcal{R}| + t) \right] \leq e^{-t},$$

where the probability is over the randomness of the algorithm run for fixed \mathbf{x} .

The above exponential mechanism ensures that the output does not reveal too much information about the privacy-critical input data, limiting how much an adversary can infer about the input data according to Definition 2.4. However, depending on data curation requirements (who can access the exact user data), protection against output-based inferences may not be sufficient and we may need to limit the algorithm’s access to exact input data. Such privacy guarantees can be formulated as *local DP* where each individual’s data is privatized before running the algorithms. One standard locally DP algorithm is the *randomized response mechanism* (Evfimievski et al. 2003). Specifically, an ϵ -DP randomized response mechanism guarantees privacy by independently flipping each bit of the input dataset (influence sample collection) with probability $1/(e^\epsilon + 1)$.

3. Differentially Private Seeding Algorithms

In this section, we provide two DP seeding algorithms that satisfy the DP requirements either centrally or locally. First in Subsection 3.1, we use an exponential mechanism that ensures the output of the seed selection is centrally DP. Next in Subsection 3.2, we use the randomized response algorithm to achieve local DP according to the criteria set forth in Definition 2.4. Theorems 3.2 and 3.5 provide our sample complexity bounds in each case to achieve ϵ -ISDP with a $(1 - 1/e)\text{OPT} - \alpha n$ performance guarantee. In particular, we observe that the sample complexity bound for achieving local DP is much harsher at $O(k^3 \epsilon^{-2k^2} \ln n / \alpha^2)$ compared to $O(k \ln n / (\alpha \epsilon))$ for central DP. This exponential separation of sample complexity dependence on k is reflected in our simulation results in Section 5, where exponential mechanism shows a faster improvement in performance with increasing number of influence samples and its output has a significantly higher expected spread size when the privacy budget (ϵ) is low.

3.1. Central DP with Exponential Mechanism

In this section, we design a DP seeding algorithm by using exponential mechanism and modifying Algorithm 1. To protect privacy, instead of Algorithm 2, we use an exponential mechanism that differentially outputs a soft max (Theorem 2.7). Formally, given $\epsilon > 0$ and integer k we define a seeding algorithm $\mathcal{M}_{exp}^{k, \epsilon}(\mathbf{x})$ that runs Algorithm 1 but replaces the single seed selection steps of Algorithm 2 by its exponential mechanism variant, Algorithm 3 $\mathcal{M}_{exp}^{\epsilon/k}(\mathbf{x}, S)$. Note that Algorithm 3 is an exponential mechanism using $I_{\mathbf{x}}(\cdot|S)$ as the scoring function.

Algorithm 3 ϵ -ISDP single seed selection, $\mathcal{M}_{exp}^{\epsilon}(\mathbf{x}, S)$

Input: m influence samples $\mathbf{x} = (x^1, \dots, x^m)^\top$, a seed set S , and privacy budget $\epsilon \geq 0$.

- 1: **for** $v \in [n] \setminus S$ **do**
 - 2: Compute $I_{\mathbf{x}}(v|S)$
 - 3: **end for**
 - 4: Return v with probability proportional to $\exp\left(\frac{\epsilon m}{2n} I_{\mathbf{x}}(v|S)\right)$
-

Note that a naive algorithm that runs the exponential mechanism directly on all k seeds at once is not efficient because the size of the output space is combinatorially large $\Omega(n^k)$. To ensure our algorithm is efficient, we sequentially run the exponential mechanism k times to estimate and choose seeds similar to the greedy algorithm of Eckles et al. (2022), reducing their time complexity to $O(nmk)$. Theorem 3.1 shows that our exponential mechanism for single seed selection, $\mathcal{M}_{exp}^\epsilon(\mathbf{x}, S)$, is ϵ -ISDP (Definition 2.4), and provides a tail bound on the approximation error of maximizing $I_{\mathbf{x}}$. Its proof in Section A.3 follows from the facts that $I_{\mathbf{x}}$ is a submodular function, and the exponential mechanism in Algorithm 3 can be seen as a noisy maximum function which implements an approximate greedy step by Theorem 2.7.

Theorem 3.1 *Given $k \leq n \in \mathbb{N}$, $\epsilon > 0$ and $m \in \mathbb{N}$ influence samples, \mathbf{x} , $\mathcal{M}_{exp}^{k,\epsilon}(\mathbf{x})$ is ϵ -ISDP and outputs a set of k nodes which, for all $t > 0$, satisfies:*

$$\Pr \left[I_{\mathbf{x}}(\mathcal{M}_{exp}^{k,\epsilon}(\mathbf{x})) \leq (1 - e^{-1}) \max_{S:|S|=k} I_{\mathbf{x}}(S) - \frac{2k^2n}{\epsilon m} (\ln n + t) \right] \leq ke^{-t},$$

where the probability is over the randomness of the algorithm run for fixed \mathbf{x} .

The above theorem provides a tail bound on the approximation error of $\mathcal{M}_{exp}^{k,\epsilon}(\mathbf{x})$ with respect to the optimal value on $I_{\mathbf{x}}$, given a fixed influence sample \mathbf{x} . Equipped with Proposition 2.1, we can derive the following error bound with respect to the optimal value $I_{\mathcal{G}}$ of the influence maximization problem (proved in Section A.4):

Theorem 3.2 *Given graph \mathcal{G} on $n \geq 2$ nodes and $k \leq n$, for any $0 < \alpha \leq 1$ and $\epsilon > 0$, $\mathcal{M}_{exp}^{k,\epsilon}(\cdot)$ that runs Algorithm 1 but replaces the single seed selection steps of Algorithm 2 by $\mathcal{M}_{exp}^{\epsilon/k}(\mathbf{x}, S)$, its exponential mechanism variant in Algorithm 3, is ϵ -ISDP and its output infects at least $(1 - 1/e)\text{OPT} - \alpha n$ nodes with high probability, using at least $m = \max\{\frac{12}{\alpha\epsilon}, \frac{9}{\alpha^2}\}k \ln n$ influence samples in $O(knm)$ run time.*

Note that if we are not concerned with privacy and set $\epsilon \gg \alpha$, then the number of samples to achieve αn additive error is of order $\alpha^{-2}k \ln n$, which improves upon the $k^2(\ln n/\alpha)/\alpha^3$ bound of Eckles et al. (2022). Moreover, our result does not violate Theorem 3 of Eckles et al. (2022) that shows $\Omega(k^2)$ influence samples are required to achieve $(1 - 1/e)\text{OPT} - \alpha n$ performance bound for all $\alpha < (1 - 1/e)/k$, because our algorithm also needs $\Omega(k^2)$ samples when $\alpha < 1/k$.

3.2. Local DP with Randomized Response

We can achieve a stronger notion of privacy, local DP, by adding noise to the input data before running our (or any other) algorithms. Line 2 of Algorithm 4 adds the requisite amount of noise to achieve local ϵ -ISDP in the input dataset \mathbf{x} — flipping each entry of \mathbf{x} independently with probability $\rho_\epsilon = 1/(1 + e^\epsilon)$ to generate the noisy input $\tilde{\mathbf{x}}$. However, the added input noise will bias our estimate of each candidate seed's quality; in particular, $\mathbb{E}_{\tilde{\mathbf{x}}}[I_{\tilde{\mathbf{x}}}(S|T)]$ is not necessarily equal to $I_{\mathcal{G}}(S|T)$ for a pair of subsets $S, T \subset V$ and we no longer have the benefit of applying Proposition 2.1 directly. Rather in Algorithm 5 we propose a post-processing of the noisy input data $\tilde{\mathbf{x}}$ to derive an unbiased estimate of a seed set's quality. Importance of proper post-processing steps in the analysis of DP data are highlighted in other applications, e.g., census

DP data release, where ignoring them can lead to biased decision-making and sub-optimal outcomes (Abowd et al. 2019, Ashmead et al. 2019, Zhu et al. 2022, 2021). The added variability of the estimators due to the DP noise can also degrade our estimation performance (even if not biased), which is a second concern in local DP algorithm design and opens a venue to explore alternative post-processing methods with potentially superior bias-variance tradeoff. In the remainder of this section, we first introduce Algorithms 4 and 5 and then offer Theorem 3.5 for their privacy and utility guarantees, addressing both concerns about the bias and variance of decision making with local DP influence samples.

Algorithm 4 Local ϵ -ISDP seeding algorithm, $\mathcal{M}_{loc}^{k,\epsilon}(\mathbf{x})$

Input: m influence samples \mathbf{x} , total number of seeds k , and privacy budget $\epsilon > 0$.

- 1: Set $S_0 = \emptyset$.
 - 2: Flip any bits of \mathbf{x} with probability $\rho_\epsilon = \frac{1}{e^\epsilon + 1}$ and get $\tilde{\mathbf{x}}$.
 - 3: **for** $i \in [k]$ **do**
 - 4: Find $v_i \in \arg \max_v J_m(S_{i-1} \cup \{v\})$ where $J_m(S)$ is defined in Algorithm 5.
 - 5: $S_i = S_{i-1} \cup v_i$.
 - 6: **end for**
 - 7: Return S_k
-

Given a set S , an influence sample $x \in \{0, 1\}^n$, and its perturbed version \tilde{x} , consider two sets of nodes $S \cap x$ and $S \cap \tilde{x}$. By Proposition 2.1, the influence function $I_G(S)$ can be estimated from the reachable set, $n \Pr[S \cap x \neq \emptyset]$. But to achieve local DP, we can only observe the perturbed, reachable set $S \cap \tilde{x}$. In other words, let $\tilde{z}_S := |S \cap \tilde{x}|$ and $z_S := |S \cap x|$ be two random variables. If we can estimate $\Pr[z_S = 0]$ from our observed samples of \tilde{z}_S , then we can estimate the size of the reachable set from $I_G(S) = n \Pr[z_S > 0]$ — using Proposition 2.1 — and then run the standard greedy algorithm for seed selection based on the estimated values.

Now, we discuss how to estimate $\Pr[z_S = 0]$ from samples of \tilde{z}_S . The main observation is that the probability mass function of \tilde{z}_S is a linear function of the probability mass function of z_S . Note that $S \cap x$ is the set of elements in S that is also in the influence sample x . Hence, $S \cap \tilde{x}$ can be partitioned into (1) the subset $(S \cap \tilde{x}) \cap x$ of elements of x that remain in S after perturbation, and (2) the subset $(S \cap \tilde{x}) \setminus x$ of the elements of \tilde{x} that join S after the perturbation. The size of the first subset is a binomial random variable $\text{Bin}(|S \cap x|, 1 - \rho)$, and the size of the second subset is $\text{Bin}(|S \setminus x|, \rho)$. Therefore, given $|S| = l$ for all a and b , the probability of $\tilde{z}_S = b$ conditional on $z_S = a$ is $\Pr[\tilde{z}_S = a | z_S = b] = \Pr[\text{Bin}(b, 1 - \rho) + \text{Bin}(l - b, \rho) = a]$, for all $a, b = 0, \dots, l$ where $\text{Bin}(b, 1 - \rho)$ and $\text{Bin}(l - b, \rho)$ are independent. Additionally, if we set matrix $C = C_{\rho, l} \in \mathbb{R}^{(l+1) \times (l+1)}$ be a likelihood function where $C(a, b) = C_{\rho, l}(a, b) = \Pr[\tilde{z}_S = a | z_S = b]$, then we have:

$$\begin{pmatrix} \Pr[\tilde{z}_S = 0] \\ \Pr[\tilde{z}_S = 1] \\ \vdots \\ \Pr[\tilde{z}_S = l] \end{pmatrix} = C_{\rho, l} \begin{pmatrix} \Pr[z_S = 0] \\ \Pr[z_S = 1] \\ \vdots \\ \Pr[z_S = l] \end{pmatrix}. \quad (2)$$

We can write out each entry explicitly as follows:

$$C_{\rho,l}(a,b) = \sum_{\ell=\max(0,b-a)}^{\min(l-a,b)} \binom{b}{\ell} \binom{l-b}{a-b+\ell} \rho^{a-b+2\ell} (1-\rho)^{l-a+b-2\ell}. \quad (3)$$

To see why, condition on ℓ of the $z_S = b$ nodes in $S \cap x$ being flipped, leaving $b - \ell$ nodes in $S \cap x \cap \tilde{x}$. To get $\tilde{z}_S = a$ nodes in $S \cap \tilde{x}$, the remaining $a - b + \ell$ nodes should come from perturbing the status of the $l - b$ nodes belonging to $S \setminus x$. Note that our indexes a and b start at 0 instead of 1. In the rest of the section, we will adopt this convention.

If matrix $C_{\rho,l}$ is invertible, then we can have an unbiased estimation of $\Pr[z_S > 0]$ using Algorithm 5, below. Proposition 3.3, proved in Section A.5, shows that $C_{\rho,l}$ is invertible for $\rho > 1/2$ and thus completes the specification of our randomized response algorithm.

Algorithm 5 Unbiased estimate for number of reachable set $J_m(S)$

Input: m perturbed influence samples $\tilde{\mathbf{x}} = (\tilde{x}^1, \dots, \tilde{x}^m)$, their perturbation probability ρ , and a candidate set $S \subset V$ with size $|S| = l$.

- 1: Compute $\tilde{\mathbf{f}} = (\tilde{f}_0, \tilde{f}_1, \dots, \tilde{f}_l) \in \mathbb{R}^{l+1}$ the empirical distribution of $\tilde{z}_S = |S \cap \tilde{x}|$ so that $\tilde{f}_a = \frac{1}{m} \sum_{t=1}^m \mathbf{1}[|S \cap \tilde{x}^t| = a]$ for all $a = 0, 1, \dots, l$.
 - 2: Solve for $\mathbf{f} = (f_0, f_1, \dots, f_l) \in \mathbb{R}^{l+1}$ so that $\tilde{\mathbf{f}} = C_{\rho,l} \mathbf{f}$.
 - 3: Return $J_m(S) = n(1 - f_0)$
-

Proposition 3.3 (Feasibility of Unbiased Post-processing) *Given any positive integer $l \geq 1$ and $\rho \in [0, 1/2)$, matrix $C_{\rho,l}$ is invertible.*

Note that when $\rho = 1/2$, $\tilde{\mathbf{x}}$ consists of uniform random bits, and we cannot recover $\Pr[z_S > 0]$ from the perturbed influence samples, and Proposition 3.3 shows that we can recover $\Pr[z_S > 0]$ for any $\rho < 1/2$.

Theorem 3.4 *Given $\epsilon > 0$, m influence samples on a graph with n nodes and integer $k < n$, Algorithm 4 is locally ϵ -ISDP, and its output satisfies: $I_G(\mathcal{M}_{loc}^{k,\epsilon}(\mathbf{x})) > (1 - 1/e)\text{OPT} - \delta$, with probability $1 - 2n^k \exp(-m\delta^2/(2k^2n^2V_{\rho_\epsilon,k}^2))$, where $V_{\rho_\epsilon,k} = O((1/2 - \rho_\epsilon)^{-k^2})$.*

The above theorem, proved in Section A.6, provides a tail bound on the approximation error of $\mathcal{M}_{loc}^{k,\epsilon}$ given a fixed number of influence samples. We can convert the above result to a high probability error bound by choosing $m = \Omega(k^3 V_{\rho_\epsilon,k}^2 \ln n / \alpha^2)$ which for k constant and $\epsilon \gg \alpha$ improves on the $1/\alpha^3$ sample complexity in Theorem 2.2 (complete proof in Section A.7):

Theorem 3.5 *Given graph \mathcal{G} with $n \geq 2$ nodes and $k \leq n$, for any $0 < \alpha \leq 1$ and $\epsilon > 0$, $\mathcal{M}_{loc}^{k,\epsilon}$ is locally ϵ -ISDP and its output infects at least $(1 - 1/e)\text{OPT} - \alpha n$ nodes with high probability, using at least $m = O(k^3 V_{\rho_\epsilon,k}^2 \ln n / \alpha^2)$ influence samples in $O(nk^4 + kn^2m)$ run time, where $V_{\rho_\epsilon,k} = O((1/2 - \rho_\epsilon)^{-k^2})$.*

Note that $V_{\rho_\epsilon,k} = O((1/2 - \rho_\epsilon)^{-k^2})$ in Theorems 3.4 and 3.5 can be simplified as follows: $V_{\rho_\epsilon,k} = O((1/2 - \rho_\epsilon)^{-k^2}) = O((1/2 - 1/(e^\epsilon + 1))^{-k^2}) = O([2(e^\epsilon + 1)/(e^\epsilon - 1)]^{k^2})$. Therefore $V_{\rho_\epsilon,k} = O(\epsilon^{-k^2})$ as $\epsilon \rightarrow 0$ and $V_{\rho_\epsilon,k} = O(2^{k^2})$ as $\epsilon \rightarrow \infty$.

4. The Nature of Our Privacy Protections in Social Networks

From the perspective of privacy guarantees, exponential mechanism (central DP) only protects the input data against the algorithmic revelations of the output (seeded nodes), giving the algorithm itself unhindered access to user data. On the other hand, the randomized response mechanism (local DP) provides a stronger privacy notion that protects the input data directly against any (adversarial) misuse, regardless of – and including — their use for seeding. Our results address both central and local notions of privacy, providing performance (utility) and sample complexity guarantees for influence maximization algorithms whose outputs/inputs are randomized at a desired level to give central/local DP protection given our input data structure, i.e., influence samples.

In our framework, we explicitly establish a budget (ϵ) for privacy leaks through the observed network cascades. This budget is a quantifiable limit on how much privacy/security risk one is willing to tolerate across all queries, not just a single query of the data. The latter highlights yet another way, in which our formulation of privacy budget is distinct from the setting of node- and edge-DP for graph input data structures. While algorithmically tractable, practice-wise our notion of adjacency protects each data donor against revelations of their contributions to any given cascade. While a donor may be willing to donate their contagion history, there may be some cascades in that history that they feel uncomfortable about (revealing sensitive or compromising information). Or the donors may dynamically contribute their contagion data where previous donations are irrevocable. Our notion of influence sample differential privacy provides donors with plausible deniability at any fixed cascade. This way donors are incentivized to contribute their entire set of m cascades because we can bound their privacy risks from information leakage at any specific cascade in the set of size m , either centrally or locally - depending on the data curation environment - using our Algorithms 3 and 4. As long as the number of sensitive cascades is much smaller than m , we believe this notion of adjacency provide meaningful privacy protections. This is reflected in the requisite randomization in our greedy exponential mechanism (Algorithm 3): to achieve ϵ -DP, each node v is chosen with probability proportional to $\exp\left(\frac{\epsilon m}{2n} I_{\mathbf{x}}(v|S)\right)$, where $I_{\mathbf{x}}(v|S)$ is the marginal benefit of adding v to the current seed set S and it is estimated from the input influence samples \mathbf{x} . As $m \rightarrow 0$, this “soft max” converges to a uniform random choice, completely ignoring the input influence samples \mathbf{x} . On the other hand, the randomized response mechanism achieves ϵ -DP locally by flipping the status of nodes in each cascade independently at random with probability $1/(1 + e^\epsilon)$. While the randomized response noise level is determined independently of the sample size m , the latter scales up as $m = O(k^3 \epsilon^{-2k^2} \ln n / \alpha^2)$ with the decreasing privacy budget (ϵ) to sustain algorithmic performance in the privacy-critical regime ($\epsilon \rightarrow 0$).

As a concrete case, consider the choice of community leaders to undergo training for a public health or education intervention. To identify and target community leaders for treatment, the interventionist can survey the social network connections among the population. For example, Banerjee et al. (2013) survey individuals to collect social network data along 12 dimensions, including whom they get medical advice from or give medical advice to, relative and non-relatives with whom they socialize, and people with whom they exchange goods. While the community leaders may consent to and be properly compensated for their time in treatment, their social contacts face a privacy risk in having one of their associates chosen. As such,

people may refrain from contributing to social network data collection or refuse to answer survey questions, especially when association with the treated individuals can pose harm, such as stigma or retaliation. For example, to prevent school bullying a few students may be recruited into treatment programs — e.g., by encouraging them to take a public stance against conflict (Paluck et al. 2016) — if the treated individuals are chosen based on their social network positions, and even if they are protected in treatment, their friends and contacts can face retaliation outside the treatment. Our central privacy protections in Section 3.1 allows the network participants to make a credible claim that their network associates are recruited into treatment by random choice, irrespective of their associations or contribution to the collected network cascade data.

In other related contexts, the nature of collected data can itself be compromising, irrespectively of how individuals are selected into treatments; e.g., surveillance and control of sexually transmitted disease and HIV may entail surveys of sexual contacts or needle sharing networks among people who inject drugs (Fairley et al. 2022, Endo et al. 2022). Administering such privacy-critical data should entail local privacy protections, whereby individual data is randomized as they are collected before any intervention designs or allocation decisions. Our local privacy guarantees in Section 3.2 are suited for such cases where individual contagion data may be collected for intervention design, but needs to be protected locally at the collection phase.

In a similar vein, social media platforms rely on social network data and information from past diffusions to organize their ad campaign and improve the efficacy of targeted advertising. Ensuring that these network operations do not violate users’ privacy is critical to the sustainability of social media platforms and their ad economies. Minority groups, in particular, can face more privacy risks than others in a social network. For example, a few adversarial nodes can coordinate their actions to move a web crawler towards or away from certain parts of an online social network to compromise their privacy through a re-identification attack (Backstrom et al. 2007). More broadly, deployment of learning systems to improve user experience requires accessing and aggregating historical usage information (e.g., for emojis and web domains) to optimize resource overhead for computation and communication, while respecting the personal and sensitive nature of the collected data (Apple Differential Privacy Team 2017, Erlingsson 2014b).

5. Simulation Results

Simulations on a synthetic input graph. To test the performance of our algorithms in a sanitized setup, we generate an input using the Erdős-Rényi random graph model on 200 nodes with edge probability 0.15 and run our randomized response and exponential mechanism algorithms with different privacy budgets ($\epsilon = 0.1, 0.5$, or 1) and different numbers of influence samples (m ranging from zero to 500). The independent cascade probability is set to 0.03. Figure 1 shows that the rate of increase with m slows down with the decreasing privacy budget for both exponential mechanism and randomized response algorithm alike.

Simulations on a real-world dataset. We use a real dataset representing email interactions between individuals in a large European research institution taken from Stanford Large Network Dataset Collection (Stanford Network Analysis Project 2007, Yin et al. 2017, Leskovec et al. 2007). The nodes represent the individuals and the edges if there is communication between two individuals. This network represents the interaction between 1005 nodes (individuals) through 25571 edges. The interactions are mutual, and the

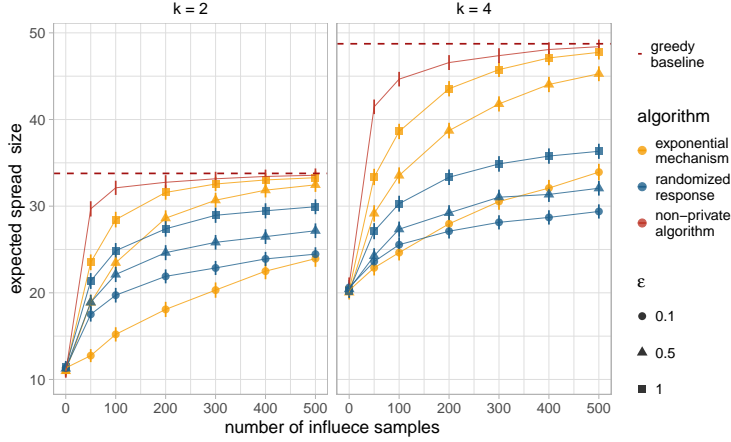


Figure 1 We show the performance (expected influence $I_{\mathcal{G}}(\cdot)$) of the outputs of our exponential mechanism and randomized response algorithms, as well as the non-private, influence sample seeding algorithm and the complete-information, deterministic greedy baseline over a synthetic network generated using Erdős-Rényi model with parameters $n = 200$ and $p = 0.15$. We evaluate the expected spread size at different privacy budgets (ϵ), as the number of influence samples (m) increases. Each point on the plot is an average of $50 \times 20 = 1000$ trials where we generate 50 collections of m influence samples, and run our mechanisms on each collection 20 times. The 50 realizations capture the randomness in the diffusion process (influence sampling) and for each set of influence samples, we perform 20 iterations to average out the randomness of the algorithms. The error bars show the 95% confidence intervals of 1000 trials around the means. Finally, to evaluate the performance of our mechanisms, we use another 1000 influence samples to estimate the expected size of the spread.

graph is undirected. In the simulation setup of Fig. 2, we consider $k = 4$ and $k = 8$ seeds, the number of influence samples ranges from zero to 1500, $m \in \{0, 100, 250, 500, 750, 1000, 1250, 1500\}$, and the independent cascade probabilities are set to $p = 0.0155$ on every edges in \mathcal{G} and zero otherwise. The $m = 0$ case corresponds to no input information where the choice of $k = 4, 8$ seeds will be uniformly at random. With no input information at $m = 0$, there are no privacy risks to consider.

In both Figures 1 and 2, we see that the exponential mechanism outperforms the randomized response mechanism as the latter provides stronger (local) privacy protections. We also observe that low values of privacy budget ϵ lead to earlier saturation in lower quality expected spread sizes. In those cases, our maximum number of influence samples is not enough to counteract the random noise introduced by the privacy mechanisms, so the value of network information diminishes with the decreasing privacy budget — cf., Eckles et al. (2022, Section 4). Increasing the privacy budget alleviates this effect, as we see a faster increase in the expected spread size with increasing m at higher values of ϵ . In fact, the performance of both mechanisms approaches the original (“non-private”) influence sample greedy seeding algorithm (Algorithm 1), as $\epsilon \rightarrow \infty$. For instance, in the randomized response mechanism (Algorithm 4), as the privacy budget increases, the flip

Figure 2 We test the performance (expected influence $I_G(\cdot)$) of our privacy-preserving seeding algorithms (exponential mechanism and randomized response) on a real-world dataset, at different privacy budgets (ϵ), as number of influence samples (m) increases. The figure also shows the non-private, influence sample seeding and the complete-information, deterministic, greedy baselines for comparison. Each point on the plot is average of $50 \times 10 = 500$ trials where we generate 50 collections of m influence samples, and run our mechanisms on each collection 10 times. The 50 realizations capture the randomness in the diffusion process (influence sampling) and for each set of influence samples, we perform 10 iterations to average out the randomness of the algorithms (randomized response and exponential mechanism). The error bars show the 95% confidence intervals of 500 trials around the means. Finally, to evaluate the performance of our mechanisms, we use another 2000 influence samples to estimate the expected size of the spread.

probability of the entries in the influence samples $x \in \{0, 1\}^{n \times m}$ (Algorithm 4, line 2) decreases, and matrix $C_{\rho, l}$ in Equation (3) is close to the identity matrix, so the performance is similar to the original influence sample greedy seeding algorithm (Algorithm 1). For the exponential mechanism of Section 3.1, at each step the mechanism approximately chooses an optimal seed that has the largest expected marginal contribution to the spread, and a large privacy budget ($\epsilon \rightarrow \infty$) sharpens the probability of choosing an optimal seed against others. Figures 1 and 2 also show the deterministic greedy baseline with complete network information to be compared with the exponential mechanism and randomized response algorithms at different ϵ values with increasing m . As we gain better information about the network by increasing the number of influence samples ($m \rightarrow \infty$) and the privacy budget ($\epsilon \rightarrow \infty$), the performance of both algorithms will converge to the deterministic greedy algorithm with complete network information.

6. Discussions, managerial insights and future directions

Comparison between node-, edge-, and influence-sample DP. In this paper, we propose a new notion of differential privacy using influence samples adjacency. This notion may be extended to various problems which have underlying network structure. Examples include viral content and rumor cascades on social media, polls in elections from voters who influence each other’s opinions, and medical history of past disease contagions on epidemiological networks.

Note that the input of an influence sample DP algorithm is different from the inputs of node- or edge-DP algorithms – capturing different notions of privacy loss that are not formally comparable; specifically, in influence sample DP an individual may decide whether or not to report their particular value for an influence sample but they cannot change the data generation process. Instead of *entry-level* adjacency, one may consider *individual-level* adjacency that two inputs are adjacent if they differ at one row (an individual can decide whether or not to report their entire contagion history). Under this new notion, our analysis for exponential mechanism in Section 3.1 still hold, but we need to strengthen privacy constraints from ϵ to ϵ/m where m is the number of samples, because an individual’s change on the influence sample increases from 1 to m . However, as the privacy constraints depend on the number of samples, a large number of samples

can no longer ensure that our mechanisms’ performance converges to the original greedy algorithm with full knowledge of the graph. This is inevitable as the new notion prevents our mechanisms from finding high-quality seeds regardless of the number of samples. Indeed, it is impossible to get any meaningful utility for ISDP with individual-level adjacency for similar reasons as edge-DP or node-DP (Propositions 2.5 and 2.6).

Adjacency relation and differential privacy. In this paper, we see a separation of utility guarantee between node/edge-DP algorithms and influence sample DP algorithms (Propositions 2.5 and 2.6 vs Theorems 3.2 and 3.5). Such separations may be attributed to different notions of adjacency (node, edge, or influence sample adjacency). This observation suggests that differentially private algorithms can have significantly different utility and privacy guarantees by changing the notion of adjacency. However, we are not advocating influence sample DP as superior to node- or edge-DP. On the contrary, one goal of this paper is to bring attention to the role that different notions of adjacency play in discussions of privacy. For instance, because people are connected by social networks, their private data of any forms (census, medical records, etc.) are inevitably affected by the network structure. Those supporting node- and edge-DP may consider that the proper notion of adjacency for two datasets (on census, medical records, etc.) should also depend on the network rather than the traditional Hamming distance. Further discussion can be found in Rezaei and Gao (2019).

Efficiency and Robustness. Our algorithms have polynomial running times in the size of the graph, with a time complexity of $O(knm)$ and $O(nk^4 + kn^2m)$ for $\mathcal{M}_{exp}^{k,\epsilon}(\mathbf{x})$ and $\mathcal{M}_{loc}^{k,\epsilon}(\mathbf{x})$, respectively, for any constant privacy budget $\epsilon > 0$. To improve running times, one may consider improving the iterative sampler for the exponential mechanism in Algorithm 3, or designing a better post-processing step for Line 2 in Algorithm 5. On the other hand, our ISDP randomized response algorithm $\mathcal{M}_{loc}^{k,\epsilon}(\mathbf{x})$ is automatically robust against independent randomness noise on influence samples. However, it is unclear how well our ISDP exponential mechanism $\mathcal{M}_{exp}^{k,\epsilon}(\mathbf{x})$ performs in the presence of noise.

Conclusions. The correlated nature of social network information has been noted as a vulnerability in DP formulations which provide user-level guarantees with respect to the addition or removal of a single user’s data but ignore information leakage across different users’ records. By focusing on the utility of influence samples for influence maximization, our approach guarantees user’s participation in any given cascade is kept private either locally or centrally and preserves the statistical validity of the cascades for influence estimation and maximization. Subsequently, we provide a rigorous operationalization of action-level privacy by providing users with plausible deniability as to whether or not they have taken part in any particular network cascade (Kifer et al. 2020). This relaxation of user-level DP is ideally suited for the purposes of data collection to inform network intervention design. We expect that formulation and investigation of influence sample DP, with specific attention to the utility of the collected data for network intervention design, should lead to novel generalizations of privacy that are both consequentialist and robust to variations in sampling distributions and randomization noise (Kifer and Machanavajjhala 2014, Rastogi et al. 2009, Liu et al. 2020, Chakrabarti et al. 2022).

Acknowledgments

Rahimian and Yu contributed equally and are listed alphabetically. Rahimian is partially supported by the National Science Foundation under Grant No. 2318844. Rahimian also acknowledges support from a Pitt Momentum Funds Grant on Socially Responsible Data Collection and Network Intervention Designs. This research was supported in part by the University of Pittsburgh Center for Research Computing, RRID:SCR_022735, through the resources provided. Specifically, this work used the H2P cluster, which is supported by NSF award number OAC-2117681. Code for reported simulations can be accessed from <https://github.com/aminrahimian/dp-inf-max>

References

- Abawajy JH, Ninggal MIH, Herawan T (2016) Privacy preserving social network data publication. *IEEE communications surveys & tutorials* 18(3):1974–1997.
- Abowd J, Ashmead R, Simson G, Kifer D, Leclerc P, Machanavajjhala A, Sexton W (2019) Census TopDown: Differentially private data, incremental schemas, and consistency with public knowledge. Technical report, US Census Bureau.
- Alexander M, Forastiere L, Gupta S, Christakis NA (2022) Algorithms for seeding social networks can enhance the adoption of a public health intervention in urban india. *Proceedings of the National Academy of Sciences* 119(30):e2120742119.
- Apple Differential Privacy Team (2017) Learning with privacy at scale. <https://machinelearning.apple.com/research/learning-with-privacy-at-scale>, accessed: 2023-05-18.
- Ashmead R, Kifer D, Leclerc P, Machanavajjhala A, Sexton W (2019) Effective privacy after adjusting for invariants with applications to the 2020 census. Technical report, US Census Bureau.
- Backstrom L, Dwork C, Kleinberg J (2007) Wherefore art thou r3579x? anonymized social networks, hidden patterns, and structural steganography. *Proceedings of the 16th international conference on World Wide Web*, 181–190, WWW ’07 (New York, NY, USA: Association for Computing Machinery).
- Banerjee A, Chandrasekhar AG, Duflo E, Jackson MO (2013) The diffusion of microfinance. *Science* 341(6144):1236498.
- Banerjee A, Chandrasekhar AG, Duflo E, Jackson MO (2019) Using gossips to spread information: Theory and evidence from two randomized controlled trials. *The Review of Economic Studies* 86(6):2453–2490.
- Barbaro M, Zeller T, Hansell S (2006) A face is exposed for aol searcher no. 4417749. *New York Times* 9(2008):8.
- Behrman JR, Kohler HP, Watkins SC (2002) Social networks and changes in contraceptive use over time: Evidence from a longitudinal study in rural kenya. *Demography* 39(4):713–738.
- Benthall S, Cummings R (2022) Integrating differential privacy and contextual integrity. *2022 USENIX Conference on Privacy Engineering Practice and Respect*.

-
- Blocki J, Blum A, Datta A, Sheffet O (2013) Differentially private data analysis of social networks via restricted sensitivity. *Proceedings of the 4th conference on Innovations in Theoretical Computer Science*, 87–96.
- Blocki J, Grigorescu E, Mukherjee T (2022) Privately estimating graph parameters in sublinear time. *arXiv preprint arXiv:2202.05776* .
- Borgs C, Brautbar M, Chayes J, Lucier B (2014) Maximizing social influence in nearly optimal time. *Proceedings of the twenty-fifth annual ACM-SIAM symposium on Discrete algorithms*, 946–957 (SIAM).
- Borgs C, Brautbar M, Chayes JT, Lucier B (2012) Influence maximization in social networks: Towards an optimal algorithmic solution. *CoRR* abs/212.0884v2, URL <https://arxiv.org/abs/1212.0884v2>.
- Cai J, De Janvry A, Sadoulet E (2015) Social networks and the decision to insure. *American Economic Journal: Applied Economics* 7(2):81–108.
- Chakrabarti D, Gao J, Saraf A, Schoenebeck G, Yu FY (2022) Optimal local Bayesian differential privacy over Markov chains. *arXiv preprint* URL <http://dx.doi.org/10.48550/ARXIV.2206.11402>.
- Chami GF, Kontoleon AA, Bulte E, Fenwick A, Kabatereine NB, Tukahebwa EM, Dunne DW (2017) Diffusion of treatment in social networks and mass drug administration. *Nature communications* 8(1):1–11.
- Chen W, Wang Y, Yang S (2009) Efficient influence maximization in social networks. *Proceedings of the 15th ACM SIGKDD international conference on Knowledge discovery and data mining*, 199–208.
- Dhulipala L, Liu QC, Raskhodnikova S, Shi J, Shun J, Yu S (2022) Differential privacy from locally adjustable graph algorithms: k-core decomposition, low out-degree ordering, and densest subgraphs. *2022 IEEE 63rd Annual Symposium on Foundations of Computer Science (FOCS)*, 754–765 (IEEE).
- Dwork C, Roth A, et al. (2014) The algorithmic foundations of differential privacy. *Found. Trends Theor. Comput. Sci.* 9(3-4):211–407.
- Eckles D, Esfandiari H, Mossel E, Rahimian MA (2022) Seeding with costly network information. *Operations Research* 70(4):2318–2348, URL <http://dx.doi.org/10.1287/opre.2022.2290>.
- Endo A, Murayama H, Abbott S, Ratnayake R, Pearson CA, Edmunds WJ, Fearon E, Funk S (2022) Heavy-tailed sexual contact networks and monkeypox epidemiology in the global outbreak, 2022. *Science* 378(6615):90–94.
- Epasto A, Mirrokni V, Perozzi B, Tsitsulin A, Zhong P (2022) Differentially private graph learning via sensitivity-bounded personalized pagerank. *arXiv preprint arXiv:2207.06944* .
- Erlingsson U (2014a) Learning statistics with privacy, aided by the flip of a coin. *Google Security Blog*, October .
- Erlingsson U (2014b) Learning statistics with privacy, aided by the flip of a coin. <https://ai.googleblog.com/2014/10/learning-statistics-with-privacy-aided.html>, accessed: 2023-05-18.

-
- Evfimievski A, Gehrke J, Srikant R (2003) Limiting privacy breaches in privacy preserving data mining. *Proceedings of the twenty-second ACM SIGMOD-SIGACT-SIGART symposium on Principles of database systems*, 211–222.
- Fairley M, Rao IJ, Brandeau ML, Qian GL, Gonsalves GS (2022) Surveillance for endemic infectious disease outbreaks: Adaptive sampling using profile likelihood estimation. *Statistics in Medicine* 41(17):3336–3348.
- Garfinkel S (2022) Differential privacy and the 2020 US census. Technical report, MIT Schwarzman College of Computing.
- Gupta A, Ligett K, McSherry F, Roth A, Talwar K (2010) Differentially private combinatorial optimization. *Proceedings of the twenty-first annual ACM-SIAM symposium on Discrete Algorithms*, 1106–1125 (SIAM).
- Hay M, Li C, Miklau G, Jensen D (2009) Accurate estimation of the degree distribution of private networks. *2009 Ninth IEEE International Conference on Data Mining*, 169–178 (IEEE).
- Hoeffding W (1994) Probability inequalities for sums of bounded random variables. *The collected works of Wassily Hoeffding*, 409–426 (Springer).
- Imola J, Murakami T, Chaudhuri K (2021) Locally differentially private analysis of graph statistics. *30th USENIX Security Symposium (USENIX Security 21)*, 983–1000.
- Jiang H, Pei J, Yu D, Yu J, Gong B, Cheng X (2021) Applications of differential privacy in social network analysis: a survey. *IEEE Transactions on Knowledge and Data Engineering* .
- Kasiviswanathan SP, Nissim K, Raskhodnikova S, Smith A (2013) Analyzing graphs with node differential privacy. *Theory of Cryptography Conference*, 457–476 (Springer).
- Kempe D, Kleinberg J, Tardos É (2003) Maximizing the spread of influence through a social network. *Proceedings of the ninth ACM SIGKDD international conference on Knowledge discovery and data mining*, 137–146.
- Kempe D, Kleinberg J, Tardos É (2005) Influential nodes in a diffusion model for social networks. *International Colloquium on Automata, Languages, and Programming*, 1127–1138 (Springer).
- Kempe D, Kleinberg J, Tardos É (2015) Maximizing the spread of influence through a social network. *Theory of Computing* 11(4):105–147.
- Kifer D, Machanavajjhala A (2014) Pufferfish: A framework for mathematical privacy definitions. *ACM Transactions on Database Systems (TODS)* 39(1):1–36.
- Kifer D, Messing S, Roth A, Thakurta A, Zhang D (2020) Guidelines for implementing and auditing differentially private systems. *arXiv preprint arXiv:2002.04049* .
- Kim DA, Hwang AR, Stafford D, Hughes DA, O’Malley AJ, Fowler JH, Christakis NA (2015) Social network targeting to maximise population behaviour change: a cluster randomised controlled trial. *The Lancet* 386(9989):145–153.

-
- Kumar R, Novak J, Pang B, Tomkins A (2007) On anonymizing query logs via token-based hashing. *Proceedings of the 16th international conference on World Wide Web*, 629–638.
- Leskovec J, Kleinberg J, Faloutsos C (2007) Graph evolution: Densification and shrinking diameters. *ACM transactions on Knowledge Discovery from Data (TKDD)* 1(1):2–es.
- Li GZ, Nguyen D, Vullikanti A (2022) Differentially private partial set cover with applications to facility location. *arXiv preprint arXiv:2207.10240* .
- Liell-Cock J, Manchester IR, Shi G (2020) Preserving privacy of the influence structure in Friedkin-Johnsen systems. *2020 59th IEEE Conference on Decision and Control (CDC)*, 6254–6259 (IEEE).
- Liu Y, Suresh AT, Yu FXX, Kumar S, Riley M (2020) Learning discrete distributions: user vs item-level privacy. *Advances in Neural Information Processing Systems* 33:20965–20976.
- McSherry F, Talwar K (2007) Mechanism design via differential privacy. *48th Annual IEEE Symposium on Foundations of Computer Science (FOCS’07)*, 94–103 (IEEE).
- Mitrovic M, Bun M, Krause A, Karbasi A (2017) Differentially private submodular maximization: Data summarization in disguise. Precup D, Teh YW, eds., *Proceedings of the 34th International Conference on Machine Learning*, volume 70 of *Proceedings of Machine Learning Research*, 2478–2487 (PMLR), URL <https://proceedings.mlr.press/v70/mitrovic17a.html>.
- Mohamed MS, Nguyen D, Vullikanti A, Tandon R (2022) Differentially private community detection for stochastic block models. *International Conference on Machine Learning*, 15858–15894 (PMLR).
- Narayanan A, Shmatikov V (2008) Robust de-anonymization of large sparse datasets. *2008 IEEE Symposium on Security and Privacy (sp 2008)*, 111–125 (IEEE).
- Nguyen D, Vullikanti A (2021) Differentially private densest subgraph detection. *International Conference on Machine Learning*, 8140–8151 (PMLR).
- Nissenbaum H (2009) Privacy in context. *Privacy in Context* (Stanford University Press).
- Nissim K, Raskhodnikova S, Smith A (2007) Smooth sensitivity and sampling in private data analysis. *Proceedings of the thirty-ninth annual ACM symposium on Theory of computing*, 75–84.
- Paluck EL, Shepherd H, Aronow PM (2016) Changing climates of conflict: A social network experiment in 56 schools. *Proceedings of the National Academy of Sciences* 113(3):566–571.
- Raskhodnikova S, Smith A (2016) Lipschitz extensions for node-private graph statistics and the generalized exponential mechanism. *2016 IEEE 57th Annual Symposium on Foundations of Computer Science (FOCS)*, 495–504 (IEEE).
- Rastogi V, Hay M, Miklau G, Suciu D (2009) Relationship privacy: output perturbation for queries with joins. *Proceedings of the twenty-eighth ACM SIGMOD-SIGACT-SIGART symposium on Principles of database systems*, 107–116.
- Rezaei A, Gao J (2019) On privacy of socially contagious attributes. *2019 IEEE International Conference on Data Mining (ICDM)*, 1294–1299 (IEEE).

-
- Rezaei A, Gao J, Sarwate AD (2021) Influencers and the giant component: The fundamental hardness in privacy protection for socially contagious attributes. *Proceedings of the 2021 SIAM International Conference on Data Mining (SDM)*, 217–225 (SIAM).
- Romanini D, Lehmann S, Kivelä M (2021) Privacy and uniqueness of neighborhoods in social networks. *Scientific reports* 11(1):1–15.
- Sadeghi O, Fazel M (2021) Differentially private monotone submodular maximization under matroid and knapsack constraints. *International Conference on Artificial Intelligence and Statistics*, 2908–2916 (PMLR).
- Sadeh G, Cohen E, Kaplan H (2020) Sample complexity bounds for influence maximization. *11th Innovations in Theoretical Computer Science Conference (ITCS 2020)* (Schloss Dagstuhl-Leibniz-Zentrum für Informatik).
- Salazar SP, Cummings R (2021) Differentially private online submodular maximization. *International Conference on Artificial Intelligence and Statistics*, 1279–1287 (PMLR).
- Stanford Network Analysis Project (2007) email-Eu-core network. <https://snap.stanford.edu/data/email-Eu-core.html>, accessed: 2023-05-25.
- Sweeney L (1997) Weaving technology and policy together to maintain confidentiality. *The Journal of Law, Medicine & Ethics* 25(2-3):98–110.
- Sweeney L (2015) Only you, your doctor, and many others may know. *Technology Science* 2015092903(9):29.
- Wang C, Chen W, Wang Y (2012) Scalable influence maximization for independent cascade model in large-scale social networks. *Data Mining and Knowledge Discovery* 25(3):545–576.
- Wang Y, Wu X, Wu L (2013) Differential privacy preserving spectral graph analysis. *Advances in Knowledge Discovery and Data Mining: 17th Pacific-Asia Conference, PAKDD 2013, Gold Coast, Australia, April 14-17, 2013, Proceedings, Part II 17*, 329–340 (Springer).
- Warner SL (1965) Randomized response: A survey technique for eliminating evasive answer bias. *Journal of the American Statistical Association* 60(309):63–69.
- Wilder B, Onasch-Vera L, Diguiseppi G, Petering R, Hill C, Yadav A, Rice E, Tambe M (2021) Clinical trial of an ai-augmented intervention for hiv prevention in youth experiencing homelessness. *Proceedings of the AAAI Conference on Artificial Intelligence* 35(17):14948–14956, URL <https://ojs.aaai.org/index.php/AAAI/article/view/17754>.
- Wu X, Ying X, Liu K, Chen L (2010) A survey of privacy-preservation of graphs and social networks. *Managing and mining graph data*, 421–453 (Springer).
- Yadav A, Wilder B, Rice E, Petering R, Craddock J, Yoshioka-Maxwell A, Hemler M, Onasch-Vera L, Tambe M, Woo D (2017) Influence maximization in the field: The arduous journey from emerging to deployed application. *Proceedings of the 16th conference on autonomous agents and multiagent systems*, 150–158.

-
- Yin H, Benson AR, Leskovec J, Gleich DF (2017) Local higher-order graph clustering. *Proceedings of the 23rd ACM SIGKDD international conference on knowledge discovery and data mining*, 555–564.
- Zheleva E, Getoor L (2011) Privacy in social networks: A survey. *Social network data analytics*, 277–306 (Springer).
- Zhu K, Fioretto F, Van Hentenryck P (2022) Post-processing of differentially private data: A fairness perspective. Raedt LD, ed., *Proceedings of the Thirty-First International Joint Conference on Artificial Intelligence, IJCAI-22*, 4029–4035 (International Joint Conferences on Artificial Intelligence Organization), URL <http://dx.doi.org/10.24963/ijcai.2022/559>, main Track.
- Zhu K, Van Hentenryck P, Fioretto F (2021) Bias and variance of post-processing in differential privacy. *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 35, 11177–11184.

Appendix A: Proofs and Supplementary Results

A.1. Proof of Proposition 2.5

Given $n > 1$, consider the isolated graph $\mathcal{G}' = (V, p')$ of n nodes where $p'_e = 0$ for all possible pairs e . Given an ϵ -node-DP M , there exists a node $v_M \in V$ so that $\Pr[M^{k=1}(\mathcal{G}') = v_M] \leq 1/n$, by pigeonhole principle. Then we define a star graph $\mathcal{G} = (V, p)$ of n nodes with center v_M where $p_{(v_M, v)} = 1/2$ for all $v \in V$ and $v \neq v_M$ and $p_{(u, v)} = 0$ if $u, v \neq v_M$.

First the center node can infect $(n-1)/2 + 1$ nodes on \mathcal{G} in expectation, $\text{OPT} \geq I_{\mathcal{G}}(\{v_M\}) = (n+1)/2$. On the other hand, because M^k is ϵ -node-DP and \mathcal{G} and \mathcal{G}' are node-adjacent, $\Pr[M^{k=1}(\mathcal{G}) = v_M] \leq e^\epsilon \Pr[M^{k=1}(\mathcal{G}') = v_M] \leq e^\epsilon/n$. Therefore,

$$\begin{aligned}
& \mathbb{E}_{\mathbf{y} \sim M^{k=1}(\mathcal{G})} [I_{\mathcal{G}}(\mathbf{y})] \\
&= \mathbb{E}[I_{\mathcal{G}}(\mathbf{y}) | \mathbf{y} \neq \{v_M\}] \Pr[M^{k=1}(\mathcal{G}) \neq \{v_M\}] \\
&\quad + \mathbb{E}[I_{\mathcal{G}}(\{v_M\})] \Pr[M^{k=1}(\mathcal{G}) = \{v_M\}] \\
&\leq (1 + 1/2 + (n-2)/4) + n \cdot e^\epsilon/n = 1 + e^\epsilon + n/4
\end{aligned}$$

which completes the proof. □

A.2. Proof of Proposition 2.6

Consider $\mathcal{G}' = (V, p')$ of n nodes consists of l cliques S_1, \dots, S_l with size n/l where for each edge e , $p'_e = 1$ if e is in one of the clique and 0 otherwise. Similar to Proposition 2.5, given an ϵ -edge DP M for influence maximization problem, there exists two cliques $S_i, S_j \subset V$ such that $\Pr[M(\mathcal{G}', 1) \in S_i \cup S_j] \leq 2/l$. Thus, we define a graph $\mathcal{G} = (V, p)$ that adds an additional edge e^* between S_i and S_j such that $p_{e^*} = 1$ and $p_e = p'_e$ for all $e \neq e^*$.

First choosing any nodes in $S_i \cup S_j$ can infect $2n/l$ nodes — $I_G(v) = 2n/l$, for all $v \in S_i \cup S_j$ — but other nodes can only infect n/l nodes because the cliques are isolated. Secondly, because M is ϵ -edge DP and \mathcal{G} and \mathcal{G}' differ in only one edge,

$$\Pr[M(\mathcal{G}, 1) \in S_i \cup S_j] \leq \frac{2e^\epsilon}{l}. \quad (4)$$

Therefore, $\mathbb{E}_{\mathbf{y} \sim M(\mathcal{G}, 1)}[I_G(\mathbf{y})] \leq \frac{2e^\epsilon}{l} \frac{2n}{l} + (1 - \frac{2e^\epsilon}{l}) \frac{n}{l} = (\frac{1}{2} + \frac{e^\epsilon}{l}) \frac{2n}{l}$, and

$$\begin{aligned} & (1 - 1/e)\text{OPT} - \mathbb{E}_{\mathbf{y} \sim M(\mathcal{G})}[I_G(\mathbf{y})] \\ & \geq (1 - \frac{1}{e}) \frac{2n}{l} - \left(\frac{1}{2} + \frac{e^\epsilon}{l}\right) \frac{2n}{l} \\ & = \left(\frac{1}{2} - \frac{1}{e} - \frac{e^\epsilon}{l}\right) \frac{2n}{l}. \end{aligned}$$

If we can set $l = 200e^\epsilon$, $\frac{1}{2} - \frac{1}{e} - \frac{e^\epsilon}{l} = \frac{1}{2} - \frac{1}{e} - \frac{1}{200} \geq \frac{1}{10}$, and $(1 - 1/e)\text{OPT} - \mathbb{E}_{\mathbf{y} \sim M(\mathcal{G})}[I_G(\mathbf{y})] \geq \frac{1}{10} \frac{2n}{200e^\epsilon} = \frac{n}{1000e^\epsilon}$. \square

One may wonder if the lower bounds hold for approximate node- and edge-DP. Formally, an algorithm M is (ϵ, δ) -node- (or edge-) DP if for all outputs \mathbf{y} and node- or edge-adjacent graphs $\mathcal{G}, \mathcal{G}'$, $\Pr[M(\mathcal{G}) = \mathbf{y}] \leq e^\epsilon \Pr[M(\mathcal{G}') = \mathbf{y}] + \delta$. We often consider δ negligibly small so that the algorithms are approximately ϵ -DP. It is not hard to see that our proof for Propositions 2.5 and 2.6 still hold for approximated DP. For example,

Proposition A.1 *For all $n \geq 1$, $\epsilon > 0$ and $\delta < 1/6$, there exists $\alpha_\epsilon \geq \frac{1}{10000e^\epsilon}$ so that any (ϵ, δ) -edge-DP seeding algorithm $M^k(\mathcal{G})$, there exists graph \mathcal{G} on n nodes so that for $k = 1$: $(1 - 1/e)\text{OPT} - \mathbb{E}_{\mathbf{y} \sim M^{k=1}(\mathcal{G})}[I_G(\mathbf{y})] \geq \alpha_\epsilon n$.*

The proof is mostly identical to Proposition 2.6, except when M is (ϵ, δ) -DP, we only have $\Pr[M(\mathcal{G}, 1) \in S_i \cup S_j] \leq 2e^\epsilon/l + \delta$, for instead of Equation (4). Then the rest of the proof follows.

A.3. Proof of Theorem 3.1

Because \mathbf{x} and \mathbf{x}' are adjacent if those matrices are different at one position, the sensitivity of the scoring function $I_{\mathbf{x}}(v|S)$ for any S is

$$\max_{v \in [n]} \max_{\substack{\mathbf{x} \sim \mathbf{x}' \\ i \sim s}} |I_{\mathbf{x}}(v|S) - I_{\mathbf{x}'}(v|S)| \leq \frac{n}{m} \max_{v \in [n]} \max_{\substack{\mathbf{x} \sim \mathbf{x}' \\ i \sim s}} \left| \sum_{t=1}^m x_v^t - (x')_v^t \right| = \frac{n}{m},$$

and the size of the output space is n . Therefore for all S , Algorithm 3 is an ϵ -DP exponential mechanism.

Privacy: Let the output be (v_1, \dots, v_k) . Because for any fixed S , Algorithm 3 is an exponential mechanism, we have

$$\ln \frac{\Pr[\mathcal{M}_{exp}^{\epsilon/k}(\mathbf{x}, S) = v_i]}{\Pr[\mathcal{M}_{exp}^{\epsilon/k}(\mathbf{x}', S) = v_i]} \leq \frac{\epsilon}{k} \text{ for all set } S \text{ and adjacent } \mathbf{x} \sim \mathbf{x}'_{is}.$$

Then we can write out the probability ratio of $\mathcal{M}_{exp}^\epsilon$ outputting the same seed set v_1, \dots, v_k on two adjacent datasets \mathbf{x} and \mathbf{x}' ,

$$\begin{aligned} & \ln \frac{\Pr[\mathcal{M}_{exp}^\epsilon(\mathbf{x}) = (v_1, \dots, v_k)]}{\Pr[\mathcal{M}_{exp}^\epsilon(\mathbf{x}') = (v_1, \dots, v_k)]} \\ &= \sum_i \ln \frac{\Pr[\mathcal{M}_{exp}^{\epsilon/k}(\mathbf{x}, S_{i-1}) = v_i \mid S_{i-1} = (v_1, \dots, v_{i-1})]}{\Pr[\mathcal{M}_{exp}^{\epsilon/k}(\mathbf{x}', S_{i-1}) = v_i \mid S_{i-1} = (v_1, \dots, v_{i-1})]} \\ &\leq \sum_i \epsilon/k = \epsilon. \end{aligned}$$

Utility guarantee: Given \mathbf{x} , we show the output of $\mathcal{M}_{exp}^\epsilon$ is close to the optimal one. First note that once \mathbf{x} is fixed, Algorithm 1 is the classical greedy algorithm for objective function $I_{\mathbf{x}}$ that is submodular. Second, the error comes from the soft max of Algorithm 3: at each $i \in [k]$, instead of choosing the seed v_i^* maximizing the score, Algorithm 3 chooses a random seed v_i according to the probabilities specified in its line 4.

We set the optimal set for $I_{\mathbf{x}}$ as $S^* := \{v_1^*, \dots, v_k^*\}$ so that $I_{\mathbf{x}}(S^*) = \max_{S: |S| \leq k} I_{\mathbf{x}}(S)$. Given a seed set v_1, \dots, v_k , for all $i = 0, \dots, k$, let $S_i := \{v_j : 1 \leq j \leq i\}$ and define the remainder of S_i as: $R_i := I_{\mathbf{x}}(S^*) - I_{\mathbf{x}}(S_i) = \frac{n}{m}(|C_{\mathbf{x}}(S^*)| - |C_{\mathbf{x}}(S_i)|)$. Because $R_{i+1} = R_i - (I_{\mathbf{x}}(S_{i+1}) - I_{\mathbf{x}}(S_i))$, we want to lower bound $I_{\mathbf{x}}(S_{i+1}) - I_{\mathbf{x}}(S_i)$ to upper bound R_{i+1} . Then, because $C_{\mathbf{x}}(S_i) \subseteq C_{\mathbf{x}}(S_{i+1})$, $I_{\mathbf{x}}(S_{i+1}) - I_{\mathbf{x}}(S_i) = \frac{n}{m}(|C_{\mathbf{x}}(S_{i+1})| - |C_{\mathbf{x}}(S_i)|) = \frac{n}{m}|C_{\mathbf{x}}(S_{i+1}) \setminus C_{\mathbf{x}}(S_i)| = I_{\mathbf{x}}(v_{i+1}|S_i)$. Thus, we have $R_{i+1} = R_i - I_{\mathbf{x}}(v_{i+1}|S_i)$. On the other hand, we show a lower bound of $I_{\mathbf{x}}(v_{i+1}|S_i)$. First, we want to apply Theorem 2.7. Since the sensitivity is n/m , the size of output space is n for $\mathcal{M}_{exp}^{\epsilon/k}$, given $t > 0$ we can set $\beta = \frac{2nk}{\epsilon m}(\ln n + t)$, and by Theorem 2.7 and union bound we have for all $i = 1, \dots, k$: $I_{\mathbf{x}}(v_{i+1}|S_i) \geq \max_{w \in [n]} I_{\mathbf{x}}(w|S_i) - \beta$, with probability $k \exp(-t)$. Additionally, we have:

$$\begin{aligned} & \max_w I_{\mathbf{x}}(w|S_i) \\ &\geq \frac{1}{k} \sum_{j=1}^k I_{\mathbf{x}}(v_j^*|S_i) = \frac{1}{k} \sum_j \frac{n}{m} |C_{\mathbf{x}}(v_j^* \cup S_i) \setminus C_{\mathbf{x}}(S_i)| \\ &\geq \frac{1}{k} \frac{n}{m} \left| \bigcup_{j=1}^k C_{\mathbf{x}}(v_j^* \cup S_i) \setminus C_{\mathbf{x}}(S_i) \right| = \frac{1}{k} I_{\mathbf{x}}(S^*|S_i) = \frac{1}{k} R_i. \end{aligned}$$

Therefore, we can combine these two inequalities and have $R_{i+1} = R_i - I_{\mathbf{x}}(v_{i+1}|S_i) \leq R_i + \beta - \max_w I_{\mathbf{x}}(w|S_i) \leq (1 - 1/k)R_i + \beta$. Because $R_k = I_{\mathbf{x}}(S^*) - I_{\mathbf{x}}(S_k)$ and $R_0 = I_{\mathbf{x}}(S^*)$, the error is bounded by

$$R_k \leq (1 - 1/k)^k R_0 + \sum_{i=1}^k (1 - 1/k)^{k-i} \beta \leq \frac{1}{e} \max_{S: |S|=k} I_{\mathbf{x}}(S) + k\beta,$$

where $k\beta = \frac{2nk^2}{\epsilon m}(\ln n + t)$. □

A.4. Proof of Theorem 3.2

Because $m \geq 9k(\ln n)/\alpha^2$, by Proposition 2.1 and union bound over all subsets of size at most k , we have $|I_{\mathbf{x}}(S) - I_{\mathcal{G}}(S)| \leq \alpha n/3$, for all S with $|S| \leq k$ with probability at least $1 - 2n^k \exp(-2\alpha^2 m/9) \geq 1 - 2n^k \exp(-2k \ln n) = 1 - 2n^{-k}$. Therefore,

$$I_{\mathcal{G}}(\mathcal{M}_{exp}^{\epsilon}(\mathbf{x})) \geq I_{\mathbf{x}}(\mathcal{M}_{exp}^{\epsilon}(\mathbf{x})) - \frac{\alpha n}{3}, \quad (5)$$

$$\text{OPT} = \max_{S:|S|=k} I_{\mathcal{G}}(S) \leq \max_{S:|S|=k} I_{\mathbf{x}}(S) + \frac{\alpha n}{3}. \quad (6)$$

On the other hand, by Theorem 3.1, $\mathcal{M}_{exp}^{\epsilon}(\cdot)$ is ϵ -ISDP. Moreover, if we set $t = \ln n$, because $m \geq \frac{12}{\alpha\epsilon} k \ln n$, we have:

$$\begin{aligned} I_{\mathbf{x}}(\mathcal{M}_{exp}^{\epsilon}(\mathbf{x})) &\geq (1 - 1/e) \max_{S:|S|=k} I_{\mathbf{x}}(S) - \frac{2kn}{\epsilon m} \cdot 2 \ln n \\ &\geq (1 - 1/e) \max_{S:|S|=k} I_{\mathbf{x}}(S) - \frac{\alpha n}{3}, \end{aligned}$$

and

$$I_{\mathbf{x}}(\mathcal{M}_{exp}^{\epsilon}(\mathbf{x})) \geq (1 - 1/e) \max_{S:|S|=k} I_{\mathbf{x}}(S) - \frac{\alpha n}{3}, \quad (7)$$

with probability at least $1 - \exp(-\ln n) = 1 - 1/n$. Combining Equations (5) to (7), with probability at least $1 - 2n^{-k} - 1/n = 1 - O(1/n)$ we have:

$$\begin{aligned} I_{\mathcal{G}}(\mathcal{M}_{exp}^{\epsilon}(\mathbf{x})) &\geq I_{\mathbf{x}}(\mathcal{M}_{exp}^{\epsilon}(\mathbf{x})) - \frac{\alpha n}{3} && \text{(by Equation (5))} \\ &\geq (1 - 1/e) \max_{S:|S|=k} I_{\mathbf{x}}(S) - \frac{2\alpha n}{3} && \text{(by Equation (7))} \\ &\geq (1 - 1/e) \text{OPT} - \alpha n, && \text{(by Equation (6))} \end{aligned}$$

which completes the proof.

Run time: Note that the time complexity of computing $I_{\mathbf{x}}(v|S)$ is m which gives an $O(knm)$ bound on the time complexity of the exponential mechanism seeding algorithm, iterating the single seed selection — Algorithm 3 — k times. \square

A.5. Proof of Proposition 3.3

Suppose $C = C_{\rho,l}$ is singular for some ρ and there exist two distinct vectors $\mathbf{v}, \mathbf{u} \in \mathbb{R}^{l+1}$ so that $C\mathbf{v} = C\mathbf{u}$. In this proof, we will use a and b as indices varying from 0 to l . We now assume $\mathbf{v} = (v_0, \dots, v_l)$ and $\mathbf{u} = (u_0, \dots, u_l)$ are two distinct distributions so that $v_b, u_b \geq 0$ for all b and $\sum_b v_b = \sum_b u_b = 1$. We will relax this assumption later. Because C is a likelihood function where $C(a, b) = \Pr[\tilde{z}_S = a | z_S = b] = \Pr[\text{Bin}(b, 1 - \rho) + \text{Bin}(l - b, \rho) = a]$ the product $Cv \in \mathbb{R}^{l+1}$ is also a distribution. Now we compute the moment generating function of a random variable y with distribution Cv . Given $0 \leq a \leq l$, let $y_b := \text{Bin}(b, 1 - \rho) + \text{Bin}(l - b, \rho)$ be the random variable of the

sum of two independent binomial random variables. Then the moment generating function of y_b is $\mathbb{E}[e^{ty_b}] = (\rho + (1-\rho)e^t)^b(1-\rho+\rho e^t)^{l-b}$. Moreover, because the random variable y with distribution $C\mathbf{v}$ is the mixture of y_b with weight v_b , $y = \sum_{b=0}^l v_b y_b$, the moment generating function of y is

$$\begin{aligned} & \mathbb{E}_{y \sim C\mathbf{v}}[e^{ty}] \\ &= \sum_{b=0}^l v_b \mathbb{E}[e^{ty_b}] = \sum_{b=0}^l v_b (\rho + (1-\rho)e^t)^b (\rho + (1-\rho)e^t)^{l-b} \\ &= (\rho + (1-\rho)e^t)^l \sum_{b=0}^l v_b \left(\frac{1-\rho+\rho e^t}{\rho+(1-\rho)e^t} \right)^b, \end{aligned}$$

for all t . Similarly, the moment generating function of a random variable with distribution $C\mathbf{u}$ is

$$\mathbb{E}_{y \sim C\mathbf{u}}[e^{ty}] = (\rho + (1-\rho)e^t)^l \sum_{b=0}^l u_b \left(\frac{1-\rho+\rho e^t}{\rho+(1-\rho)e^t} \right)^b.$$

Because $C\mathbf{u} = C\mathbf{v}$, the moment generating functions are equal, $\mathbb{E}_{y \sim C\mathbf{v}}[e^{ty}] = \mathbb{E}_{y \sim C\mathbf{u}}[e^{ty}]$ for all t . Since $(1-\rho+\rho e^t)^l > 0$ for all t , we have

$$\sum_{b=0}^l (v_b - u_b) \left(\frac{\rho + (1-\rho)e^t}{1-\rho+\rho e^t} \right)^b = 0, \forall t.$$

Because $\rho \neq 1/2$, $\frac{\rho+(1-\rho)e^t}{1-\rho+\rho e^t} \neq \frac{\rho+(1-\rho)e^{t'}}{1-\rho+\rho e^{t'}}$ for all $t \neq t'$, so the degree l polynomial $\sum_{b=0}^l (v_b - u_b)x^b$ has more than l zeros. By the fundamental theorem of algebra, $\mathbf{v} = \mathbf{u}$.

Finally, suppose there exists $\mathbf{v} \neq \mathbf{u}$ with $C\mathbf{v} = C\mathbf{u}$ but \mathbf{v} is not a distribution. We show there exists two distributions $\mathbf{v}' \neq \mathbf{u}'$ with $C\mathbf{v}' = C\mathbf{u}'$ which completes the proof. Let $\beta := \min_b \{v_b, u_b\}$. Because each row of C is a distribution and $\mathbf{1}^\top C = \mathbf{1}^\top$, we can set $\alpha := \sum_b v_b = \mathbf{1}^\top \mathbf{v} = \mathbf{1}^\top C\mathbf{v} = \mathbf{1}^\top C\mathbf{u} = \sum_b u_b$. We can see the sum of $l+1$ terms should be greater than the minimum times $l+1$, $\alpha - (l+1)\beta > 0$; otherwise, $v_b = u_b = \beta$ for all b and $\mathbf{v} = \mathbf{u}$. Then we define $\mathbf{v}', \mathbf{u}' \in \mathbb{R}^{l+1}$ so that $v'_b = \frac{v_b - \beta}{\alpha - (l+1)\beta}$ and $u'_b = \frac{u_b - \beta}{\alpha - (l+1)\beta}$ for all b . We can see \mathbf{v}' and \mathbf{u}' are two distinct distributions, and $C\mathbf{v}' = \frac{1}{\alpha - (l+1)\beta} C\mathbf{v} - \frac{1}{\alpha - (l+1)\beta} C\mathbf{1} = \frac{1}{\alpha - (l+1)\beta} C\mathbf{u} - \frac{1}{\alpha - (l+1)\beta} C\mathbf{1} = C\mathbf{u}'$, completes the proof. \square

A.6. Proof of Theorem 3.4

Because all bits of the influence samples is flipped with probability ρ_ϵ , the perturbed $\tilde{\mathbf{x}}$ is ϵ -locally DP. By the post processing immunity of DP, the output of Algorithm 4 is ϵ -locally DP.

For the utility, by Lemmas A.3 and A.4 and a union bound, for any $\delta' > 0$ and S with $|S| \leq k$, the estimate J_m is close to the influence function $I_{\mathcal{G}}$

$$|J_m(S) - I_{\mathcal{G}}(S)| \leq \delta', \quad (8)$$

with probability $1 - 2n^k \exp(-\frac{2m\delta'^2}{n^2 V^2 \rho_{\epsilon, k}})$ over the randomness of the perturbation.

Next we show that during the k iterations of line 4 of Algorithm 4, $S \mapsto \arg \max_v J_m(S \cup \{v\})$ satisfies the conditions in Lemma A.2. Given Equation (8), for each S with $|S| < k$ if $u \in \arg \max_v J_m(S \cup v)$ and $u^* \in \arg \max_v I_G(S \cup v)$ we have:

$$\begin{aligned} I_G(S \cup u) &\geq J_m(S \cup u) - \delta' \geq J_m(S \cup u^*) - \delta' \\ &\geq I_G(S \cup u^*) - 2\delta' = \max_v I_G(S \cup v) - 2\delta'. \end{aligned}$$

The second inequality holds because $u \in \arg \max_v J_m(S \cup v)$. Because the k iterations of line 4 of Algorithm 4 satisfy the condition in Lemma A.2 with $\delta_i = 2\delta'$ for all $i = 1, \dots, k$, the output of Algorithm 4 satisfies:

$$\begin{aligned} I_G(\mathcal{M}_{loc}^{k,\epsilon}(\mathbf{x})) &> (1 - 1/e)\text{OPT} - \sum_{i=1}^k (1 - 1/k)^{k-i} \delta_i \\ &\geq (1 - 1/e)\text{OPT} - 2k\delta', \end{aligned}$$

with probability $1 - 2n^k \exp(-\frac{2m\delta'^2}{n^2V^2\rho_{\epsilon,k}})$. We complete the proof by setting $\delta' = \frac{\delta}{2k}$. \square

Lemma A.2 Suppose $A: 2^V \rightarrow V$ is an iterative single seed selection algorithm with a sequence of errors $\delta_0, \delta_1, \dots, \delta_{k-1} > 0$ so that for all $S \subseteq [n]$ with $|S| = i < k$, $I_G(S \cup A(S)) > \max_v I_G(S \cup v) - \delta_i$. If $S_i = S_{i-1} \cup A(S_{i-1})$ for all $0 < i \leq k$ and $S_0 = \emptyset$, then $I_G(S_k) > (1 - 1/e)\text{OPT} - \sum_{i=1}^k (1 - 1/k)^{k-i} \delta_i$.

Proof of Lemma A.2: We set the optimal k seeds for I_G as v_1^*, \dots, v_k^* so that $I_G(\{v_1^*, \dots, v_k^*\}) = \max_{S: |S| \leq k} I_G(S) = \text{OPT}$ and let v_1, \dots, v_k be the outputs of algorithm A so that $S_0 = \emptyset$ and $S_i = \{v_1, \dots, v_i\} = S_{i-1} \cup A(S_{i-1})$ for all $1 \leq i \leq k$. We define the remainder of S_i as $R_i = I_G(S^*) - I_G(S_i)$ which is the gap between the influence of the optimal seed set S^* and S_i . Note that $R_0 = \text{OPT}$. We want prove that

$$R_{i+1} \leq (1 - 1/k)R_i + \delta_i, \text{ for all } i = 0, \dots, k-1. \quad (9)$$

That will complete the proof, because $R_k \leq (1 - 1/k)^k R_0 + \sum_i (1 - 1/k)^{k-i} \delta_i \leq \frac{1}{e}\text{OPT} + \sum_i (1 - 1/k)^{k-i} \delta_i$ and $R_k = \text{OPT} - I_G(S_k)$, which together imply $\text{OPT} - I_G(S_k) \leq \frac{1}{e}\text{OPT} + \sum_i (1 - 1/k)^{k-i} \delta_i$.

Now we prove (9). Similar to the proof of Theorem 3.1, first by definition we have $R_{i+1} = R_i - (I_G(S_{i+1}) - I_G(S_i))$. Second, because $S_i \subset S_{i+1}$, $I_G(S_{i+1}) - I_G(S_i) = I_G(v_{i+1}|S_i)$, we have: $R_{i+1} = R_i - I_G(v_{i+1}|S_i)$. To lower bound $I_G(v_{i+1}|S_i)$, by the condition of the lemma, we have:

$$\begin{aligned} I_G(v_{i+1}|S_i) &= I_G(S_i \cup v_{i+1}) - I_G(S_i) \\ &\geq \max_v I_G(S_i \cup v) - \delta_i - I_G(S_i) \\ &= \max_v I_G(v|S_i) - \delta_i. \end{aligned}$$

Finally, because $I_G(\cdot|S_i)$ is submodular, $I_G(S^*|S_i) \leq \sum_{j=1}^k I_G(v_j^*|S_i) \leq k \max_v I_G(v|S_i)$. By definition, $R_i \leq I_G(S^*|S_i)$, and we have $\max_v I_G(v|S_i) \geq \frac{1}{k} R_i$. We can combine the above three inequalities and prove (9), $R_{i+1} = R_i - I_G(v_{i+1}|S_i) \leq R_i - \max_v I_G(v|S_i) + \delta_i \leq (1 - 1/k)R_i + \delta_i$. \square

By Proposition 3.3, we know $C_{\rho,l}^{-1}$ exists for all l and $\rho \in [0, 1/2)$ and $J_m(S)$ is an unbiased estimate of $I_G(S)$. The next lemma helps us bound the error of the estimate.

Lemma A.3 *Given $1 \leq l \leq k$, for all $C_{\rho,l}$ with $0 \leq \rho < 1/2$ defined in (3), as $\rho \rightarrow 1/2$, $|1 - C_{\rho,l}^{-1}(a,b)| = O((1/2 - \rho)^{-l^2})$ for all $0 \leq a, b \leq l$. Thus¹, there exists $V_{\rho,k} = O((1/2 - \rho)^{-k^2})$ where $|1 - C_{\rho,l}^{-1}(a,b)| \leq V_{\rho,k}$ for all $l \leq k$ and $a, b \leq l$.*

Proof of Lemma A.3: To simplify the notation, we write $C = C_{\rho,l} \in \mathbb{R}^{(l+1) \times (l+1)}$. We will use a, b to denote indices from 0 to l . To bound $|1 - C^{-1}(a,b)|$ it is sufficient to bound $|C^{-1}(a,b)|$.

By Cramer's rule, we can compute the inverse of C from C 's determinant $\det(C)$ and cofactors. Specifically, for all $a, b = 0, 1, \dots, l$ $|C^{-1}(a,b)| = |\det(D^{b,a})/\det(C)|$ where $D^{a,b}$ is called the (a,b) -cofactor of C that is a submatrix of C formed by deleting row a and column b of C for all a and b . Therefore, it is sufficient for us to upper bound $|\det(D^{a,b})|$ for all a, b and lower bound $|\det(C)|$.

First because C is a column-stochastic matrix, $D^{a,b}$ is a column sub-stochastic matrix. We define a diagonal matrix $R \in \mathbb{R}^{l \times l}$ where $R_{\ell,\ell} = 1/(\sum_i D_{i,\ell}^{a,b}) \geq 1$ for all ℓ by (3). Because $D^{a,b}R$ is a column-stochastic matrix, $|\det(D^{a,b}R)| \leq 1$ and $|\det(D^{a,b})| \leq |\det(D^{a,b})\det(R)| = |\det(D^{a,b}R)|$. Therefore, $|\det(D^{a,b})| \leq 1$.

Now we lower bound $|\det(C_{\rho,l})|$. Because $C(a,b)$ is a degree l polynomial in ρ for all $a, b = 0, \dots, l$, $\det(C_{\rho,l})$ is a degree l^2 polynomial in ρ . When $\rho = 1/2$, $C_{\rho,l}$ becomes singular and $\det(C_{1/2,l}) = 0$, and $\det(C_{\rho,l}) \neq 0$ for all $0 \leq \rho < 1/2$ by Proposition 3.3. Thus, $\det(C_{\rho,l}) = \Omega((1/2 - \rho)^{l^2})$ as $\rho \rightarrow 1/2$. The latter, together with the fact that $|\det(D^{a,b})| \leq 1$, implies $|C^{-1}(a,b)| = |\det(D^{b,a})/\det(C)| = O((1/2 - \rho)^{-l^2})$ which completes the proof. \square

Lemma A.4 *Consider any candidate seed set S with size at most k , $\delta > 0$, and m perturbed influence samples with $\rho < 1/2$. Then $|J_m(S) - I_G(S)| \leq \delta$, with probability at least $1 - 2\exp(-2m\delta^2/(n^2V_{\rho,k}^2))$ over the randomness of the perturbed samples where $V_{\rho,k} = O((1/2 - \rho)^{-k^2})$ is defined in Lemma A.3.*

Proof of Lemma A.4: Given S with $|S| = l$, the value of $J_m(S)$ is a linear function of the empirical distribution \tilde{f} on m samples, so $J_m(S)$ can be written as a sum of m iid random variables. Specifically, $J_m(S) = \sum_{t=1}^m X_t$ is the sum of m iid random variable where for $t \in [m]$, $X_t =$

¹Here we first fix k and take $\rho \rightarrow 1/2$. Thus, $l \leq k$ are constant relative to $1/2 - \rho$.

$\frac{n}{m}(1 - C_{\rho,l}^{-1}(0, a))$ if the intersection of the t -th perturbed influence sample and S has size $|\tilde{x}^t \cap S| = a$. Thus, the expectation of J_m is

$$\begin{aligned}
\mathbb{E}_{\tilde{\mathbf{x}}}[J_m(S)] &= \frac{n}{m} \sum_{t=1}^m \sum_{a=0}^l (1 - C_{\rho,l}^{-1}(0, a)) \Pr[|\tilde{x}^t \cap S| = a] \\
&= n \sum_{a=0}^l (1 - C_{\rho,l}^{-1}(0, a)) \Pr[|\tilde{x} \cap S| = a] \\
&= n(1 - \Pr[|x \cap S| = 0]) \quad (\text{by definition of } C_{\rho,l}) \\
&= n \Pr[x \cap S \neq \emptyset] = I_{\mathcal{G}}(S).
\end{aligned}$$

Additionally, because $|1 - C_{\rho,l}^{-1}(0, a)| \leq V_{\rho,k}$, $|X_i| \leq \frac{n}{m} V_{\rho,k}$ by Lemma A.3, we can apply Hoeffding's inequality Hoeffding (1994) to get $\Pr[|J_m(S) - I_{\mathcal{G}}(S)| \geq \delta] \leq 2 \exp(-2m\delta^2/(n^2 V_{\rho,k}^2))$, for all $\delta > 0$, which completes the proof. \square

A.7. Proof of Theorem 3.5

Given $\alpha > 0$, we set $\delta = \alpha n$ and $m^* = (\gamma^* k^3 V_{\rho_{\epsilon},k} \ln n) / \alpha^2$ for some $\gamma^* > 0$. By Theorem 3.4, $I_{\mathcal{G}}(\mathcal{M}_{loc}^{k,\epsilon}(\mathbf{x})) > (1 - 1/e)\text{OPT} - \alpha n$, with probability

$$1 - 2n^k \exp\left(-\frac{m^* \alpha^2 n^2}{2k^2 n^2 V_{\rho_{\epsilon},k}^2}\right) \geq 1 - 2n^k \exp\left(-\frac{\gamma^* k \ln n}{2}\right) = 1 - o(1),$$

when the constant γ^* is large enough.

Run time: Note that the time complexity of computing $\tilde{\mathbf{f}}$ in Line 1 of Algorithm 5 is $O(mn)$ and the linear system in Line 2 can be solved using $O(k^3)$ arithmetic operations, so computing $J_m(S_{i-1} \cup \{v\})$ in Line 4 of Algorithm 4 takes $O(k^3 + nm)$ time. The nk calls to Algorithm 5 by Algorithm 4, bring the overall run time to $O(nk^4 + kn^2m)$. \square