A Survey of Potential MPI Complex Collectives: Large-Scale Mining and Analysis of HPC Applications

Pouya Haghi^{*}, Ryan Marshall[†], Po Hao Chen^{*}, Anthony Skjellum[‡], Martin Herbordt^{*} Email: *haghi@bu.edu, [†]rjmarshall2@ua.edu, *bupochen@bu.edu, [‡]tony-skjellum@utc.edu, *herbordt@bu.edu

Abstract—Offload of MPI collectives to network devices, e.g., NICs and switches, is being implemented as an effective mechanism to improve application performance by reducing inter- and intra-node communication and bypassing MPI software layers. Given the rich deployment of accelerators and programmable NICs/switches in data centers, we posit that there is an opportunity to further improve performance by extending this idea (of in-network collective processing) to a new class of more complex collectives. The most basic type of complex collective is the fusion of existing collectives.

In previous work we have demonstrated the efficacy of this additional hardware and software support and shown that it can substantially improve the performance of certain applications. In this work we extend this approach. We seek to characterize a large number of MPI applications to determine *overall* applicability, both breadth and type, and so provide insight for hardware designers and MPI developers about future offload possibilities.

Besides increasing the scope of prior surveys to include finding (potential) new MPI constructs, we also tap into new methods to extend the survey process. Prior surveys on MPI usage considered lists of applications constructed based on application developers' knowledge. The approach taken in this paper, however, is based on an automated *mining* of a large collection of code sources. More specifically, the mining is accomplished by GitHub REST APIs. We use a database management system to store the results and to answer queries. Another advantage is that this approach provides support for a more complex analysis of MPI usage, which is accomplished by user queries.

Index Terms—High Performance Computing, MPI, Mining, Survey, Automation

I. INTRODUCTION

Message Passing Interface (MPI) [1] is the *de facto* standard in HPC and it has been widely used to implement portable and scalable parallel applications. It is being actively supported and developed by dozens of implementations.

MPI offers various primitives; among them collectives are integral part of MPI and they are frequently invoked in a spectrum of HPC applications [2]. Offloading MPI collectives to network devices (NICs and switches) is gaining much interest as an effective mechanism to improve the application performance [3]–[10]. More specifically, in-network processing unlocks higher application performance by reducing interand intra-node communication and bypassing MPI software layers. As new classes of devices including programmable NICs/switches [11], [12], Data Processing Units (DPUs) [13], and accelerators (FPGAs, GPUs) [14]–[16] are emerging in the datacenters [17], [18], we posit that there is an unrevealed opportunity to further improve the performance by extending in-network collective processing to a new class of complex collectives.

The most basic type of complex collective is the fusion of (more than one) existing collectives; in this paper, referred to as fused collectives. This can be either back-toback collectives or collectives with computation in between. Complex collectives can take other types; for example, we identify a Bulk Synchronous Parallel (BSP) region [19] as a more coarse-grained type. There are many HPC and scientific applications that follow a BSP model. For instance, in stencil computation, MPI processes communicate with neighbors and perform computation; this happens for a number of iterations.

In this work, we seek to characterize a large number of MPI applications to determine overall applicability, both breadth and type. This provides a number of benefits. First, MPI complex collective characterization can provide insight for hardware designers about future offload possibilities. Second, complex collective usage statistics can inform the MPI standardization body about standardization and prioritization of new features with the greatest and smallest impact on the community. Third, MPI programming model is extended to a new set of APIs that can abstract existing routines from application programmers' perspective.

Besides expanding the scope of prior arts to include finding (potential) new MPI constructs, we take a novel direction to attain a large-scale mining and analysis. Previous surveys on MPI usage were limited to a narrow set of MPI applications or specific projects [20]-[23]. The approach taken in this paper, however, is based on an automated *mining* of a large collection of MPI code sources hosted in GitHub. More specifically, the mining is accomplished by searching the GitHub universe using REST APIs. Also, prior approaches fall short to provide a large-scale complex analysis. To tackle this challenge, we use a database management system to store the information and answer the queries. Another advantage of our approach is that it provides support for a more complex analysis of MPI usage. To the best of our knowledge, this is the first work that searches a large collection of MPI code sources existing in GitHub and uses a database management system to store and analyze the MPI usage for new collectives.

In this work, we focus on the first type of complex collectives (fused collective) as the analysis and exploration of all of complex collectives types is beyond the scope of this paper. But our approach remains as the foundation to explore other (possible) new complex collectives and it is flexible enough to generalize to more in-depth analysis. According to our experimental results, our finding is that there is a large number of complex collective instances over the dataset we generated from open-source repositories covering a broad range of scientific domains with different sizes and level of complexity. The finding proves that there is a great opportunity for fused collectives to be further explored by MPI developers, hardware designers, and application programmers.

Our contributions are:

- We generate a dataset over two hundred distinct repositories. To our best knowledge, this is the largest curation of repositories used for MPI usage surveys.
- We provide a scalable framework, called MPI-Recon, for searching open-source GitHub repositories and collecting them in a database to facilitate complex analysis.
- We introduce the classifications of complex collectives and analyze their usages.

II. COMPLEX COLLECTIVES

The idea of complex collective is to extend existing collectives to a new abstract form encompassing both MPI communication primitives and user-defined computation. Let us first define these compund collectives.

A. Definition

The most basic type of complex collective is the fusion of (more than one) existing collective communication routines. We refer to them as fused collectives. This can be either backto-back collectives or collectives with computation blocks in between. Complex collectives can take other types; for example, there might be only one collective communication but the computation is fused to the communication. More specifically, computation following the collective depends on the collective's receive buffer or the collective's send buffer depends on the computation result. We refer to this type as semi-fused collectives. A more coarse-grained complex collective is a Bulk Synchronous Parallel (BSP) region. For example, the critical part of stencil computations and iterative solvers are BSPs. For the rest of the paper, we consider fused collectives as complex collectives and we provide a thorough analysis on their MPI usage.

B. Motivation

We now give an example to illustrate the idea of complex collectives. Fig. 1 (a) shows an example of a fused collective (first type) for NAS parallel benchmark ¹ (IS benchmark). Communication (marked with blue rectangles) and computation (marked with red rectangles, referred as *op*) are chained together. The computation in *op* depends on the receive buffer in the MPI_Alltoall (*recv_count*); and the displacement array in the MPI_Alltoallv depends on the result of computation in *op* (*recv_displ*). By offloading such a complex collective to network devices (*e.g.*, switches), *op* is processed

¹https://www.nas.nasa.gov/publications/npb.html#url

MPI Program




Fig. 1. Example of a fused collective: (Alltoall fused with Alltoallv in the IS application from the NAS parallel benchmark.

in the network instead of the traditional approach: receiving the *recv_count* from the network back to the nodes, performing the *op* computation in the nodes, and sending *recv_displ* to the network. This saves sending and receiving data back and forth considerably. In other words, we seek to extend this communication optimization (hop saving) from a single collective to more than one collective.

For more generic examples, there might be cases where the *op* part depends on (produces) external arrays other than the arguments of preceding (following) collective. Hence, we refer to *inbound* as the collection of arrays that are input to the *op* and do not depend on the preceding collective(s); and similarly, we refer to *outbound* as the collection of arrays that are outputs of *op* and the following collective(s) do not depend on them. Clearly, inbound, input arguments of the collectives, and the target instructions in the *op* (according to the architecture of programmable network devices) are sent to the network. On the other hand, outbound and output arguments of collectives are received from the network to the nodes.

III. PROPOSED FRAMEWORK

We describe the following setup used for our analysis. The implemented pipelines follow the depiction in Figure 2 and is made publicly available 2 .

A. MPI-Recon Pipeline

We follow the heuristic that complex collectives exist in many classes of applications varying in sizes and structures. Our study targets open-sourced projects per the plethora of samples that are accessible.

²https://github.com/rmarshall42/mpi-recon

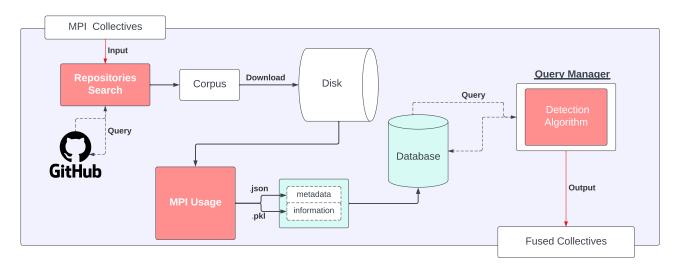


Fig. 2. MPI-Recon Pipeline

1) Repositories Search: Previous studies [24] had a sample size up to more than one hundred distinct MPI programs. Our implementation provides a scalable method of probing for more collections via the GitHub REST APIs. We use PyGitHub ³ for this purpose. We support searches in different programming languages. However, since the MPI Standard adopts C/C++ and Fortran as its official languages, we narrow our analysis to these.

Our pipeline begins with the supply of MPI collectives as keywords to crawl the search space. We selected the following set in our study: "Allgather", "Allreduce", "Alltoallv", "Barrier", "Gather", "Gatherv", "Reduce", "Scatter", and "Scatterv" as they are commonly used.

2) Corpus: We generate a corpus of links to the found repositories. In our study, we curated a list of over two hundred public GitHub projects. Many of the scientific applications are large in size, possibly on the scale of millions of lines in code from a relatively small sample of repositories. To avoid excessive storage space, we partition the corpus into smaller subsets and iteratively remove the downloaded content after successful extraction of the information.

3) *MPI-Usage:* We leverage the tool, *MPI-Usage*, made available from previous study by Laguna et al. [24]. It recursively searches the local file directory and outputs statistics of the MPI routines in JSON format. Optionally, users may enable verbose mode to locate the files of the specific MPI calls. We processed the detailed output and saved it in standard binary format.

4) Database: We maintain the results from the previous stage in a SQL Database. Table I shows the attribute we have generated from our dataset. Naturally, duplication may arise in the corpus. We characterize them into identical code repositories or different versions of the same project. For example, MVAPICH2 vs. MVAPICH. In this case, we record

³https://pygithub.readthedocs.io/en/latest/introduction.html

both because the later version may introduce more advanced usage of MPI.

5) Query Manager: The last stage of the pipeline is an interface with the database. Our implementation supports a generic search method by sampling pairs of collective calls. This stage takes user input (*i.e.* lists of MPI collectives to search from), generates the corresponding query to the database, and reports the MPI complex collective usage. The framework allows users to implement custom detection algorithm to look for undiscovered patterns.

IV. EXPERIMENTAL RESULTS

We run MPI-Recon pipeline with collectives mentioned in Section III-A1 and the database is populated with the resulting corpus from repository search. We note that more than 200 repositories are stored in MPI-Recon database. Table II shows the total number of occurrences of each MPI collectives. MPI_Barrier MPI_Bcast, and MPI_Allreduce have the highest number of occurrences.

A. Collectives Pattern

Based on our experimental study, we provide the following definitions. The following classifications are the fundamental building blocks of complex collective that we identified.

Definition 1 (Complex or Fused Collective). A group C of more than one MPI collective.

Definition 2 ((ϵ , δ)-Repeated Collective). A complex collective with a group *C* of more than one MPI collective within an ϵ number of lines with δ occurrences.

Definition 3 (Homogeneous Collective). A complex collective C is homogeneous if there exists only a unique type of collectives.

Definition 4 (Mixed Collective). A complex collective C is mixed if it is not a homogeneous complex collective.

TABLE I Database Attributes

Metadata								
Repo ID	Owner	Filename	Revision ID	Clone URL	Retrieval Date	OpenMP Lines		
OpenACC Lines	CUDA Lines	OpenCL Lines	C Lines	CPP Lines	Fortran Lines	Total Lines		
Collectives								
Filename		Collective Call		Line Number				

TABLE II DATABASE STATISTICS: TOTAL NUMBER OF OCCURRENCES OF EACH MPI COLLECTIVES IN MPI-RECON DATABASE.

Collective	# Occurrences	Collective	# Occurrences
Name	in Database	Name	in Database
MPI_Allgather	2145	MPI_Gatherv	868
MPI_Allreduce	13576	MPI_Reduce	11703
MPI_Alltoallv	1287	MPI_Scatter	1252
MPI_Barrier	32954	MPI_Scatterv	477
MPI_Gather	2630	MPI_Bcast	20417

To make the above definitions clear, we give two examples according to our populated database. Example 1 shows a homogeneous (5, 2)-repeated collective and Example 2 shows a mixed (30, 4)-repeated collective (two homogeneous collectives sandwiched together).

```
[Example 1]
MPI_Allreduce() | line 93
MPI_Allreduce() | line 98
[Example 2]
MPI_Allreduce() | line 200
MPI_Allreduce() | line 217
MPI_Allgather() | line 227
MPI_Allgather() | line 230
```

B. All-Pair Search

In this work, we implement a pair-wise search algorithm for our analysis. We sampled several potential MPI collectives combinations that usually occur together. Namely, the commonly used pairs such as: (Gather, Scatter), (Allreduce, Allgather), (Allreduce, Alltoall), (Reduce, Bcast), (Gatherv, Gather), (Scatterv, Scatter). We query each file with selected combinations of MPI collectives.

For our experiment, we set to find repeated collectives within some ϵ range. The detection method searches all combinations within the same file of the same repository and counts the aforementioned pairs that arise. The result of this experiment is depicted in Figure 3. The horizontal axis shows the ϵ range and the vertical axis shows the total number of occurrences for each sampled pair in our database.

As it can be seen from the figure, as ϵ range is increased number of occurrences becomes higher. As it is evident from the figure, (Reduce, Bcast) pair is dominant among all of the other sampled pairs. We note that (Gather, Scatter) and (Allreduce, Allgather) are the next two dominant pairs that have the highest number of occurrences. To give some insight on what is the ratio of number of occurrences in Figure 3 to total number of occurrences in the database (Table II), we give an example for (Gather, Scatter) with ϵ range as 50. This complex collective is used as much as 38% and 80% of total number of occurrences for MPI_Gather and MPI_Scatter, respectively, which shows the high possibility of fusion of these two collectives.

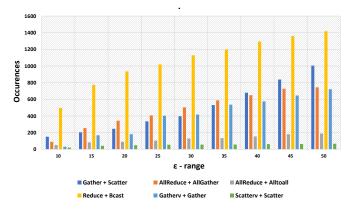


Fig. 3. All-Pair Search Experiment for A Sample of Complex Collectives

C. Homogeneity Distribution

In this experiment, we provide analysis for the distribution of homogeneous and mixed collectives. In this test, we focus on the correlation of individual collectives in each pair; we do not consider ϵ range. Although it is likely that there exists other combination of MPI collectives in between the two pairs, our study only focuses on the pair-wise pattern we described above. We recorded the number of occurrences found in each pair and tested their *homogeneity* in Figure 4. Blue (red) bars represent homogeneous (mixed) collectives and Y-axis represent the ratio in percent. According to the distribution in this figure, homogeneous collectives outweigh mixed collectives significantly. (Gatherv, Gather) has the highest correlation while (Allreduce, Alltoall) has the lowest.

V. RELATED WORK

The authors in [21] collected MPI usage profiles for around 100K jobs over a two-year period using a lightweight profiling tool, called Autoperf, that profiles and logs summarized statistics of MPI usage for production applications. Laguna et al. [24] presents a comprehensive study of MPI usage in applications at a significant scale with more than one hundred distinct MPI programs covering a large space of the

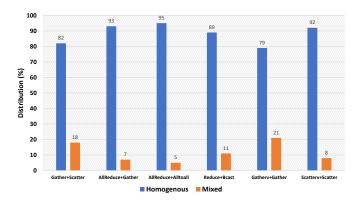


Fig. 4. Homogeneity test: Y-axis shows the distribution of homogeneous versus mixed collectives for each sampled complex collective.

population of MPI applications. In their study, they focus on understanding the characteristics of MPI usage with respect to the most used features, code complexity, and programming models and languages. The authors in [20] explore the usage of MPI for only fourteen mini applications within Exascale Computing Project (ECP) suite. Finally, the work [22] provides a summary of a survey conducted within the ECP community to gain information about how the MPI standard is currently used and how the various ECP projects are planning on using it to achieve exascale; but the scope of this paper is beyond current existing MPI usage as we provide insight on new MPI collective usage.

VI. DISCUSSION

While MPI-Recon provides a straightforward yet efficient framework to mine MPI code bases there are still certain limitations. For instance, in this work, each line is treated equally with other lines. This might not be true in some cases; a line with simple addition is computationally lighter than a line with a convolution filter. Also, there might be one or more function calls within the complex collective that we did not take into account. This can change the analysis of potential complex collectives. Moreover, currently, the framework does not consider the collectives that are called multiple times (e.g., loops). Finally, some applications use their own MPI calls which is not currently supported in our work.

VII. CONCLUSION AND FUTURE DIRECTION

In this work, we propose a fully-automated pipeline to mine and characterize a large-scale collection of MPI code sources hosted in GitHub to explore new collective constructs. To efficiently store the information and perform complex analysis we use a database management system. Our pipeline is highly scalable and one can easily increase the size of the search space with enough storage space. We also believe that there exists many more complex collectives in the space for future studies.

We wish to extend our framework to search for other types of MPI communication routines including one-sided communication (RMA), point-to-point communication, neighborhood collectives, and many others. To account for loops and collectives that are called for multiple times, we plan to add a BSP detector plugin to our pipeline. A challenge in identifying the MPI collectives is the abstraction offered from other libraries such as *HYPRE*⁴ or *Boost*⁵. A possible method to resolve the issue is to maintain a dictionary for translating the MPI collectives in the respective libraries. Additionally we seek to find other interesting patterns (*e.g.*, tuples) and new probing methods (*e.g.*, random probing).

ACKNOWLEDGEMENTS

This work was supported, in part, by the NSF through awards CCF-1919130, CNS-1925504, and CCF-2151021, and by a grant from Red Hat.

REFERENCES

- D. W. Walker and J. J. Dongarra, "MPI: a standard message passing interface," *Supercomputer*, vol. 12, pp. 56–68, 1996.
- [2] H. Zhou, J. Gracia, and R. Schneider, "MPI Collectives for Multi-Core Clusters: Optimized Performance of the Hybrid MPI+MPI Parallel Codes," in *Proceedings of the 48th International Conference on Parallel Processing: Workshops*, ser. ICPP 2019. New York, NY, USA: Association for Computing Machinery, 2019. [Online]. Available: https://doi.org/10.1145/3339186.3339199
- [3] R. L. Graham and et al., "Overlapping computation and communication: Barrier algorithms and ConnectX-2 core-direct capabilities," in *IPDPSW*, 2010, pp. 1–8.
- [4] P. Haghi, A. Guo, Q. Xiong, R. Patel, C. Yang, T. Geng, J. Broaddus, R. Marshall, A. Skjellum, and M. Herbordt, "FPGAs in the Network and Novel Communicator Support Accelerate MPI Collectives," in *IEEE High Performance Extreme Computing Conference*, 2020.
- [5] M. Bayatpour, N. Sarkauskas, H. Subramoni, J. M. Hashmi, and D. K. Panda, "BluesMPI: Efficient MPI Non-blocking Alltoall Offloading Designs on Modern BlueField Smart NICs," in *High Performance Computing*. Springer International Publishing, 2021, pp. 18–37.
- [6] R. L. Graham and et al., "Scalable hierarchical aggregation protocol (SHArP): A hardware architecture for efficient data reduction," in *COMHPC*, 2016, pp. 1–10.
- [7] D. De Sensi, S. Di Girolamo, S. Ashkboos, S. Li, and T. Hoefler, "Flare: Flexible in-Network Allreduce," in *Proceedings of the International Conference for High Performance Computing, Networking, Storage and Analysis*, ser. SC '21. New York, NY, USA: Association for Computing Machinery, 2021. [Online]. Available: https://doi.org/10.1145/3458817.3476178
- [8] J. Stern, Q. Xiong, A. Skjellum, and M. Herbordt, "A Novel Approach to Supporting Communicators for In-Switch Processing of MPI Collectives," in *Workshop on Exascale MPI*, 2018, https://www.bu.edu/caadlab/ ExaMPI18a.pdf.
- [9] P. Haghi, A. Guo, Q. Xiong, C. Yang, T. Geng, J. Broaddus, R. Marshall, D. Schafer, A. Skjellum, and M. Herbordt, "Reconfigurable switches for high performance and flexible MPI collectives," *Concurrency and Computation: Practice and Experience*, vol. 34, no. 2, 2022, doi: 10.1002/cpe.6769.
- [10] P. Haghi, W. Krska, C. Tan, T. Geng, P. Chen, C. Greenwood, A. Guo, T. Hines, C. Wu, A. Li, A. Skjellum, and M. Herbordt, "FLASH: FPGA-Accelerated Smart Switches with GCN Case Study," in *ICS 2023: International Conference on Supercomputing*, 2023.
- [11] M. Liu, T. Cui, H. Schuh, A. Krishnamurthy, S. Peter, and K. Gupta, "Offloading Distributed Applications onto SmartNICs Using IPipe," in *Proceedings of the ACM Special Interest Group on Data Communication*, ser. SIGCOMM '19. New York, NY, USA: Association for Computing Machinery, 2019, p. 318–333. [Online]. Available: https://doi.org/10.1145/3341302.3342079

⁴https://computing.llnl.gov/projects/hypre-scalable-linear-solvers-multigrid-methods ⁵https://www.boost.org/doc/libs/1_77_0/doc/html/mpi.html

- [12] P. Bosshart, G. Gibb, H.-S. Kim, G. Varghese, N. McKeown, M. Izzard, F. Mujica, and M. Horowitz, "Forwarding Metamorphosis: Fast Programmable Match-Action Processing in Hardware for SDN," in *Proceedings of the ACM SIGCOMM 2013 Conference on SIGCOMM*, ser. SIGCOMM '13. New York, NY, USA: Association for Computing Machinery, 2013, p. 99–110. [Online]. Available: https://doi.org/10.1145/2486001.2486011
- [13] I. Burstein, "Nvidia Data Center Processing Unit (DPU) Architecture," in 2021 IEEE Hot Chips 33 Symposium (HCS), 2021, pp. 1–20.
- [14] P. Haghi, T. Geng, A. Guo, T. Wang, and M. Herbordt, "Reconfigurable Compute-in-the-Network FPGA Assistant for High-Level Collective Support with Distributed Matrix Multiply Case Study," in *IEEE Conference on Field Programmable Technology*, 2020.
- [15] A. Guo, T. Geng, Y. Zhang, P. Haghi, C. Wu, C. Tan, Y. Lin, A. Li, and M. Herbordt, "A Framework for Neural Network Inference on FPGA-Centric SmartNICs," in *International Conference on Field-Programmable Logic and Applications*, 2022, dOI: 10.1109/FPL57034.2022.00071.
- [16] A. Guo, Y. Hao, C. Wu, P. Haghi, Z. Pan, M. Si, D. Tao, A. Li, M. Herbordt, and T. Geng, "Software-Hardware Co-design of Heterogeneous SmartNIC System for Recommendation Models Inference and Training," in *ICS 2023: International Conference on Supercomputing*, 2023.
- [17] H. Shahzad, A. Sanaullah, S. Arora, R. Munafo, X. Yao, U. Drepper, and M. Herbordt, "Reinforcement Learning Strategies for Compiler Optimization in High Level Synthesis," in *The Eighth Workshop on the LLVM Compiler Infrastructure in HPC*, 2022, dOI: 10.1109/LLVM-HPC56686.2022.00007.
- [18] C. Bobda, J. Mandebi, P. Chow, M. Ewais, N. Tarafdar, J. Vega, K. Eguro, D. Koch, S. Handagala, M. Leeser, M. Herbordt, H. Shahzad, P. Hofstee, B. Ringlein, J. Szefer, A. Sanaullah, and R. Tessier, "The Future of FPGA Acceleration in Datacenters and the Cloud," ACM *Transactions on Reconfigurable Technology and Systems*, vol. 15, no. 3, pp. 1–42, 2022, doi: 10.1145/3506713.
- [19] T. Cheatham, A. Fahmy, D. Stefanescu, and L. Valiant, Bulk Synchronous Parallel Computing — A Paradigm for Transportable Software. Boston, MA: Springer US, 1996, pp. 61–76. [Online]. Available: https://doi.org/10.1007/978-1-4615-4123-3_4
- [20] N. Sultana, M. Rüfenacht, A. Skjellum, P. Bangalore, I. Laguna, and K. Mohror, "Understanding the use of message passing interface in exascale proxy applications," *Concurrency and Computation: Practice and Experience*, vol. 33, no. 14, p. e5901, 2021. [Online]. Available: https://onlinelibrary.wiley.com/doi/abs/10.1002/cpe.5901
- [21] S. Chunduri, S. Parker, P. Balaji, K. Harms, and K. Kumaran, "Characterization of MPI Usage on a Production Supercomputer," in SC18: International Conference for High Performance Computing, Networking, Storage and Analysis, 2018, pp. 386–400.
- [22] D. E. Bernholdt, S. Boehm, G. Bosilca, M. Gorentla Venkata, R. E. Grant, T. Naughton, H. P. Pritchard, M. Schulz, and G. R. Vallee, "A survey of MPI usage in the US exascale computing project," *Concurrency and Computation: Practice and Experience*, vol. 32, no. 3, p. e4851, 2020, e4851 cpe.4851. [Online]. Available: https://onlinelibrary.wiley.com/doi/abs/10.1002/cpe.4851
- [23] S. VanderWiel, D. Nathanson, and D. Lilja, "Complexity and performance in parallel programming languages," in *Proceedings Second International Workshop on High-Level Parallel Programming Models* and Supportive Environments, 1997, pp. 3–12.
- [24] I. Laguna, R. Marshall, K. Mohror, M. Ruefenacht, A. Skjellum, and N. Sultana, "A Large-Scale Study of MPI Usage in Open-Source HPC Applications," in *Proceedings of the International Conference for High Performance Computing, Networking, Storage and Analysis*, ser. SC '19. New York, NY, USA: Association for Computing Machinery, 2019. [Online]. Available: https://doi.org/10.1145/3295500.3356176