# Adaptation and Optimization of Automatic Speech Recognition (ASR) for the Maritime Domain in the Field of VHF Communication

Emin Çağatay Nakilcioğlu, Fraunhofer CML, Hamburg/GERMANY emin.nakilcioglu@cml.fraunhofer.de

**Maximilian Reimann**, Fraunhofer CML, Hamburg/GERMANY, maximilian.reimann@cml.fraunhofer.de

Ole John, Fraunhofer CML, Hamburg/GERMANY ole.john@cml.fraunhofer.de

#### **Abstract**

This paper introduces a multilingual automatic speech recognizer (ASR) for maritime radio communication that automatically converts received VHF radio signals into text. The challenges of maritime radio communication are described at first, and the deep learning architecture of marFM® consisting of audio processing techniques and machine learning algorithms is presented. Subsequently, maritime radio data of interest is analyzed and then used to evaluate the transcription performance of our ASR model for various maritime radio data.

#### 1. Introduction

Maritime communication is a critical aspect of global trade and transportation, enabling ships to communicate with one another and with shore-based facilities. VHF stands for Very High Frequency and is a commonly used radio communication technology in the maritime domain, providing reliable voice communication. VHF is a type of electromagnetic radiation used in maritime radio communications mainly in the frequency range from 156.025 MHz to 162.025 MHz, ITU (2022). VHF radio is used for ship-to-ship, ship-to-shore (vice versa) and onboard communications, Alagha and Løge (2023). Due to its vast range, simplicity of use, and technological robustness in application, VHF communication has established itself as a useful instrument throughout decades and became a part of the mandatory equipment on board according to SOLAS, IMO (1974). However, using VHF-Radio technology for communication poses several obstacles. In addition to the background noise that is a characteristic feature of VHF radio, the noise on board adds to the difficulty, which can significantly impair speech intelligibility. In the maritime context, there are many sources of background noise, such as the noise of machinery or the sound of the sea. On the other hand, the signal quality depends strongly on the weather. Weather influences on the signal quality include fog, rain, or snow, whereby rain in particular reduces the power of the radio wave and can thus lead to signal interruptions, Meng et al. (2009). A poor connection can also affect intelligibility. If the signal between the vessel and the coast station is weak or affected by sources of interference in the vicinity, distortion and interruptions in the radio call may occur. In addition to the factors mentioned so far, which are primarily technological based and have a negative impact on the reception quality of the radio signal, there are other factors that affect the linguistic characteristics of maritime radio communication.

Another challenge is the internationality of the ship's crews with their different language levels. Language richness poses a challenge for speech recognition because it is difficult to develop models that cover all possible language variations. As people from different countries and language regions work together at sea, language barriers can arise, making communication more difficult. Since English is the main language of communication, a variety of different dialects and accents occur in radio communication, *John et al.* (2017). Depending on the level of English proficiency and the strength of the respective accents, this circumstance has a great impact on the intelligibility of maritime radio communications, especially if speakers are not used to talking to people from other regions of the world. To reduce the problem of language barriers and to mitigate the occurrence of misunderstandings, the IMO introduced the "Standard Marine Communication Phrases" (SMCP) in 1977, which replaced the Standard Marine Navigational Vocabulary (SMNV). The SMCP is a framework containing phrases for routine situations and standard responses for emergency situations, *IMO* (2001). In practice, these phrases, which aim to reduce language barriers and avoid misunderstandings in maritime communication, have little application, *Mockel et al.* (2014).

Despite its shortcomings, VHF radio is an indispensable tool for communication between ships and shore stations in the maritime domain and provides a fast, easy and reliable way to transmit information between different stakeholders. Automatic speech recognition technologies serve a great potential to address the challenges in the field of VF radio communication.

Automatic speech recognition (ASR) is an increasingly important component of human-computer interaction since it is a technology that enables machines to transcribe human speech into text. This technology has made considerable progress in recent years and has also found application in the end-consumer sector. Examples of areas where ASR is used today include voice control, voice input, automated customer support systems and many more. ASR is based on the ability of machines to recognize and interpret spoken language, calculating the most likely spoken sentence based on audio signals. The technology uses complex algorithms and mathematical models to capture the acoustic signals of speech and convert them into digital formats that can be processed.

In the field of maritime communication, deep learning-based ASR has been used to improve the accuracy of speech recognition. Various models have been proposed for different applications, including the use of RNNs for decoding of Maritime VHF communications, *Goudsmit et al.* (2016), and the use of CNNs and RNNs for detecting keywords in distress calls, *Yu et al.* (2019). However, there is still a need for more accurate and efficient ASR models for the maritime domain.

The introduction of transfer learning has also shown promising results in ASR. Transfer learning involves using a pre-trained model and fine-tuning it on a specific task. This approach has been used in various fields, including computer vision, *He et al.* (2015), and natural language processing (Peters et al., 2018). In the field of ASR, transfer learning has been used to improve the performance of models on low-resource languages, *Zhao and Zhang* (2018), and tasks, *Chorowski et al.* (2019).

The Wav2Vec2 model, introduced by *Baevski et al.* (2020), is a state-of-the-art ASR model that utilizes self-supervised learning to learn speech representations from raw audio. The model uses a contrastive predictive coding (CPC) objective to learn contextualized representations of audio, which can then be used for downstream tasks such as ASR. Fine-tuning the Wav2Vec2 model on specific speech recognition tasks has shown significant improvements in performance, *Baevski et al.* (2020), *Schneider et al.* (2021).

Considering the international nature of maritime communication, ships and ports from different countries often communicate with each other, and there are a variety of languages used in maritime communication. A multilingual ASR system would enable efficient and accurate communication between different language speakers, improving safety and efficiency in the maritime domain.

In recent years, the development of multilingual ASR models has gained significant attention. With the addition of the recent advancements in deep learning, large-scale pre-trained models, such as the Crosslingual Language Model Pre-training (XLM) and XLSR models, which have shown great potential for improving the performance of ASR systems, were introduced. The XLSR model, in particular, is a pre-trained model that has been trained on a large corpus of multilingual data and has shown to be effective in low-resource languages and domains. For example, in a recent study by *Conneau et al.* (2020), the XLSR models were pre-trained on a large corpus of speech data in hundreds of languages and achieved state-of-the-art performance on several benchmarks for cross-lingual speech recognition.

In the context of maritime communication, where there is a need for accurate and efficient ASR models, the use of XLSR models can be beneficial due to their ability to handle multilingual and low-resource data. The XLSR model has been shown to be effective in various multilingual ASR tasks, such as speech-to-text translation and code-switching speech recognition. In a recent study by *Li et al.* (2021), the authors developed a multilingual ASR system for the maritime domain by fine-tuning the XLSR model on a custom maritime audio dataset. The study demonstrated the effectiveness of the XLSR model in improving the performance of ASR in the maritime domain.

In this paper, we introduce marFM®, a multilingual ASR system for the maritime domain. Our approach is similar to transfer learning, as we use a pretrained XLSR model to initialize the weights of our model and then fine-tune it on our custom maritime audio database which consists of maritime audio recordings in English and German. By doing so, we aim to improve the accuracy and efficiency of ASR for maritime communication in multiple languages simultaneously and thus to facilitate safer and more efficient communication between vessels of different nationalities.

### 2. Methodology

This chapter lays out the underlying methodology applied in developing/training a multilingual ASR model for multilingual maritime communication. As shown in the Fig.1, our methodology consists of two main steps: data pre-processing and fine-tuning of a pretrained ASR-Model. In this section, the details of the fine-tuning process are presented, and our custom maritime database and the data preprocessing steps are discussed in detail.

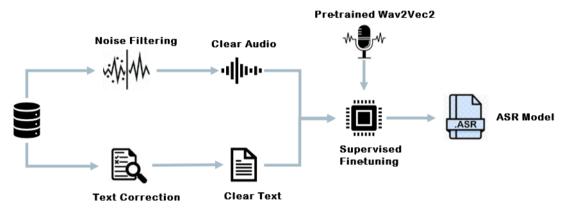


Fig.1: Preprocessing and fine-tuning of ASR-model

# 2.1 Supervised Fine-Tuning

Our approach in this work is to use Wav2Vec2-XLSR-53 model pretrained on large-scale German data as our base model and to fine tune it on our custom maritime database. The pretrained model was acquired through Hugging Face Hub. Hugging Face is an open-source software library that provides easy-to-use interfaces for popular NLP models, including Wav2Vec2 and XLSR, *HuggingFace* (2023). It allows users to easily access and fine-tune these models on their own datasets. Hugging Face also provides pre-trained models that can be used as a starting point for fine-tuning. The pre-trained models are trained on large-scale datasets, which makes them suitable for transfer learning on smaller datasets. In our work, we utilized the Wav2Vec2-XLSR-53 German model from Hugging Face as our base model for fine-tuning on our maritime audio dataset.

The base architecture of the Wav2Vec2-XLSR-53 German model is based on the XLSR approach which was built on wav2vec 2.90 architecture and designed to learns cross-lingual speech representations by pretraining a single model from the raw waveform of speech in multiple languages, *Conneau et al.* (2020). As shown in Fig.2, the XLSR approach consists of a layer convolutional neural network (CNN) encoder followed by a transformer decoder. The CNN encoder extracts contextualized speech features from the input waveform whose embeddings are then act as targets for the training of the transformer decoder using contrastive learning. Similar to self-supervising training of wav2vec 2.0, XLSR only requires raw unlabelled speech audio in multiple languages. The Wav2Vec2-XLSR-53 German is pretrained on a large-scale German speech corpus and fine-tuned on the Common Voice German dataset, *Conneau et al.* (2020).

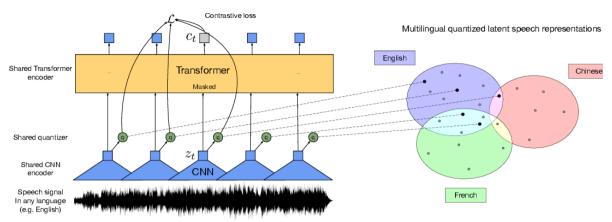


Fig.2: The XLSR approach on multilingual speech recognition, Conneau et al. (2020)

To fine-tune the Wav2Vec2-XLSR-53 model for the maritime domain, we used a custom maritime audio database that was collected by Fraunhofer CML. The database contains various types of maritime radio communication, such as distress calls, navigational messages, and weather reports as well as situational reports. The more detail regarding the database will be provided the following sub-section. For fine-tuning, we followed a transfer learning approach. We initialized the model with the pre-trained weights and fine-tuned it on our dataset using the Connectionist Temporal Classification (CTC) loss function. CTC loss function is a popular method for training ASR models, where the model learns to align the predicted output sequence with the ground truth by maximizing the log-likelihood of the correct transcription, Graves et al. (2006). This approach has been shown to be effective in various ASR tasks, including phone recognition, Graves et al. (2006), keyword spotting, Park et al. (2020), and speaker diarization, Wang et al. (2021). In our work, we use CTC loss to train our multilingual ASR model to predict character sequences from audio waveforms. We use the CTC loss implementation provided by the PyTorch framework, *Paszke et al.* (2019). During the fine-tuning process, we used a learning rate of 3e-5, a batch size of 8. We also used early stopping to prevent overfitting and reduce training time. The training for fine-tuning on a single GPU (Nvidia RTX A6000) took approximately 34 hours in total.

# 2.2 Database and Preprocessing

For this project, Fraunhofer CML have created our own custom maritime database by gathering maritime audio recordings. This database consists of about 62-hour long audio recordings of real VHF radio conversations in English and German together with their respective transcriptions.

Since the pretrained XLRS model was trained on data with a sampling rate of 16 kHz, the fine-tuning data needed to be converted into the same format so that the convolutional filters could operate on the same timescale. To this end, every audio recording in the database was resampled to 16 kHz. Preprocessing was done using librosa library in Python, *McFee et al.* (2015).

As mentioned in Section 1, another the main challenge regarding VHF-Radio recordings is the heavy background noise that is ever present regardless of the type of VHF-Radio hardware. Depending on the range of the VHF-Radio receivers, the hardware quality and the distance between the communicators, prepotency of the background differs in the recordings. To address the background noise with different characteristics, we applied non-stationary noise gating to the raw audio data. The "noisereduce" library in Python was used for noise gating/reduction, *Sainburg et al.* (2020). The library offers two different noise reduction algorithms: stationary and non-stationary. Main difference between the algorithms is that non-stationary noise reduction allows the noise gate to change over time by using a sliding window where noise statistics are recomputed every time the window is moved to adjacent part of the audio clip. The working schematics of the stationary and non-stationary noise reduction is shown in Fig.3. Following steps are applied during the noise reduction process.

- First, a spectrogram is calculated over the signal
- A time-smoothed version of the spectrogram is computed using an IIR filter applied forward and backward on each frequency channel, *Grout* (2008).
- A mask is computed based on that time-smoothed spectrogram
- The mask is smoothed with a filter over frequency and time
- The mask is applied to the spectrogram of the signal, and is inverted

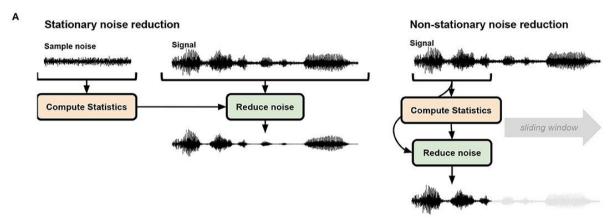


Fig.3: Stationary vs. non-stationary noise reduction, Sainburg and Gentner (2021)

The other preprocessing steps, text correction and clearing, were also carried out simultaneously. The objective behind text correction and clearing was removing all characters that don't contribute to the meaning of a word and cannot be properly represented by an acoustic sound and thus, normalizing the text. A quick investigation revealed that our transcriptions contained some punctuation marks which do not correspond to any characteristic sound unit, i.e., phoneme. For example, the letter "d" has its own phonetic sounds whereas the punctuation mark "-" cannot be represented as a phoneme. To finalize the text clearing stage, we have consulted with a native German speaker to find out whether any further simplification and clearing of the transcriptions was possible. We were informed that the certain vowels that were to be written with an umlaut such as ä, ö and ü were written according to the English alphabets. Thus, as the final step of the preprocessing, we rewrote these vowels according to the German alphabet.

# 3. Experiments

For the experimental setup, we have split the dataset into, training and test datasets with the ratio of 90:10, which correspondents to ca. 56 h of audio for training and 6 h of audio for testing. Training dataset was further divided into two splits: train and validation sets. Ratio of 80:20 was applied to these splits which adds up to ca. 45 h of audio for training and 11 h of audio for validation. In summary, 6 hours of maritime recordings consisting of real VHF radio calls both in English and German were used to evaluate the model performance.

Three different models were considered for the comparative performance analysis. Our base model, Wav2Vec2-XLSR-53 German, was involved in the experiments in order to see the full effect of the fine tuning on the model's performance. We have also evaluated the performance of the Wav2Vec2-XLSR-53 German with a language model. As shown in *Udagawa et al.* (2022), Vaibhav and Padmapriya (2022) and on model evaluation pages of Hugging Face Hub, attaching a language model to a Wav2Vec2 model has a positive effect on the decoding performance of the ASR models. Thus, we have also included Wav2Vec2-XLSR-53 German with a language model trained on English and German phrases.

In late 2022, a general-purpose speech recognition model called Whisper were introduced by OpenAI Research Lab, *Radford et al.* (2022). It is trained on a large dataset of diverse audio, 680,000 hours of multilingual and multitask supervised data collected from the web, and is also a multi-task model that can perform multilingual speech recognition as well as speech translation and language identification.

The Whisper's zero-shot performance were measured across many diverse datasets, and it showed is much more robustness and made fewer errors than the other state-of-the-art models. We have concluded that the involvement of a Whisper-based model to our experimental setup would be worthwhile addition and thus, in the evaluation phase, we have also considered the transcription performance of the largest available Whisper model, Whisper large-v2 model, which is biggest model in size and trained for 2.5x more epochs with added regularization for improved performance compared Whisper large model, *Cho et al.* (2021).

Speech recognition research typically evaluates and compares systems based on the word error rate (WER) metric. To calculate WER, the reference and recognized transcript are aligned. It is accomplished by minimizing the Levenshstein distance (or edit distance) between the two texts. Following this, you can count the number of substitutions (S), insertions (I), and deletion (D) errors. In its simply form, the WER is the proportion of the total number of errors over the number of words in the reference. In a transcription output where all the words were correct, the WER would be zero which we are aiming to drive towards in terms of the marFM®'s performance. The WER calculated using the following equation

$$WER = \frac{S + D + I}{N} \tag{1}$$

where N is the total number of symbols in the reference word, D the number of deleted symbols in the hypothesis with respect to the reference word, S the number of changed symbols, and I the number of additional symbols.

#### 4. Results

In this study, we compared the multilingual speech recognition performance between four different models including marFM® on the test split of our custom maritime database which contains 6 hours of real VHF radio calls. Wav2Vec2-XLSR-53 German model performance was evaluated both with and without an additional language model (LM). Other models performed the multilingual transcription task without the attachment of any external language model.

The results of the multilingual audio transcription task are presented in Table I. Each model used a shared capacity of a single GPU (Nvidia RTX A6000) while generating their predictions, i.e., transcriptions. The total inference time of the models added up to approximately 19 minutes.

As expected, the positive influence of attaching a language model to the base model, Wav2Vec2-XLSR-53 German, was apparent on the model's transcription performance. With the help of the language model, its transcription accuracy has increased by approximately 4%. The base model without any language model attached ended up performing the worst among the models. Considering that the dataset the model was trained on consisted of mostly daily speech recordings, the relatively poor performance by the base model was expected. However, though it was trained on a data with similar characteristics, Whisper large-v2 model has outperformed both XLSR models. We observed close to 7% improvement in accuracy when compared to the base model and about 3% compared to the XLSR model with the language model extension. Although both architectures, Wav2Vec2 and Whisper, were based on transformers and encoder-decoder style approach, the Whisper implementation has demonstrated a certain level of superiority regarding the transcription accuracy on the multilingual VHF calls.

Table I: Results of multilingual speech recognition performance among different ASR models

Model	Word Error Rate (WER%)
Wav2Vec2-XLSR-53 DE	44.36
Wav2Vec2-XLSR-53 DE w/ ML	40.58
Whisper Large V2	37.62
marFM®	31.59

Despite the higher accuracy output of the Whisper large-v2 model, marFM® has produce the most accurate transcriptions among the models. With 31.5 % of WER, marFM® has shown a significant improvement in comparison to its closest contender which is the Whisper large-v2 model with 37.62 % of WER. As hypothesized, fine-tuning process has elevated the model's transcription performance with an approximately 13% boost in WER in comparison to the transcription accuracy of the base model, Wav2Vec2-XLSR-53 German.

#### 5. Conclusion and Future Work

In this study, we introduced marFM® a multilingual automatic speech recognizer for maritime communications. We also showcased its superior performance on the multilingual transcription task for VHF radio calls in comparison with the other open-source and readily available ASR models.

One of the main challenges for developing an ASR system for maritime domain was collecting the real maritime data with its corresponding transcriptions for our fine-tuning process. Throughout the span of multiple projects, we were able to gather a total of 62 hours of maritime recordings. Thanks to the state-of-the-art ASR architectures such as Wav2Vec2 and XLSR, we were able to develop marFM® and to provide an ASR system transcribing the maritime calls with higher accuracy compared to the other open-source, state-of-the-art ASR systems available.

As the experimental results have demonstrated, the addition of a language model can help Wav2Vec2-based ASR models transcribe with more accuracy. Thus, the performance of marFM® is expected to increase as we attach a language model trained on a language dataset expanded with maritime-related corpus. For this end, we have initialized a development process where we started training our own language model with the maritime expansion.

Among the non-finetuned models, Whisper large-v2 model has shown the best transcription performance. Thus, we are of the opinion of that it would be worthwhile research effort to develop Whisper-based maritime ASR in order to evaluate whether we can achieve higher accuracy levels with such implementation for the maritime communication. For this end, we have also initialized a side research project where we explore the capabilities of Whisper in the maritime domain further.

### References

ALAGHA, N.; LØGE (2023), *Opportunities and challenges of maritime VHF data exchange systems*, IJSC&N Special Issue - Satell Network 41/2, pp.99–101

CHO, H.; LEE, J., KIM, J., LEE, H.; LEE, K. (2021), Whisper Large v2: An effective end-to-end ASR for whispered speech

CHOROWSKI, J.; WEISS, R. J.; BENGIO, S.; VAN DEN OORD, A. (2019), *Unsupervised speech representation learning using wavenet autoencoders*, IEEE/ACM Trans. Audio, Speech, And Language Processing 27/12, pp.2041-2053

CONNEAU, A.; KHANDELWAL, K.; GOYAL, N.; CHAUDHARY, V.; WENZEK, G.; GUZMÁN, F.; GRAVE, E.; OTT, M.; ZETTLEMOYER, L. (2020), *Unsupervised Cross-lingual Representation Learning at Scale*, 58th Annual Meeting of the Association for Computational Linguistics, pp.8440-8451

DOMINGUEZ-PÉRY, C.; VUDDARAJU, L.N.R.; CORBETT-ETCHEVERS, I.; TASSABEHJI, R. (2021), Reducing maritime accidents in ships by tackling human error: a bibliometric review and research agenda, J. Shipp. Trd. 6/1

GALES, M.; YOUNG, S. (2008), Application of Hidden Markov Models in Speech Recognition, Now Foundations and Trends

GEORGESCU, A.L.; PAPPALARDO, A.; CUCU, H.; BLOTT, M. (2021), Performance vs. hardware requirements in state-of-the-art automatic speech recognition, J. Audio Speech Music Proc. 2021/1

GOUDSMIT, J.; SCHAVEMAKER, J.; JANSEN, S. (2016), *Robust maritime speech recognition with recurrent neural networks*, IEEE Int. Conf. Acoustics, Speech and Signal Processing (ICASSP), pp.5570-5574

GRAVES, A.; FERNÁNDEZ, S.; GOMEZ, F.; SCHMIDHUBER, J. (2006), Connectionist temporal classification: labelling unsegmented sequence data with recurrent neural networks, 23rd Int. Conf. Machine Learning, pp.369-376

GRAVES, A.; WAYNE, G.; DANIHELKA, I. (2014), Neural turing machines, arXiv preprint

GROUT, I. (2008), Digital Systems Design with FPGAs and CPLDs, Newnes, pp.475-536

HE, K.; ZHANG, X.; REN, S.; SUN, J. (2016), *Deep residual learning for image recognition*, IEEE Conf. Computer Vision and Pattern Recognition, pp.770-778

HANNUN, A.; CASE, C.; CASPER, J.; CATANZARO, B.; DIAMOS, G.; ELSEN, E.; PRENGER, R.; SATHEESH, S.; SENGUPTA, S.; COATES, A.; NG, A. (2014), *Deep speech: Scaling up end-to-end speech recognition*, arXiv preprint

HUGGINGFACE (2023), Transformers: State-of-the-art Natural Language Processing, https://huggingface.co/

IMO (1974), International Convention for the Safety of Life at Sea (SOLAS), Int. Mar. Org., London

IMO (2001), IMO Standard Marine Communication Phrases, Int. Mar. Org., London

ITU (2022), Technical characteristics for a VHF data exchange system in the VHF maritime mobile band: M Series Mobile, radiodetermination, amateur and related satellite services

JOHN, P.; BROOKS, B.; SCHRIEVER, U. (2017), Profiling maritime communication by non-native speakers: A quantitative comparison between the baseline and standard marine communication phraseology, English for Specific Purposes, vol. 47, pp.1-14

KLAKOW, D.; PETERS, J. (2002), *Testing the correlation of word error rate and perplexity*, Speech Communication 38/1-2, pp.19-28

LI, J.; CAO, J.; ZHANG, Y.; LIU, X.; ZHAO, J.; LIU, X. (2021), An Investigation of Pretrained Cross-Lingual Models for Maritime Domain Automatic Speech Recognition, Sensors 21/7, pp.2561

LI, J. (2022), Recent advances in end-to-end automatic speech recognition, APSIPA Trans. Signal and Information Processing 11/1

McFEE, B.; RAFFEL, C.; LIANG, D.; ELLIS, D.P.; MCVICAR, M.; BATTENBERG, E.; PARASCANDOLO, G. (2020), *Librosa: Audio and music signal analysis in python*, 14<sup>th</sup> Python in Science Conf., pp.18–25

- MENG, Y. S.; LEE, Y. H.; NG, B. C. (2009), Further Study of Rainfall Effect on VHF Forested Radio-Wave Propagation With Four-Layered Model, PIER, vol. 99, pp.149-161
- MOCKEL, S.; BRENKER, M.; STROHSCHNEIDER, S. (2014), Enhancing Safety through Generic Competencies, TransNav 8/1, pp.97-102
- PARASKEVOPOULOS, G.; PARTHASARATHY, S.; KHARE, A.; SUNDARAM, S. (2020), *Multimodal and Multiresolution Speech Recognition with Transformers*, 58th Annual Meeting of the Association for Computational Linguistics, pp.2381-2387
- PARK, D. H.; Han, K.; LEE, J. H. (2020), *Listen, attend, and spot: A framework for end-to-end keyword spotting with recurrent neural networks*, Neural Networks 128, pp.29-40
- PASZKE, A.; GROSS, S.; MASSA, F.; LERER, A.; BRADBURY, J.; CHANAN, G.; DESMAISON, A. (2019), *PyTorch: An imperative style, high-performance deep learning library*, Advances in Neural Information Processing Systems, pp.8024-8035
- RADFORD, A.; KIM, J.; XU, T. & BROCKMAN, G.; MCLEAVEY, C.; SUTSKEVER, I. (2022), Robust Speech Recognition via Large-Scale Weak Supervision
- SAINBURG, T.; THIELK M.; GENTNER; T.Q. (2020), Finding, visualizing, and quantifying latent structure across diverse animal vocal repertoires, PLoS Computational Biology, Public Library of Science, pp.1-48
- SCHNEIDER, S.; BAEVSKI, A.; COLLOBERT, R.; AULI, M. (2019), wav2vec: Unsupervised pretraining for speech recognition, arXiv preprint
- UDAGAWA, T.; SUZUKI, M.; KURATA, G.; ITOH, N.; SAON, G. (2022), Effect and analysis of large-scale language model rescoring on competitive ASR system, arXiv preprint
- VAIBHAV, H.; PADMAPRIYA, M. (2022), Methods to Optimize Wav2Vec with Language Model for Automatic Speech Recognition in Resource Constrained Environment, 19th Int. Conf. Natural Language Processing (ICON), pp.149-153
- WANG, X.; ZHU, L.; WAN, Y. (2021), Speaker diarization with connectionist temporal classification, IEEE Int. Conf. Acoustics, Speech and Signal Processing (ICASSP), pp.4956-4960
- YADAV, H.; SITARAM S. (2022), A Survey of Multilingual Models for Automatic Speech Recognition
- YU, K.; CHEN, K.; WANG, W. (2019), Keyword detection from maritime distress calls with convolutional and recurrent neural networks, IEEE Access, 7, pp.87333-87341
- ZHAO, J.; ZHANG, W. Q. (2022), *Improving Automatic Speech Recognition Performance for Low-Resource Languages with Self-Supervised Models*, IEEE J. Selected Topics in Signal Processing 16/6, pp.1227-1241