

Enhancing Robustness of AI Offensive Code Generators via Data Augmentation

CRISTINA IMPROTA* and PIETRO LIGUORI*, University of Naples Federico II, Italy
 ROBERTO NATELLA, University of Naples Federico II, Italy
 BOJAN CUKIC, University of North Carolina at Charlotte, USA
 DOMENICO COTRONEO, University of Naples Federico II, Italy

In this work, we present a method to add perturbations to the code descriptions to create new inputs in natural language (NL) from well-intentioned developers that diverge from the original ones due to the use of new words or because they miss part of them. The goal is to analyze how and to what extent perturbations affect the performance of AI code generators in the context of security-oriented code. First, we show that perturbed descriptions preserve the semantics of the original, non-perturbed ones. Then, we use the method to assess the robustness of three state-of-the-art code generators against the newly perturbed inputs, showing that the performance of these AI-based solutions is highly affected by perturbations in the NL descriptions. To enhance their robustness, we use the method to perform data augmentation, i.e., to increase the variability and diversity of the NL descriptions in the training data, proving its effectiveness against both perturbed and non-perturbed code descriptions.

CCS Concepts: • **Computing methodologies** → **Machine translation**; *Lexical semantics*; *Language resources*.

Additional Key Words and Phrases: ML Robustness, Data Augmentation, AI Offensive Code Generators, Natural Language Perturbations

ACM Reference Format:

Cristina Improta, Pietro Liguori, Roberto Natella, Bojan Cukic, and Domenico Cotroneo. 2023. Enhancing Robustness of AI Offensive Code Generators via Data Augmentation. 1, 1 (October 2023), 22 pages. <https://doi.org/10.1145/nnnnnnn.nnnnnnn>

1 INTRODUCTION

AI-based code generators are powerful tools using neural machine translation (NMT) models to generate programming code from natural language (NL) descriptions (*intents*) [Mastropaolo et al. 2021; Tufano et al. 2019]. When adopted in the context of ethical hacking and offensive security testing, AI (offensive) code generators support auditors in developing *proof-of-concept* (POC) attacks to accelerate the process of identifying and exploiting vulnerabilities, assess their severity, and motivate vendors and users to adopt mitigations [Arce 2004].

To be used in real scenarios, these tools must be *robust* to the variability of the NL since developers follow various conventions in writing code descriptions [Padioleau et al. 2009; Rani et al. 2021a,b].

*Both authors contributed equally to this research.

Authors' addresses: Cristina Improta, cristina.improta@unina.it; Pietro Liguori, pietro.liguori@unina.it, University of Naples Federico II, Naples, Italy; Roberto Natella, University of Naples Federico II, Naples, Italy; Bojan Cukic, University of North Carolina at Charlotte, Charlotte, North Carolina, USA, bcukic@charlotte.edu; Domenico Cotroneo, University of Naples Federico II, Naples, Italy, cotroneo@unina.it.

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than ACM must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from permissions@acm.org.

© 2023 Association for Computing Machinery.

XXXX-XXXX/2023/10-ART \$15.00

<https://doi.org/10.1145/nnnnnnn.nnnnnnn>

In fact, the syntax of the code descriptions is neither imposed by the grammar of a programming language nor checked by a compiler. For example, developers may have different levels of technical knowledge and use different vocabulary or terminology to describe the same NL intent [Wang 2013]. Also, developers may use precise specifications, while others may provide high-level or abstract descriptions to speed up the coding process, e.g., due to release deadlines and other time pressures during development [Steidl et al. 2013].

If code generators are unable to handle this variability, they may only work effectively with a narrow range of specific sentence structures, vocabulary, or levels of detail. This restricts the usability of the code generators, limiting their adoption by a wider user base and hampering developers' productivity. Hence, the robustness of code generators is an important problem in the field.

Previous research assessed the robustness of the models against the variability of NL in the context of human language translation (e.g., English to Chinese) by injecting perturbations at different linguistic levels [Belinkov and Bisk 2018; Heigold et al. 2018; Huang et al. 2021; Li et al. 2019], and showed that models are not inherently robust to new, perturbed inputs.

However, it is still unclear how to evaluate the robustness of AI-based solutions in the context of code generation from NL. The main issue concerns the choice of perturbations to introduce in the NL code descriptions. Indeed, perturbations commonly used in human languages are often not suitable for code descriptions. It suffices to think that human languages are usually made up of assertions, which are, instead, almost absent from the descriptions of programming languages [Tychonievich 2014]. Moreover, NL descriptions of code snippets can use ad hoc terms that are barely used in human languages (e.g., the names of functions or variables) or are used with different meanings (e.g., the word *class*). Therefore, they should be treated differently to preserve the meaning of the descriptions. This issue is further exacerbated in the context of offensive code, where the code descriptions may include detailed information about the target systems (e.g., the operating system, software versions, network configuration, internal registers, etc.) to tailor the code to a specific environment. Hence, even a slight perturbation in the NL may alter the whole semantics of the description.

This paper proposes a method to assess the robustness of AI offensive code generators. The method works as follows. First, we generate perturbations in security-oriented code descriptions that reflect the natural variability of different developers. More precisely, starting from the original code descriptions, the method generates new perturbed NL descriptions that diverge from the original ones due to the use of new terms (*word substitution*) or because they miss part of them (*word omission*). We show that the method generates new, perturbed descriptions preserving the semantics of the original code descriptions. Then, we analyze how and to what extent the perturbed code descriptions affect the performance of the code generators, in terms of *syntactic* and *semantic* correctness of the code generated by the models. Finally, we apply the method to perform *data augmentation*, i.e., to increase the diversity of the training data with perturbed code descriptions. To the best of our knowledge, this is the first work that applies word-level perturbations in NL code descriptions to assess and enhance the robustness of AI code generators.

We conduct experiments with three state-of-the-art models to validate our method. The results of our analysis provide the following key findings:

- (1) The proposed method shows that the three NMT models used in our experiments are vulnerable to new, perturbed code descriptions. Indeed, the performance of the models decreases in terms of syntactic correctness ($\sim 10\%$ and $\sim 18\%$ for word substitution and word omission on average, respectively) and semantic correctness ($\sim 20\%$ and $\sim 34\%$ on average).
- (2) The proposed method is an effective solution to perform data augmentation, i.e., to enhance the robustness of the generators against perturbed code descriptions. In fact, when the training data is significantly perturbed ($> 50\%$), we observe a boost in performance, regardless of

the type of perturbation in the data. In particular, data augmentation leads to a consistent improvement of both syntax correctness (up to $\sim 17\%$ for word substitution, and $\sim 27\%$ for word omission) and semantic correctness (up to $\sim 25\%$ and $\sim 16\%$).

- (3) Data augmentation can be used to increase the performance of the AI offensive code generators against non-perturbed code descriptions (i.e., the original corpus). Indeed, we found that the semantic correctness of the models improves up to $\sim 5\%$ and up to $\sim 4\%$ when we use word substitution and word omission in the training data, respectively.

In the following, Section 2 discusses related work; Section 3 presents the proposed method; Section 4 describes our case study; Section 5 analyses the semantics of the perturbed descriptions; Section 6 shows the robustness assessment of the NMT models; Section 7 concludes the paper.

2 RELATED WORK

Adversarial Inputs. Previous work investigated the use of perturbations at different linguistic levels (i.e., character, word, and sentence levels) to address the security concerns raised by the ML models, focusing on *adversarial attacks*, i.e., inputs that are specifically designed to mislead the models, rather than well-intentioned perturbations. Character-level perturbations include homograph attacks, where characters are replaced with homoglyphs, i.e., characters that render the same or a visually similar glyph (e.g., the lowercase Latin letter ‘l’ and the uppercase Latin letter ‘I’), which are used to mislead models in question-answer problems [Wu et al. 2020] or to reproduce keyboard typos [Belinkov and Bisk 2018]. [Boucher et al. 2022] proposed a class of encoding-based attacks using invisible characters, control characters, and homoglyphs, which are imperceptible to human inspection and can strongly harm machine learning systems. [Heigold et al. 2018] studied the effects of word scrambling and random noise insertion in machine translation, focusing on English and German languages. Their perturbation strategies include character flips and swaps of neighboring characters to imitate typos. At the word level, words in a sentence can be substituted with different random words, similar words in the word embedding space (i.e., real-valued vector representation of the words), or meaning-preserving words [Huang et al. 2021; Li et al. 2019; Michel et al. 2019]. Paraphrases, back translation, and reordering are some of the approaches to produce syntactically and semantically similar sentences to fool models [Huang et al. 2021].

Models’ Robustness. Recent work introduced several tools for the generation of adversarial inputs to assess how they impact the performance of the models in the generation of NL, but never targeted the code descriptions. As an example, [Cheng et al. 2020] proposed *Seq2Sick*, an optimization-based framework to generate adversarial examples for sequence-to-sequence neural network models. [Michel et al. 2019] presented *TEAPOT*, a toolkit to evaluate the effectiveness of adversarial perturbations on NMT models by taking into account the preservation of meaning in the source. *TextBugger* [Li et al. 2019] is a framework to generate utility-preserving adversarial texts against real-world online text classification systems. Adversarial attacks have also been investigated against the code. These works focused on perturbing code snippets to mislead models on several code-code and code-NL tasks across different programming languages. *ALERT* [Yang et al. 2022b] is a black-box attack that transforms code snippets to make pre-trained models fail predictions in three software engineering tasks. *ACCENT* [Zhou et al. 2022] is an approach that crafts adversarial code snippets to mislead the models to produce completely irrelevant code comments. *DAMP* [Yefet et al. 2020] is an approach to generate attacks on models of code by renaming variables and adding dead code. *CodeAttack* [Jha and Reddy 2022] is a black-box attack model that generates imperceptible adversarial code samples by leveraging the code structure. In the field of code generation from NL, [Mastropaolo et al. 2023] investigated the robustness of a public model against paraphrased descriptions, showing that semantically equivalent code descriptions can result in different outputs. [Zhu and Zhang 2023]

proposed a white-box attack to measure the robustness of a pre-trained model in the generation of code solutions for programming problems, showing that the model is affected by character-level perturbations. [Zhuo et al. 2023] investigated the robustness of a prompt-based semantic parser in text-to-SQL tasks and proposed adversarial in-context learning, i.e., contextual guidance during a given task or interaction, as a means to improve robustness.

Data Augmentation. To enhance the robustness of the models, data augmentation has proven to be an effective solution in numerous NL processing tasks. However, it has never been applied in the specific task of code generation due to the difficulty of manipulating intents that use ad hoc terminology and precise structure to describe code snippets. [Wang et al. 2018] designed a data augmentation algorithm as an optimization problem, where they seek the policy that maximizes an objective that encourages both smoothness and diversity of the examples. [Gao et al. 2019] proposed to augment NMT training data by replacing a randomly chosen word in a sentence with a *soft word*, which is a probabilistic distribution over the vocabulary and is computed based on the contextual information of the sentence. [Nguyen et al. 2020] trained multiple models on forward translation, i.e., source-to-target, and on backward translation, i.e., target-to-source, and used them to generate a diverse set of synthetic training data from both lingual sides. Wei and Zou [Wei and Zou 2019] presented an effective *easy data augmentation* strategy to reduce the problem of overfitting in text classification tasks. They improved the performance of models trained on smaller datasets by performing synonym replacement and random insertion, swap and deletion of words on different subsets of training examples. [Yu et al. 2022] proposed a solution to improve the models' generalization ability in the software engineering domain. They designed program transformation rules that can preserve both the semantics and the syntactic naturalness of code snippets to increase the accuracy of tasks such as method naming and code clone detection.

AI Offensive Code Generators. Automatic exploit generation (AEG) research challenge consists of automatically generating working exploits [Avgerinos et al. 2014]. This task requires technical skills and expertise in low-level languages to gain full control of the memory layout and CPU registers and attack low-level mechanisms (e.g., heap metadata and stack return addresses) not otherwise accessible through high-level programming languages. Given their recent advances, AI-code generators have become a new and attractive solution to help developers and security testers in this challenging task. Although these solutions have shown high accuracy in the generation of software exploits, their robustness against new inputs has never been studied before. [Liguori et al. 2022] released a dataset containing NL descriptions and assembly code extracted from software exploits. The authors performed an empirical analysis showing that NMT models can correctly generate assembly code snippets from NL and that in many cases can generate entire exploits with no errors. [Liguori et al. 2021b] extended the analysis to the generation of Python security-oriented code used to obfuscate software exploits from systems' protection mechanisms. [Yang et al. 2022a] proposed a data-driven approach to software exploit generation and summarization as a dual learning problem. The approach exploits the symmetric structure between the two tasks via dual learning and uses a shallow Transformer model to learn them simultaneously. [Yang et al. 2023] proposed a novel template-augmented exploit code generation approach. The approach uses a rule-based template parser to generate augmented NL descriptions and uses a semantic attention layer to extract and calculate each layer's representational information. The authors show that the proposed approach outperforms the state-of-the-art baselines from the previous studies of automatic code generation.

Our work is complementary to the ones discussed above. Indeed, we target the specific task of generating programming code from NL code descriptions by injecting non-malicious perturbations into NL to reproduce the variability of different developers describing code. Different from [Mastropaolo et al. 2023], which assessed a public AI-code generator with paraphrased descriptions,

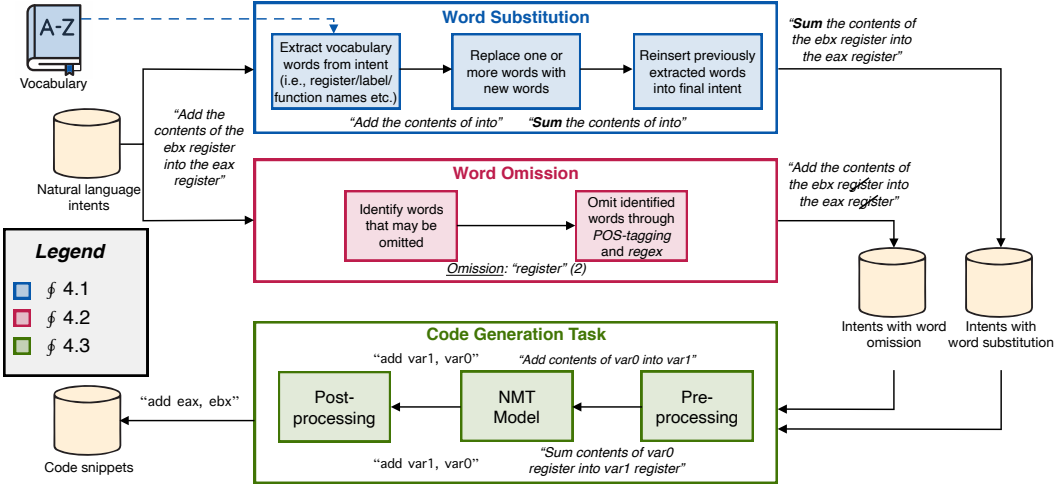


Fig. 1. Overview of the proposed method

we adopt word-level perturbations to assess and enhance the robustness of three NMT models via data-augmentation, i.e., by fine-tuning the models on perturbed data. Moreover, we contextualize our work in the software security field, by evaluating and improving the robustness of NMT models in the generation of offensive code for software security exploits.

3 METHOD

To assess the robustness of the AI offensive code generators, we present a method that perturbs the original code descriptions to create new NL descriptions. Figure 1 shows the overview of the proposed method.

To add perturbations to the NL intents of the corpora, we choose types of perturbation reflecting the variability of the NL. Indeed, the description of a code snippet depends on the different writing styles and capabilities of the developers. Moreover, a sentence can be expressed using different words, ordering words in different ways, lacking significant details, or being too specific. A robust model should be resistant to this variability and be able to predict the same output when dealing with two different but equivalent code descriptions. Therefore, to measure the robustness of the code generators, we define a set of perturbations to the models' inputs.

Although character-level perturbations can be adopted to study the sensitivity of the models to human errors (e.g., typos), in this work we focus on perturbing words but still preserving the original meaning of the NL intents. To identify the perturbation types that best reproduce this variability, we look at the intents and analyze how each word contributes to the meaning of the whole sentence based on its part of speech.

Consider the example in Figure 2, which shows a long and detailed NL intent used to describe assembly code extracted from a software exploit program for the IA-32 (the 32-bit version of the x86 Intel Architecture). The intent contains nine *part-of-speech* (POS), i.e., the category of words that have similar grammatical properties, in the English grammar¹: *noun* (AX, register, contents, stack), *verb* (is, save, push), *adjective* (greater), *adverb* (then), *pronoun* (it), *preposition* (if, than, into, on), *conjunction* (and), *determiner* (the) and *number* (100). The figure shows that we can express a semantically equivalent intent by using different NL descriptions. Indeed, POS such as verbs and

¹For this example, we used [Parts-of-speech.Info](#), a POS tagger based on the Stanford University Part-Of-Speech Tagger.

nouns can be, in some cases, substituted with new words, while they can be omitted in others; adjectives can be replaced, but not omitted (i.e., the word *greater* is fundamental to this description); adverbs and determiners can be omitted without altering the sentence.

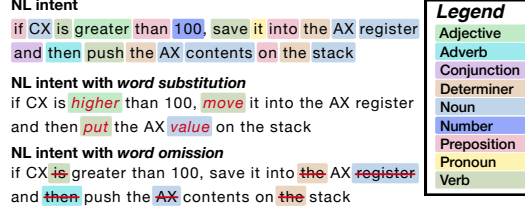


Fig. 2. Example of NL description for assembly code. Equivalent intents can be expressed with different words (*word substitution*) or by omitting some words (*word omission*).

Based on these assumptions, we focus on two types of perturbations: *word substitution* (§ 3.1), and the *word omission* (§ 3.2). The former can be used to evaluate the performance of code generation when descriptions diverge from the lexicon used in the training corpus due to variability in the cultural and technical background knowledge of developers [Wang 2013]. The latter, instead, allows us to assess the models’ performance when developers omit information that would be redundant, such as information implicitly contained in the sentence or words already stated in previous intents (e.g., in a large program where the same operand or variable is accessed by multiple instructions in sequence, it would be redundant to refer to that operand/variable multiple times), or simply when the NL intents do not adequately describe the behavior of the code as they lack details [Panichella et al. 2012].

The new set of perturbed NL intents is used as input to assess the robustness of the models in the generation of the code snippets (§ 3.3). Ideally, the performance of the models against the perturbed data should be comparable to the ones obtained against the original, non-perturbed data, otherwise, the code generator is not robust to the variability of the NL descriptions.

3.1 Word Substitution

Substituting words is not a trivial task, especially in a programming context. In fact, blindly replacing words may lead to the loss of the original meaning of the code description if we do not consider the context of code generation. For example, consider the NL intent “*clear the contents of the EAX register*”, which describes an assembly snippet that zeros out a register. A valid perturbation of the input can reasonably lead to the sentence “*empty the contents of the register*”, but not to “*purify the contents of the register*” since the verb *purify* is out of the programming context. This problem is further exacerbated by the use of words that belong only to the programming context (e.g., EAX) that cannot be substituted.

To address these issues, we impose a set of *constraints* on the word substitution process. First, we consider the set of the *top-k nearest neighbors* in the counter-fitted embedding space [Mrkšić et al. 2016], i.e., a vector space constructed by injecting antonym and synonym constraints into real-valued vector representations to improve the vectors’ ability to judge semantic similarity. Counter-fitted word vectors allow us to find better candidates for word substitution than regular word vectors as a result of nearest-neighbor searches [Yoo and Qi 2021]. Then, to select the most suitable candidate, we compute the *cosine similarity*, which measures the similarity between two-word vectors by computing the cosine of the angle between them [Hauser et al. 2021; Li et al. 2021; Mathai et al. 2020; Yoo and Qi 2021]. The metric ranges between 0 (total dissimilarity) and 1 (total similarity). Additionally, we use the POS tag to further constrain the transformation, that is, we mark each word

Table 1. Examples of the word substitution on the intents. Underlined text refers to the candidate word replacing the original one.

Word Substitution	NL Intent
None (Original Intent)	<i>Store the shellcode pointer in the ESI register.</i>
w/o constraints	<i><u>Stock</u> the shellcode pointer in the ESI register.</i>
with constraints	<i><u>Save</u> the shellcode pointer in the ESI register.</i>

with its corresponding part of speech [Jin et al. 2020] to limit the substitution to words that share the same POS tag (e.g., a verb can be replaced with another verb, but not with a noun). Therefore, we replace the original word with a different one only if they have a cosine similarity value above a specific threshold and the same POS tag. We set the cosine similarity threshold to 0.8 to guarantee a good trade-off between the quality and strength of the generated perturbed example [Li et al. 2019] and set to 20 the number of nearest-neighbors [Yoo and Qi 2021]. By enforcing these constraints, we replace words with semantically and syntactically similar words, hence ensuring that the examples are perceptibly similar [Alzantot et al. 2018].

Table 1 shows how the use of constraints contributes to preserving the original meaning in the perturbed intent (the intent is chosen intentionally as simple for the example). In the original sentence “*Store the shellcode pointer in the ESI register*”, the word *store* clearly expresses the action of memorizing a pointer in a specific register. However, if we perform the substitution without using the constraints, the verb can be interpreted as a noun and be replaced with a similar noun, i.e., *stock*, producing an incoherent sentence. When we use constraints, instead, the word is replaced with the verb *save*, resulting in a semantically equivalent description.

A problem to deal with when we substitute the words in the code descriptions is to replace words related to the programming language that cannot be expressed with different terms (e.g., the word *class*, the names of the variables, etc.). To overcome this issue, we use a *vocabulary* of programming-language-related words that cannot be substituted. We build the vocabulary by comparing the NL intents of the corpus used to train the models and a large comparison corpus not containing any text from the programming field (e.g., contemporary prose), with both corpora written in the same NL (e.g., English). The key idea is to add to the vocabulary all the words that occur more often in the corpus for code generation than in the comparison corpus or that occur only in the code generation corpus, regardless of their occurrence [Chung and Nation 2004; Liu and Lei 2019].

To this end, we first count the number of unique words in both the code generation and comparison corpora, excluding *stopwords* (i.e., articles, conjunctions, etc.) [Silva and Ribeiro 2003]. Then, for both corpora, we compute the ratio of the occurrences of every word to the number of unique words in the corpus. If the ratio in the code generation corpus is at least 50 times higher than the ratio in the comparison corpus, or if the word never appears in the comparison corpus (i.e., ratio = 0), then we add the word to the vocabulary. Indeed, *structure-related words*, i.e., words describing the structure of the code such as *function*, *operand*, *variable*, etc., are frequently mentioned in the code generation corpus, and rarely (or never) appear in the comparison corpus. Moreover, *name-related words*, i.e., words containing the names of labels, functions, variables, words between brackets or containing special characters, etc., even if used just in a few instructions of the code generation corpora, are unlikely to feature in the comparison corpus.

Once we build the vocabulary, we extract all the programming language-related words contained in the vocabulary from each NL intent, leaving only the subset of words eligible for substitution. Then, one or more words in this subset are swapped with a new one using counter-fitting vectors and

Table 2. Examples of word omission on the same intent. ~~Slashed~~ text refers to the omitted words.

Word Omission	Intent
None (Original Intent)	<i>Store the shellcode pointer in the ESI register</i>
Action-related Words	Store the shellcode pointer in the ESI register
Structure-related Words	Store the shellcode pointer in the ESI register
Name-related Words	Store the shellcode pointer in the ESI register

applying constraints on the transformation. Finally, the words previously extracted are reinserted into the NL intents, resulting in the final perturbed intents.

3.2 Word Omission

Deleting information from NL intents is useful for analyzing how the behavior of the model and the comprehension of text vary when part of the information is omitted or can be derived from previous sentences. As shown in the example of Figure 2, nouns, verbs, adverbs, and determiners can be removed under specific circumstances without losing the original meaning of the sentence. We focus on the omission of nouns and verbs since adverbs (e.g., *then*) and determiners (e.g., *the*) are noninformative and usually removed during data preprocessing in the code generation task [Silva and Ribeiro 2003].

To explain the process of word omission, consider the simple intent “*copy 0x4 into the BL register*”. The intent preserves its semantic meaning also if we remove the verb *copy*. This type of construct, often used to describe code, is known as a *noun phrase* [Tychonievich 2014]. Other examples of noun phrases in programming are “*2 > 3*” or “*if result not negative*”, in which the verb is omitted. This NL intent can be further reduced by omitting the noun *register*, which is implied since BL is, in fact, a register. Furthermore, if the previous intent is preceded by the NL intent “*zero out BL*”, we can again avoid specifying the name of the register, leading to the sentence “*copy 0x4 into the register*”. However, we cannot omit both nouns from this intent without resulting in a meaningless sentence (i.e. “*copy 0x4 into*”). For this reason, we need to constrain the perturbation process based on the role each noun has in the phrase.

Based on the considerations stated above, we identify three main categories of words that can be omitted without losing the original meaning: *i*) the *action-related words*, i.e., verbs, which contain information on the actions of the intents (e.g., *is*, *define*, *push*, etc.); *ii*) the *structure-related words*, i.e., nouns depending on the structure of the target programming language (e.g., the words *function*, *variable*, *register*, etc.); and *iii*) *name-related words*: i.e., words containing names of variables, functions, classes, labels, registers, etc. Table 2 shows the different types of word omission on the intent “*Store the shellcode pointer in the ESI register*”. In this example, the intent still preserves its meaning even without specifying the omitted words. The verb *store* and the word *register* are implicit (the pointer of the shellcode can only be moved to ESI, which is a register), while the name of the register can be derived from the context of the program (ESI is commonly used to store the shellcode).

To omit words from the NL intents, we use POS tagging to identify action-related words (i.e., verbs) and use the same vocabulary of programming language-related words used to avoid word substitution (described in § 3.1) to identify structure-related and name-related words. For each word omission category, we generate a different version of perturbed intent when possible. For example, if we identify action-related, structure-related and name-related words in the original NL intent, then we generate three perturbed NL intents, one for each category, but we never omit multiple word categories from the same NL intent to avoid altering the meaning of the original code description.

3.3 Code Generation Task

We use NMT models to generate code snippets starting from the NL intents perturbed with word substitution and word omission. To perform the generation of security-oriented code, we follow the best practices in the field by supporting the models with *data processing* operations. The data processing steps are usually performed both before translation (*pre-processing*), to train the NMT model and prepare the input data, and after translation (*post-processing*), to improve the quality and the readability of the code in output.

The preprocessing starts with the *stopwords filtering*, i.e., we remove a set of custom-compiled words (e.g., *the, each, onto*) from the intents to include only relevant data for machine translation. Next, we use a *tokenizer* to break the intents into fragments of text containing space-separated words (i.e., the *tokens*). To improve the performance of machine translation [Li et al. 2018; Liguori et al. 2021b; Modrzejewski et al. 2020], we *standardize* the intents (i.e., we reduce the randomness of the NL descriptions) by using a *named entity tagger*, which returns a dictionary of *standardizable* tokens, such as specific values, names of labels, and parameters, extracted through regular expressions. We replace the selected tokens in every intent with “*var#*”, where # denotes a number from 0 to $|I|$, and $|I|$ is the number of tokens to standardize. Finally, the tokens are represented as real-valued vectors using *word embedding*. Pre-processed data is used to feed the NMT model (*model’s training*). Once the model is trained, we perform the code generation from the NL intents. Therefore, when the model takes as inputs new intents, it generates the related code snippets based on its knowledge (*model’s prediction*). Finally, the code snippets predicted by the models are processed (*post-processing*) to improve the quality and readability of the code. The dictionary of standardizable tokens is used in the *de-standardization* process to replace all the “*var#*” with the corresponding values, names, and parameters. Moreover, code snippets are cleaned using regular expressions to remove any extra characters or spaces.

4 CASE STUDY

4.1 NMT Models

To assess the robustness of the neural machine translation models, we consider three architectures, a standard Seq2Seq model with attention mechanisms, and two pre-trained models, CodeBERT and CodeT5+, which are representative of the state-of-the-art [Gao et al. 2023].

■ **Seq2Seq** is a model that maps an input of sequence to an output of sequence. Similar to the encoder-decoder architecture with attention mechanism [Bahdanau et al. 2015], we use a bi-directional LSTM as the encoder to transform an embedded intent sequence into a vector of hidden states with equal length. We implement the Seq2Seq model using *xnmt* [Neubig et al. 2018]. We use an Adam optimizer [Kingma and Ba 2015] with $\beta_1 = 0.9$ and $\beta_2 = 0.999$, while the learning rate α is set to 0.001. We set all the remaining hyper-parameters in a basic configuration: layer dimension = 512, layers = 1, epochs = 200, beam size = 5.

■ **CodeBERT** [Feng et al. 2020] is a large multi-layer bidirectional Transformer architecture [Vaswani et al. 2017] pre-trained on millions of lines of code across six different programming languages. Our implementation uses an encoder-decoder framework where the encoder is initialized to the pre-trained CodeBERT weights, and the decoder is a transformer decoder, composed of 6 stacked layers. The encoder follows the RoBERTa architecture [Liu et al. 2019], with 12 attention heads, hidden layer dimension of 768, 12 encoder layers, and 514 for the size of position embeddings. We set the learning rate $\alpha = 0.00005$, batch size = 32, and beam size = 10.

■ **CodeT5+** [Wang et al. 2023] is a new family of Transformer models pre-trained with a diverse set of pretraining tasks including causal language modeling, contrastive learning, and text-code matching to learn rich representations from both unimodal code data and bimodal code-text data. We utilize

Table 3. Dataset statistics

Metric	NL Intents	Assembly Snippets
<i>Unique lines</i>	5,740	3,316
<i>Unique tokens</i>	2,855	1,770
<i>Avg. tokens per line</i>	9.18	5.83

the variant with model size 220M, which is trained from scratch following T5’s architecture [Raffel et al. 2020]. It has an encoder-decoder architecture with 12 decoder layers, each with 12 attention heads and hidden layer dimension of 768, and 512 for the size of position embeddings. We set the learning rate $\alpha=0.00005$, batch size = 16, and beam size = 10.

During data pre-processing, we tokenize the NL intents using the *nlk word tokenizer* [Bird 2006] and code snippets using the Python *tokenize* package [Python 2023]. We use *spaCy*, an open-source, NL processing library written in Python and Cython [spaCy 2023], to implement the named entity tagger for the standardization of the NL intents.

4.2 Dataset

To fine-tune the models for the generation of security-oriented code, we extended the publicly available *Shellcode_IA32* dataset for automatically generating *shellcodes* from NL descriptions [Liguori et al. 2021a]. A shellcode is a list of machine code instructions to be loaded in a vulnerable application at runtime. The traditional way to develop shellcodes is to write them using the assembly language, and by using an assembler to turn them into *opcodes* (operation codes, i.e., a machine language instruction in binary format, to be decoded and executed by the CPU) [Foster 2005; Megahed 2018]. Common objectives of shellcodes include spawning a system shell, killing or restarting other processes, causing a denial-of-service, etc.

The dataset consists of instructions in assembly language for *IA-32* collected from publicly available security exploits [Exploit-db 2023; Shell-storm 2022], manually annotated with detailed English descriptions. In total, it contains 3,200 unique pairs of assembly code snippets/English intents. We further enriched the dataset with additional up-to-date samples of shellcodes collected from publicly available security exploits, reaching 5,900 unique pairs of assembly code snippets/English intents. To take into account the variability of descriptions in NL, multiple authors described independently different samples of the dataset in the English language. Where available, we used as NL descriptions the comments written by developers of the collected programs. To the best of our knowledge, the resulting dataset is the largest collection of security-oriented code available to date for code generation. The dataset also includes 1,374 intents (~23% of the dataset) that generate multiple lines of assembly code, separated by the newline character `\n`. These multi-line snippets contain many different assembly instructions (e.g., whole functions). Table 3 summarizes the statistics of the dataset used in this work, including the unique examples of NL intents and assembly code snippets, the unique number of tokens, and the average number of tokens per snippet and intent.

4.3 Implementation of Perturbations

■ **Word Substitution.** We used TextAttack [Morris et al. 2020b], a Python framework for data augmentation, to substitute words and apply constraints, and Flair POS-tagging model [Akbi et al. 2018] as POS tagger. The TextAttack framework implements the *word swap by embedding* transformation replacing words with their candidates in the counter-fitted vector space [Mrkšić et al. 2016]. To build the vocabulary of programming-language-related words, we compared our dataset with a book containing 832 pages describing the English language as it is spoken around the

world [Kachru et al. 2009]. Unsurprisingly, structure-related words like *stack*, *function*, or *pointer* are among the most frequent words in our dataset but barely (or never) mentioned in the book, while the name-related words, such as the name of the registers (e.g., EAX) and labels (e.g., `encoded_shellcode`) never appear in the book. We randomly substitute the 10% of words in every NL intent, ensuring that at least one word is swapped with a similar one [Yoo and Qi 2021].

■ **Word Omission.** We removed action-related words from each intent (e.g., *define*, *add*, etc.) using Flair POS-tagging model [Akbik et al. 2018] as POS tagger, while we identify structure-related words (e.g., *register*, *label*, etc.) and name-related words (e.g., EAX, `_start_label`, etc.) to omit from the NL intents by using the vocabulary of programming-language-related words. After identifying the words to omit, we removed from the intents all the words related to a word omission category (i.e., we removed all the verbs, all the structure-related words, or all the names), generating different perturbed intents, according to the word omission categories, but we did not generate a perturbed intent with multiple word omission categories.

4.4 Metrics

To evaluate the performance of the models, we computed the *Syntactic Accuracy* (SYN) and the *Semantic Accuracy* (SEM). While the former gives insights into whether the code is correct according to the rules of the target language, the latter indicates whether the output is the exact translation of the NL intent into the target programming language (i.e., assembly). Syntactic/semantic accuracy is computed as the number of syntactically/semantically correct predictions over the total number of predictions (i.e., the total number of code snippets generated by the model). Furthermore, to better estimate the impact of the perturbations on the models, we computed the *Robust Accuracy* (ROB) [Huang et al. 2021]. Similar to semantic accuracy, this metric evaluates the semantic correctness of the code predicted by the models. However, instead of considering all the examples in the test data, the robust accuracy limits the evaluation to the subset of examples correctly generated by the model without the use of perturbations (i.e., it discards from the evaluation the semantically incorrect predictions w/o perturbations in the NL intents).

To evaluate the syntactic correctness of the predictions, we use the NASM assembler for the Intel x86 architecture in order to check whether the code generated by the models is compilable. For the semantic correctness of the predictions, instead, we manually analyze every code snippet generated by the models to inspect if it is the correct translation of the English intent. This analysis cannot be performed automatically (e.g., by comparing the predictions with ground-truth references) since an English intent can be translated into different but equivalent code snippets. Thereby, manual (human) evaluation is a common practice in machine translation [Han et al. 2021; Liguori et al. 2023]. To reduce the possibility of errors in manual analysis, multiple authors performed this evaluation independently, obtaining a consensus for the semantic correctness of the predictions.

5 SEMANTICS EVALUATION

An NMT model is robust if the performance obtained on the original, non-perturbed data is similar to the one achieved against the perturbed data, i.e., the perturbations do not imply a significant drop in the model's performance. To properly assess the model's robustness, the key requirement is to guarantee that new, perturbed inputs, although syntactically different, preserve the semantics of the original ones. In fact, if the perturbations alter the semantics of the NL descriptions, then the model is tested with different inputs (e.g., inputs requiring other actions), hence invalidating the analysis.

Therefore, before analyzing the robustness of NMT models, we assessed whether the perturbations violate this requirement by comparing the semantics of inputs before and after the perturbations. To this aim, we perturbed all the 5,900 examples in our dataset with word substitution and word omission. For the former, we considered both the substitution with and without constraints to verify

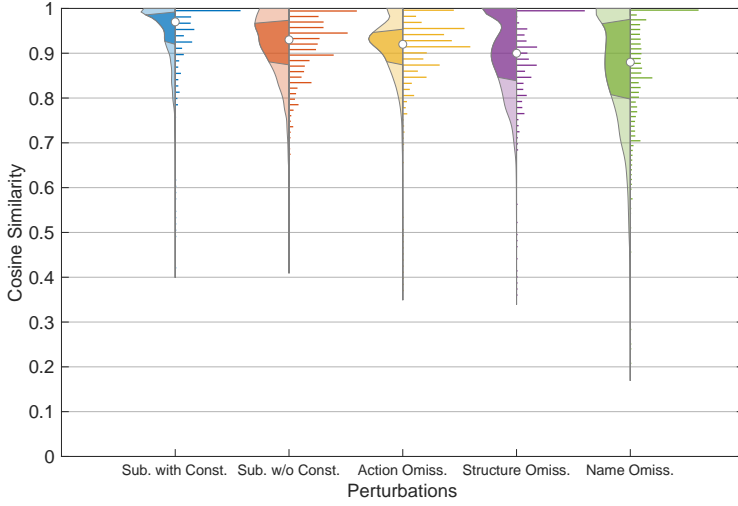


Fig. 3. Violin plots showing the cosine similarity between the original and the perturbed NL descriptions in the whole dataset.

if they helped to preserve the original semantics. For the latter, we performed an in-depth analysis that considered independently all the types of omission, i.e., action, structure, and name-related words. This helped us to understand what is the omission that impacted the most on the semantics.

Unfortunately, there is no automatic solution to check the semantic equivalence of the descriptions, i.e., solving the ambiguity in the NL. A common practice is represented by the inspection from different human annotators (e.g., through a survey) that manually analyze whether the perturbed descriptions are actually semantically equivalent to the original ones [Mastropaolo et al. 2023]. However, a manual inspection becomes infeasible and too prone to errors due to the massive amount of NL descriptions to review, which, in our case study, depends on the number of examples in the dataset (i.e., 5,900), and the number of different perturbations (i.e., word substitution with and without constraints, action, structure, and name-related omission).

Therefore, following the best practices of the field [Huang et al. 2021; Li et al. 2019; Morris et al. 2020a], we adopted multi-lingual models to compute sentence embeddings that are then compared with cosine similarity to find sentences with similar semantics. More precisely, these models, named *sentence transformers*, are fine-tuned to produce similar vector-space representations for semantically similar sentences within one language or across languages [Reimers and Gurevych 2019, 2020]. We adopted the sentence transformers to create sentence embeddings of both the original, non-perturbed NL descriptions and the perturbed ones. Then, we compared the cosine similarity between the two embedded descriptions: only if the similarity is higher than a threshold, then we consider that the perturbation did not alter the semantics of the original description. We implemented these models by using SentenceTransformers, a Python framework for state-of-the-art sentence, text, and image embeddings [Reimers 2022]. We set the threshold for similarity equal to 0.80 [Li et al. 2019].

Figure 3 shows, for each perturbation, the violin plots of the cosine similarity across all the examples in the dataset. First, the figure highlights that, regardless of the perturbations, the cosine similarity values are mostly distributed over the threshold of 0.80. For the word substitution, the median value is 0.97 and 0.93 with and without constraints, respectively (the average is 0.94 vs. 0.91). The percentage of perturbed descriptions having a cosine similarity higher than the threshold value is equal to 96.20% when we use constraints and 92.90% without constraints. For the word omission, the median values

are 0.92, 0.90, and 0.88 for action-related, structure-related, and name-related words, respectively (the average values are 0.91, 0.90, and 0.86). In this case, the percentage of perturbations not violating the threshold value for the semantic similarity is 94.98% for action-related, 85.97% for structure-related and 74.63% for name-related words.

These results provide practical insights. Indeed, the word substitution perturbation impacts less than the word omission on the semantic similarity with the original descriptions. This happens because the removal of a word, different from its substitution, implies that the information contained in the omitted word is missing from the original sentence. A further takeaway of the analysis is that the constraints for word substitution help to preserve the original semantics of the descriptions. In fact, the cosine similarity is on average higher than 3% when compared with the substitution without constraints. Finally, among the word omission categories, the removal of action-related words is the most semantics-preserving, followed by structure-related and name-related words. The latter is the only perturbation that has a median (average) value below 0.90, although it is still higher than the threshold value. This category of words contains particular important information (e.g., the name of the variables, registers, etc.), but which are sometimes omitted either because they are redundant (e.g., repeated in the same NL description or in previous ones), or because programmers are not accurate when describing the code.

For the robustness analysis (see § 6), we train and test the models with perturbed intents that meet the similarity threshold, i.e., when the cosine similarity between the encoded code description before and after the perturbation is greater than 0.80.

6 ROBUSTNESS EVALUATION

To perform the experiments, we split the dataset into training (the set of examples used to fit the parameters), validation (the set used to tune the hyperparameters of the models), and test (the set used for the evaluation of the models) sets using a common random 80%/10%/10% ratio [Kim and MacKinnon 2018; Mashhadi and Hemmati 2021]. To validate the proposed method, we conducted the experimental analysis by answering the following research questions (RQs):

▷ **RQ1:** *Are models robust to perturbations in the code descriptions?*

We first assess the robustness of the models in the generation of offensive assembly code by using word substitution and word omission in the NL intents of the test set. In this RQ, the test set is 100% perturbed, i.e., we add a perturbation in every code description.

▷ **RQ2:** *Can data augmentation enhance the robustness of the models against perturbed code descriptions?*

In this RQ, we assess if training the model with perturbed NL intents improves the performance of the models against perturbed code descriptions. We use a different percentage of perturbed intents in the training set (25%, 50%, and 100%) and compare the results with the case of no perturbed intents in the training set (0%). The test set is again perturbed 100%.

▷ **RQ3:** *Can data augmentation increase the performance of models against non-perturbed code descriptions?*

Finally, we assess whether data augmentation (we perturbed 50% of the training set) can improve the performance of the models against non-perturbed code descriptions, i.e., the original test set.

6.1 Robustness Evaluation

To assess the robustness of the models in the generation of offensive code, we perturbed the test set by using word substitution or by removing words from the NL intents of the corpus. Then we compared the results with the performance of the models on the original, non-perturbed test set. Ideally, a model is robust if the results obtained with and without perturbations are similar. Table 4

Table 4. Evaluation of the models with and w/o perturbations in the test set. *None* indicates the original, non-perturbed test set.

Perturbation	Seq2Seq			CodeBERT			CodeT5+		
	SYN	SEM	ROB	SYN	SEM	ROB	SYN	SEM	ROB
<i>None</i>	0.95	0.65	-	0.93	0.69	-	0.90	0.69	-
<i>Word Substitution</i>	0.86	0.51	0.66	0.89	0.49	0.68	0.73	0.42	0.58
<i>Word Omission</i>	0.81	0.33	0.45	0.67	0.32	0.44	0.75	0.37	0.51

shows the results of the models in terms of syntactic, semantic, and robust accuracy, with and without perturbations in the test set.

Without any perturbation, the performance of all models is $\geq 90\%$ for the syntactic accuracy, while the semantic one is equal to 65%, 69%, and 69% for Seq2Seq, CodeBERT and CodeT5+, respectively. Hence, the choice of models does not impact the ability to produce syntactically correct code.

When we evaluate the models using word substitution in the NL intents of the test set, the syntactic correctness of the models drops by 9%, 4%, and 17% for Seq2Seq, CodeBERT, and CodeT5+, respectively, while the semantic correctness of the predictions decreases by 14% for Seq2Seq, by 20% for CodeBERT, and by 27% for CodeT5+. According to the robust accuracy, only the 66%, 68%, and 58% of the code snippets are correctly predicted before and after perturbations by SeqSeq, CodeBERT, and CodeT5+, respectively.

The performance gets even worse when we omit words from the NL intents of the test set. Indeed, the syntactic correctness notably fell by 14%, 26%, and 15% for Seq2Seq, CodeBERT, and CodeT5+, respectively. Also, the table highlights that semantic correctness decreases by 32% for CodeT5+, and is approximately halved for the other two models when compared to the results obtained without perturbations. On top of that, only $\leq 51\%$ of the models' predictions are correct both with and without perturbations.

RQ1: Are models robust to perturbations in the code descriptions?

In our experiments, we found that NMT models are not robust to intents that diverge from those of the corpus. Indeed, the dropping of the performance is too evident even when the intents slightly differ from the original ones (i.e., word substitution). The worst-case scenario occurs when the intent lacks information. In this case, the semantic correctness of the prediction is more than halved. Therefore, the model shows limited usability in practice since it is not able to deal with the variability of NL descriptions. We attribute this limitation to the corpora used to train the models since they are often oriented to specific writing styles, or because descriptions in the corpus are often too literal and cumbersome.

6.2 Data Augmentation Against Perturbed Code Descriptions

We investigated how the use of perturbed intents in the training phase² improves the robustness of the models when dealing with perturbations in the test set. Therefore, we randomly perturbed different amounts of the original code descriptions in the training set (25%, 50%, and 100%), similarly to previous work [Huang et al. 2021; Wu et al. 2020]. The models were then trained from scratch using the different perturbed training sets before comparing the results obtained by the models without the use of data augmentation, i.e., 0% of perturbed intents in the training set (as shown in § 6.1). We remark that, in our experiments, we did not alter the size of the training data, i.e., the augmentation of

²We injected perturbations in both the training and validation sets.

Table 5. Evaluation of the models trained with different percentages of perturbed code descriptions. The test set is 100% perturbed. The worst performance per perturbation is **red**, while the best is **blue**.

Perturb.	Advers. Inputs	Seq2Seq			CodeBERT			CodeT5+		
		SYN	SEM	ROB	SYN	SEM	ROB	SYN	SEM	ROB
Word Substitution	0%	0.86	0.51	0.66	0.89	0.49	0.68	0.73	0.42	0.58
	25%	0.91	0.52	0.80	0.93	0.62	0.86	0.90	0.63	0.88
	50%	0.91	0.57	0.85	0.92	0.66	0.90	0.88	0.62	0.87
	100%	0.91	0.57	0.87	0.92	0.64	0.88	0.90	0.67	0.92
Word Omission	0%	0.81	0.33	0.45	0.67	0.32	0.44	0.75	0.37	0.51
	25%	0.89	0.38	0.57	0.89	0.45	0.61	0.89	0.46	0.62
	50%	0.90	0.39	0.61	0.91	0.46	0.63	0.89	0.47	0.64
	100%	0.92	0.40	0.60	0.94	0.48	0.66	0.90	0.47	0.63

the data refers to an increasing variability of the training examples obtained with the new, perturbed code descriptions, which replace the non-perturbed ones of the original dataset.

Table 5 shows the results. The table highlights that, for all the perturbations, the use of perturbed code descriptions increases the robustness of the model over all the metrics. For syntactic correctness, both models get a performance boost already with 25% of word substitution in the training set (+5% for Seq2Seq, +4% for CodeBERT, +17% for CodeT5+), while in the case of word omission, we obtain the best results with a training set 100% perturbed (+11% for Seq2Seq, +27% for CodeBERT, +15% for CodeT5+).

Semantic correctness analysis shows that all models gain greater benefits from the use of higher percentages of perturbed inputs ($\geq 50\%$). In fact, in the case of the use of word substitution in the training set, Seq2Seq increases the number of semantically correct predictions up to 6%, and the robustness accuracy up to 21%, CodeBERT gets a boost in semantic correctness up to 17% and robust accuracy up to 22%, and CodeT5+ shows an evident improvement up to 25% and 34%. In the case of the omissions in the training set, Seq2Seq improves the semantic and robustness accuracy up to 7% and 16%, respectively, while CodeBERT gets an even more marked boost of the performance, increasing the semantic accuracy up to 16% and robustness accuracy up to 22%. Finally, for CodeT5+, the semantic and robustness accuracy increased by 10% and 13%.

To show the improvement in the code generation obtained with the data augmentation, Table 6 presents a qualitative analysis using cherry-picked examples from our test sets. In particular, the table shows examples of failed (i.e., semantically incorrect) predictions without using the data augmentation that resulted in successful (i.e., semantically correct) predictions after the augmentation of the code descriptions. In the case of word substitution, it is worth noticing that the model failed to predict the correct output even if the perturbed intent slightly differs from the original one. As concerns the omission of words, the table points out that the model's successful prediction is constrained to all the parts of the description, hence the removal of an unnecessary word from the intent (e.g., the word *function*) implied a failure prediction. The table also highlights that all these failure cases were fixed by the use of data augmentation since the predictions are all syntactically and semantically correct.

After showing that the use of perturbations in the training set is an effective solution to increase the robustness of the models, we compared the best performance of the models with data augmentation on the perturbed test set with the performance of the models on the original training/test sets, i.e., without perturbations. Figure 4 shows the results in terms of syntactic and semantic accuracy. We did not include robust accuracy since this metric cannot be evaluated without perturbations in the test set (i.e., for the *None* bar).

Table 6. Illustrative examples of predictions with and without data augmentation (DA) against the perturbed test set. The prediction errors are **red**. Underlined and ~~slashed~~ text refer to word substitution and to word omission in the test set, respectively.

Original intent	Prediction before perturbing the intent	Perturbed Intent	Prediction w/o DA after perturbing the intent	Prediction with DA after perturbing the intent
<i>subtract the contents of al from the bl register</i>	sub bl, al	<u>deducting the contents of al from the bl register</u>	or al, bl	sub bl, al
<i>push double word 0x74652f2f onto the stack and point the EBX register to the stack register</i>	push dword 0x74652f2f \n mov ebx, esp	<u>push double word 0x74652f2f onto the stack and point the EBX register to the stack register</u>	push dword 0x74652f2f \n push dword ebx \n mov ebx, esp	push dword 0x74652f2f \n mov ebx, esp
<i>call_myfunc function</i>	call _myfunc	<u>call_myfunc function</u>	int 0x80	call _myfunc

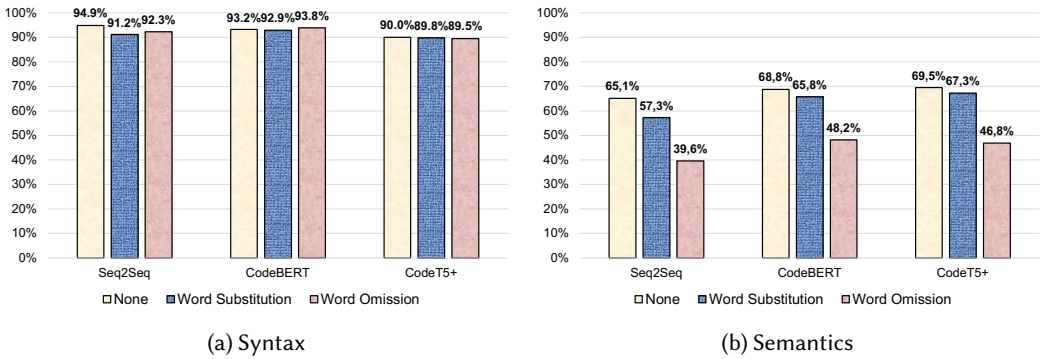


Fig. 4. Comparison between the best results obtained by models with data augmentation on the perturbed test set against the results obtained on the original, non-perturbed training/test set (*None*).

Both subfigures highlight that the syntactic correctness provided by the models with data augmentation on perturbed test sets is comparable to those obtained on the original, non-perturbed training/test sets. Furthermore, the use of omissions in the training set helped CodeBERT to exceed the performances obtained without perturbations (93.84% vs 93.22%). However, the analysis of semantics led to very different results. Indeed, all models provide performance lower than that obtained without perturbations. In the case of word substitution, Seq2Seq and CodeBERT showed a drop in the performance of 8% and 3%, while CodeT5+ is very close to the results of the original training/test set (2.2% decrease in semantic accuracy). The decrement of semantic accuracy is more pronounced in the case of omissions in the NL intents. Indeed, despite the use of data augmentation, Seq2Seq, CodeBERT, and CodeT5+ show a clear drop of 25%, 21%, and 23%, respectively.

RQ2: Can data augmentation enhance the robustness of the models against perturbed code descriptions?

Data augmentation proved to be an effective solution to improve the robustness of models in the generation of offensive code. Indeed, our experiments showed that when the model is trained with a high percentage of perturbed intents, it can deal with the variability of the descriptions. For all the perturbations, the syntactic correctness of the predictions with the data augmentation is comparable to the one obtained by the model on the original, non-perturbed test set. However, the semantic correctness of the predictions on perturbed code descriptions is still lower than the one obtained on the original, non-perturbed data. This drop is more evident when the models deal with the omission of information. This suggests the need for more sophisticated solutions to derive the missing or implicit information from the context of the program [Lutellier et al. 2020; Wu et al. 2022].

6.3 Data Augmentation Against Non-perturbed Code Descriptions

In our last analysis, we assessed whether the use of perturbed code descriptions in the training phase improves the performance of the model against non-perturbed NL code descriptions. Therefore, we added perturbed inputs in the 50% of the training set, while the remaining 50% is not perturbed, and evaluated the performance of the models against non-perturbed data. The key idea is to understand whether the models gain benefits from the data augmentation when generating snippets starting from the original non-perturbed intents. Figure 5 shows the results of the syntax and semantic evaluation for the three models. Again, we did not include robust accuracy in this analysis since the test set is not perturbed.

Figure 5a shows that the syntactic correctness of the models is pretty similar ($\geq 90\%$), regardless of the perturbation added in the training phase and the model. Notably, CodeT5+ provides an increment of the syntax accuracy by 1% and 2% when trained with word substitution and word omission, respectively. For the semantic evaluation, Figure 5b shows that the usage of word substitution in the training phase provides a performance that is superior to the one achieved without perturbations for the Seq2Seq and CodeT5+ (+4.6% and +3.1%, respectively). The usage of word omission in half of the training data boosts the performance of CodeT5+ (+4.0%), while the other models decrease their semantic accuracy up to $\sim 2\%$.

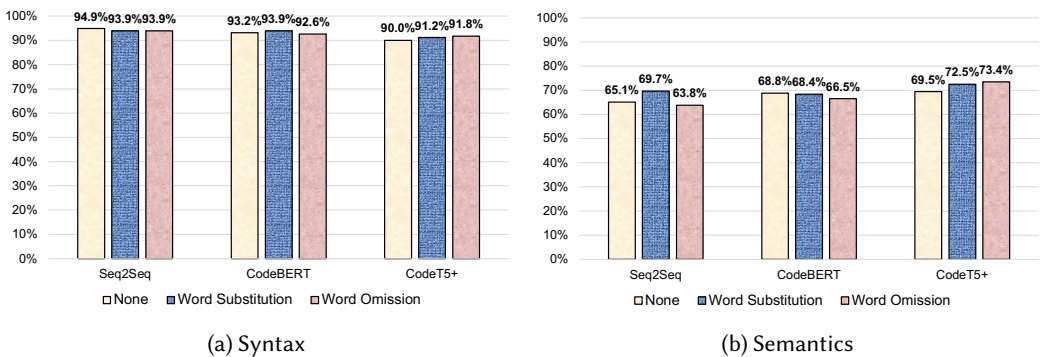


Fig. 5. Comparison between results obtained by models with data augmentation on the original, non-perturbed test set against the results obtained on the original, non-perturbed training/test set (None).

Table 7. Illustrative examples of predictions with and without data augmentation (DA) on the original, non-perturbed test set. The prediction errors are **red**.

Original Intent	Prediction w/o DA	Prediction with DA
<i>push eax and edx on the stack</i>	push edx \n push eax	push eax \n push edx
<i>move the bits of ax to the right by a number equal to the content of cl</i>	mov ax, cl	shr ax, cl

Table 7 shows two worth noticing examples in which, despite the non-perturbed test set, the models failed the prediction when trained with the original, non-perturbed training set, but returned syntactically and semantically correct predictions when trained with perturbed code descriptions. The first example of the table shows that the use of word substitution in 50% of the training set helped the model in predicting the right order of the instructions. In the second example, despite the model identifying the correct operands and their ordering, we found that the word *move* confused the model since this verb is mostly used to transfer contents (e.g., from a register into another one). The removal of words in the training set helped the model to emphasize also other parts of the intent, such as the word *right*. Therefore, after the data augmentation, the model correctly interpreted the *move right* by generating the shift right operation (shr instruction).

RQ3: Can data augmentation increase the performance of the models against non-perturbed code descriptions?

An important takeaway from our experiments is that the use of perturbations in the training data can increase the performance of the models in the code generation also against the original, non-perturbed code descriptions. Indeed, although the syntactic correctness is almost the same for all models (with an improvement up to 1.8%), we found that the semantic correctness increased up to 4.6% when using word substitution and up to 4.0% when using word omission. In particular, a newer, pre-trained model such as CodeT5+, benefits more from descriptions that are shorter or contain more variability. Therefore, even if the test set is not perturbed, the models can improve the semantic correctness of the predictions by learning from the higher variability in the training set due to the use of perturbations. This is an effective solution to overcome a fixed structure of the NL intents derived from a single description style of the code used to fine-tune the models.

7 CONCLUSION

In this paper, we proposed a method to assess the robustness of AI offensive code generators through the injection of perturbations in the NL code descriptions. We first showed that the perturbed descriptions preserve the semantics of the original ones. Then, we applied the method to assess three state-of-the-art NMT models in the automatic generation of offensive assembly code for software security exploits starting from the English language. Our experiments pointed out that the models are not robust when the intents deviate from the ones used in the corpora. In particular, the performance of the models drastically drops when developers do not explicitly specify all the information in the NL intents (*word omission*). To enhance the robustness of the code generators, we applied the method to perform *data augmentation*, i.e., to increase the variability of the code descriptions, showing that models increase the performance when at least 50% of the training data is perturbed. Finally, we found that the performance of the code generation task improves when the model is trained with a

perturbed version of the code descriptions containing new words (*word substitution*) also against the original, non-perturbed test-set.

REFERENCES

- Alan Akbik, Duncan Blythe, and Roland Vollgraf. 2018. Contextual String Embeddings for Sequence Labeling. In *Proceedings of the 27th International Conference on Computational Linguistics, COLING 2018, Santa Fe, New Mexico, USA, August 20-26, 2018*. Association for Computational Linguistics, 1638–1649. <https://aclanthology.org/C18-1139/>
- Moustafa Alzantot, Yash Sharma, Ahmed Elgohary, Bo-Jhang Ho, Mani B. Srivastava, and Kai-Wei Chang. 2018. Generating Natural Language Adversarial Examples. In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing, Brussels, Belgium, October 31 - November 4, 2018*, Ellen Riloff, David Chiang, Julia Hockenmaier, and Jun'ichi Tsujii (Eds.). Association for Computational Linguistics, 2890–2896. <https://doi.org/10.18653/v1/d18-1316>
- Iván Arce. 2004. The shellcode generation. *IEEE security & privacy* 2, 5 (2004), 72–76.
- Thanassis Avgerinos, Sang Kil Cha, Alexandre Rebert, Edward J Schwartz, Maverick Woo, and David Brumley. 2014. Automatic exploit generation. *Commun. ACM* 57, 2 (2014), 74–84.
- Dzmitry Bahdanau, Kyunghyun Cho, and Yoshua Bengio. 2015. Neural Machine Translation by Jointly Learning to Align and Translate. In *3rd International Conference on Learning Representations, ICLR 2015, San Diego, CA, USA, May 7-9, 2015, Conference Track Proceedings*. <http://arxiv.org/abs/1409.0473>
- Yonatan Belinkov and Yonatan Bisk. 2018. Synthetic and Natural Noise Both Break Neural Machine Translation. In *6th International Conference on Learning Representations, ICLR 2018, Vancouver, BC, Canada, April 30 - May 3, 2018, Conference Track Proceedings*. OpenReview.net. <https://openreview.net/forum?id=BJ8vJebC->
- Steven Bird. 2006. NLTK: the natural language toolkit. In *Proceedings of the COLING/ACL 2006 Interactive Presentation Sessions*. 69–72.
- Nicholas Boucher, Ilia Shumailov, Ross Anderson, and Nicolas Papernot. 2022. Bad Characters: Imperceptible NLP Attacks. In *2022 IEEE Symposium on Security and Privacy (SP)*. 1987–2004. <https://doi.org/10.1109/SP46214.2022.9833641>
- Minhao Cheng, Jinfeng Yi, Pin-Yu Chen, Huan Zhang, and Cho-Jui Hsieh. 2020. Seq2sick: Evaluating the robustness of sequence-to-sequence models with adversarial examples. In *Proceedings of the AAAI conference on artificial intelligence*, Vol. 34. 3601–3608.
- Teresa Mihwa Chung and Paul Nation. 2004. Identifying technical vocabulary. *System* 32, 2 (2004), 251–263.
- Exploit-db. 2023. Exploit Database Shellcodes. https://www.exploit-db.com/shellcodes?platform=linux_x86/.
- Zhangyin Feng, Daya Guo, Duyu Tang, Nan Duan, Xiaocheng Feng, Ming Gong, Linjun Shou, Bing Qin, Ting Liu, Daxin Jiang, and Ming Zhou. 2020. CodeBERT: A Pre-Trained Model for Programming and Natural Languages. In *Findings of the Association for Computational Linguistics: EMNLP 2020, Online Event, 16-20 November 2020 (Findings of ACL, Vol. EMNLP 2020)*. Association for Computational Linguistics, 1536–1547. <https://doi.org/10.18653/v1/2020.findings-emnlp.139>
- J.C. Foster. 2005. *Sockets, Shellcode, Porting, and Coding: Reverse Engineering Exploits and Tool Coding for Security Professionals*. Elsevier Science. <https://books.google.it/books?id=ZNI5dvBSfZoC>
- Fei Gao, Jinhua Zhu, Lijun Wu, Yingce Xia, Tao Qin, Xueqi Cheng, Wengang Zhou, and Tie-Yan Liu. 2019. Soft contextual data augmentation for neural machine translation. In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*. 5539–5544.
- Shuzheng Gao, Hongyu Zhang, Cuiyun Gao, and Chaozheng Wang. 2023. Keeping Pace with Ever-Increasing Data: Towards Continual Learning of Code Intelligence Models. In *45th IEEE/ACM International Conference on Software Engineering, ICSE 2023, Melbourne, Australia, May 14-20, 2023*. IEEE, 30–42. <https://doi.org/10.1109/ICSE48619.2023.00015>
- Lifeng Han, Alan Smeaton, and Gareth Jones. 2021. Translation Quality Assessment: A Brief Survey on Manual and Automatic Methods. In *Proceedings for the First Workshop on Modelling Translation: Translatology in the Digital Age*. Association for Computational Linguistics, online, 15–33. <https://aclanthology.org/2021.motra-1.3>
- Jens Hauser, Zhao Meng, Damián Pascual, and Roger Wattenhofer. 2021. BERT is Robust! A Case Against Synonym-Based Adversarial Examples in Text Classification. CoRRabs/2109.07403 (2021). arXiv:2109.07403 <https://arxiv.org/abs/2109.07403>
- Georg Heigold, Stalin Varanasi, Günter Neumann, and Josef van Genabith. 2018. How Robust Are Character-Based Word Embeddings in Tagging and MT Against Word Scrambling or Random Noise?. In *Proceedings of the 13th Conference of the Association for Machine Translation in the Americas (Volume 1: Research Track)*. Association for Machine Translation in the Americas, Boston, MA, 68–80. <https://aclanthology.org/W18-1807>
- Shuo Huang, Zhuang Li, Lizhen Qu, and Lei Pan. 2021. On Robustness of Neural Semantic Parsers. In *Proceedings of the 16th Conference of the European Chapter of the Association for Computational Linguistics: Main Volume, EACL 2021, Online, April 19 - 23, 2021*. Association for Computational Linguistics, 3333–3342. <https://aclanthology.org/2021.eacl-main.292/>
- Akshita Jha and Chandan K Reddy. 2022. Codeattack: Code-based adversarial attacks for pre-trained programming language models. *arXiv preprint arXiv:2206.00052* (2022).

- Di Jin, Zhijing Jin, Joey Tianyi Zhou, and Peter Szolovits. 2020. Is bert really robust? a strong baseline for natural language attack on text classification and entailment. In *Proceedings of the AAAI conference on artificial intelligence*, Vol. 34. 8018–8025.
- Braj B Kachru, Yamuna Kachru, and Cecil L Nelson. 2009. *The handbook of world Englishes*. Vol. 48. John Wiley & Sons.
- DH Kim and T MacKinnon. 2018. Artificial intelligence in fracture detection: transfer learning from deep convolutional neural networks. *Clinical radiology* 73, 5 (2018), 439–445.
- Diederik P. Kingma and Jimmy Ba. 2015. Adam: A Method for Stochastic Optimization. In *3rd International Conference on Learning Representations, ICLR 2015, San Diego, CA, USA, May 7-9, 2015, Conference Track Proceedings*. <http://arxiv.org/abs/1412.6980>
- Jinfeng Li, Shouling Ji, Tianyu Du, Bo Li, and Ting Wang. 2019. TextBugger: Generating Adversarial Text Against Real-world Applications. In *26th Annual Network and Distributed System Security Symposium, NDSS 2019, San Diego, California, USA, February 24-27, 2019. The Internet Society*. <https://www.ndss-symposium.org/ndss-paper/textbugger-generating-adversarial-text-against-real-world-applications/>
- Zhongwei Li, Xuancong Wang, AiTi Aw, Eng Siong Chng, and Haizhou Li. 2018. Named-entity tagging and domain adaptation for better customized translation. In *Proceedings of the seventh named entities workshop*. 41–46.
- Zongyi Li, Jianhan Xu, Jiehang Zeng, Linyang Li, Xiaoqing Zheng, Qi Zhang, Kai-Wei Chang, and Cho-Jui Hsieh. 2021. Searching for an Effective Defender: Benchmarking Defense against Adversarial Word Substitution. In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*. Association for Computational Linguistics, Online and Punta Cana, Dominican Republic, 3137–3147. <https://doi.org/10.18653/v1/2021.emnlp-main.251>
- Pietro Liguori, Erfan Al-Hossami, Domenico Cotroneo, Roberto Natella, Bojan Cukic, and Samira Shaikh. 2021a. Shellcode_IA32: A Dataset for Automatic Shellcode Generation. In *Proceedings of the 1st Workshop on Natural Language Processing for Programming (NLP4Prog 2021)*. Association for Computational Linguistics, Online, 58–64. <https://doi.org/10.18653/v1/2021.nlp4prog-1.7>
- Pietro Liguori, Erfan Al-Hossami, Domenico Cotroneo, Roberto Natella, Bojan Cukic, and Samira Shaikh. 2022. Can we generate shellcodes via natural language? An empirical study. *Automated Software Engineering* 29, 1 (05 Mar 2022), 30. <https://doi.org/10.1007/s10515-022-00331-3>
- Pietro Liguori, Erfan Al-Hossami, Vittorio Orbinato, Roberto Natella, Samira Shaikh, Domenico Cotroneo, and Bojan Cukic. 2021b. EVIL: Exploiting Software via Natural Language. In *2021 IEEE 32nd International Symposium on Software Reliability Engineering (ISSRE)*. 321–332. <https://doi.org/10.1109/ISSRE52982.2021.00042>
- Pietro Liguori, Cristina Improta, Roberto Natella, Bojan Cukic, and Domenico Cotroneo. 2023. Who evaluates the evaluators? On automatic metrics for assessing AI-based offensive code generators. *Expert Systems with Applications* 225 (2023), 120073.
- Dilin Liu and Lei Lei. 2019. Technical vocabulary. In *The Routledge handbook of vocabulary studies*. Routledge, 111–124.
- Yinhan Liu, Myle Ott, Naman Goyal, Jingfei Du, Mandar Joshi, Danqi Chen, Omer Levy, Mike Lewis, Luke Zettlemoyer, and Veselin Stoyanov. 2019. RoBERTa: A Robustly Optimized BERT Pretraining Approach. *CoRR* abs/1907.11692 (2019). arXiv:1907.11692 <http://arxiv.org/abs/1907.11692>
- Thibaud Lutellier, Hung Viet Pham, Lawrence Pang, Yitong Li, Moshi Wei, and Lin Tan. 2020. Coconut: combining context-aware neural translation models using ensemble for program repair. In *Proceedings of the 29th ACM SIGSOFT international symposium on software testing and analysis*. 101–114.
- Ehsan Mashhadi and Hadi Hemmati. 2021. Applying CodeBERT for Automated Program Repair of Java Simple Bugs. In *18th IEEE/ACM International Conference on Mining Software Repositories, MSR 2021, Madrid, Spain, May 17-19, 2021*. IEEE, 505–509. <https://doi.org/10.1109/MSR52588.2021.00063>
- Antonio Mastropaolo, Luca Pascarella, Emanuela Guglielmi, Matteo Ciniselli, Simone Scalabrino, Rocco Oliveto, and Gabriele Bavota. 2023. On the Robustness of Code Generation Techniques: An Empirical Study on GitHub Copilot. In *45th IEEE/ACM International Conference on Software Engineering, ICSE 2023, Melbourne, Australia, May 14-20, 2023*. IEEE, 2149–2160. <https://doi.org/10.1109/ICSE48619.2023.00181>
- Antonio Mastropaolo, Simone Scalabrino, Nathan Cooper, David Nader Palacio, Denys Poshyvanyk, Rocco Oliveto, and Gabriele Bavota. 2021. Studying the usage of text-to-text transfer transformer to support code-related tasks. In *2021 IEEE/ACM 43rd International Conference on Software Engineering (ICSE)*. IEEE, 336–347.
- Alex Mathai, Shreya Khare, Srikanth Tamilselvam, and Senthil Mani. 2020. Adversarial Black-Box Attacks On Text Classifiers Using Multi-Objective Genetic Optimization Guided By Deep Networks. *CoRR* abs/2011.03901 (2020). arXiv:2011.03901 <https://arxiv.org/abs/2011.03901>
- H. Megahed. 2018. *Penetration Testing with Shellcode: Detect, exploit, and secure network-level and operating system vulnerabilities*. Packt Publishing.
- Paul Michel, Xian Li, Graham Neubig, and Juan Miguel Pino. 2019. On Evaluation of Adversarial Perturbations for Sequence-to-Sequence Models. In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, NAACL-HLT 2019, Minneapolis, MN, USA, June 2-7, 2019, Volume 1 (Long and Short Papers)*. Association for Computational Linguistics, 3103–3114. <https://doi.org/10.18653/v1/n19-1314>

- Maciej Modrzejewski, Miriam Exel, Bianka Buschbeck, Thanh-Le Ha, and Alex Waibel. 2020. Incorporating external annotation to improve named entity translation in NMT. In *Proceedings of the 22nd Annual Conference of the European Association for Machine Translation*. 45–51.
- John X Morris, Eli Lifland, Jack Lanchantin, Yangfeng Ji, and Yanjun Qi. 2020a. Reevaluating adversarial examples in natural language. *arXiv preprint arXiv:2004.14174* (2020).
- John X. Morris, Eli Lifland, Jin Yong Yoo, Jake Grigsby, Di Jin, and Yanjun Qi. 2020b. TextAttack: A Framework for Adversarial Attacks, Data Augmentation, and Adversarial Training in NLP. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing: System Demonstrations, EMNLP 2020 - Demos, Online, November 16–20, 2020*. Association for Computational Linguistics, 119–126. <https://doi.org/10.18653/v1/2020.emnlp-demos.16>
- Nikola Mrkšić, Diarmuid Ó Séaghdha, Blaise Thomson, Milica Gašić, Lina Rojas-Barahona, Pei-Hao Su, David Vandyke, Tsung-Hsien Wen, and Steve Young. 2016. Counter-fitting Word Vectors to Linguistic Constraints. In *Proceedings of HLT-NAACL*.
- Graham Neubig, Matthias Sperber, Xinyi Wang, Matthieu Felix, Austin Matthews, Sarguna Padmanabhan, Ye Qi, Devendra Singh Sachan, Philip Arthur, Pierre Godard, John Hewitt, Rachid Riad, and Liming Wang. 2018. XNMT: The eXtensible Neural Machine Translation Toolkit. In *Conference of the Association for Machine Translation in the Americas (AMTA) Open Source Software Showcase*. Boston, USA. <https://arxiv.org/pdf/1803.00188.pdf>
- Xuan-Phi Nguyen, Shafiq Joty, Kui Wu, and Ai Ti Aw. 2020. Data diversification: A simple strategy for neural machine translation. *Advances in Neural Information Processing Systems* 33 (2020), 10018–10029.
- Yoann Padioleau, Lin Tan, and Yuanyuan Zhou. 2009. Listening to programmers—taxonomies and characteristics of comments in operating system code. In *2009 IEEE 31st International Conference on Software Engineering*. IEEE, 331–341.
- Sebastiano Panichella, Jairo Aponte, Massimiliano Di Penta, Andrian Marcus, and Gerardo Canfora. 2012. Mining source code descriptions from developer communications. In *2012 20th IEEE International Conference on Program Comprehension (ICPC)*. IEEE, 63–72.
- Python. 2023. tokenize. <https://docs.python.org/3/library/tokenize.html>
- Colin Raffel, Noam Shazeer, Adam Roberts, Katherine Lee, Sharan Narang, Michael Matena, Yanqi Zhou, Wei Li, and Peter J. Liu. 2020. Exploring the Limits of Transfer Learning with a Unified Text-to-Text Transformer. *J. Mach. Learn. Res.* 21 (2020), 140:1–140:67. <http://jmlr.org/papers/v21/20-074.html>
- Pooja Rani, Suada Abukar, Nataliia Stulova, Alexandre Bergel, and Oscar Nierstrasz. 2021a. Do comments follow commenting conventions? a case study in java and python. In *2021 IEEE 21st International Working Conference on Source Code Analysis and Manipulation (SCAM)*. IEEE, 165–169.
- Pooja Rani, Mathias Birrer, Sebastiano Panichella, Mohammad Ghafari, and Oscar Nierstrasz. 2021b. What do developers discuss about code comments?. In *2021 IEEE 21st International Working Conference on Source Code Analysis and Manipulation (SCAM)*. IEEE, 153–164.
- Nils Reimers. 2022. SentenceTransformers Documentation. <https://www.sbert.net/>.
- Nils Reimers and Iryna Gurevych. 2019. Sentence-BERT: Sentence Embeddings using Siamese BERT-Networks. In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing, EMNLP-IJCNLP 2019, Hong Kong, China, November 3-7, 2019*, Kentaro Inui, Jing Jiang, Vincent Ng, and Xiaojun Wan (Eds.). Association for Computational Linguistics, 3980–3990. <https://doi.org/10.18653/v1/D19-1410>
- Nils Reimers and Iryna Gurevych. 2020. Making Monolingual Sentence Embeddings Multilingual using Knowledge Distillation. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing, EMNLP 2020, Online, November 16–20, 2020*, Bonnie Webber, Trevor Cohn, Yulan He, and Yang Liu (Eds.). Association for Computational Linguistics, 4512–4525. <https://doi.org/10.18653/v1/2020.emnlp-main.365>
- Shell-storm. 2022. Shellcodes database for study cases. <http://shell-storm.org/shellcode/>.
- C. Silva and B. Ribeiro. 2003. The importance of stop word removal on recall values in text categorization. In *Proceedings of the International Joint Conference on Neural Networks, 2003.*, Vol. 3. 1661–1666 vol.3. <https://doi.org/10.1109/IJCNN.2003.1223656>
- spaCy. 2023. Industrial-Strength Natural Language Processing. <https://spacy.io/>
- Daniela Steidl, Benjamin Hummel, and Elmar Juergens. 2013. Quality analysis of source code comments. In *2013 21st international conference on program comprehension (icpc)*. Ieee, 83–92.
- Michele Tufano, Jevgenija Pantiuchina, Cody Watson, Gabriele Bavota, and Denys Poshyvanyk. 2019. On learning meaningful code changes via neural machine translation. In *2019 IEEE/ACM 41st International Conference on Software Engineering (ICSE)*. IEEE, 25–36.
- Luther Tychonievich. 2014. Parts of Programming Speech. <https://luthert.web.illinois.edu/blog/posts/519.html>.
- Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. 2017. Attention is all you need. In *Advances in neural information processing systems*. 5998–6008.
- Xinyi Wang, Hieu Pham, Zihang Dai, and Graham Neubig. 2018. SwitchOut: an Efficient Data Augmentation Algorithm for Neural Machine Translation. In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*. 856–861.

- Yue Wang, Hung Le, Akhilesh Deepak Gotmare, Nghi DQ Bui, Junnan Li, and Steven CH Hoi. 2023. Codet5+: Open code large language models for code understanding and generation. *arXiv preprint arXiv:2305.07922* (2023).
- Zonghua Wang. 2013. Study on the importance of cultural context analysis in machine translation. In *Proceedings of The Eighth International Conference on Bio-Inspired Computing: Theories and Applications (BIC-TA)*, 2013. Springer, 29–35.
- Jason Wei and Kai Zou. 2019. EDA: Easy Data Augmentation Techniques for Boosting Performance on Text Classification Tasks. In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*. 6382–6388.
- Winston Wu, Dustin Arendt, and Svitlana Volkova. 2020. Evaluating Neural Machine Comprehension Model Robustness to Noisy Inputs and Adversarial Attacks. *CoRR abs/2005.00190* (2020). arXiv:2005.00190 <https://arxiv.org/abs/2005.00190>
- Xueqing Wu, Yingce Xia, Jinhua Zhu, Lijun Wu, Shufang Xie, and Tao Qin. 2022. A study of BERT for context-aware neural machine translation. *Machine Learning* 111, 3 (2022), 917–935.
- Guang Yang, Xiang Chen, Yanlin Zhou, and Chi Yu. 2022a. Dualsc: Automatic generation and summarization of shellcode via transformer and dual learning. In *2022 IEEE International Conference on Software Analysis, Evolution and Reengineering (SANER)*. IEEE, 361–372.
- Guang Yang, Yu Zhou, Xiang Chen, Xiangyu Zhang, Tingting Han, and Taolue Chen. 2023. ExploitGen: Template-augmented exploit code generation based on CodeBERT. *Journal of Systems and Software* 197 (2023), 111577.
- Zhou Yang, Jieke Shi, Junda He, and David Lo. 2022b. Natural attack for pre-trained models of code. In *Proceedings of the 44th International Conference on Software Engineering*. 1482–1493.
- Noam Yefet, Uri Alon, and Eran Yahav. 2020. Adversarial examples for models of code. *Proc. ACM Program. Lang.* 4, OOPSLA (2020), 162:1–162:30. <https://doi.org/10.1145/3428230>
- Jin Yong Yoo and Yanjun Qi. 2021. Towards Improving Adversarial Training of NLP Models. In *Findings of the Association for Computational Linguistics: EMNLP 2021*. Association for Computational Linguistics, Punta Cana, Dominican Republic, 945–956. <https://doi.org/10.18653/v1/2021.findings-emnlp.81>
- Shiwen Yu, Ting Wang, and Ji Wang. 2022. Data augmentation by program transformation. *Journal of Systems and Software* 190 (2022), 111304.
- Yu Zhou, Xiaoqing Zhang, Juanjuan Shen, Tingting Han, Taolue Chen, and Harald C. Gall. 2022. Adversarial Robustness of Deep Code Comment Generation. *ACM Trans. Softw. Eng. Methodol.* 31, 4 (2022), 60:1–60:30. <https://doi.org/10.1145/3501256>
- R. Zhu and C. Zhang. 2023. How Robust Is a Large Pre-trained Language Model for Code Generation? A Case on Attacking GPT2. In *2023 IEEE International Conference on Software Analysis, Evolution and Reengineering (SANER)*. IEEE Computer Society, Los Alamitos, CA, USA, 708–712. <https://doi.org/10.1109/SANER56733.2023.00076>
- Terry Yue Zhuo, Zhuang Li, Yujin Huang, Fatemeh Shiri, Weiqing Wang, Gholamreza Haffari, and Yuan-Fang Li. 2023. On Robustness of Prompt-based Semantic Parsing with Large Pre-trained Language Model: An Empirical Study on Codex. In *Proceedings of the 17th Conference of the European Chapter of the Association for Computational Linguistics*. Association for Computational Linguistics, Dubrovnik, Croatia, 1090–1102. <https://doi.org/10.18653/v1/2023.eacl-main.77>