

DECIDER: A Rule-Controllable Decoding Strategy for Language Generation by Imitating Dual-System Cognitive Theory

Chen Xu , Tian Lan , Changlong Yu , Wei Wang , Jun Gao , Yu Ji ,
Qunxi Dong , Kun Qian , Senior Member, IEEE, Piji Li , Wei Bi , and Bin Hu , Fellow, IEEE

Abstract—Lexicon-based constrained decoding approaches aim to control the meaning or style of the generated text through certain target concepts. Existing approaches over-focus the targets themselves, leading to a lack of high-level reasoning about how to achieve them. However, human usually tackles tasks by following certain rules that not only focuses on the targets but also on semantically relevant concepts that induce the occurrence of targets. In this work, we present DECIDER, a rule-controllable decoding strategy for constrained language generation inspired by dual-system cognitive theory. Specifically, in DECIDER, a pre-trained language model (PLM) is equipped with a logic reasoner that takes high-level rules as input. Then, the DECIDER allows rule signals to flow into the PLM at each decoding step. Extensive experimental results demonstrate that DECIDER can effectively follow given rules to guide generation direction toward the targets in a more human-like manner.

Index Terms—Controllable Text Generation, First Order Logic, Knowledge Graph, Knowledge Enhanced Generation.

1 INTRODUCTION

CONTROLLABLE natural language generation [1]–[3] aims to generate natural sentences that satisfy specific conditions, such as sentiment [4], [5], topic [6]–[10] and keywords [11]–[13]. In this work, we mainly focus on the latter, i.e., keyword-controlled generation, where language generation is *lexically* or *semantically* constrained by certain target keywords. These keywords can be used to control the meaning or style of the generated text. For example, as the representative of the lexically-constrained task, CommonGen [11] requires the model to generate a sentence that *exactly covers all* the target keywords. For a simple instance, given a concept set {enjoy, classroom, students}, a plausible answer is “The students enjoy learning in the classroom”. Besides, personalized response generation (PersonaChat) [14], a semantically-constrained task, needs the model to generate a reply that is *semantically consistent* with certain keywords in a given persona description. For instance, when asked, “Hi, what are you doing?”, the one with the target persona “I have pets” might answer, “I just got home from walking my dog.”

Recent research in this field can be divided into two categories. The first category involves fine-tuning a vanilla generative model [11], or designing more sophisticated model structures [15]–[19] and generation processes [20]–[23] that incorporate task-related prior knowledge. However, these methods often need to be fine-tuned or re-trained on large data due to the domain adaptation, or their customized

model structure and generation process. With the popularity of pre-trained language models (PLMs), researchers are working on developing decoding methods that directly guide a pre-trained base model toward target keywords while keeping the text quality as much as possible without training [2], [24]–[28]. Specifically, the representatives of this line mainly aim to shift the next word probability distribution toward target keywords [2], [27] or topping up more-target-keywords-contained candidate sequences during generation [28].

These decoding methods have made significant progress in balancing text quality and target satisfaction at inference time. However, due to a lack of the plan towards the goal, existing works usually generate continuations by *greedily* selecting the target as soon as possible while losing *overall planning*, *commonsense reasoning*, and the *controllability of the process* to complete the specific task.

For example in CommonGen, the famous decoding method NEUROLOGIC [28] that uses {bike, ride, sidewalk, wheel} as constraints writes the sentence “A woman rides a wheeled bike on a sidewalk”. It can be observed that greedily focusing on the targets contributes to quick task satisfaction, however, at the cost of violating an important human commonsense: *we rarely point out the commonsense that we all know such as “wheeled bike”*. In contrast, when we tackle this task, we may follow an implicit rule that not only focuses on the targets but also on the related concepts that contribute to the construction of a more commonsense and rich scenario [18] such as “A man was hit by the wheel of a car when he was riding a bike on the sidewalk, police said”.

Similarly, a recent study [21] found that even the most competitive personalized models often respond *self-centeredly*: they tend to copy the keywords in the target

Chen Xu, Tian Lan, Yu Ji, Qunxi Dong, Kun Qian, Bin Hu (corresponding author) are with Beijing Institute of Technology, Beijing, China (e-mail: chenxu05037@bit.edu.cn). Piji Li is with Nanjing University of Aeronautics and Astronautics, Nanjing, China. This work has been submitted to the IEEE for possible publication. Copyright may be transferred without notice, after which this version may no longer be accessible.

persona by all means to pull the conversation to their own interests, at the cost of user experience and model interactivity. In contrast, we, as equally personalized individuals, may follow an implicit rule in daily conversation which finds the common interests: we tend to *selectively* “copy” keywords that are relevant to both parties to construct the response. Just as a computer science student would not chat with a music major about technical details, a better option is to discuss the collaboration in AI-assisted music creation.

Therefore, these prompt us to think about a new possibility in controllable text generation: *Can we control pre-trained generative models by such rules of our general plan, strategy, or experience about how to approach the target through relevant words rather than the target itself greedily?* If possible, the decoded text will be able to not only hit the targets but also in our customized manners. Surprisingly, we notice that *Dual Processing Theory* [29], [30] could be used to explain the existing constrained decoding works. *Dual Processing Theory* is a popular theory in cognitive science (Figure 1), which has proven that human decision-making is made through the interplay between an intuitive and unconscious System 1 (S1) and an logical and controllable System 2 (S2) [31]. Imagine that most of the time when we speak, we do not have to think about what the next word is because our brain can *intuitively* come up with the next one (as S1). At the same time, our brain also has the ability to *logically* pick words that fit our high-level plan or strategy for the current task (as S2). Through the *interplay* of two systems, the final content of our speech is formed.

In the above analogy, the PLM, which produces the probability distribution for the next fluent word, actually plays the role of S1. Existing decoding methods can be seen as naive implementations for the S2 component by simply encouraging the probability of the concrete target words, leading to a lack of high-level reasoning. Besides, it is challenging to explicitly model the interplay between the S1 system (PLM) and the high-level reasoning of the S2 system. To address these problems, our proposed method makes two important improvements. Firstly, the well-designed high-level logic reasoner is introduced to implement the S2 component, which is programmable and customized for different tasks. Secondly, the interplay between two systems is explicitly modeled to imitate the decision-making process in dual-system theory.

For the first improvement, we implement S2 component by *First-Order Logic* (FOL), also known as predicate logic, which is programmable. FOL allows us to express high-level human cognition by logically connecting predicates [32], a function that takes variables provided by PLM as input and returns a truth value about whether a statement holds. For a simple example here, in order to capture the previously mentioned strategy in PersonaChat: “finding the common interests”, we may define a predicate as the rule $R(x) := \text{Self}(x) \wedge \text{User}(x)$ where x is a word and $\wedge$ is the logical conjunction. The $\text{Self}(x)$ and $\text{User}(x)$ are sub-predicates stating that x is a related word to the model Self persona and to the User persona shown in dialogue history, respectively. $R(x)$ describes a high-level rule through the variable x . Because its final truth value can only be evaluated when the x is grounded to a specific word.

For the second improvement, we apply the rule $R(x)$

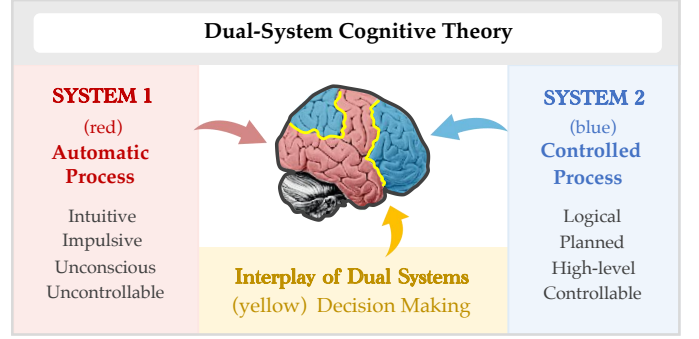


Fig. 1: In dual-system theory, individuals have two different systems for their decision-making processes. We use the same colors to depict our framework and modules in Fig. 2 and Fig. 3 to map how our method imitates these parts.

for the vocabulary to produce a vector of truth values. This *logic vector* with the same dimension can be seen as the word choices from the logical S2. Then the final decision-making process can be modeled as *using a logic vector to shift the probability distribution towards the words that satisfy the rule*.

Taking all of this into account, this paper proposes a rule-controllable decoding framework DECIDER that consists of three modules: 1) a base PLM as S1 to generate fluent text; 2) a *logical reasoner* as S2 to express and evaluate our high-level rules; and 3) a *decision function* to merge the decisions from two systems. Figure 2 gives a simple example of how these modules collaborate to predict the next word for different tasks. Basically, the rules in our framework can be used to shift any probability distribution, not only the one for the next prediction in Figure 2 but also the attention distribution over previous words. Perturbing attention distribution has been shown to also lead to performance changes [2], [33], [34]. Therefore, the idea behind DECIDER is that the PLM, though a black box, will generate some meaningful and understandable distributions over words, such as attention and prediction; we just view these parts as opportunities for communicating with human logic rules to change its “intuitive” behaviours.

DECIDER is a general rule-controllable framework that can be applied to a variety of tasks. Because during generation, the logical reasoner just calls predicates to calculate the logical vector, delegating how to define them to the users. In experiments, we apply DECIDER for lexically- and semantically-constrained tasks, leaving the exploration of its other use cases for future work. For each task above, we first design predicates to describe the rule. Then, DECIDER is compared with other competitive decoding methods by guiding the same widely-used PLM in the task. Finally, we study the impact of the rule on the final generation.

In summary, our contributions are shown as follows:

- We introduce a rule-controlled decoding strategy DECIDER for language generation. Instead of encouraging the words that are targets, our method encourages the words that meet certain rules. This allows us to logically program and inject our high-level thinking process about how to approach the target instead of the target itself.
- Based on the dual-system thinking theory, we built the DECIDER as a two-system structure, where the PLM is

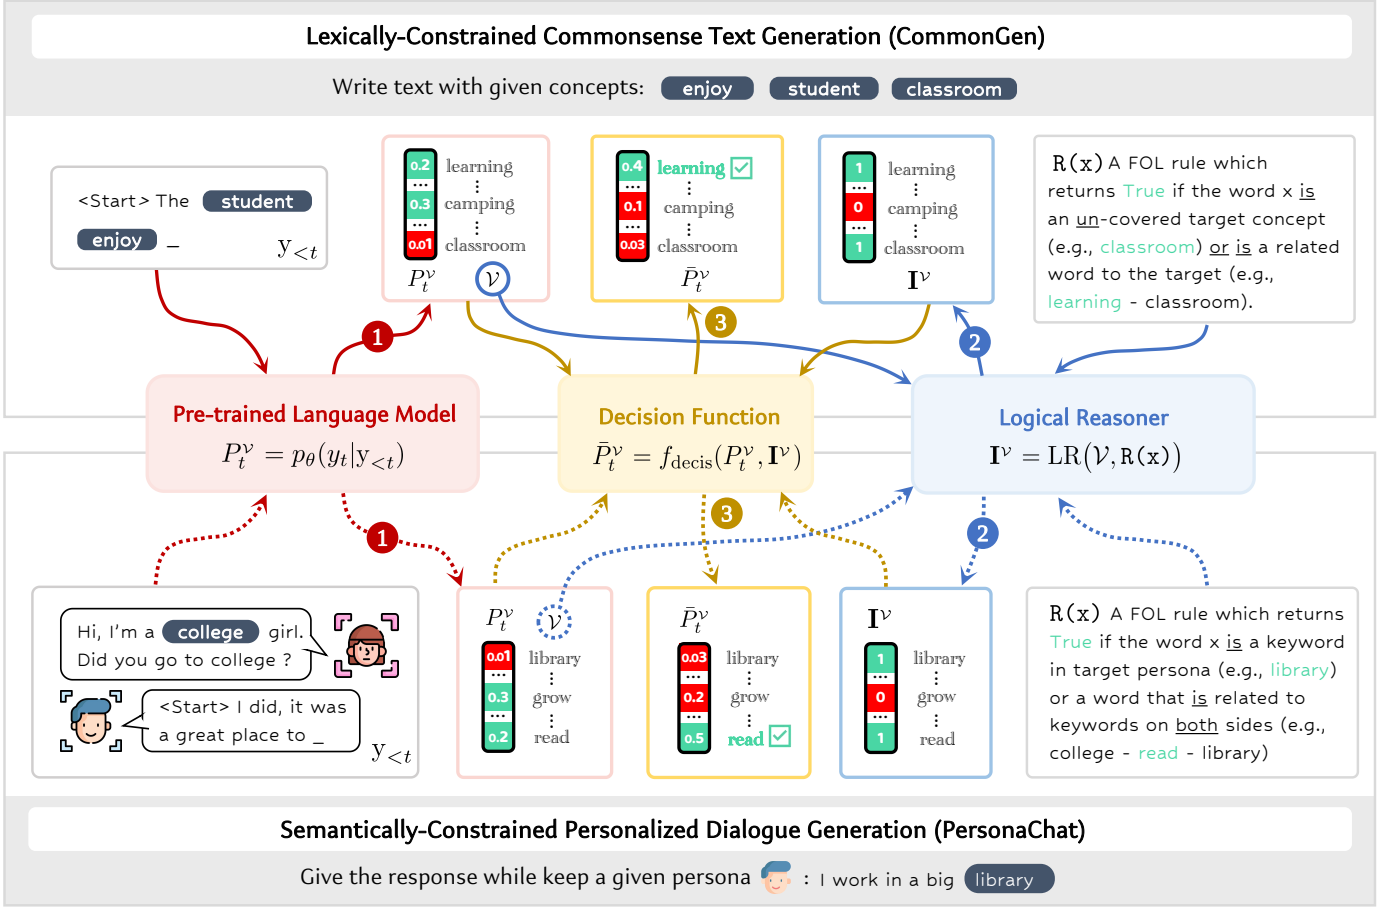


Fig. 2: Applying DECIDER for CommonGen (top solid arrows) and PersonaChat (bottom dashed arrows) with different rules. In these two simple examples, **classroom** (top) and **library** (bottom) are selected by the logical reasoner because they meet the rule as the target words. However, they are suppressed by the PLM because they violate the intuition of human fluent speaking. In contrast, **camping** and **grow** are good options for the PLM, but bad ones for the logical reasoner. Because their appearance may cause the generation to deviate from the target in the future (e.g., we may not go **camping** in the **classroom**). Through the interplay of two systems, DECIDER will prefer the fluent words that also meet our rules.

equipped with a logic reasoner designed for parsing and evaluating our FOL rules. In addition, a decision function is proposed to explicitly model the interplay between S1 and S2, which enables the logic signals to flow into the PLM at each decoding step, steering the generation without any training.

- DECIDER is a general framework that allows users to program any rules according to different tasks. Both quantitative and qualitative results on CommonGen and PersonaChat demonstrate that DECIDER can follow our rules to generate higher-quality and target-meeting text.

2 METHODOLOGY

2.1 Overview

DECIDER is a dual-system inspired decoding framework that includes a base PLM for text generation, a logical reasoner for rule interpretation, and a decision function to explicitly model the interplay between logical reasoner and PLM. At each decoding time step t , DECIDER models the next-word distribution $p_t(y_t | y_{<t}, R(x))$ given both previous words $y_{<t}$ and a FOL rule $R(x)$. As is shown in Figure 2, this process can be viewed as three steps :

- ① given previous words $y_{<t}$, the PLM first produces a probability distribution P_t^v over vocabulary $\mathcal{V}$ for the next word prediction (red arrow);
- ② then, the logical reasoner applies $R(x)$ to all words in the vocabulary to produce a logical vector I^v that contains truth values (blue arrow).
- ③ finally, the decision function $f_{\text{decis}}(P_t^v, I^v)$ combines results from both systems by shifting the distribution toward words with corresponding truth values in I^v which equal to 1 (yellow arrow). The final $\bar{P}_t^v$ will replace the original P_t^v , steering the direction of generation.

In the sub-sections below, we first begin with logical reasoner in Section 2.2 and decision function in Section 2.3. After demonstrating all the modules, we formulate the entire decoding process of DECIDER in Section 2.4.

2.2 Logical Reasoner

Fig. 3 gives an overview of logical reasoning with the same example in CommonGen. At each decoding step, the logical reasoner aims to produce a logic vector I^v over a vocabulary. Each element in I^v is a truth value about whether the corresponding word meets the user-defined rule $R(x)$. The logical reasoner uses a *rule parser* and a *rule prover* for

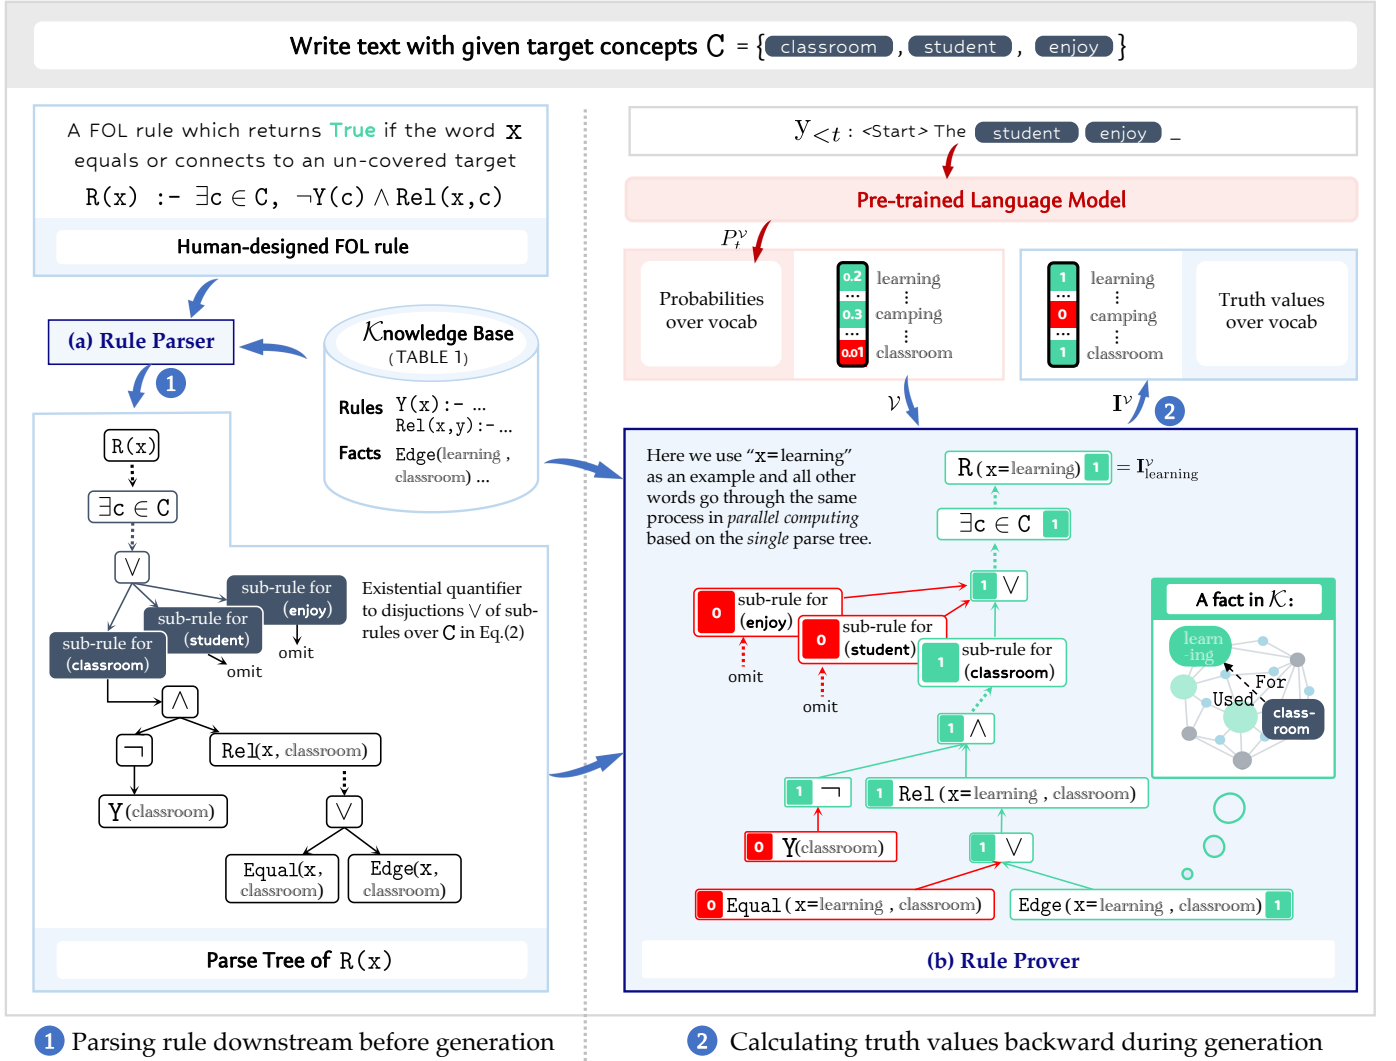


Fig. 3: The logical reasoner aims to produce a logic vector over a vocabulary given a user-defined FOL rule. It has a (a) parser to construct a parse tree and a (b) prover to prove whether words meet the rule based on the tree. In this example, though the *learning* at the lower right corner is not a target (*Equal*=0), it is semantically relevant to a target *classroom* since there is an edge typed “used-for” between them in the knowledge graph ConceptNet (*Edge*=1). Hence, the logic disjunction over them plays the role of selecting not only the targets but also the words that contribute to the targets. These words would have been ignored based on the past alone but incorporate the probability of task completion in the future.

achieving the above process: ① Before generation, the rule parser first turns the top rule into a parse tree downstream according to the knowledge base $\mathcal{K}$ from the top one all the way to the atomic rules. ② At each decoding step during generation, the rule prover will traverse the parse tree backward, evaluating the logic vector by grounding the rules to the facts (e.g., $x=\text{learning}$). The truth values for all words in the vocabulary are computed in a parallel way.

In this section, we first introduce our knowledge base $\mathcal{K}$ which includes all rules, facts, logic connectives, and quantifiers used in this paper (§ 2.2.1). Then, we demonstrate how to turn predicates into their vector-version implementation (§ 2.2.2). This is necessary for the proving process because the vocabulary is usually very large and all the words in it need to be calculated in parallel. Lastly, we show how parsing and proving steps are used to obtain the final logic vector during generation (§ 2.2.3).

2.2.1 First-Order Logic and Rule Knowledge Base

Rules and Facts. FOL models the world through 1) objects, such as words in this paper, and 2) relations between objects, such as “two words are relevant”. Such a relation is represented by *predicate*, a function that maps its arguments to true or false. In this paper, all predicates are defined and stored in the knowledge base $\mathcal{K}$ in Table 1. The predicates can be further divided into *rules* and *facts*. The rule is denoted with $\text{Head}:-\text{Body}$ that reads *if* the Body holds *then* the Head holds, where the Head is a predicate, the Body is multiple sub-predicates with *logical connectives* and *quantifiers*, and $:-$ is logical implication notation. A fact is a rule whose body always holds and is indicated by Head, which is equivalent to $\text{Head}:-\text{true}$. In Table 1, rows 1-6 are rules and 7-8 are facts.

Logic Connectives. In order to consider both hard and soft logic [35] which allows continuous predicates whose output truth values ranging from $[0, 1]$ instead of $\{0, 1\}$. Therefore, the

TABLE 1: The definition and descriptions of rules and facts in our knowledge base $\mathcal{K}$

Type	Definition	Description
Rules for Common-Gen	1: $R(x) :- \exists c \in C, \neg Y(c) \wedge \text{Rel}(x, c)$	The word x satisfy the rule if x is related to an un-covered target concept.
	2: $\text{Rel}(x, y) :- \text{Edge}(x, y) \vee \text{Eq1}(x, y)$	Words x and y are related if they are equal or there is an edge between them in a given knowledge graph.
	3: $Y(x) :- \exists y \in y_{<t}, \text{Eq1}(x, y)$	The word x has been covered in the generation $Y_{<t}$ so far if there is a previous word y equals to x .
Rules for Persona-Chat	4: $R(x) :- \text{Persona}(x) \vee \text{Common}(x)$	The word x satisfy the rule if x is a persona keyword or the one related to the common interests of both sides.
	5: $\text{Pers}(x) :- \exists p \in P, \text{Eq1}(x, p)$	The word x is a persona keyword if there is a keyword p in the given persona description equals to x .
	6: $\text{Common}(x) :- \left\{ \exists p \in P, \text{Edge}(x, p) \right\} \wedge \left\{ \exists u \in U, \text{Edge}(x, u) \right\}$	The word x is related to the common interests if x is a bridging word that connects to both sides, i.e., it connects to both a word in self-persona P and a word in the user input utterance U .
Facts across tasks	7: $\left\{ \text{Equal}(w_i, w_j) w_i w_j \in s, s \in S \right\}$	Words with same stem are seen as equaled, e.g., (ran, run, running runs). S denotes word groups with different stems.
	8: $\left\{ \text{Edge}(v_i, v_j) \text{Edge}(v_i, v_j) \in \mathcal{E}, v_i v_j \in \mathcal{V} \right\}$ or its soft version: $\left\{ W(v_i, v_j) W(v_i, v_j) \in \mathcal{W}, v_i v_j \in \mathcal{V} \right\}$	The facts are from the knowledge graph ConceptNet $\mathcal{G} = (\mathcal{V}, \mathcal{E}, \mathcal{W})$ where $\mathcal{V}$ denotes its concept vertices, edges $\mathcal{E}$ denote the relevances between concepts, and $\mathcal{W}$ are the weights of edges indicating the intensity of the relevances. We consider the $\text{Edge}(v_i, v_j)$ as the facts which states that there is relevance between two concepts, such as $\text{Edge}(\text{rain}, \text{umbrella})$. We also provide a soft-version $W(v_i, v_j)$ which is the weighted of Edge whose truth value ranging from $(0, 1)$ instead of $\{0, 1\}$.

logic connectives are reformulated as the following equations:

$$\begin{aligned}
P_1 \vee P_2 &= \min(1, P_1 + P_2) \\
P_1 \wedge P_2 &= (P_1 + P_2) / 2 \\
P_1 \& P_2 &= \max(P_1 + P_2 - 1, 0) \\
\neg P_1 &= 1 - P_1 \\
P_1 &\equiv P_2
\end{aligned} \tag{1}$$

where P_i is a predicate, $\&$ and $\wedge$ are two different approximations to logical conjunction [36]. Specifically, $\&$ is a more-hard selection operator (e.g., $P_1 \& P_2 = P_2$ when $P_1 = 1$, and $P_1 \& P_2 = 0$ when $P_1 = 0$). $\wedge$ is an averaging operator. $\vee$ is the logical disjunction; $\neg$ is the negation operator; $\equiv$ is the logic equivalence indicating that the predicates P_1 and P_2 have the same truth value.

Quantifiers. In certain scenarios, we need quantifiers to formally express the meaning of “for all” and “there is”. For instance, row 1 in Table 1 states that if *there is* an un-covered target concept c that is relevant to the word x , then the x is the one that meets our expectations. There are two types of quantifiers: existential quantifier $\exists c \in C, P(C)$ that reads “there is a $c \in C$ such that $P(c)$ ” and universal Quantifier $\forall c \in C, P(C)$ that reads “for every c in $C, P(c)$ ”. To automatically process and calculate quantifiers, we transform existential ($\exists$) and universal ($\forall$) quantifiers equivalently as disjunction ($\vee$) and conjunction

($\wedge$) connectives by iterating the domain C , respectively:

$$\begin{aligned}
\exists c \in C, P(c) &\equiv P(c_1) \vee P(c_2) \vee \dots \vee P(c_{|C|}) \\
\forall c \in C, P(c) &\equiv P(c_1) \wedge P(c_2) \wedge \dots \wedge P(c_{|C|})
\end{aligned} \tag{2}$$

where both sides have identical truth-value semantics, P is a predicate, and C is the domain of c (here we use the letter C just to align with the example; it can be any letter). For example in Fig. 3, the above equation is used to construct the parse tree.

2.2.2 Vector Version of First-Order Logic

According to the rules and facts defined in the knowledge base $\mathcal{K}$, traditional tools such as Prolog [37] can be used to logically “prove” whether a word meets a FOL rule through a recursive backward chaining algorithm. Theoretically, it can be used to produce the logic vector $\mathbf{I}^v$ over a vocabulary $\mathcal{V}$ by iterating the above process on every word. However, in our scenario, the vocabulary for the next prediction is very large, e.g., the vocabulary of GPTs can be up to tens of thousands of words. Therefore, this motivates us to calculate logic over the entire vocabulary in parallel instead of word by word.

In order to achieve this, we extend the predicate $P(x)$ to its vector version implementation $P(\mathbf{X})$, where its variable $\mathbf{X}$ is a bag-of-word vector over the vocabulary instead of a single word x . Moreover, $P(\mathbf{X})$ returns a logic vector of all truth values for $\mathcal{V}$ instead of a single truth value for x . This logic vector can be viewed as a new bag of words that is fed into other predicates as input. Therefore, the job of the logic reasoner

can be viewed as using vector-version predicates to filter the bag of all words $[1]^\mathcal{V}$ into the bag of words that meet our rules, i.e., the final logic vector $\mathbf{I}^\mathcal{V}$. In terms of the implementation of predicates, we turn all for loops into vector and matrix calculations. Here we use the implementation of $\text{Edge}(\mathbf{x}, p)$ at row 6 in Tab. 1 as an example. Its vector implementation is defined as

$$\text{Edge}(\mathbf{X}, p) = \mathbf{X}_{|\mathcal{V}| \times 1} \times \mathbf{E}_{|\mathcal{V}| \times |\mathcal{V}|}[:, \text{index_of}(p)] \quad (3)$$

where $\mathbf{E}$ is an *adjacency matrix* with a dimension of $|\mathcal{V}| \times |\mathcal{V}|$ (in practice it is supported by Pytorch sparsity matrix). Each element in the matrix represents whether there is an edge between the row and column words. The matrix is pre-processed (§ 5.1) from ConceptNet [38]. In the above equation, the element-multiplication ($\times$) between $\mathbf{X}$ and one column of $\mathbf{E}$ indexed by p aims to obtain a logic vector of whether the bag of words in $\mathbf{X}$ connects to the keyword p in the persona profile. Then $\exists p \in \mathcal{P}$, $\text{Edge}(\mathbf{X}, p)$ can be transformed into the logic disjunctions (Eq. 2):

$$\text{Edge}(\mathbf{X}, p_1) \vee \text{Edge}(\mathbf{X}, p_2) \vee \dots \vee \text{Edge}(\mathbf{X}, p_{|\mathcal{P}|}) \quad (4)$$

where all connectives, such as $\vee$, are implemented by Pytorch operators over vectors according to the Equation 1.

2.2.3 Rule Parser and Rule Prover

The logical reasoner aims to produce a logic vector of truth values about whether the words in a vocabulary satisfy a user-defined FOL rule. As is shown in Figure 3, such a process can be further divided into two steps.

Parsing Step. Before generation, the rule parser first turns the rule into a parse tree, which is denoted by $\mathcal{T}$. According to the knowledge base, the tree is constructed from the top rule $R(\mathbf{x})$ as the root to the atomic rules as the leaves, such as `Equal` and `Edge`. Our FOL parser is built on a general syntax open-source parser framework. The quantifier node in the tree is then changed into conjunctions or disjunctions of sub-trees based on Eq. 2. In addition, each node of the tree is linked to a function that is used to evaluate the truth value of this node (described in Sec. 2.2.2). These functions are called in the proving step.

Proving Step. At each time step during generation, the rule prover will traverse the parse tree $\mathcal{T}$ backward, computing the truth values for the entire vocabulary $\mathcal{V}$ at each node. The truth values of all leaf nodes are evaluated by calling their predicate functions, and the truth values of non-leaf nodes are computed by logical connectives (solid arrows) or kept by logical equivalents (dashed arrows), as shown in Fig. 3. Note that in the example, the proving step only shows the calculation on a single word, such as `Edge(x=learning, classroom)`. However, the prover actually does it in parallel by calculating the leaf `Edge( $\mathbf{X}$ , classroom)` whose $\mathbf{X}$ is initialized by $[1]_{|\mathcal{V}| \times 1}$, a bag of all words over $\mathcal{V}$. This vector-version predicate will return a logic vector over the entire vocabulary (described in Sec. 2.2.2). The above rule-proving process is concluded in Algorithm 1. Lastly, the logic vector $\mathbf{I}^\mathcal{V}$ obtained from the root node $\mathcal{T}$ is the final output of the logical reasoner.

2.3 Decision Function

From the above section, we can see that for any distribution over a vocabulary $P^\mathcal{V}$, the logical reasoner can produce a logical vector over the same vocabulary $\mathbf{I}^\mathcal{V}$ about whether each word in it meets a user-defined rule:

$$\mathbf{I}^\mathcal{V} = \text{LR}(\mathcal{V}, R(\mathbf{x})) \quad (5)$$

Then the decision function f_{decis} is proposed to use a logic vector to shift a probability distribution towards the words whose truth value equals one:

$$\begin{aligned} \bar{P}^\mathcal{V} &= f_{\text{decis}}(P^\mathcal{V}, \mathbf{I}^\mathcal{V}; \alpha) \\ &= \text{softmax}(\text{invsoft}(P^\mathcal{V}) + \mathbf{I}^\mathcal{V} \times (\alpha P^\mathcal{V})) \end{aligned} \quad (6)$$

Algorithm 1: Recursive Proving

Data: the parse tree $\mathcal{T}$, a vocab $\mathcal{V}$, the knowledge base $\mathcal{K}$
Result: logic vector $\mathbf{I}^\mathcal{V}$

```

1 Function ProvingTraversal(root, vocab, knowledge base):
2    $\mathbf{I}^\mathcal{V} \leftarrow \text{evaluate}(\text{root}, \text{vocab}, \text{knowledge base});$ 
3   return  $\mathbf{I}^\mathcal{V}$ ;
4 Function evaluate(node, vocab, knowledge base):
5   if node is the leaf node then
6      $\text{truth\_values} \leftarrow$  Evaluating the truth values over  $\mathcal{V}$  by
        calling rules, facts and logical operators which are
        defined in  $\mathcal{K}$ ;
7     return  $\text{truth\_values}$ ;
8   end
9   else
10     $\text{truth\_values\_list} \leftarrow$  empty list;
11    for each child in children of node do
12       $\text{truth\_values} \leftarrow \text{evaluate}(\text{child}, \mathcal{V}, \mathcal{K});$ 
13       $\text{truth\_values\_list.append}(\text{truth\_values});$ 
14    end
15     $\text{truth\_values} \leftarrow \Delta^*(\text{truth\_values\_list});$ 
16    return  $\text{truth\_values}$  over  $\mathcal{V}$ ;
17  end

```

* The Δ represents the logical operator such as $\vee$, and $\wedge$.

where $\text{invsoft}(P^\mathcal{V})$ (inverse softmax) stores the pre-activated scores, and α is a positive parameter for the intensity of rule control. The intuition is that we want to 1) increase the probabilities of words whose corresponding truth values equal one by boosting their pre-activated scores before softmax, and 2) balance the rule control and text quality: the positive original probability $P^\mathcal{V}$ automatically decides the magnitude of the boost, which avoids making a big adjustment to an originally small probability even if the word meets the rule. Therefore, only the words that are not bad choices $P^\mathcal{V}$ and also meet the rule can gain a good boost from this function. From this perspective, the decision function plays the role of combining both decisions from neural and logic systems. The resultant $\bar{P}^\mathcal{V}$ is the perturbed distribution used to substitute the original one, adjusting the “intuitive” behaviours of the PLM.

2.4 DECIDER Decoding

The idea behind DECIDER is that during generation, the PLM will produce some probability distributions, and we just see these distributions as the interface for communicating with human logic signals. In this section, we show how logical reasoner perturbs these distributions and formulate the entire decoding process. For the base PLM, we adopt the currently most commonly used structure: the pre-trained transformer decoder [39] with L transformer blocks (e.g., the GPT family [40]–[43]). At each time step t , the generation process of PLM can be viewed as understanding previous words $\mathbf{y}_{<t}$ and target words C in the attention distribution, then predicting the next word y_t in the prediction distribution. We formulate them one by one through forward propagation order.

Shifting Attention Distribution over Previous Words. At each time step t , we denote all the previous words to the current time as $\mathbf{y}_{<t}$. For a self-attention layer on certain head in transformer, we represent the key-value pairs of previous layer for the input $\mathbf{y}_{<t}$ as $\mathbf{K}_{<t} \mathbf{V}_{<t}$, then the self-attention distribution $A_{<t}$ is calculated by the product of the current query q_t with all previous keys $\mathbf{K}_{<t}$. The $A_{<t}$ will be shifted to $\bar{A}_{<t}$ when the logical vector $\mathbf{I}^{<t}$ is provided by the logical reasoner LR given a FOL rule $R(\mathbf{x})$:

$$\begin{aligned} A^{<t} &= \text{softmax} \left(\frac{q_t \cdot (\mathbf{K}_{<t})^\top}{\sqrt{d}} \right) \\ \mathbf{I}^{<t} &= \text{LR}(\mathbf{y}_{<t}, R(\mathbf{x})) \\ \bar{A}^{<t} &= f_{\text{decis}}(A^{<t}, \mathbf{I}^{<t}) \end{aligned} \quad (7)$$

TABLE 2: Performance of the different unconstrained and constrained decoding methods for the CommonGen benchmark

Decoding Method	Constrained	BLEU	ROUGE	METEOR	CIDEr	SPICE	Coverage
Top-k Sampling [44]	✗	18.73	1.62	10.25	0.54	7.65	8.3
Beam Search [11]	✗	19.56	1.54	11.22	0.87	7.21	8.2
Keyword2Text Decoding [27]	✓	16.37	33.34	23.23	10.46	21.46	84.5
PPLM Decoding [2]	✓	4.23	21.35	15.94	6.97	14.33	19.1
Constrained Beam Search [24]	✓	20.47	37.83	28.15	12.64	27.17	96.5
Grid Beam Search [25]	✓	17.86	37.04	26.53	11.44	26.16	96.3
Dynamic Beam Allocation [26]	✓	18.26	37.15	27.25	12.26	26.27	96.4
NEUROLOGIC Decoding [28]	✓	24.53	41.84	29.57	14.24	27.53	96.7
DECIDER Decoding (Ours)	✓	27.03	43.14	30.13	15.24	28.52	97.1

The perturbed $\bar{P}^{<t}$ will replace the original ones to re-assign the attentions more on the previous words that satisfy our rule.

Shifting Attention Distribution over Target Words. An additional operation to the standard self-attention layer is that we also individually feed the target words C into the PLM, to pre-produce stack of key-values $\mathbf{K}_C \mathbf{V}_C = \text{PLM}(C)$. Then the attention distribution A^C over target words is calculated by the product of the current query q_t with $\mathbf{K}_C$. Similarly, A^C will be shifted to $\bar{A}^C$ when a logical vector is provided by the LR:

$$\begin{aligned} A^C &= \text{softmax} \left(\frac{q_t \cdot (\mathbf{K}_C)^\top}{\sqrt{d}} \right) \\ \mathbf{I}^C &= \text{LR}(C, \mathbf{R}(\mathbf{x})) \\ \bar{P}^C &= f_{\text{decis}}(P^C, \mathbf{I}^C) \end{aligned} \quad (8)$$

The perturbed $\bar{P}^C$ will replace the original ones to introduce more information from the target words that satisfy our rule. Next, to combine the attentions of previous and target words, the final attention distribution of this layer is the concatenation of them: $A_{[C:<t]} = [\bar{P}^C : \bar{P}^{<t}]$. With the dot production to their values $\mathbf{V}_{[C:<t]} = [\mathbf{V}_C : \mathbf{V}_{<t}]$, the hidden state is calculated by $h_t = f(A_{[C:<t]} \cdot \mathbf{V}_{[C:<t]})$ (f contains the immediate transformer operations [39] such as residual connections, layer normalization and feed-forward network for the concise expression). Finally, h_t is used to produce the query, key and value for the next self-attention layer.

Shifting Prediction Distribution for Next Word. The probability distribution P_t for the next word is generated from the last layer hidden state h_t^L . This distribution over LM vocabulary $\mathcal{V}$ will be shifted to $\bar{P}^\mathcal{V}$ when a logical vector is provided:

$$\begin{aligned} P_t^\mathcal{V} &= \text{softmax}(W \cdot h_t^L) \\ \mathbf{I}^\mathcal{V} &= \text{LR}(\mathcal{V}, \mathbf{R}(\mathbf{x})) \\ \bar{P}_t^\mathcal{V} &= f_{\text{decis}}(P_t^\mathcal{V}, \mathbf{I}^\mathcal{V}) \end{aligned} \quad (9)$$

Finally, DECIDER uses the beam search to balance the proportion of rule-relevant words and the target words by combining the top k items from $\bar{P}_t^\mathcal{V}$ with the top $(b-k)$ items of the target words [28] in $\bar{P}_t^\mathcal{V}$, where b is beam size, $k(<b)$ is an integer.

3 EXPERIMENTS I: CONSTRAINED COMMON-SENSE GENERATION ON COMMONGEN

In the constrained commonsense generation task, the model is expected to generate a sentence that describes a common scenario using a given set of target concepts $C = \{c_1, \dots, c_n\}$. However, the challenge lies in the fact that in order to build a common scenario, the model may need to reason out relevant concepts in addition to the given ones [18]. Therefore, we first design a rule $\mathbf{R}(\mathbf{x})$ that is shown in the row 1 in Tab. 1 to control the decision-making process of DECIDER: *the model should focus on not only the un-covered targets but also the ones that have connection to them*. At each decoding step, DECIDER will inject rule

TABLE 3: Human evaluation on the CommonGen dataset

Decoding Method	Quality	Common.	Infor.	Average
Keyword2Text [27]	1.36	1.48	1.92	1.59
NEUROLOGIC [28]	2.16	2.30	1.68	2.05
DECIDER (Ours)	2.21	2.33	2.21	2.25

signals into PLM at both attention and prediction distributions according to Sec. 2.4, steering the generative direction.

3.1 Experiment Setup

Datasets. We use the test set of CommonGen for evaluation. The dataset contains 35,141 concept sets (32,651 in train, 993 in validation, and 1,497 in test) associated with 77,449 sentences. The average size of the concept sets in the test set is 4.04, and the average sentence length is 13.34 words.

Evaluation Metrics. Following CommonGen [11], we adopt widely-used metrics for text generation, which focus on (1) n-gram overlap such as BLEU [45], ROUGE [46], and METEOR [47], (2) concept-oriented metrics such as CIDEr [48] and SPICE [49], and (3) concept coverage rate [11]. For human evaluation, we sample 100 test examples with concepts and generation pairs. Three crowdsourced occupational annotators are asked to give a score $\in \{1, 2, 3\}$ for quality, commonsense, and informative. Specifically, for quality, the sentence may be: (1) neither well-formed nor fluent, (2) understandable but awkward, or (3) human-level quality; For common sense, the sentence may be (1) counter, (2) not counter, or (3) very consistent with our common sense; For informative, the sentence may 1) only focus on the given concepts, 2) be more vivid, but introduced information is not necessary for building a better scene, such as adjectives, or (3) build a more informative and commonsensible scenario contributed by the extra information.

Base Model and Baselines. We compare our method with the classical unconstrained and competitively constrained decoding strategies based on the same open-source PLM, the GPT-2-large, for text generation: Top-k sampling [44] and beam search decoding [11] is the most commonly used unconstrained decoding. For the constrained ones, PPLM [2] changes the neural hidden states (key-value pairs) with the gradients from an external bag-of-words model to increase the probability of the target words. Keyword2Text [27] directly shifts the probability distribution over the vocabulary towards the words with similar word embeddings to the target ones. Constrained Beam Search [24] is an approximate search algorithm to enforce the target concepts over the resulting output sequences with a finite-state machine; Grid Beam Search [25] (GBS) extends the beam search to incorporate the grouping method that groups together hypotheses by the number of constraints satisfied. Dynamic Beam Allocation [26] incorporates the pruning method into the GBS. NEUROLOGIC [28], as the master of this type of

method, incorporates both grouping and pruning to select the hypotheses that satisfy more target words.

3.2 Results and Analysis.

Automatic and Human Evaluation. The automatic and human evaluation results are shown in Table 2 and Table 3. We can see: (1) DECIDER outperforms all other previously constrained decoding methods with respect to all metrics, making a good trade-off between the text quality and task completion (Coverage). 2) The human evaluation results indicate that the target-related information introduced by DECIDER are essential to build a more commonsense scenario (Info, and Common.) without decreasing the quality of sentences (Quality).

Variant and Ablation Study. As shown in Table 4, we conduct a variant study for two versions of the DECIDER and an ablation study to see the influence of shifting different distributions by the rule on the performance. Some key observations are: 1) The influence of *soft* predicate logic is important. The *soft* version allows the logical reasoner to *weighted* control the semantics of generation by treating word relevance differently. 2) Cutting off the perturbation on the prediction distribution results in the most deteriorated performance, since $\bar{P}_t^V$ degrades into P_t^V (Eq. 9), it will lose the power to directly select the next words that satisfy our rules. 3) The decreases in performance for A^C (Eq. 8) and $A^{<t}$ (Eq. 7) also suggests that properly adjusting the attentions over target words and previously generated words also contribute to the final results.

Case Study. Figure 4 shows two cases compared with the NEUROLOGIC as baseline and we observe that: baseline tend to generate boring sentences mainly constrained on the given concepts while DECIDER can generate more commonsense and informative sentence benefiting the rules to focus on external related concepts. In addition, the semantic and senario behand decipted by the decider is closer to the human described ones such as a person is hit by the ball casully in Case 2.

4 EXPERIMENTS II: PERSONALIZED RESPONSE GENERATION ON PERSONACHAT

In the personalized response generation task, the model is expected to generate a response y based on a user-input utterance u . In addition, y is required to be semantically consistent with a given target persona $S = \{s_1, \dots, s_n\}$ which consists a set of sentences to describe the interests (e.g., "I like football") or occupations (e.g., "I am a teacher"). Intuitively, "copying" the keywords or concepts in the persona in response appears to produce plausible personalized responses. However, focusing too much on self persona makes the model more egocentric [21], which may violate our daily conversational scenario: When talking with a partner, we usually follow a persona selection strategy: finding the common ground to chat. Therefore, we develop a rule as is shown at the row 1 in Tab. 1: *the model should focus on not only the self persona keywords but also the words falling to the common interests of both sides, even if they do not directly appear in the target persona*. During generation, the DECIDER will inject the rule signals into PLM at both attention and prediction distributions according to Sec. 2.4, influencing the generation.

4.1 Experiment Setup.

Datasets. We conduct experiments on PersonaChat [14], where each persona is described with several profile sentences. The dataset contains 8,939/1,000 dialogues conditioned on 1,155/100 personas for the train/dev set. We report all results on the latter. Note that we also present the experimental results on the revised dataset where *the original personas are rephrased, generalized, or specialized* [14] because there is a danger that during the dataset construction, humans will unwittingly copy persona information either verbatim or with significant word

Case 1	
Concept	① bike ② ride ③ sidewalk ④ wheel
Human Reference	The man takes care not to get the wheel of his bike on the sidewalk when he rides .
NEUROLOGIC	A woman rides a wheeled bike on a sidewalk .
DECIDER (ours)	The man was hit by the wheel of a car when he was riding a bike on the sidewalk , police said.
Case 2	
Concept	① ball ② hit ③ practice ④ stand
Human Reference	During basketball practice the boy missed catching the ball and it hit a man standing at the side of the court .
NEUROLOGIC	A girl hits a ball in the stands during practice .
DECIDER (ours)	The child was standing on the practice court when he was hit by the ball .

Fig. 4: Case study for the CommonGen. Underlined words violate an important commonsense that **we rarely tell commonsense or details out unless they are special for the current scene**. Benefiting from the rule at row 1 in the Tab. 1, DECIDER has the ability to guess this special scene at human-level with the external information in purple

TABLE 4: Variant and ablation study on CommonGen. Since the edge predicate in Tab. 1 has both a soft version $\bar{W}(v_i, v_j)$ by default and a hard version $\text{Edge}(v_i, v_j)$, which results in the final DECIDER having two variants. $\leftrightarrow$ - means we ablate the influence of shifting different distributions by the rule one by one, which is achieved by setting the logical vector $\mathbf{I}$ as zeros to cut off rule signals. Hence the distributions will degrade into their original ones in turn.

Variant	ROUGE	METEOR	SPICE	Cover.
DECIDER (Hard)	38.33	27.91	26.32	88.1
DECIDER (Soft)	43.14	30.13	28.52	97.1
$\leftrightarrow$ - $\bar{A}^{<t}$ in Eq. 7	40.21	28.42	26.25	94.5
$\leftrightarrow$ - $\bar{A}^C$ in Eq. 8	38.11	27.45	24.12	89.2
$\leftrightarrow$ - $\bar{P}_t^V$ in Eq. 9	29.33	21.23	19.07	69.1

overlap. Therefore, such a revised PersonaChat makes the task more challenging because it requires the generalization ability of methods to reason out more relevant information instead of just copying the content in the persona descriptions.

Evaluation Metrics. The semantically constrained task is different from CommonGen: the gold responses not only literally copy the words in the persona but also construct the response from persona-relevant contents. Therefore, we should consider both the lexicon overlap and the semantic similarity in the metrics. Specifically, to evaluate the quality of the generated text, we measure the difference between the decoded response and the gold reference by the cumulated 2-gram BLEU [45], 4-gram NIST [50] (weighted BLEU), ROUGE-L [46], F1 score [21] (harmonic mean of precision and recall), and BERT-score [51] (semantic version of F1 computed by the DeBERTa V2 large model [52]).

For the evaluation of controllability, we designed a persona

TABLE 5: Performance of different (un)constrained decoding methods on both original and revised PersonaChat datasets

Decode Method	Dataset	Constr.	BLEU	NIST	ROUGE	F1	BERT	Persona C ²
Beam Search Decoding [11]	Original	✗	15.78	0.71	11.64	7.89	47.22	0.32
NEUROLOGIC Decoding [28]		✓	15.63	0.83	12.33	9.62	50.12	0.54
DECIDER Decoding (Ours)		✓	16.59	0.91	13.42	10.77	50.83	0.66
Beam Search Decoding [11]	Revised	✗	14.23	0.79	10.83	8.71	47.08	0.36
NEUROLOGIC Decoding [28]		✓	14.64	0.74	11.81	8.98	48.24	0.48
DECIDER Decoding (Ours)		✓	15.43	0.81	12.92	9.81	50.11	0.62

consistency score which is termed as Persona C², which leverages a referee model to predict semantic consistency between the generation $\mathbf{y}$ and persona sentences of both sides p_i :

$$C^2(\mathbf{y}) = \sum_p \text{NLI}(\mathbf{y}, p), p \in \{S, U\} \quad (10)$$

$$\text{NLI}(\mathbf{y}, p_i) = \begin{cases} -1, & \text{if } \mathbf{y} \text{ contradicts } p_i, \\ 0, & \text{if } \mathbf{y} \text{ is irrelevant to } p_i, \\ 1, & \text{if } \mathbf{y} \text{ entails } p_i. \end{cases} \quad (11)$$

where the NLI is a pre-trained RoBERTa model [53] fine-tuned with the dialogue inference dataset DNLI. The NLI model achieves a test set accuracy of 88.2% reported by [54]. The $\mathbf{y}$ is a generated utterance, and the p_i is one sentence in the persona description. Different from the traditional persona C score [55], [56], C² score also considers the consistency of the partner’s persona sentences U which is also loaded from the dataset. Therefore, having a higher C² score means that the generated responses are controlled by the common interests of both parties.

For human evaluation, we sample 150 test examples with persona, user context, and generation triplets. Three crowd-sourced occupational annotators are asked to give a score $\in \{1, 2, 3\}$ for quality, consistency, and coherence. The evaluation protocol for each aspect is shown as follows: Consis. measures whether the response is consistent with the target persona. The response may be 1) contradictory, 2) irrelevant, or 3) consistent with the given persona descriptions. Cohere. measures whether the response is coherent with the user’s context. The response may be 1) incoherent, 2) utterance-level coherent, or 3) both utterance- and persona-level coherent, which means the response not only follows what the user just said but also focuses on the user’s persona information shown in the context and finds the common interests to give a reply.

Base Model and Baselines. For the comparisons with DECIDER, we select the widely-used unconstrained decoding, beam search, and the most competitive constrained decoding, NEUROLOGIC [28] from Experiment I. All methods are equipped with the same open-source base model, DialoGPT-large [43], the large-scale pre-trained response generation model on the 147M Reddit corpus.

4.2 Results and Analysis.

Automatic and Human Evaluation The automatic and human evaluation results are shown in Table 5 and Table 7. The key observations are: (1) DECIDER outperforms both canonical and constrained decoding for all metrics, making a good trade-off between persona consistency (C² ↑) and response quality (other metrics). (2) A good performance on C² indicates that DECIDER can follow our rule to find the common interests to chat about because, only when consistent with the persona across both parties, the response can achieve a high score. In addition, such a change in response pattern influenced by the rule makes the response closer to our real scenario, which explains the

TABLE 6: Variant and ablation study on PersonaChat. Since the edge predicate in Tab. 1 has both a soft version $\bar{W}(v_i, v_j)$ by default and a hard version $\text{Edge}(v_i, v_j)$, which results in the final DECIDER having two variants. $\hookrightarrow$ - means we ablate the influence of shifting different distributions by the rule one by one, which is achieved by setting the logical vector $\mathbf{I}$ as zeros to cut off rule signals. Hence the distributions will degrade into their original ones in turn.

Variant	BLEU	F1	BERT	Persona C ²
DECIDER(Hard)	15.83	10.22	50.63	0.52
DECIDER(Soft)	16.59	10.77	50.83	0.66
$\hookrightarrow$ - $\bar{A}^{<t}$ in Eq. 7	16.11	10.42	50.23	0.59
$\hookrightarrow$ - $\bar{A}^C$ in Eq. 8	15.52	9.74	49.54	0.53
$\hookrightarrow$ - $\bar{P}_t^V$ in Eq. 9	14.93	9.18	48.13	0.48

TABLE 7: Human Evaluation on the PersonaChat dataset

Method	Quality	Consis.	Cohere.	Average
Beam Search [11]	2.22	2.15	<u>2.15</u>	2.17
NEUROLOGIC [28]	<u>2.23</u>	2.45	1.95	<u>2.21</u>
DECIDER (ours)	2.33	<u>2.43</u>	2.28	2.35

improvements in quality metrics that measure the difference between the generation and the gold references. (3) DECIDER can also perform well on semantic-oriented similarity metrics such as BERT and C² scores due to the relevant concepts recalled by the high-level rule $\bar{R}(\mathbf{x})$. Compared to the baseline that focused on the exact target words such as NEUROLOGIC, this advantage would be more pronounced in the revised dataset, where the persona is revised to test the generalization of methods. (4) The human evaluation results indicate that DECIDER can follow our rule to build more conversational scenarios by both expressing our interests and taking care of the partner (Cohere.↑ and Consis.↑) without decreasing the generation quality.

Variant and Ablation Study We conduct the variant and ablation studies in Table 6. Some key observations are: (1) When compared to the hard variant, the soft predicate calculus still plays an important role in performance, indicating that treating relevances between words differently has a positive influence on controlling the more accurate semantics of responses. (2) Similar to the trend on CommonGen, all the perturbations in the three probability distributions by the rule contribute to the final performance. This indicates that shifting attention or prediction distribution can also change the generation’s direction towards the way that is consistent with our rule.

Case Study Figure 5 gives two cases and we observe that (1) The responses of Beam Search and NEUROLOGIC are either over-focus on the partner or self persona while DECIDER can do a good balance. (2) DECIDER can select the common interest (e.g., read and reading in case 1) or explore new concepts in the common ground (e.g., library→{read, book, school}← college

Case 1	
Persona	① I am a graduate student ② I am an avid kayaker ③ I walk dogs for a living ④ I enjoy reading journal
Context	So what do you do now for fun? I like to read .
Human	I have dogs and I walk them.
Beam-Search	I like to play video games. Do you like it?
NEURO-LOGIC	I am a dog walker , but I am also a graduate student .
DECIDER (ours)	I play with my dog , but I also like reading .
Case 2	
Persona	① I grow roses in my garden ② I have a big library at home ③ I am a museum tour guide ④ I love to drink fancy tea
Context	Sounds pretty yummy, did you go to college ?
Human	No I did now I had all the books I needed at home
Beam-Search	Nope, I was in high school at the time.
NEURO-LOGIC	No I grew up in a home that had a garden .
DECIDER (ours)	I did, it was a great place to read a book but I am home schooled now.

Fig. 5: In PersonaChat, two scenarios between the interlocutors that have one common interest are selected for illustration. Following the rule at row 4 in the Tab. 1, DECIDER has the ability to recognize the common interests and control the responses relevant to the intersection (purple) of the self-persona and the partner-persona in the user input context.

in case 2). This is mainly due to rule 6 in Table 1, which makes a concept more competitive if it connects both parties. DECIDER can choose the appropriate concepts to construct responses with the strategy: finding the common interests. Blue and purple words are persona and external concepts respectively. The common interests are underlined.

5 RELATED WORK

Neuro-Symbolic Methods in Natural Language Generation. Neuro-Symbolic AI aims to integrate the symbolic knowledge into neural generation methods to complement the strengths of each field [57]. The symbolic knowledge can be classified into two types: the knowledge graph (KG) such as ConceptNet and the logic rules, such as First-Order Logic. For KG-enhanced generation, [21] uses the concept relations from KG to improve the personalized dialogue generation. [58] inject concepts with higher emotion intensity values from KG into the model for empathetic dialogue generation. [59] explores multisource

multi-type knowledge from LLMs and injects knowledge into dialogue context to generate final responses. [60] employs graph attention embedding to encode sub-graphs in pre-trained models for dialogue reasoning. Recently, for the other hand, many attempts have been made to inject logic rules in NLP tasks in the way of knowledge regularization [61] or knowledge distillation [32]. However, this line of research for the generation field remains unexplored. [62] and [63] first introduce the semantic parser as the symbolic system to improve consistency and coherence of the generated text. NEUROLOGIC [28] is the first to introduce the First-Order Rule to controllable text generation.

All of the above works are different from ours in that they introduce *either* knowledge graphs or logic rules into the neural generation, while our decoding method introduces *both* of them: we view the *concrete edges* in KG as the facts of the *general rule* $R(x)$. These facts play the role of evidence for $R(x)$ to query or do reasoning on them.

Constrained Decoding Strategies Constrained decoding strategies for directly guiding PLMs without training have sparked a surge in research. NEUROLOGIC [28] guides generation based on whether the candidates contain certain *concrete* target words or not while we guide generation based on whether the candidates satisfy a *high-level* rule (with the variable x to enable implication). Another difference is that our rule introduces the reasoning over the external knowledge graph. PPLM methods [2], [64] changes the neural hidden states with the gradients from an external attribute model while we change the hidden states by combining logical signals in decision function. Keyword2Text [27] shifts the probability distribution with similar word embeddings to the target, while we use the general rules to reason out the relevant words that contribute to approach the target.

Steering Generation by Attention Perturbation. Some decoding methods aim to directly perturb attention on the fly in either 1) a post-activated manner, such as PPLM [2] which control the generation attributes by using the gradients to shift the original attention, or 2) a pre-activated manner, such as work from [34] that perturbed pre-activated attention scores to alleviate text degeneration. Our work borrows the idea that different attentions can lead to different generations and explores a new post-and pre-activated way: our decision function uses the original distribution and a logical vector to perturb the pre-activated scores of the new one.

5.1 Implementation Details

The System 1 is built on GPT-2-Large [42] for CommonGen and Dialogpt [43] for PersonaChat of HuggingFace transformers [65] and run on one single NVIDIA V100 GPU. All predicate calculus in the System 2 are based on the matrix computations implemented by Pytorch [66]. For the hyper-parameters, the batch size is 10; the beam size is 20 for CommonGen and 10 for PersonaChat, which are same for all other baselines that are built on the beam search. All key parameters of $\{\alpha_1, \alpha_2, \alpha_3, \rho, k\}$ are set as $\{12, 24, 24, 0.6, 16\}$ for CommonGen and $\{12, 24, 48, 0.4, 8\}$ for PersonaChat.

To preprocess facts from ConceptNet, for each triplet (h, r, t) which denotes that the head concept h has a relation r with the tail concept t , we use the pre-process pipeline from [60] (tokenization, lemmatization, stop-word and black-word filtering) to process both h and t to get h' and t' . Then we set $E(h', t') = E(t', h') = 1$ for Hard or $w(r)$ for soft predicates. In soft version which the DECIDER uses by default, $w(r) \in (0, 1)$ is the rescaled weight for the relation r in graph.

6 CONCLUSIONS

In this paper, we propose DECIDER, a novel decoding strategy for constrained language generation that can be controlled by

any FOL rules as we desire. DECIDER is driven by the dual systems with a decision function to let the rule signal flow into the PLM at each decoding step. Extensive experimental results on widely-used benchmarks demonstrate that our proposed DECIDER significantly outperforms competitive baselines by using well-designed rules to guide the PLM’s generative direction towards the targets.

REFERENCES

- [1] N. S. Keskar, B. McCann, L. R. Varshney, C. Xiong, and R. Socher, “Ctrl: A conditional transformer language model for controllable generation,” *arXiv preprint arXiv:1909.05858*, 2019.
- [2] S. Dathathri, A. Madotto, J. Lan, J. Hung, E. Frank, P. Molino, J. Yosinski, and R. Liu, “Plug and play language models: A simple approach to controlled text generation,” in *International Conference on Learning Representations*, 2020. [Online]. Available: <https://openreview.net/forum?id=H1edEyBKDS>
- [3] J. Qian, L. Dong, Y. Shen, F. Wei, and W. Chen, “Controllable natural language generation with contrastive prefixes,” *arXiv preprint arXiv:2202.13257*, 2022.
- [4] S. Ghosh, M. Chollet, E. Laksana, L.-P. Morency, and S. Scherer, “Affect-lm: A neural language model for customizable affective text generation,” in *Proceedings of the 55th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, 2017, pp. 634–642.
- [5] Y. Li, R. Zhang, W. Li, and Z. Cao, “Hierarchical prediction and adversarial learning for conditional response generation,” *IEEE Transactions on Knowledge and Data Engineering*, vol. 34, no. 1, pp. 314–327, 2020.
- [6] C. Xing, W. Wu, Y. Wu, J. Liu, Y. Huang, M. Zhou, and W.-Y. Ma, “Topic aware neural response generation,” in *Proceedings of the AAAI conference on artificial intelligence*, vol. 31, no. 1, 2017.
- [7] L. Liao, R. Takanobu, Y. Ma, X. Yang, M. Huang, and T.-S. Chua, “Topic-guided conversational recommender in multiple domains,” *IEEE Transactions on Knowledge and Data Engineering*, vol. 34, no. 5, pp. 2485–2496, 2020.
- [8] Z. Liu, D. Zhou, H. Liu, H. Wang, Z.-Y. Niu, H. Wu, W. Che, T. Liu, and H. Xiong, “Graph-grounded goal planning for conversational recommendation,” *IEEE Transactions on Knowledge and Data Engineering*, vol. 35, no. 5, pp. 4923–4939, 2022.
- [9] Y. Su, T. Lan, Y. Wang, D. Yogatama, L. Kong, and N. Collier, “A contrastive framework for neural text generation,” in *Advances in Neural Information Processing Systems*, S. Koyejo, S. Mohamed, A. Agarwal, D. Belgrave, K. Cho, and A. Oh, Eds., vol. 35. Curran Associates, Inc., 2022, pp. 21 548–21 561. [Online]. Available: https://proceedings.neurips.cc/paper_files/paper/2022/file/871cae8f599cb8bbfcb0f58fe1af95ad-Paper-Conference.pdf
- [10] Y. Su, T. Lan, Y. Liu, F. Liu, D. Yogatama, Y. Wang, L. Kong, and N. Collier, “Language models can see: Plugging visual controls in text generation,” 2022.
- [11] B. Y. Lin, W. Zhou, M. Shen, P. Zhou, C. Bhagavatula, Y. Choi, and X. Ren, “CommonGen: A constrained text generation challenge for generative commonsense reasoning,” in *Findings of the Association for Computational Linguistics: EMNLP 2020*. Online: Association for Computational Linguistics, Nov. 2020, pp. 1823–1840. [Online]. Available: <https://www.aclweb.org/anthology/2020.findings-emnlp.165>
- [12] Y. Li, S. Huang, X. Zhang, Q. Zhou, Y. Li, R. Liu, Y. Cao, H.-T. Zheng, and Y. Shen, “Automatic context pattern generation for entity set expansion,” *IEEE Transactions on Knowledge and Data Engineering*, 2023.
- [13] Y. Lan, G. He, J. Jiang, J. Jiang, W. X. Zhao, and J.-R. Wen, “Complex knowledge base question answering: A survey,” *IEEE Transactions on Knowledge and Data Engineering*, 2022.
- [14] S. Zhang, E. Dinan, J. Urbanek, A. Szlam, D. Kiela, and J. Weston, “Personalizing dialogue agents: I have a dog, do you have pets too?” in *Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, vol. 1, 2018, pp. 2204–2213.
- [15] Z. Fan, Y. Gong, Z. Wei, S. Wang, Y. Huang, J. Jiao, X. Huang, N. Duan, and R. Zhang, “An enhanced knowledge injection model for commonsense generation,” in *Proceedings of the 28th International Conference on Computational Linguistics*. Barcelona, Spain (Online): International Committee on Computational Linguistics, Dec. 2020, pp. 2014–2025. [Online]. Available: <https://aclanthology.org/2020.coling-main.182>
- [16] B. P. Majumder, H. Jhamtani, T. Berg-Kirkpatrick, and J. McAuley, “Like hiking? you probably enjoy nature: Persona-grounded dialog with commonsense expansions,” in *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*. Online: Association for Computational Linguistics, Nov. 2020, pp. 9194–9206. [Online]. Available: <https://aclanthology.org/2020.emnlp-main.739>
- [17] Y. Wang, C. Xu, H. Hu, C. Tao, S. Wan, M. Dras, M. Johnson, and D. Jiang, “Neural rule-execution tracking machine for transformer-based text generation,” *Advances in Neural Information Processing Systems*, vol. 34, pp. 16 938–16 950, 2021.
- [18] Y. Liu, Y. Wan, L. He, H. Peng, and S. Y. Philip, “Kg-bart: Knowledge graph-augmented bart for generative commonsense reasoning,” in *Proceedings of the AAAI Conference on Artificial Intelligence*, vol. 35, no. 7, 2021, pp. 6418–6425.
- [19] F. Carlsson, J. Öhman, F. Liu, S. Verlinden, J. Nivre, and M. Sahlgren, “Fine-grained controllable text generation using non-residual prompting,” in *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, 2022, pp. 6837–6857.
- [20] Q. Liu, Y. Chen, B. Chen, J.-G. Lou, Z. Chen, B. Zhou, and D. Zhang, “You impress me: Dialogue generation via mutual persona perception,” in *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*. Online: Association for Computational Linguistics, Jul. 2020, pp. 1417–1427. [Online]. Available: <https://aclanthology.org/2020.acl-main.131>
- [21] C. Xu, P. Li, W. Wang, H. Yang, S. Wang, and C. Xiao, “Cosplay: Concept set guided personalized dialogue generation across both party personas,” in *Proceedings of the 45th International ACM SIGIR Conference on Research and Development in Information Retrieval*, 2022, pp. 201–211.
- [22] P. Wang, J. Zamora, J. Liu, F. Ilievski, M. Chen, and X. Ren, “Contextualized scene imagination for generative commonsense reasoning,” in *International Conference on Learning Representations (ICLR)*, 2022.
- [23] H. Yang, Y. Wang, P. Li, W. Bi, W. Lam, and C. Xu, “Bridging the gap between pre-training and fine-tuning for commonsense generation,” in *Findings of the Association for Computational Linguistics: EACL 2023*, A. Vlachos and I. Augenstein, Eds. Dubrovnik, Croatia: Association for Computational Linguistics, May 2023, pp. 376–383. [Online]. Available: <https://aclanthology.org/2023.findings-eacl.28>
- [24] P. Anderson, B. Fernando, M. Johnson, and S. Gould, “Guided open vocabulary image captioning with constrained beam search,” in *Proceedings of the 2017 Conference on Empirical Methods in Natural Language Processing*. Copenhagen, Denmark: Association for Computational Linguistics, Sep. 2017, pp. 936–945. [Online]. Available: <https://www.aclweb.org/anthology/D17-1098>
- [25] C. Hokamp and Q. Liu, “Lexically constrained decoding for sequence generation using grid beam search,” in *Proceedings of the 55th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*. Vancouver, Canada: Association for Computational Linguistics, Jul. 2017, pp. 1535–1546. [Online]. Available: <https://www.aclweb.org/anthology/P17-1141>
- [26] M. Post and D. Vilar, “Fast lexically constrained decoding with dynamic beam allocation for neural machine translation,” in *Proceedings of the 2018 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long Papers)*. New Orleans, Louisiana: Association for Computational Linguistics, Jun. 2018, pp. 1314–1324. [Online]. Available: <https://www.aclweb.org/anthology/N18-1119>
- [27] D. Pascual, B. Egressy, C. Meister, R. Cotterell, and R. Wattenhofer, “A plug-and-play method for controlled text generation,” in *Findings of the Association for Computational Linguistics: EMNLP 2021*. Punta Cana, Dominican Republic: Association for Computational Linguistics, Nov. 2021, pp. 3973–3997. [Online]. Available: <https://aclanthology.org/2021.findings-emnlp.334>
- [28] X. Lu, P. West, R. Zellers, R. Le Bras, C. Bhagavatula, and Y. Choi, “NeuroLogic decoding: (un)supervised neural text generation with predicate logic constraints,” in *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*. Online: Association for Computational Linguistics, Jun. 2021, pp. 4288–4299. [Online]. Available: <https://aclanthology.org/2021.naacl-main.339>

- [29] P. M. Groves and R. F. Thompson, "Habituation: a dual-process theory." *Psychological review*, vol. 77, no. 5, p. 419, 1970.
- [30] G. E. Beroggi and W. A. Wallace, "The effect of reasoning logics on real-time decision making," *IEEE Transactions on Systems, Man, and Cybernetics-Part A: Systems and Humans*, vol. 27, no. 6, pp. 743–749, 1997.
- [31] K. Daniel, *Thinking, fast and slow*, 2017.
- [32] Z. Hu, X. Ma, Z. Liu, E. Hovy, and E. Xing, "Harnessing deep neural networks with logic rules," in *Proceedings of the 54th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, Berlin, Germany, Aug. 2016, pp. 2410–2420. [Online]. Available: <https://aclanthology.org/P16-1228>
- [33] J. Ji, Y. Kim, J. Glass, and T. He, "Controlling the focus of pretrained language generation models," in *Findings of the Association for Computational Linguistics: ACL 2022*. Dublin, Ireland: Association for Computational Linguistics, May 2022, pp. 3291–3306. [Online]. Available: <https://aclanthology.org/2022.findings-acl.260>
- [34] Y. Dong, C. Bhagavatula, X. Lu, J. D. Hwang, A. Bosselut, J. C. K. Cheung, and Y. Choi, "On-the-fly attention modulation for neural generation," in *Findings of the Association for Computational Linguistics: ACL-IJCNLP 2021*. Online: Association for Computational Linguistics, Aug. 2021, pp. 1261–1274. [Online]. Available: <https://aclanthology.org/2021.findings-acl.107>
- [35] S. H. Bach, M. Broecheler, B. Huang, and L. Getoor, "Hinge-loss Markov random fields and probabilistic soft logic," *arXiv preprint arXiv:1505.04406*, 2015.
- [36] J. Foulds, S. Kumar, and L. Getoor, "Latent topic networks: A versatile probabilistic programming framework for topic models," in *Proc. of ICML*, 2015, pp. 777–786.
- [37] A. Colmerauer, "An introduction to prolog iii," *Communications of the ACM*, vol. 33, no. 7, pp. 69–90, 1990.
- [38] R. Speer, J. Chin, and C. Havasi, "Conceptnet 5.5: An open multilingual graph of general knowledge," in *Thirty-first AAAI conference on artificial intelligence*, 2017.
- [39] A. Vaswani, N. Shazeer, N. Parmar, J. Uszkoreit, L. Jones, A. N. Gomez, L. Kaiser, and I. Polosukhin, "Attention is all you need," in *Advances in neural information processing systems*, 2017, pp. 5998–6008.
- [40] Y. Liu, T. Han, S. Ma, J. Zhang, Y. Yang, J. Tian, H. He, A. Li, M. He, Z. Liu *et al.*, "Summary of chatgpt-related research and perspective towards the future of large language models," *Meta-Radiology*, p. 100017, 2023.
- [41] A. Radford, K. Narasimhan, T. Salimans, and I. Sutskever, "Improving language understanding by generative pre-training," 2018.
- [42] A. Radford, J. Wu, R. Child, D. Luan, D. Amodei, and I. Sutskever, "Language models are unsupervised multitask learners," 2019.
- [43] Y. Zhang, S. Sun, M. Galley, Y.-C. Chen, C. Brockett, X. Gao, J. Gao, J. Liu, and B. Dolan, "DIALOGPT : Large-scale generative pre-training for conversational response generation," in *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics: System Demonstrations*. Online: Association for Computational Linguistics, Jul. 2020, pp. 270–278. [Online]. Available: <https://aclanthology.org/2020.acl-demos.30>
- [44] A. Fan, M. Lewis, and Y. Dauphin, "Hierarchical neural story generation," *arXiv preprint arXiv:1805.04833*, 2018.
- [45] K. Papineni, S. Roukos, T. Ward, and W.-J. Zhu, "Bleu: a method for automatic evaluation of machine translation," in *Proceedings of the 40th annual meeting of the Association for Computational Linguistics*, 2002, pp. 311–318.
- [46] C.-Y. Lin, "Rouge: A package for automatic evaluation of summaries," in *Text summarization branches out*, 2004, pp. 74–81.
- [47] S. Banerjee and A. Lavie, "Meteor: An automatic metric for mt evaluation with improved correlation with human judgments," in *Proceedings of the acl workshop on intrinsic and extrinsic evaluation measures for machine translation and/or summarization*, 2005, pp. 65–72.
- [48] R. Vedantam, C. Lawrence Zitnick, and D. Parikh, "Cider: Consensus-based image description evaluation," in *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, June 2015.
- [49] P. Anderson, B. Fernando, M. Johnson, and S. Gould, "Spice: Semantic propositional image caption evaluation," in *European conference on computer vision*. Springer, 2016, pp. 382–398.
- [50] Y. Cao, W. Bi, M. Fang, S. Shi, and D. Tao, "A model-agnostic data manipulation method for persona-based dialogue generation," *arXiv preprint arXiv:2204.09867*, 2022.
- [51] T. Zhang, V. Kishore, F. Wu, K. Q. Weinberger, and Y. Artzi, "Bertscore: Evaluating text generation with bert," in *International Conference on Learning Representations*, 2020. [Online]. Available: <https://openreview.net/forum?id=SkeHuCVFDr>
- [52] P. He, X. Liu, J. Gao, and W. Chen, "Deberta: Decoding-enhanced bert with disentangled attention," in *International Conference on Learning Representations*, 2021. [Online]. Available: <https://openreview.net/forum?id=XPZlaotutsD>
- [53] Y. Liu, M. Ott, N. Goyal, J. Du, M. Joshi, D. Chen, O. Levy, M. Lewis, L. Zettlemoyer, and V. Stoyanov, "Roberta: A robustly optimized bert pretraining approach," 2019.
- [54] S. Welleck, J. Weston, A. Szlam, and K. Cho, "Dialogue natural language inference," in *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*. Florence, Italy: Association for Computational Linguistics, Jul. 2019, pp. 3731–3741. [Online]. Available: <https://www.aclweb.org/anthology/P19-1363>
- [55] H. Song, Y. Wang, K. Zhang, W.-N. Zhang, and T. Liu, "BoB: BERT over BERT for training persona-based dialogue models from limited personalized data," in *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*. Online: Association for Computational Linguistics, Aug. 2021, pp. 167–177. [Online]. Available: <https://aclanthology.org/2021.acl-long.14>
- [56] A. Madotto, Z. Lin, C.-S. Wu, and P. Fung, "Personalizing dialogue agents via meta-learning," in *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*. Florence, Italy: Association for Computational Linguistics, Jul. 2019, pp. 5454–5459. [Online]. Available: <https://aclanthology.org/P19-1542>
- [57] Z. Susskind, B. Arden, L. K. John, P. Stockton, and E. B. John, "Neuro-symbolic ai: An emerging class of ai workloads and their characterization," *arXiv preprint arXiv:2109.06133*, 2021.
- [58] Q. Li, P. Li, Z. Ren, P. Ren, and Z. Chen, "Knowledge bridging for empathetic dialogue generation," 2020. [Online]. Available: <https://arxiv.org/abs/2009.09708>
- [59] X. Ni, H. Dai, Z. Ren, and P. Li, "Multi-source multi-type knowledge exploration and exploitation for dialogue generation," in *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, H. Bouamor, J. Pino, and K. Bali, Eds. Singapore: Association for Computational Linguistics, Dec. 2023, pp. 12522–12537. [Online]. Available: <https://aclanthology.org/2023.emnlp-main.771>
- [60] H. Ji, P. Ke, S. Huang, F. Wei, X. Zhu, and M. Huang, "Language generation with multi-hop reasoning on commonsense knowledge graph," in *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, 2020, pp. 725–736.
- [61] Y. Zhou, Y. Yan, R. Han, J. H. Caufield, K.-W. Chang, Y. Sun, P. Ping, and W. Wang, "Clinical temporal relation extraction with probabilistic soft logic regularization and global inference," in *Proceedings of the AAAI Conference on Artificial Intelligence*, vol. 35, no. 16, 2021, pp. 14 647–14 655.
- [62] M. Nye, M. Tessler, J. Tenenbaum, and B. M. Lake, "Improving coherence and consistency in neural sequence models with dual-system, neuro-symbolic reasoning," *Advances in Neural Information Processing Systems*, vol. 34, pp. 25 192–25 204, 2021.
- [63] C. Shu, Y. Zhang, X. Dong, P. Shi, T. Yu, and R. Zhang, "Logic-consistency text generation from semantic parses," in *Findings of the Association for Computational Linguistics: ACL-IJCNLP 2021*. Online: Association for Computational Linguistics, Aug. 2021, pp. 4414–4426. [Online]. Available: <https://aclanthology.org/2021.findings-acl.388>
- [64] C. Xu, J. Zhao, R. Li, C. Hu, and C. Xiao, "Change or not: A simple approach for plug and play language models on sentiment control," in *Proceedings of the AAAI Conference on Artificial Intelligence*, vol. 35, no. 18, 2021, pp. 15 935–15 936.
- [65] T. Wolf, L. Debut, V. Sanh, J. Chaumond, C. Delangue, A. Moi, P. Cistac, T. Rault, R. Louf, M. Funtowicz *et al.*, "Huggingface's transformers: State-of-the-art natural language processing," *arXiv preprint arXiv:1910.03771*, 2019.
- [66] A. Paszke, S. Gross, F. Massa, A. Lerer, J. Bradbury, G. Chanan, T. Killeen, Z. Lin, N. Gimelshein, L. Antiga *et al.*, "Pytorch: An imperative style, high-performance deep learning library," *Advances in neural information processing systems*, vol. 32, pp. 8026–8037, 2019.