

A Recommender System for NFT Collectibles with Item Feature

Minjoo Choi^{1*}, Seonmi Kim^{1*}, Yejin Kim^{1*}, Youngbin Lee^{1*}, Joohwan Hong^{1†}, Yongjae Lee^{1‡}

¹Ulsan National Institute of Science and Technology(UNIST)
{mincule, msraask3, kimyejin99, young, joohwanhong, yongjaelee}@unist.ac.kr

Abstract

Recommender systems have been actively studied and applied in various domains to deal with information overload. Although there are numerous studies on recommender systems for movies, music, and e-commerce, comparatively less attention has been paid to the recommender system for NFTs despite the continuous growth of the NFT market. This paper presents a recommender system for NFTs that utilizes a variety of data sources, from NFT transaction records to external item features, to generate precise recommendations that cater to individual preferences. We develop a data-efficient graph-based recommender system to efficiently capture the complex relationship between each item and users and generate node(item) embeddings which incorporate both node feature information and graph structure. Furthermore, we exploit inputs beyond user-item interactions, such as image feature, text feature, and price feature. Numerical experiments verify the performance of the graph-based recommender system improves significantly after utilizing all types of item features as side information, thereby outperforming all other baselines.

1. Introduction

Recommender systems are a subset of artificial intelligence used to browse a large collection of objects and make suggestions for products, services, or content. The past few years have witnessed major advances in recommender systems as the interest in harnessing deep learning methods for recommender systems surged. The representations generated from deep learning models are proven to be useful as they capture complex nonlinear relationships between users and items, thereby outperforming traditional methods including Matrix Factorization and Collaborative Filtering. Among deep learning models, one area is graph-based models, which efficiently deal with graph-structured data like user-item interactions or relationships between entities. The most remarkable advantages of these models are their capability of exploring high-order connectivity and leveraging the information of the local graph neighborhoods (He et al. 2020; Wang et al. 2019). They have been actively studied

in various domains and have outperformed countless recommender systems, however, graph-based recommender systems for Non-Fungible Tokens (NFT) are yet to be explored.

Where cryptocurrency was proposed as the digital substitute for currency, NFTs are nowadays being touted as the digital substitute for collectibles. With NFTs being a growing trend, the total worth of NFT market reached \$41 million in 2021 alone, nearing that of the entire global fine art market (Conti and Schmidt 2022). It was quite recently, at the beginning of 2020, when the NFT market started to take off (Vairagade et al. 2022). There were 1,415,638 NFT sales with a trading volume of 82,492,916 USD in 2020, which later soared to 27,414,477 sales and a trading volume of 17,694,851,721 USD in 2021 (Besancia 2022). Among them, most of the transactions identified are for collectibles which take up to 27% of the total sales. As it is a market with great potential, and every transaction information is digitized and disclosed, we expect that there will be considerable benefits from applying the recommendation system.

However, there are a few challenges specific to NFT recommender systems. NFTs are absolutely lacking in feedback information since NFT's uniqueness allows only one person to own it at a time while music, movies, and products on online platforms can be consumed by multiple users simultaneously and therefore are more likely to have plenty amount of feedback information. In addition, it seems to be very difficult to specify user features since NFTs operate in a blockchain system, which is based on anonymity.

In this paper, we implement a graph-based recommender system which also incorporates item features (NFT images, textual information, and price) so as to tackle the aforementioned challenges. Graph learning provides a unified way to utilize all available different types of data and effectively capture non-trivial user-item, user-user, and item-item relations. Our experimental results confirm these expectations, graph-based models significantly improving the recommendation performance by effectively incorporating all types of item features and outperforming other models.

2. Related Works

Non-Fungible Token (NFT) is a new type of cryptocurrency that represents a unique digital asset such as metaverse, collectibles, music, and even game items. In this paper we focus on NFT collectibles.

*These authors contributed equally.

†Corresponding author

‡Corresponding author

Presented at the AAAI 2023 Bridge on AI for Financial Services (<https://sites.google.com/view/aaai-ai-fin/home>)

The majority of NFT collections feature a large number of NFT items that all share a similar artistic style. A decent example of this would be Bored Apes Yacht Club (BAYC), a collection made up of 10,000 NFT artworks depicting variants of Bored Apes. Every token in BAYC shares same array of traits including ‘fur’, and ‘clothes’, depicting the color and style of its fur, and outfit of the Bored Ape, respectively. The rarer each token’s features, the higher value it is prone to fetch. That said, NFT collections can take on many different forms, such as commemorative tickets, music albums, and so on.

Recommender Systems Broadly speaking, there are two main approaches in recommender systems. The content-based methods rely on the characteristics of the items historically consumed by a user whereas the Collaborative filtering (CF) requires users’ interactions and feedback on a set of items.

Recommendation system expands its area to deep learning to capture higher-order interactions in the data. Especially, recent years have seen major advancements in graph-based recommender system, which is efficient in modelling complex relationship between users and items in a graph and provide recommendations based on graph exploration (Zheng et al. 2018; Wang et al. 2019). Recently proposed method Graph Convolutional Network (Kipf and Welling 2017) has developed a graph convolution, followed by numerous works that adapt GCN to recommendation system (Berg, Kipf, and Welling 2018; Zheng et al. 2018; Wang et al. 2019; He et al. 2020; Hamilton, Ying, and Leskovec 2017; Ying et al. 2018). The underlying structure for most of the GCN based recommendation system is user-item collaborative filtering (Zheng et al. 2018; Wang et al. 2019). SpectralCF (Zheng et al. 2018) operates a spectral convolution in the spectral domain in order to find the proximity and all possible connectivity between users and items. NGCF (Wang et al. 2019) proposes iterative user and item embeddings propagation to add collaborative signal into the embedding process.

NFT Recommender Systems The idea of applying recommender system to NFT sector was first proposed in a blog article, where they presented a multiple regression based recommender system to help users to navigate recommendations voluntarily (OpenSea 2020). Pradana et al. (2022) proposed a multi-criteria recommender system for NFT-based IAP in RPG game while Piyadigama and Poravi (2022a) identified some meaningful features for NFT recommender systems and proposed a method to integrate social trends into NFT recommendations (Piyadigama and Poravi 2022b). However, these studies left room for further improvement as they did not consider the unique characteristics of NFTs when building a recommender system for NFTs. In addition, to our knowledge, this is the first study to apply a graph-based recommender system to exploit high-order connectivity between users and items effectively.

3. Data

Data Preparation We selected five collections, BAYC, Azuki, Meebits, Doodles, and Cool Cats, which were ranked

Collection	Users	Items	Interactions
BAYC	2,469	929	3,504
Azuki	9,384	3,931	16,401
Meebits	4,581	1,694	7,317
Doodles	9,321	3,497	15,176
Cool Cats	4,806	1,647	6,667

Table 1: NFT data description

within the top 15 in terms of market capitalization as of the end of August 2022 on DappRadar.

We collected about a year-long transaction data from September 2021 to September 2022 from Etherscan NFT tracker (Etherscan 2022) and the transaction data consists of transaction hash, buyer’s wallet address, token ID, and price of the token sold.

Data Description and Sparsity Our data consists of implicit feedback that only considers purchase history as interactions. Items in our user-item matrices have at least 3 interactions. Typically benchmark data set a higher threshold of 5 or 10, however, considering the lack of transaction history due to the uniqueness of NFTs and the fact that the NFT market is still in its infancy, we have set relatively low threshold. Specific figures for the user-item matrix of each collection can be found in the Table 1.

In addition to that, we also included some additional features of NFTs to address the transaction data shortage and to boost the predictive power of the recommender system. The description of each type of feature can be found in subsequent paragraphs of this section.

Item Features

Besides transaction data shortage, as alluded to earlier, the anonymity of the blockchain makes it difficult to specify the user’s characteristics. We therefore collected external features and price of each NFT to compensate for the shortcomings specific to NFT data.

Image We downloaded images from the url of each token we found using OpenSea API (OpenSea 2022). Each collection has about 10,000 images in general.

Text We have sourced text data from OpenSea API. Text data is comprised of tags describing visual properties like ‘background color’, ‘body’, and ‘outfit’ of each NFT (token).

Price Each item’s average selling price was used as a price feature of the item. We only considered the selling price stated in Ethereum (ETH) and Wrapped Ethereum (WETH) and replaced the rest with 0.

4. Method

Problem Definition Each wallet address represents each user u , and each token ID as each item i , where set of users is $U = \{u_1, u_2, \dots, u_N\}$, and set of items is $I = \{i_1, i_2, \dots, i_M\}$. A user-item interaction matrix $\mathbf{Y} \in \mathbb{R}^{N \times M}$ consists of implicit feedback, where $y_{ui} = 1$ if a

user bought an item, and $y_{ui} = 0$, otherwise. The matrix \mathbf{Y} is then converted into a bipartite graph.

Since our goal is to predict whether the user has a potential interest in item v , we aim to learn a prediction function $\hat{y}_{ui} = \mathcal{F}(u, i | \Theta, \mathbf{X}, \mathbf{Y})$ where \hat{y}_{ui} denotes the probability that user u will buy item i , \mathbf{X} denotes combined representations of three different features $\mathbf{X}_{img}, \mathbf{X}_{txt}, \mathbf{X}_{price}$ that are described in 3. Data section, and Θ denotes the trainable model parameters of function \mathcal{F} .

Item Feature Embedding As a first step, we make a representation of each of the raw item feature data, which will be the input for the model. Image representations are obtained using convolutional auto-encoders (CAEs) (Masci et al. 2011). An encoder f maps our input \mathbf{X}_{img} to the latent representation \mathbf{X}^*_{img} , and a decoder g generates reconstructed input \mathbf{X}'_{img} . Once the model is trained to minimize MSE, only the encoder part is used to extract representations. That is, by using 3-layer encoder f with 3*3 convolutional kernels, 2*2 max pooling and flattening, we get $\mathbf{X}^*_{img} \in \mathbb{R}^{M \times 64}$.

We converted each word into 300-dimensional word embedding by retrieving the embedding of each word present in the pre-trained Word2Vec model (Mikolov et al. 2013) and otherwise replaced it with a 300-dimensional vector of zeros.¹ Each word embedding was then concatenated with other embeddings corresponding to the same item, with each item’s word embedding size varying between 1500 and 1800 depending on the number of visual traits considered. As a result, we obtain textual information representation, $\mathbf{X}^*_{txt} \in \mathbb{R}^{M \times 1500 \text{ or } 1800}$.

The size of the price feature vector is initially $\mathbf{X}_{price} \in \mathbb{R}^{M \times 1}$. However, because the dimension of the item representation becomes the dimension of the item node embedding in the graph, we need the size of the price representation to be large enough to contain some information. Therefore, we replicate the original price feature vector and then concatenate those to get a larger representation of $\mathbf{X}^*_{price} \in \mathbb{R}^{M \times 64}$.

Model Architecture

Our framework uses three different types of item features into the **Neural Graph Collaborative Filtering (NGCF)**. Thus, we follow the model architecture and the notations of NGCF (Wang et al. 2019).

(1) Input Layer For NGCF-all model, all types of NFT features for each item are concatenated: $\mathbf{X}^* = \mathbf{X}^*_{img} || \mathbf{X}^*_{txt} || \mathbf{X}^*_{price}$ and projected to a low-dimensional latent space using three linear layers of Multi-Layer Perceptrons (MLPs): $\mathbf{X} = \text{MLP}(\mathbf{X}^*)$. On the other hand, we also made a model utilizing one type of feature each: NGCF-image, NGCF-text, and NGCF-price.

¹Most of the data describing each visual property consists of a single word, however, in case there are multiple words describing a single property like ‘short red hair’ for ‘hair’, a sum of each word embedding was used instead.

(2) Embedding Layer N users and M items are embedded into 64-dimensional vectors, $\mathbf{e}_{u_1}, \dots, \mathbf{e}_{u_N}, \mathbf{e}_{i_1}, \dots, \mathbf{e}_{i_M}$, respectively. User embeddings are then initialized with Xavier initialization method whereas item embeddings are initialized with item representations we extracted earlier. In other words, the weight matrix of the item embedding layer is initialized with the item representation matrix \mathbf{X} .

(3) Embedding Propagation Layers User and item embeddings are refined by GCN-based propagation. For example, a node embedding at l -th layer receives messages \mathbf{m} from their neighbors and itself: $\mathbf{e}_u^{(l)} = \text{LeakyReLU}(\mathbf{m}_u^{(l)})$, where \mathbf{m} is defined in the same way as Wang et al. (2019).

(4) Prediction Layer Refined embeddings from each propagation layers are then aggregated to create the final embeddings $\mathbf{e}^* = \mathbf{e}^{(0)} || \dots || \mathbf{e}^{(L)}$ and the predicted value of user’s preference is calculated by taking the inner product of the final embeddings: $\hat{y}_{ui} = \mathbf{e}_u^{*T} \mathbf{e}_i^*$. For optimization, a pairwise BPR loss (Rendle et al. 2009) is used to learn parameters in (1) Input Layer, (2) Embedding Layer, and (3) Embedding Propagation Layers.

5. Experiment

We performed experiments on the NFT transaction dataset we collected. All the experiments are implemented based on an open-sourced recommendation library, Recbole.

Data sets We filtered transaction data and made five user-item matrices as discussed in 3. Data section. Moreover, we conducted a negative sampling to make a user-specific pairwise preference. Items purchased by the user are set as positive.

Evaluation schema We used NDCG@K (Normalized Discounted Cumulative Gain) and Recall@K to evaluate the performance of the top K recommendations. We randomly split the historical user-item interaction of each collection into training, validation and test sets with proportions of 80%, 10%, and 10%, respectively.

Model comparison We compared a basic NGCF with non graph-based models including Pop(Zhao et al. 2021), ItemKNN(?), BPR(Rendle et al. 2009), DMF(Xue et al. 2017), NeuMF(He et al. 2017). We also conducted ablation studies and considered several NGCF variants utilizing different types of NFT features; NGCF-img, NGCF-txt, NGCF-price, and NGCF-all when evaluating the significance of each feature.

Hyperparameter settings We optimized every model with Adam optimizer, where the batch size and epochs were fixed at 2048 and 50. In terms of hyperparameters, we applied a grid search and used NDCG@20 as an indicator. The search ranges of NGCF models are as follows: learning rate of $[0.01, 0.001]$, node dropout ratio in $[0.0, 0.2]$, message dropout ratio in $[0.0, 0.2]$, regularization weight of $[1e - 5, 1e - 3]$, and the number of Embedding Propagation Layers as $[1, 2, 3]$, where the embedding size is fixed at

Methods	Azuki		BAYC		Cool Cats		Doodles		Meebits		Average	
	Recall	NDCG	Recall	NDCG	Recall	NDCG	Recall	NDCG	Recall	NDCG	Recall	NDCG
Pop	0.0718	0.0318	0.1152	0.0518	0.0741	0.0360	0.0755	0.0351	0.0692	0.0284	0.0812	0.0366
ItemKNN	0.1027	0.0486	0.1217	0.0592	0.1016	0.0475	0.0978	0.0485	0.1192	0.0654	0.1086	0.0538
BPR	0.0492	0.0443	0.0971	0.0358	0.1238	0.0532	0.0937	0.0432	0.1134	0.0562	0.1058	0.0465
DMF	0.0975	0.0463	0.1111	0.0466	0.1196	0.0540	0.1046	0.0493	0.1047	0.0492	0.1075	0.0491
NeuMF	0.0849	0.0385	0.0864	0.0367	0.0905	0.0412	0.0970	0.0429	0.0841	0.0455	0.0886	0.0410
NGCF	0.1046	0.0486	0.1079	0.0480	0.1040	0.0480	0.1017	0.0471	0.1443	0.0749	0.1125	0.0533
NGCF-img	0.1200	0.0583	0.0975	0.0469	0.1113	0.0514	0.0914	0.0426	0.1501	0.0687	0.1141	0.0536
NGCF-price	0.1220	0.0558	0.1089	0.0499	0.1545	0.0671	0.1616	0.0761	0.1425	0.0662	0.1379	0.0630
NGCF-txt	0.1237	0.0567	0.1866	0.0895	0.1745	0.0775	0.1275	0.0603	0.1726	0.0803	0.1570	0.0729
NGCF-all	0.1548	0.0729	0.1474	0.0656	0.2287	0.1083	0.1554	0.0724	0.2193	0.1118	0.1811	0.0862

Table 2: Results measured by Recall@10 and NDCG@10

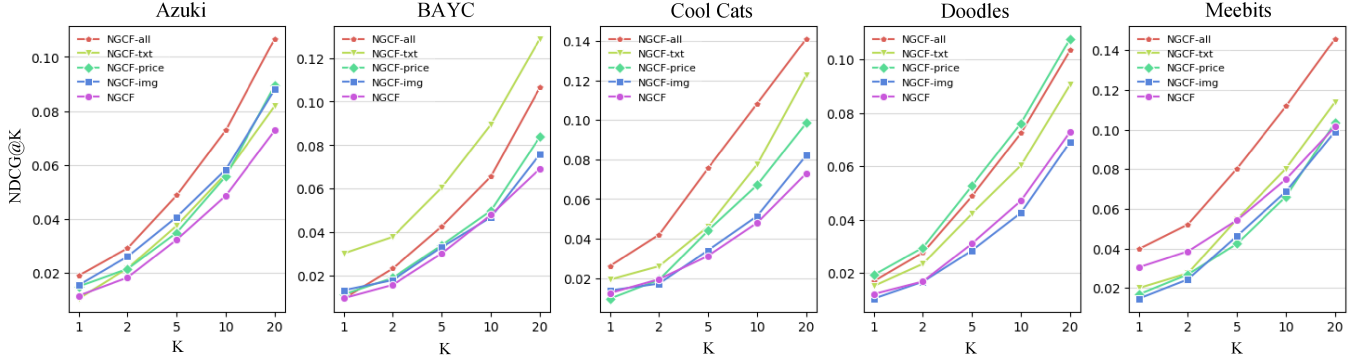


Figure 1: Performance comparison between NGCF and NGCF variant models over the top K recommendations on different datasets.

512. We did hyperparameter tuning for the baseline models as well.

Results and Discussion

Table 2 shows the results of the NGCF, NGCF variants, and baseline models.

Effect of item features We start our analysis by comparing the performance of NGCF and its variant models. Figure 1, shows that both NGCF-txt and NGCF-all outperform NGCF without features across all collections while NGCF-img outperforms NGCF on 3 collections by a slight margin. NGCF-price outperforms NGCF on the majority of the collections and achieved the best performance on Doodles dataset. This demonstrates that tag information (text), and price are the most influential features of NFTs that shape user’s preference whereas the image feature is less likely to be influential. In addition, from the fact that price feature enhances the recommendation performance, it seems like adding the price information of each product could reflect user’s budgets.

Performance comparison with the baselines Table 2 compares the performance of the various approaches. The average recall score for all datasets shows NGCF and its variants consistently outperforming the baselines by a significant margin. This verifies the effectiveness of graph-

based models, empirically demonstrating modelling high-order relations can well facilitate the recommendation task.

6. Conclusion

We proposed an NFT recommender system that utilizes item features to overcome the limitations stemming from the unique characteristics of NFTs. We implemented the recommender system on the actual NFT transactions data and evaluated the recommendation performance with offline metrics demonstrating substantial improvement in recommendation performance. Our work identified some useful NFT features for recommender systems and shows graph-based models efficiently leverage neighbor information.

References

- Berg, R. v. d.; Kipf, T. N.; and Welling, M. 2018. Graph convolutional matrix completion. In *Proceedings of the 24th ACM SIGKDD international conference on knowledge discovery & data mining*.
- Besancia. 2022. Our 2021 NFT Yearly Report is out! <https://nonfungible.com/news/corporate/yearly-nft-market-report-2021>. Accessed: 2022-10-25.
- Conti and Schmidt. 2022. What Is An NFT? Non-Fungible Tokens Explained. <https://www.forbes.com/advisor/investing/cryptocurrency/nft-non-fungible-token/>. Accessed: 2022-10-24.

- DappRadar. 2022. DappRadar. <https://dappradar.com/nft/collections/protocol/ethereum/1>. Accessed: 2022-08-31.
- Etherscan. 2022. NFT Tracker. <https://etherscan.io/nfttracker>. Accessed: 2022-09-30.
- Hamilton, W.; Ying, Z.; and Leskovec, J. 2017. Inductive representation learning on large graphs. *Advances in neural information processing systems*, 30.
- He, X.; Deng, K.; Wang, X.; Li, Y.; Zhang, Y.; and Wang, M. 2020. Lightgcn: Simplifying and powering graph convolution network for recommendation. In *Proceedings of the 43rd International ACM SIGIR conference on research and development in Information Retrieval*, 639–648.
- He, X.; Liao, L.; Zhang, H.; Nie, L.; Hu, X.; and Chua, T.-S. 2017. Neural collaborative filtering. In *Proceedings of the 26th international conference on world wide web*, 173–182.
- Kipf, T. N.; and Welling, M. 2017. Semi-supervised classification with graph convolutional networks. In *International Conference on Learning Representations (ICLR) 2017*.
- Masci, J.; Meier, U.; Cireşan, D.; and Schmidhuber, J. 2011. Stacked convolutional auto-encoders for hierarchical feature extraction. In *International conference on artificial neural networks*, 52–59. Springer.
- Mikolov, T.; Sutskever, I.; Chen, K.; Corrado, G. S.; and Dean, J. 2013. Distributed representations of words and phrases and their compositionality. *Advances in neural information processing systems*, 26.
- OpenSea. 2020. What are you missing? Using basic machine learning to predict and recommend NFTs with OpenSea data. <https://opensea.io/blog/guides/predict-and-recommend-nfts/>. Accessed: 2022-10-24.
- OpenSea. 2022. OpenSea API. <https://docs.opensea.io/reference/api-overview>. Accessed: 2022-05-28.
- Piyadigama, D.; and Poravi, G. 2022a. An Analysis of the Features Considerable for NFT Recommendations. *arXiv preprint arXiv:2205.00456*.
- Piyadigama, D. R.; and Poravi, G. 2022b. Exploration of the possibility of infusing Social Media Trends into generating NFT Recommendations. *arXiv preprint arXiv:2205.11229*.
- Pradana, R. P.; Hariadi, M.; Rachmadi, R. F.; and Arif, Y. M. 2022. A Multi-Criteria Recommender System For NFT Based IAP In RPG Game. In *2022 International Seminar on Intelligent Technology and Its Applications (ISITIA)*, 214–219. IEEE.
- Rendle, S.; Freudenthaler, C.; Gantner, Z.; and Schmidt-Thieme, L. 2009. BPR: Bayesian personalized ranking from implicit feedback. In *The Conference on Uncertainty in Artificial Intelligence (UAI)*, 452–461.
- Vairagade, R.; Bitla, L.; Judge, H. H.; Dharpude, S. D.; and Kekatpure, S. S. 2022. Proposal on NFT Minter for Blockchain-based Art-Work Trading System. In *2022 IEEE 11th International Conference on Communication Systems and Network Technologies (CSNT)*, 571–576. IEEE.
- Wang, X.; He, X.; Wang, M.; Feng, F.; and Chua, T.-S. 2019. Neural graph collaborative filtering. In *Proceedings of the 42nd international ACM SIGIR conference on Research and development in Information Retrieval*, 165–174.
- Xue, H.-J.; Dai, X.; Zhang, J.; Huang, S.; and Chen, J. 2017. Deep matrix factorization models for recommender systems. In *IJCAI*, volume 17, 3203–3209. Melbourne, Australia.
- Ying, R.; He, R.; Chen, K.; Eksombatchai, P.; Hamilton, W. L.; and Leskovec, J. 2018. Graph convolutional neural networks for web-scale recommender systems. In *Proceedings of the 24th ACM SIGKDD international conference on knowledge discovery & data mining*, 974–983.
- Zhao, W. X.; Mu, S.; Hou, Y.; Lin, Z.; Chen, Y.; Pan, X.; Li, K.; Lu, Y.; Wang, H.; Tian, C.; et al. 2021. Recbole: Towards a unified, comprehensive and efficient framework for recommendation algorithms. In *Proceedings of the 30th ACM International Conference on Information & Knowledge Management*, 4653–4664.
- Zheng, L.; Lu, C.-T.; Jiang, F.; Zhang, J.; and Yu, P. S. 2018. Spectral collaborative filtering. In *Proceedings of the 12th ACM conference on recommender systems*, 311–319.