

# DiffStyler: Diffusion-based Localized Image Style Transfer

Shaoxu Li

*John Hopcroft Center for Computer Science*

*Shanghai Jiao Tong University*

Shanghai, China

lishaoxu@sjtu.edu.cn



Fig. 1: Style transfer results using the proposed method. Utilizing a content image alongside a style image, the proposed methodology is capable of effectuating the transfer of the content image’s attributes to the specified style target while preserving the semantic integrity of the content. Beyond the comprehensive style transfer, this methodology facilitates prompt-guided localized style transfer. This includes the capability to integrate multiple mask prompts and style targets.

**Abstract**—Image style transfer aims to imbue digital imagery with the distinctive attributes of style targets, such as colors, brushstrokes, shapes, whilst concurrently preserving the semantic integrity of the content. Despite the advancements in arbitrary style transfer methods, a prevalent challenge remains the delicate equilibrium between content semantics and style attributes. Recent developments in large-scale text-to-image diffusion models have heralded unprecedented synthesis capabilities, albeit at the expense of relying on extensive and often imprecise textual descriptions to delineate artistic styles. Addressing these limitations, this paper introduces DiffStyler, a novel approach that facilitates efficient and precise arbitrary image style transfer. DiffStyler lies the utilization of a text-to-image Stable Diffusion model-based LoRA to encapsulate the essence of style targets. This approach, coupled with strategic cross-LoRA feature and attention injection, guides the style transfer process. The foundation of our methodology is rooted in the observation that LoRA maintains the spatial feature consistency of UNet, a discovery that further inspired the development of a mask-wise style transfer technique. This technique employs masks extracted through a pre-trained FastSAM model, utilizing mask prompts to facilitate feature fusion during the denoising process, thereby enabling localized style transfer that preserves the original image’s unaffected regions. Moreover, our approach accommodates multiple style

targets through the use of corresponding masks. Through extensive experimentation, we demonstrate that DiffStyler surpasses previous methods in achieving a more harmonious balance between content preservation and style integration.

**Index Terms**—3D Cartoon Face Reconstruction, 3D Face Rigging, Volume Rendering, Neural Surface

## I. INTRODUCTION

A painting embodies an artist’s creativity and engagement, reflecting their unique vision through distinctive styles, textures, brushstrokes, and elements that elicit deep emotional responses. These nuances defy simple linguistic description, presenting challenges in verbally encapsulating a painting’s essence. This complexity becomes particularly evident in the context of example-guided artistic image style transfer, where the goal is to create digital artworks that replicate the original artist’s intent.

Image Style transfer has attracted significant attention for its innovative applications across various fields [1]–[3]. This process generates visually compelling outputs that maintain the original content’s integrity while adopting the stylistic

features of the style image. Recently, the advent of text-guided image style transfer has opened new research avenues, particularly with the advancement of diffusion models [4]–[6]. These models, renowned for generating high-quality images from textual prompts, offer novel methods to direct the style transfer process. However, this approach faces challenges, primarily the intricate and time-consuming task of crafting detailed text prompts that accurately convey the desired style, necessitating a deep understanding of the style’s nuances and significant effort.

In this paper, we introduce an innovative framework for diffusion-based localized image style transfer, termed Diff-Styler. This framework is designed to learn and transfer style attributes from a single input image, such as a cartoon or painting, to a natural image within a similar domain. Moreover, as demonstrated in Figure 1, our methodology facilitates localized image style transfer via an editing target prompt or enables the transfer of multiple parts’ styles through corresponding prompts.

To achieve this goal, we harness the advanced capabilities of text-to-image diffusion models renowned for their high-quality image synthesis. We exploit the recent success of attention manipulation [6], [7] of diffusion models and LoRA [8] for diffusion models fine-tuning. We observe that different LoRA-integrated diffusion models yields a notable semantic consistency across generated features. This foundational insight allows for the utilization of LoRA to meticulously learn the attributes of a designated style image, thereby directing the image generation process through the nuanced manipulation of features and attention maps derived from the original denoising procedure. Given the semantic coherence of the features, we posit the feasibility of synergizing original and LoRA-integrated Stable Diffusion (SD) models, including the fusion of disparate LoRA-integrated SD models. We propose to fuse the features in the denoising process with extracted masks. Such an approach paves the way for localized image style transfer, predicated on specific style target images and editing target prompts.

To summarize, our contributions are as follows:

- We provide new empirical insights about internal spatial features across different LoRA-integrated text-to-image diffusion models.
- We introduce a practical framework that leverages the power of pre-trained and LoRA-integrated diffusion, allowing the performance of high-quality arbitrary image style transfer.
- We propose prompts-guided localized image style transfer, allowing to perform multiple style targets transfer to specified parts or preserving the content.
- We show, both quantitatively and qualitatively, that our method outperforms existing state-of-the-art methods, achieving a significantly better balance between preserving the content semantic and style attributes.

## II. RELATED WORK

### A. Image Style Transfer.

Image stylization transforms images into various artistic styles, ranging from watercolor and oil painting to abstract expressions. Originally, style transfer relied on matching hand-crafted features of content and style images through traditional methods [1], [9]. With the advent of neural style transfer [2], which utilizes pre-trained CNNs to extract image features, the field has evolved significantly. Recent advancements focus on enhancing accessibility [10]–[12], quality [13]–[15], acceleration [16], [17], and application [18]–[21] of style transfer techniques. Innovations such as AdaAttN [22] introduce adaptive attention normalization to leverage both shallow and deep features, while ArtFlow [23] employs reversible neural flows for universal style transfer without content leakage. IEContraAST [24] and CAST [25] explore new directions in style pattern learning and direct style representation from image features, respectively. Moreover, StyleFormer [26] and StyTr<sup>2</sup> [27] innovate with convolution-free structures and multi-layer transformer decoders for effective style composition and stylization. Recent methods also incorporate pre-trained diffusion models for improved style translation, as seen in InST [3] and VCT [28], which offer novel approaches to guiding image synthesis and translating visual concepts based on reference images.

### B. Personalizing Text-to-Image Generation.

Pre-trained text-to-image diffusion models are increasingly recognized for their capacity in generating diverse images. However, these models often struggle to preserve the identity of specific objects or humans when guided solely by text instructions. To tackle this challenge, research has shifted towards personalizing text-to-image generation. Unlike conventional style transfer or image-to-image translation, this approach allows for variations in poses, backgrounds, and other elements by learning from one or more target images. ILVR [29] leverages noised low-pass filtered data from target images to guide the denoising process for creating personalized image deviations. DALL·E 2 [5] introduces a text-conditional image generation framework named unCLIP, focusing on inverting the CLIP image encoder for generation. Textual Inversion [30] proposes embedding a specific visual concept as a pseudo-word within the model’s embedding space, enabling the generation of images that adhere to a particular object or style. DreamBooth [31] extends this by embedding a semantic prior into the model, facilitating diverse image synthesis with class-specific preservation. IP-Adapter [32] distinguishes itself with a decoupled cross-attention mechanism for better handling of multimodal image generation. Similarly, InstantID [33] introduces IdentityNet, which combines facial and landmark cues with textual prompts for more accurate identity preservation in generated images. Furthermore, LoRA [8] has emerged as an effective technique for enhancing large models, including those for text-to-image generation. By incorporating trainable rank decomposition matrices into the Transformer architecture

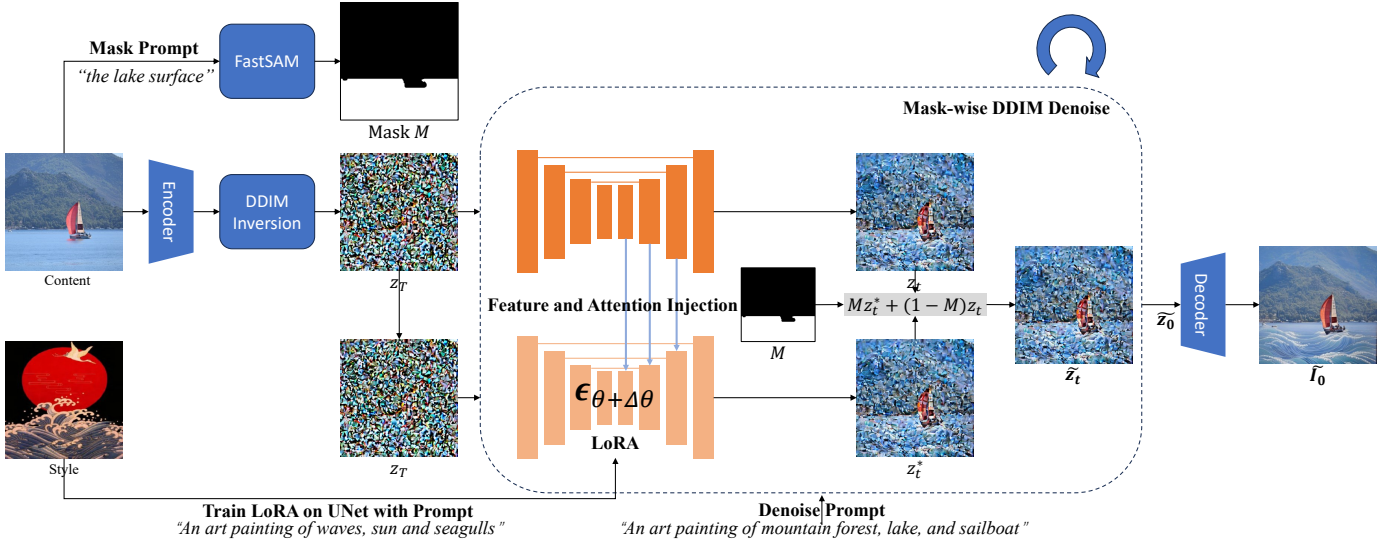


Fig. 2: Method pipeline. For the style attributes transfer, we train LoRA on UNet with a simple prompt. For the content semantic maintaining, we execute the DDIM inversion and denoise. In the DDIM denoise process, the feature and attention are injected to the LoRA-integrated SD model. For prompt guided editing, we use a pre-trained FastSAM to extracted the mask, and execute mask-wise feature combination in the denoise process.

without altering the pre-trained model weights, LoRA facilitates efficient and lightweight fine-tuning.

### C. Attention-based Image Editing.

In recent advancements in text-to-image diffusion models, attention mechanisms have been crucial for manipulating image generation effectively. Prompt-to-Prompt [6] highlights the significance of cross-attention layers in mapping the spatial layout of images to prompt words, thereby enabling localized and global image editing. Plug-and-Play [7] approach demonstrates the potential of spatial feature manipulation within the self-attention framework for fine-grained image structure control. CreativeSynth [34] integrates multimodal features with bespoke attention mechanisms, facilitating style transfer and inversion. DiffMorpher [35], employs attention techniques and adaptive normalization for semantic image morphing. SIDiff [36] leverages style transfer through self-attention layer manipulation, addressing content disruption and color disharmony.  $Z^*$  [37] develops a dual-path denoising approach for content and style representation in latent space. VSP [38] and RIVAL [39] enhance denoising and feature interaction for image variation via novel attention and normalization techniques.

### D. Semantic Localized Image Editing.

Image style transfer often aims to modify aesthetic aspects like color and brushstrokes, potentially compromising the semantic integrity of the output. In contrast, semantic image editing seeks to achieve domain-appropriate modifications through editing instructions, often in the form of prompts. Text-to-image diffusion models, which denoise images from random noise by learning semantic features, have emerged as powerful tools for this task. Techniques such as DDIM [4] and Glide

[40] implement pixel copying strategies during the denoising process, whereas Paint by Word [41] and similar methods [42], [43] leverage CLIP-guided gradients for text-matching within specific image regions. RePaint [44] modifies diffusion iterations to enhance realism by sampling from unmasked regions with existing image information. DiffusionCLIP [45] and SDEdit [46] utilize diffusion models' inversion capabilities and SDE priors, respectively, for text-driven manipulation and realism enhancement. DiffEdit [47] introduces automatic mask extraction for targeted editing, contrasting diffusion model predictions based on different prompts, while some approaches like ILVR [29] and Prompt-to-Prompt [6] achieve localized edits without explicit masks, using attention map correlations. Our approach also facilitates localized editing with mask extraction, but uniquely introduces style deviations from target images. Despite potential mask extraction directly from diffusion models, we opt for the superior mask quality offered by pre-trained FastSAM [6] models, tailored for localized editing prompts.

## III. METHOD

In this work, we aim to generate a new image  $I^*$  that embodies the style of a given image  $I_s$  while preserving the semantic content of another image  $I_c$ . Utilizing Stable Diffusion (SD) [48], a cutting-edge pre-trained text-to-image LDM model, as our generative backbone, we introduce a method involving DDIM inversion, LoRA training, cross-LoRA feature and attention injection, and mask-wise DDIM denoising as depicted in Fig. 2.

Our significant finding reveals that spatial features in different LoRA-integrated diffusion models maintain high semantic consistency. Leveraging this insight, we propose a framework that extracts features from the content image  $I_c$ 's generation

process in the original model and injects them, along with prompts  $c$ , into the style image  $I_s$ 's generation process in the LoRA-integrated model. Furthermore, we suggest employing feature fusion during the generation to facilitate localized style transfer, which requires the use of corresponding masks.

#### A. Preliminaries

**Latent Diffusion Models.** Diffusion models [49]–[51] represent a class of probabilistic generative models that are trained to reverse a diffusion process. Being the latest advancement in generative models, diffusion models have garnered significant attention due to their superior capability in generating high-quality images. In the image generation, the forward diffusion process incrementally introduces noise into an initially clean image  $x_0$ :

$$x_t = \sqrt{\alpha_t}x_0 + \sqrt{1 - \alpha_t}z \quad (1)$$

where  $z \sim N(0, I)$  and  $\{\alpha_t\}$  are the noise schedule. The back process progressively removes noise from an initial Gaussian noise image. Typically, a neural network  $\epsilon_\theta(x_t, t)$  is trained to predict the added noise.

Latent Diffusion Models (LDM) [48] uses a variational auto-encoder (VAE) [52] to encode the images to the latent image embeddings. A text-conditioned denoising UNet [53]  $\epsilon_\theta(z_t, t, c)$  is trained in the latent space. Our method is built upon Stable Diffusion (SD), a widely used pre-trained text-to-image model based on the LDM framework. A layer of the UNet in the SD involves a residual block, a self-attention block, and a cross-attention block. The attention module in UNet can be formulated as follows:

$$\text{Attention}(Q, K, V) = \text{softmax}\left(\frac{QK^T}{\sqrt{d_K}}\right)V \quad (2)$$

where  $Q$  denotes the query features,  $K, V$  denotes the corresponding key and value feature. Self-attention is computed purely on the spatial features. Cross-attention is computed between spatial features and the text embeddings.

**Low-Rank Adaption (LoRA).** Low-Rank Adaptation (LoRA) [8] is an efficient method initially employed for fine-tuning large language models by adapting a low-rank residual  $\Delta\theta$ , which can be decomposed into low-rank matrices, thus offering a streamlined approach to modifying the entire model parameters  $\theta$ . Recently, LoRA has demonstrated its effectiveness and ease of integration in the fine-tuning of diffusion models, particularly in personalizing text-to-image generation. Our method utilizes LoRA to transfer the attributes of the style target in the image style transfer task.

**Segment Anything Model (SAM).** Segment Anything Model (SAM) [54] emerges as the inaugural foundation model specifically engineered for image segmentation, heralding significant advancements across a spectrum of tasks within image analysis and comprehension. SAM distinguishes itself by delivering high-precision, class-agnostic segmentation capabilities, demonstrating exceptional efficacy in zero-shot task scenarios.

FastSAM [55] is a novel adaptation that reinterprets the SAM paradigm into the established domain of instance segmentation. By judiciously employing only 1/50 of the com-

prehensive SA-1B dataset originally curated by the SAM developers, FastSAM manages to train an extant instance segmentation framework, thus achieving a performance metric comparable to that of SAM, albeit with a remarkable 50-fold increase in runtime efficiency. Our method employs the FastSAM to derive the mask guidance for mask-wise style transfer.

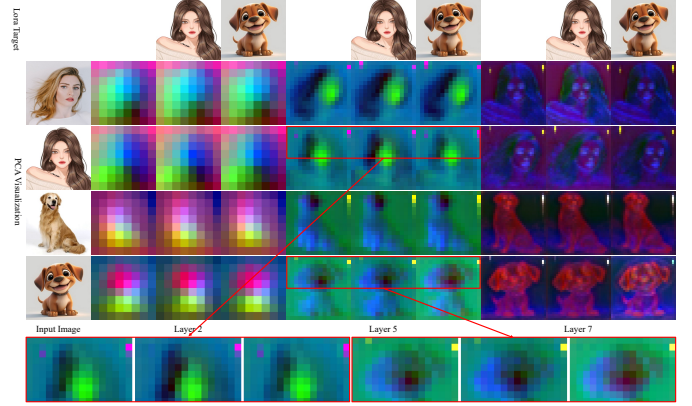


Fig. 3: Analysis of features from different LoRA-integrated SD. We extracted spatial features from different decoder layers at roughly 50% of the generation process ( $t = 540$ ). For each image, we applied PCA on the extracted features with three models: original SD, in-domain LoRA-integrated SD and out-of-domain LoRA-integrated SD and visualized the top three leading components. Early layers focus more on semantics, while later layers concentrate on textures. Little feature difference emerges across LoRA-integrated SD models. In-domain LoRA-integrated SD leads to better correspondences in some layers (layer 5, for example).

#### B. Spatial Features across LoRA Models.

Recent studies have leveraged pre-trained SD features for zero-shot tasks like Image-to-Image translation [6], [7], [34], [36] and image morphing [35]. Some researches [7], [35], [36] integrates these features alongside self-attention (SA) mechanisms to steer spatially-aware image synthesis. Conversely, cross-attention (CA) mechanisms are employed for embedding identities or concepts from reference images [6], [34]. Our endeavor focuses on maintaining both spatial and identity integrity of content. Considering this, we incorporate both SA and CA injection for image generation. Fig. 6 shows the effectiveness of our designs.

We delve into the potential of SD features in facilitating cross-LoRA image synthesis. To explore this, we fine-tune two distinct LoRA models within separate stylistic domains. A Principal Component Analysis (PCA) is conducted to compare the fine-tuned LoRA models, incorporating a real image from each domain. Features are extracted from each decoder layer at every timestep  $t$ , considering the original SD, alongside in-domain and out-of-domain LoRA-modified SDs. As depicted in Figure 3, initial layers predominantly capture broader semantic aspects, while subsequent layers detail finer



elements. Minimal discrepancy is noted among features of LoRA-enhanced SD models. In real images, discerning feature variation across models proves challenging. However, for styled images, certain layers exhibit more pronounced feature alignment with in-domain LoRA-enhanced SDs (notably, layer 5 for cartoon hair and dog faces). Conversely, out-of-domain cartoon face features appear diminished at layer 5. Overall, the integration of LoRA subtly affects spatial features. These findings suggest the feasibility of spatial feature injection and fusion across LoRA models, presenting a viable approach for mask-based image synthesis.

### C. Feature and Attention Injection across LoRA Models.

Based on the preceding observations, we now turn to the style transfer task. We propose a novel approach whereby the attribute of the style target is assimilated using a LoRA model, while the semantic integrity of the content is preserved through the integration of features and attention mechanisms. The methodology allows for selective transfer within an image through the application of extracted masks, facilitated by the interoperability across LoRA models.

**LoRA Training.** Given a style image, we first train a LoRA  $\Delta\theta$  on the SD UNet  $\epsilon_\theta$ . The learning objective for training is:

$$L(\Delta\theta) = \mathbb{E}_{\epsilon, t} [\|\epsilon - \epsilon_{\theta+\Delta\theta}(\sqrt{\alpha_t}z_0 + \sqrt{1-\alpha_t}\epsilon, t, c)\|] \quad (3)$$

where  $z_0$  denotes the encoded latent embedding of the input image,  $\epsilon$  denotes the random sampled Gaussian noise,  $\epsilon_{\theta+\Delta\theta}$  denotes the LoRA-integrated UNet,  $c$  denotes the text embedding of the text prompt. With the LoRA-integrated SD, attributes of the style target can be injected into the generation of images with corresponding prompts. To avoid overfitting, the LoRA training is only carried out on the projection matrices  $Q, K, V$  in the attention modules of UNet.

**Feature injection.** Given a content image, we invert the encoded image embedding into the initial noise using DDIM [4]. The design of shared initial noise has been proved to lead to visual similarity in the denoising [7], [35].

At each denoising step, we extract the guidance features  $f_t^l$  from the original denoising step:  $z_{t-1} = \epsilon_\theta(z_t, t, \emptyset)$ . We then inject these features into the LoRA-integrated UNet to guide the semantics of style transfer. The injection is accomplished with feature override. The operation can be expressed by:

$$z_{t-1}^* = \hat{\epsilon}_{\theta+\Delta\theta}(z_t^*, t, c; \{f_t^l\}) \quad (4)$$

where  $\hat{\epsilon}_{\theta+\Delta\theta}(\cdot; \{f_t^l\})$  denotes the denoising with injected features on the LoRA-integrated UNet. To balance the structure-preserving and the deviating, we choose layers 4-11 as the injection layers, following the design of Plug-and-Play [7]. By doing this, a balance between preserving the content structure and deviating from its appearance can be achieved.

**Attention Injection.** The attention control has been studied in many previous works [6], [7], [34]–[36]. As a supplement of feature injection, attention injection helps with the details or identity consistency of the image generation guidance. In the original SD, SA and CA correspond to the spatial features and text embeddings. For attention injection, SA is used for

spatial geometry preserving with style or domain variations [7], [35], [36]. CA is used for localized attributes or identity preserving [6], [34]. In the style transfer task, many methods transfer the color of the content to the style [22], [25]–[27], which impairs the semantics of the content. We aim to alter the painting style and brushwork while maintaining the shape and color. Considering this, we inject both the SA and CA into the LoRA-integrated UNet. At each denoising step, we inject the attention matrix similarly to feature injection. The modified operation can be denoted as:

$$z_{t-1}^* = \hat{\epsilon}_{\theta+\Delta\theta}(z_t^*, t, c; \{f_t^l\}, \{A_t^l\}) \quad (5)$$

We use a default setting where self-attention and cross-attention are injected into all the decoder layers.

### D. Semantic Localized Localized Image Style Transfer

Semantic localized image editing focuses on modifying specific regions of an image while preserving the integrity of the remaining areas. This domain has seen substantial interest, particularly with the advent of text-to-image diffusion models that leverage pre-extracted semantic masks and editing prompts for targeted adjustments [4], [40], [41]. Beyond relying on external masks, these models inherently grasp the image’s semantic structure during generation, facilitating prompt-based localized editing without separate masks [47], [56]. While integrating features for semantic segmentation shows promise, achieving complete semantic separation remains challenging in specific contexts.

The emergence of SAM [54] marks a significant advancement in zero-shot image segmentation, boasting superior segmentation quality compared to self-extracted masks from Stable Diffusion models. In light of SAM’s capabilities, our approach employs a pre-trained SAM model (specifically, FastSAM) for mask extraction based on given prompts. This mask then directs the denoising process, ensuring the area outside the mask remains unchanged. Our method involves substituting the encoded latent features’ values within the mask’s boundaries, effectively guiding the denoising process through mask-based feature manipulation. The mask is adjusted to align with the dimensions of the latent features to facilitate this. The mask-guided denoising can be expressed by:

$$\hat{z}_t = Mz_t^* + (1 - M)z_t. \quad (6)$$

As a basic pipeline, mask-guided cross-LoRA denoising enables the semantic guided image style transfer. Since the pipeline is decoupled, we can synthesize images with multiple style targets and corresponding mask prompts. That can be expressed by:

$$\hat{z}_{(t-1)} = \sum M_i \hat{\epsilon}_{\theta+\Delta\theta_i}(\hat{z}_t, t, c; \{f_t^l\}, \{A_t^l\}) + (1 - \sum M_i) \epsilon_\theta(\hat{z}_t, t, c). \quad (7)$$

where  $\hat{\epsilon}_{\theta+\Delta\theta_i}$  denotes the  $i_{th}$  LoRA-integrated UNet with injection, and  $M_i$  denotes the corresponding mask.

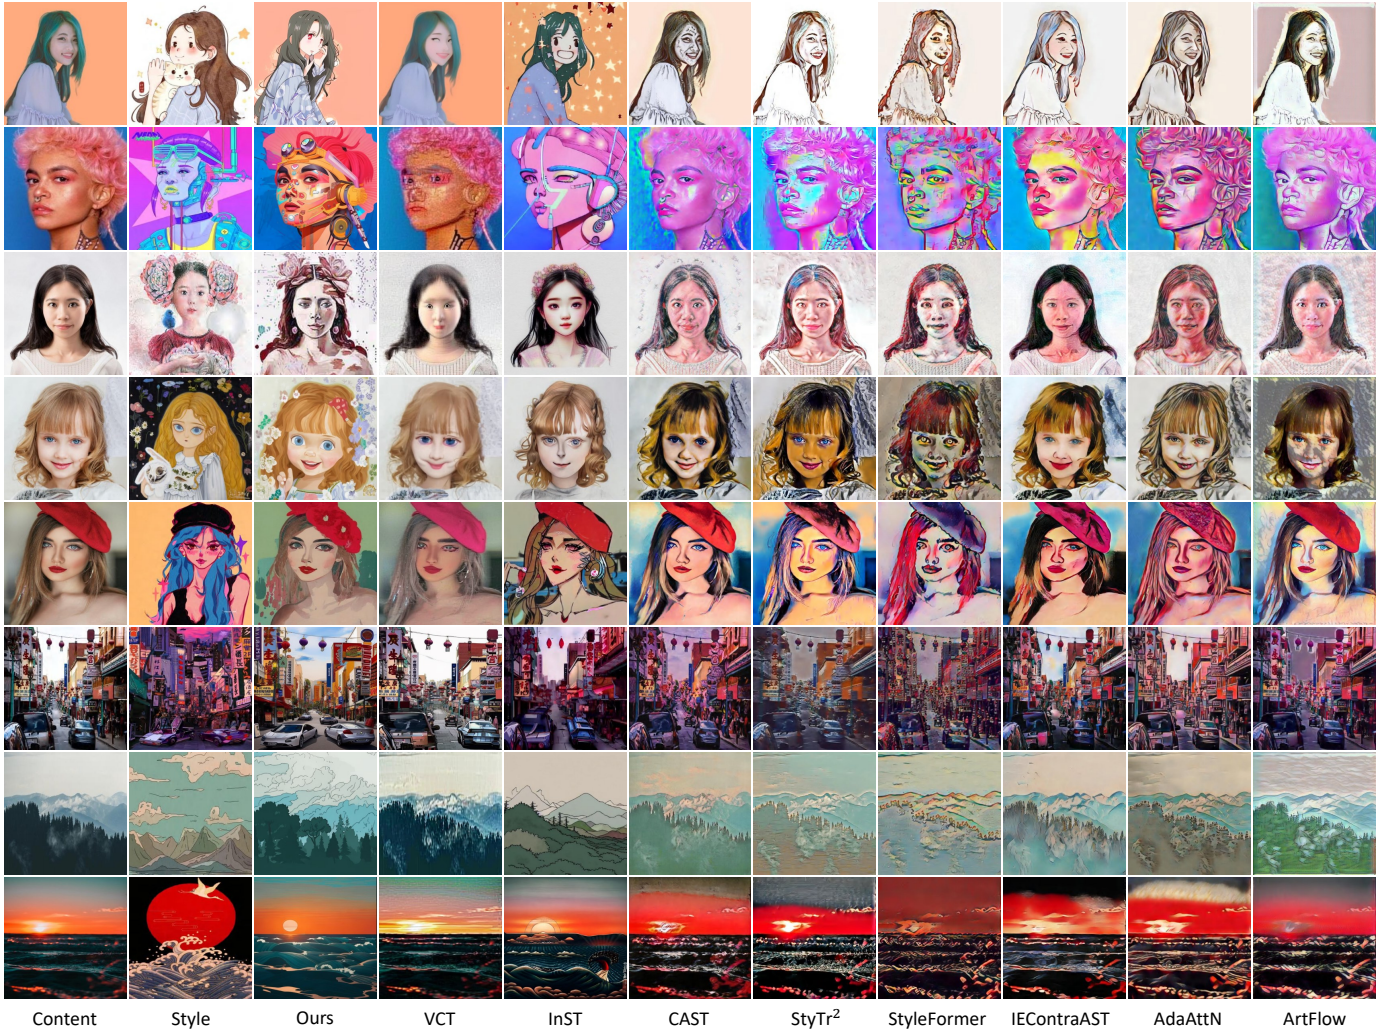


Fig. 4: Qualitative comparison with some state-of-the-art image style transfer methods.

#### IV. EXPERIMENTS

We use the Stable Diffusion v2.1-base as our diffusion model. The inversion and denoise are implemented with diffusers [57]. All experiments are conducted on a single GeForce RTX3090 GPU. The input and output images are in the resolution of 512x512. We train the LoRA to fine-tune the projection matrices  $Q, K, V$  in the attention modules of the diffusion UNet. We set the LoRA rank to 16, training steps to 200, and learning rate to  $2 \times 10^{-4}$  using AdamW optimizer. We perform deterministic DDIM inversion with 1000 forward steps and denoising with 50 sampling steps distilled from entire diffusion steps. We set our default feature and attention injection thresholds to 30 and 25 out of the 50 sampling steps.

##### A. Comparison with Style Transfer Methods

We compare our method with leading image style transfer techniques including VCT [28], InST [3], CAST [25], StyTr<sup>2</sup> [27], StyleFormer [26], IEContraAST [24], AdaAttN [22], and ArtFlow [23]. Comparative outcomes depicted in Fig. 4 reveal that while CAST [25], StyTr<sup>2</sup> [27], StyleFormer

[26], IEContraAST [24], AdaAttN [22], and ArtFlow [23] predominantly alter the image’s color style, VCT [28], InST [3], and our method are capable of transferring more complex style attributes, including semantics and shapes. Notably, InST [3] struggles with maintaining a balance between content semantics and style, and VCT [28] induction often results in undesirable artifacts. In contrast, our model not only achieves superior visual quality but also effectively preserves content semantics amidst stylistic transformation. Despite its efficacy, our model is not without flaws, occasionally generating artifacts attributable to the diffusion model and LoRA, such as unnatural hand placements (in the 1st and 4th rows) and anomalous text (in the 6th row).

##### B. Mask-wise Style Transfer Results

In addition to global style transfer, our methodology facilitates mask-wise localized image style transfer, guided by semantic prompts, as illustrated in Figure 5, which presents the outcomes of two case studies. For each content image, two style targets along with corresponding mask prompts are pro-



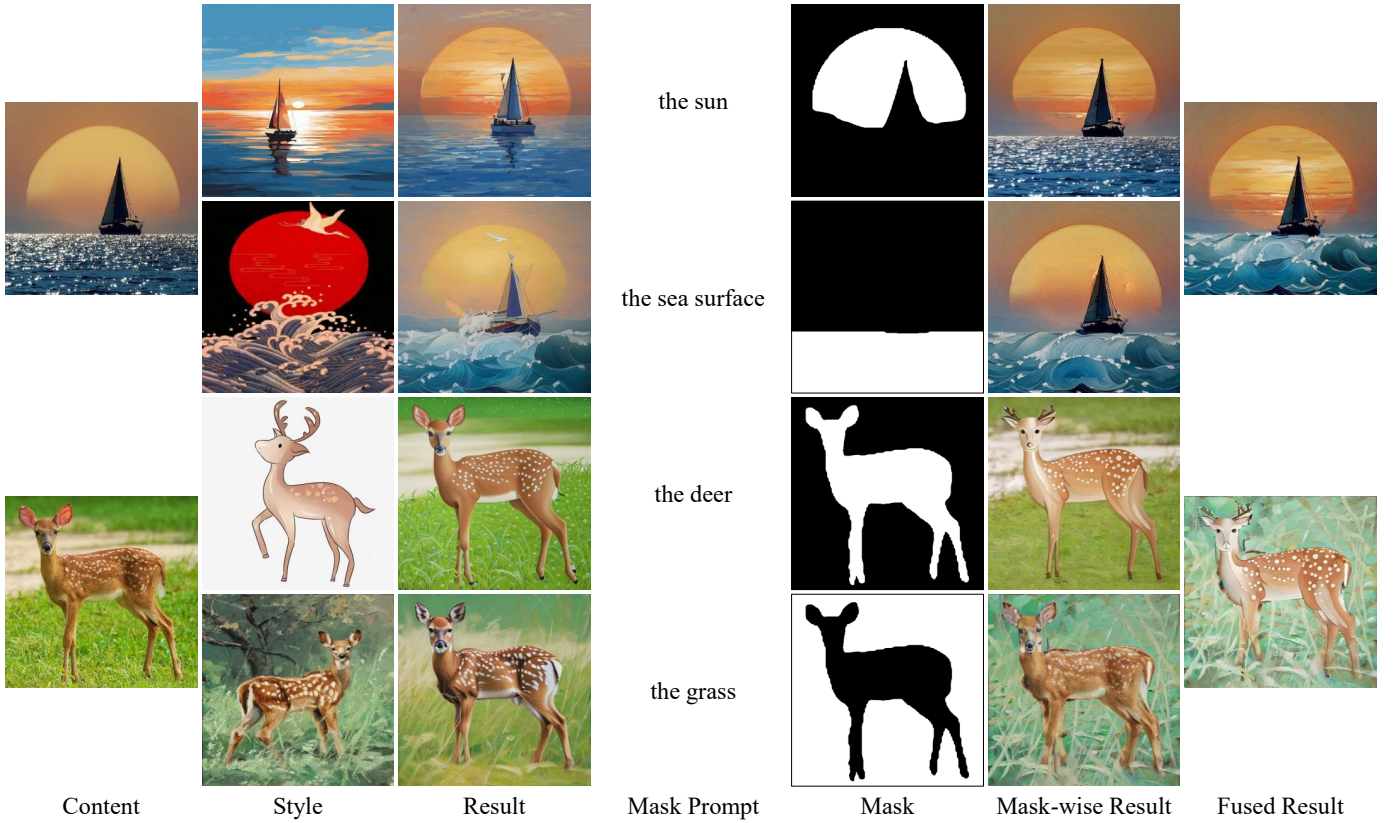


Fig. 5: Mask-wise style transfer results. The global style transfer results, extracted masks, mask-wise results and fused results are shown.

vided. The global results, pertinent masks, mask-wise results, and fused results are depicted. In the case of holistic style transfer, our approach is capable of generating esthetically pleasing outcomes that incorporate the style characteristics of the style target while preserving the semantic attributes of the content. Upon receiving a mask prompt, the mask is computed utilizing a pre-trained FastSAM model. Our approach is adept at synthesizing mask-wise outcomes that are aligned with the mask and style target, without altering other segments. The nuances of mask-wise style transfer outcomes contrast with those of comprehensive style transfer, with the fusion process leaving the generated results predominantly unaltered.

### C. User Study

To quantitatively assess the efficacy of our method in contrast to other state-of-the-art (SOTA) style transfer algorithms, we executed a user study. This study involved the participation of 32 individuals, who were presented with 15 different pairs of content and style, alongside the style transfer outcomes generated by both DiffStyler and a randomly selected SOTA technique. Participants were tasked with evaluating "which of the results more effectively preserved the content?/ captured the style? and which they preferred overall for each pair?" From 32 participants, a total of 480 votes were collected. The distribution of votes, as detailed in Table I, underscores the superiority of our proposed method in achieving style transfer.

	VCT	InST	CAST	Sty-Tr <sup>2</sup>	StyleFormer	IEContraAST	AdaAttN	ArtFlow
Content	26%	20%	48%	42%	38%	34%	40%	44%
Style	14%	32%	10%	14%	8%	16%	14%	18%
Overall	18%	42%	22%	14%	26%	32%	20%	26%

TABLE I: Quantitative Evaluation. The results show the proportion of instances where the analyzed approach is favored over ours in terms of better content preservation, better style presentation and better overall quality.

### D. Ablation Study

The mask guidance represents an engineered design predicated on the consistency of cross-LoRA features. The impact of attention injection layers has been a subject of extensive investigation in prior researches [6], [7], [35], [47]. Our discussion focuses primarily on the efficacy of cross-LoRA features and attention injection, alongside the influence exerted by the feature and attention injection processes.

**Cross-LoRA feature and attention injection.** We evaluate the efficacy of our design approaches by comparing the synthesis outcomes of four different configurations: SD, SD+LoRA, SD+Prompt, and SD+LoRA+Prompt. For each configuration, we synthesize images incorporating various combinations of feature, SA, and CA injections. The resultant images are presented in Fig. 6, using a dog photo as the content and a cartoon dog image as the style reference. In the SD+Prompt

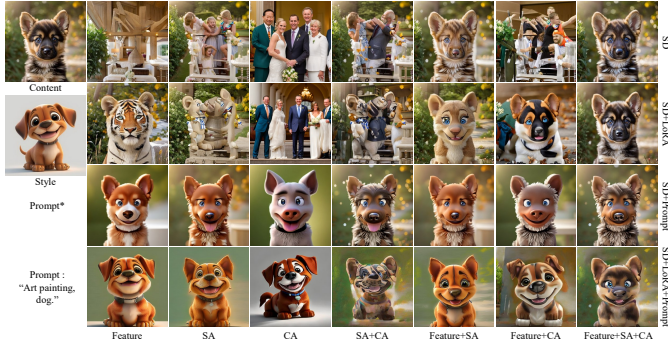


Fig. 6: Results of cross-LoRA feature and attention injection.

configuration, text prompts are optimized to closely align with the style target image utilizing a pre-trained Image-to-Prompt model, CLIP Interrogator [58]. The optimized text is denoted as Prompt\*<sup>1</sup>. For the SD+LoRA+Prompt configuration, a simpler prompt, "Art painting, dog.", is employed to direct the synthesis process.

The comparison between SD and SD+LoRA, without the utilization of prompts, reveals that both approaches produce images with similar coarse shapes but exhibit variations in detail, underscoring the utility of prompts in achieving more accurate image synthesis. The application of prompts ensures that the synthesis outcomes are semantically coherent.

When examining the impact of feature, SA, and CA, it is evident that the spatial distribution is predominantly influenced by the feature and SA, while CA focuses primarily on the prompts. Furthermore, a comparison between SD+inverted prompts and our proposed method indicates that our method consistently generates images that are more aligned with the style target, whereas SD+inverted prompts better preserve the attributes of the content. Overall, our approach, incorporating feature, SA, and CA, achieves superior results by preserving the semantic content (texture and geometry) of the image, while adeptly adopting the stylistic characteristics (e.g., large eyes, smooth skin) of the style target.

**Feature and attention injection steps.** Our methodology incorporates feature and attention injection to preserve the semantic integrity of the content. An analysis of the impact resulting from the feature and attention injection process is presented. Figure 7 illustrates the outcomes. It is important to point out that feature injection is confined to layers 4 through 11. Despite the greater number of feature injection steps compared to attention injection steps, attention injection still contributes to content generation.

As the number of feature injection steps increases, there is a notable enhancement in content preservation. A small feature injection step amplifies coarse pose preservation through attention injection, whereas a substantial feature injection step refines the details through the same.

<sup>1</sup>prompt\*: "a close up of a dog sitting on a white surface, 3D cartoon, charming smile, photographic render, cartoons, small round face, portrait photo profile picture, avatar image, photo photo, (rust), as a Pixar character, dramatic smiling pose, puppies, upbeat"

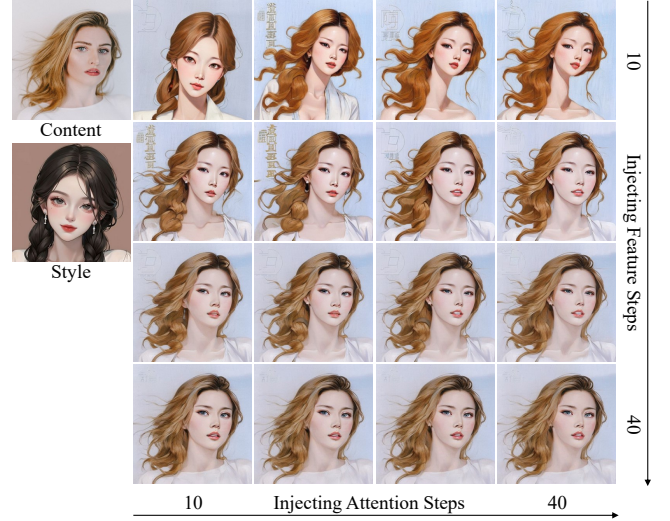


Fig. 7: Style transfer results with increasing feature and attention injection steps.

### E. Discussion and Limitations


LoRA is capable of learning the stylistic attributes of the target. When guiding the DDIM denoise process through feature and attention injection, we restrict the fine-tuning to projection matrices within the attention modules to mitigate overfitting risks. Despite these measures, our approach occasionally struggles to preserve the semantic integrity of content. The intertwinement of stylistic attributes and structural elements within an image presents a significant challenge towards achieving a complete decoupling. Instances occur where the properties assimilated by LoRA inadvertently alter the content's semantic meaning. Figure 8 illustrates two such instances of failure: the first exhibits a disruption caused by conflicting eye details, while the second demonstrates an unintended modification in the pose of a subject cat to match that of the style target, accompanied by the replacement of missing elements with foliage and the unintended transfer of a railing beneath the cat from the style target into the final image.

To facilitate mask extraction, our methodology incorporates the use of the pre-trained FastSAM model. Despite FastSAM's robust capabilities, the extraction process does not always yield optimal results. This can result in inaccuracies of the mask, potentially compromising the quality of mask-wise style transfer outcomes.


## V. CONCLUSION

In this paper, we introduce DiffStyler, a pioneering approach to style transfer that learns the attributes of a single style target via LoRA training, subsequently guiding the image synthesis process through feature and attention injection. This method is predicated on novel insights concerning the internal representation consistency within cross-LoRA text-to-image diffusion models. DiffStyler surpasses current state-of-the-art (SOTA) methods, striking a superior balance between content semantic preservation and style attribute incorporation.



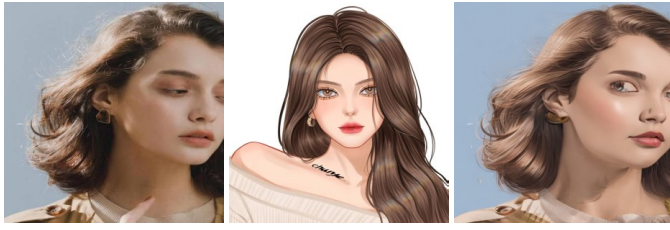

(a) Unideal expression generation.

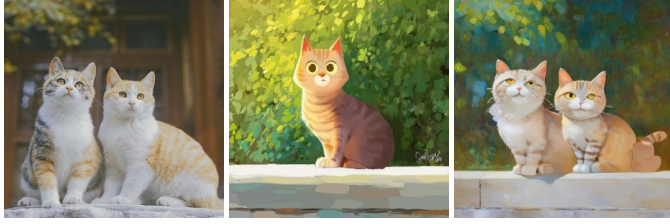

(b) Failure in pose control.

Fig. 8: Failure cases caused by the conflict between content and style.

Furthermore, we propose a novel concept of prompt-guided localized style transfer, drawing upon these insights. Comprehensive experimental analysis confirms that our approach outperforms contemporary state-of-the-art techniques.

## REFERENCES

- [1] Bin Wang, Wenping Wang, Huaiping Yang, and Jianguang Sun, "Efficient example-based painting and synthesis of 2d directional texture," *IEEE Transactions on Visualization and Computer Graphics*, vol. 10, no. 3, pp. 266–277, 2004.
- [2] Leon A Gatys, Alexander S Ecker, and Matthias Bethge, "A neural algorithm of artistic style," *arXiv preprint arXiv:1508.06576*, 2015.
- [3] Yuxin Zhang, Nisha Huang, Fan Tang, Haibin Huang, Chongyang Ma, Weiming Dong, and Changsheng Xu, "Inversion-based style transfer with diffusion models," in *2023 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 2023, pp. 10146–10156.
- [4] Jiaming Song, Chenlin Meng, and Stefano Ermon, "Denoising diffusion implicit models," 2022.
- [5] Aditya Ramesh, Prafulla Dhariwal, Alex Nichol, Casey Chu, and Mark Chen, "Hierarchical text-conditional image generation with clip latents," 2022.
- [6] Amir Hertz, Ron Mokady, Jay Tenenbaum, Kfir Aberman, Yael Pritch, and Daniel Cohen-Or, "Prompt-to-prompt image editing with cross attention control," 2022.
- [7] Narek Tumanyan, Michal Geyer, Shai Bagon, and Tali Dekel, "Plug-and-play diffusion features for text-driven image-to-image translation," in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, June 2023, pp. 1921–1930.
- [8] Edward J. Hu, Yelong Shen, Phillip Wallis, Zeyuan Allen-Zhu, Yuanzhi Li, Shean Wang, Lu Wang, and Weizhu Chen, "Lora: Low-rank adaptation of large language models," 2021.
- [9] Wei Zhang, Chen Cao, Shifeng Chen, Jianzhuang Liu, and Xiaou Tang, "Style transfer via image component analysis," *IEEE Transactions on Multimedia*, vol. 15, no. 7, pp. 1594–1601, 2013.
- [10] Jing Liao, Yuan Yao, Lu Yuan, Gang Hua, and Sing Bing Kang, "Visual attribute transfer through deep image analogy," *ACM Transactions on Graphics*, vol. 36, no. 4, 2017.
- [11] Shuyang Gu, Congliang Chen, Jing Liao, and Lu Yuan, "Arbitrary style transfer with deep feature reshuffle," in *CVPR*, 2018.
- [12] Zicheng Zhang, Yinglu Liu, Congying Han, Tiande Guo, Ting Yao, and Tao Mei, "Generalized one-shot domain adaptation of generative adversarial networks," 2022.
- [13] Chuan Li and Michael Wand, "Combining markov random fields and convolutional neural networks for image synthesis," in *CVPR*, 2016.
- [14] Nicholas Kolkin, Jason Salavon, and Gregory Shakhnarovich, "Style transfer by relaxed optimal transport and self-similarity," in *CVPR*, 2019.
- [15] Yingying Deng, Fan Tang, Weiming Dong, Wen Sun, Feiyue Huang, and Changsheng Xu, "Arbitrary style transfer via multi-adaptation network," in *Acm International Conference on Multimedia*, 2020, ACM.
- [16] Justin Johnson, Alexandre Alahi, and Li Fei-Fei, "Perceptual losses for real-time style transfer and super-resolution," in *ECCV*, 2016, pp. 694–711.
- [17] Yuan Yao, Jianqiang Ren, Xuansong Xie, Weidong Liu, Yong-Jin Liu, and Jun Wang, "Attention-aware multi-stroke style transfer," in *CVPR*, 2019.
- [18] Shuai Yang, Jiaying Liu, Zhouhui Lian, and Zongming Guo, "Awesome typography: Statistics-based text effects transfer," in *CVPR*, 2017.
- [19] Samaneh Azadi, Matthew Fisher, Vladimir G. Kim, Zhaowen Wang, Eli Shechtman, and Trevor Darrell, "Multi-content gan for few-shot font style transfer," in *CVPR*, 2018.
- [20] Shaoxu Li and Ye Pan, "Instant photorealistic neural radiance fields stylization," in *ICASSP 2024 - 2024 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, 2024, pp. 2980–2984.
- [21] Shaoxu Li and Ye Pan, "Rendering and reconstruction based 3d portrait stylization," in *2023 IEEE International Conference on Multimedia and Expo (ICME)*, 2023, pp. 912–917.
- [22] Songhua Liu, Tianwei Lin, Dongliang He, Fu Li, Meiling Wang, Xin Li, Zhengxing Sun, Qian Li, and Errui Ding, "Adaatt: Revisit attention mechanism in arbitrary neural style transfer," in *Proceedings of the IEEE International Conference on Computer Vision*, 2021.
- [23] Jie An, Siyu Huang, Yibing Song, Dejing Dou, Wei Liu, and Jiebo Luo, "Artflow: Unbiased image style transfer via reversible neural flows," in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2021.
- [24] Haibo Chen, lei zhao, Zhizhong Wang, Huiming Zhang, Zhiwen Zuo, Ailin Li, Wei Xing, and Dongming Lu, "Artistic style transfer with internal-external learning and contrastive learning," in *Advances in Neural Information Processing Systems*, M. Ranzato, A. Beygelzimer, Y. Dauphin, P.S. Liang, and J. Wortman Vaughan, Eds. 2021, vol. 34, pp. 26561–26573, Curran Associates, Inc.
- [25] Yuxin Zhang, Fan Tang, Weiming Dong, Haibin Huang, Chongyang Ma, Tong-Yee Lee, and Changsheng Xu, "Domain enhanced arbitrary image style transfer via contrastive learning," in *ACM SIGGRAPH*, 2022.
- [26] Xiaolei Wu, Zhihao Hu, Lu Sheng, and Dong Xu, "Styleformer: Real-time arbitrary style transfer via parametric style composition," in *Proceedings of the IEEE/CVF International Conference on Computer Vision*, 2021, pp. 14618–14627.
- [27] Yingying Deng, Fan Tang, Weiming Dong, Chongyang Ma, Xingjia Pan, Lei Wang, and Changsheng Xu, "Stytr<sup>2</sup>: Image style transfer with transformers," in *IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, 2022.
- [28] B. Cheng, Z. Liu, Y. Peng, and Y. Lin, "General image-to-image translation with one-shot image guidance," *arXiv preprint arXiv:2307.14352*, 2023.
- [29] Jooyoung Choi, Sungwon Kim, Yonghyun Jeong, Youngjune Gwon, and Sungroh Yoon, "Ilvr: Conditioning method for denoising diffusion probabilistic models," in *2021 IEEE/CVF International Conference on Computer Vision (ICCV)*, 2021, pp. 14347–14356.
- [30] Rinon Gal, Yuval Alaluf, Yuval Atzmon, Or Patashnik, Amit H. Bermano, Gal Chechik, and Daniel Cohen-Or, "An image is worth one word: Personalizing text-to-image generation using textual inversion," 2022.
- [31] Nataniel Ruiz, Yuanzhen Li, Varun Jampani, Yael Pritch, Michael Rubinstein, and Kfir Aberman, "Dreambooth: Fine tuning text-to-image diffusion models for subject-driven generation," in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2023.
- [32] Hu Ye, Jun Zhang, Sibio Liu, Xiao Han, and Wei Yang, "Ip-adapter: Text compatible image prompt adapter for text-to-image diffusion models," 2023.
- [33] Qixun Wang, Xu Bai, Haofan Wang, Zekui Qin, and Anthony Chen, "Instantid: Zero-shot identity-preserving generation in seconds," *arXiv preprint arXiv:2401.07519*, 2024.
- [34] Nisha Huang, Weiming Dong, Yuxin Zhang, Fan Tang, Ronghui Li, Chongyang Ma, Xiu Li, and Changsheng Xu, "Creativesynth: Creative blending and synthesis of visual arts based on multimodal diffusion," 2024.

- [35] Kaiwen Zhang, Yifan Zhou, Xudong Xu, Xingang Pan, and Bo Dai, “Diffmorpher: Unleashing the capability of diffusion models for image morphing,” *arXiv preprint arXiv:2312.07409*, 2023.
- [36] Jiwoo Chung, Sangeek Hyun, and Jae-Pil Heo, “Style injection in diffusion: A training-free approach for adapting large-scale diffusion models for style transfer,” *arXiv preprint arXiv:2312.09008*, 2023.
- [37] Yingying Deng, Xiangyu He, Fan Tang, and Weiming Dong, “z\*: Zero-shot style transfer via attention rearrangement,” 2023.
- [38] Jaeseok Jeong, Junho Kim, Yunje Choi, Gayoung Lee, and Youngjung Uh, “Visual style prompting with swapping self-attention,” 2024.
- [39] Yuechen Zhang, Jinbo Xing, Eric Lo, and Jiaya Jia, “Real-world image variation by aligning diffusion inversion chain,” *arXiv preprint arXiv:2305.18729*, 2023.
- [40] Alex Nichol, Prafulla Dhariwal, Aditya Ramesh, Pranav Shyam, Pamela Mishkin, Bob McGrew, Ilya Sutskever, and Mark Chen, “Glide: Towards photorealistic image generation and editing with text-guided diffusion models,” 2022.
- [41] Alex Andonian, Sabrina Osmany, Audrey Cui, YeonHwan Park, Ali Jahanian, Antonio Torralba, and David Bau, “Paint by word,” 2023.
- [42] Katherine Crowson, “Clip-guided-diffusion,” <https://colab.research.google.com/drive/1V66mUeJbXrTuQITvJunvnWVn96FEbSI3>, 2023.
- [43] Omri Avrahami, Dani Lischinski, and Ohad Fried, “Blended diffusion for text-driven editing of natural images,” in *2022 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, jun 2022, IEEE.
- [44] Andreas Lugmayr, Martin Danelljan, Andres Romero, Fisher Yu, Radu Timofte, and Luc Van Gool, “Repaint: Inpainting using denoising diffusion probabilistic models,” 2022.
- [45] Gwanghyun Kim, Taesung Kwon, and Jong Chul Ye, “Diffusionclip: Text-guided diffusion models for robust image manipulation,” in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, June 2022, pp. 2426–2435.
- [46] Chenlin Meng, Yutong He, Yang Song, Jiaming Song, Jiajun Wu, Jun-Yan Zhu, and Stefano Ermon, “Sdedit: Guided image synthesis and editing with stochastic differential equations,” 2022.
- [47] Guillaume Couairon, Jakob Verbeek, Holger Schwenk, and Matthieu Cord, “Diffedit: Diffusion-based semantic image editing with mask guidance,” 2022.
- [48] Robin Rombach, Andreas Blattmann, Dominik Lorenz, Patrick Esser, and Björn Ommer, “High-resolution image synthesis with latent diffusion models,” 2021.
- [49] Jonathan Ho, Ajay Jain, and Pieter Abbeel, “Denoising diffusion probabilistic models,” 2020.
- [50] Jascha Sohl-Dickstein, Eric A. Weiss, Niru Maheswaranathan, and Surya Ganguli, “Deep unsupervised learning using nonequilibrium thermodynamics,” 2015.
- [51] Yang Song, Jascha Sohl-Dickstein, Diederik P Kingma, Abhishek Kumar, Stefano Ermon, and Ben Poole, “Score-based generative modeling through stochastic differential equations,” in *International Conference on Learning Representations*, 2021.
- [52] Diederik P Kingma and Max Welling, “Auto-encoding variational bayes,” 2022.
- [53] Olaf Ronneberger, Philipp Fischer, and Thomas Brox, “U-net: Convolutional networks for biomedical image segmentation,” *ArXiv*, vol. abs/1505.04597, 2015.
- [54] Alexander Kirillov, Eric Mintun, Nikhila Ravi, Hanzi Mao, Chloe Rolland, Laura Gustafson, Tete Xiao, Spencer Whitehead, Alexander C. Berg, Wan-Yen Lo, Piotr Dollár, and Ross Girshick, “Segment anything,” *arXiv:2304.02643*, 2023.
- [55] Xu Zhao, Wenchao Ding, Yongqi An, Yinglong Du, Tao Yu, Min Li, Ming Tang, and Jinqiao Wang, “Fast segment anything,” 2023.
- [56] Dave Epstein, Allan Jabri, Ben Poole, Alexei A. Efros, and Aleksander Holynski, “Diffusion self-guidance for controllable image generation,” 2023.
- [57] Patrick von Platen, Suraj Patil, Anton Lozhkov, Pedro Cuenca, Nathan Lambert, Kashif Rasul, Mishig Davaadorj, Dhruv Nair, Sayak Paul, William Berman, Yiyi Xu, Steven Liu, and Thomas Wolf, “Diffusers: State-of-the-art diffusion models,” <https://github.com/huggingface/diffusers>, 2022.
- [58] pharmapsychotic, “clip-interrogator,” <https://github.com/pharmapsychotic/clip-interrogator>, 2023.