

# COMBO: Compositional World Models for Embodied Multi-Agent Cooperation

Hongxin Zhang<sup>1\*</sup>, Zeyuan Wang<sup>2\*</sup>, Qiushi Lyu<sup>3\*</sup>, Zheyuan Zhang<sup>4</sup>  
Sunli Chen<sup>2</sup>, Tianmin Shu<sup>5</sup>, Yilun Du<sup>6</sup>, Chuang Gan<sup>1,7</sup>

<sup>1</sup> University of Massachusetts Amherst <sup>2</sup> IIIS, Tsinghua University  
<sup>3</sup> Peking University <sup>4</sup> University of Michigan <sup>5</sup> Johns Hopkins University  
<sup>6</sup> Massachusetts Institute of Technology <sup>7</sup> MIT-IBM Watson AI Lab

**Abstract.** In this paper, we investigate the problem of embodied multi-agent cooperation, where decentralized agents must cooperate given only partial egocentric views of the world. To effectively plan in this setting, in contrast to learning world dynamics in a single-agent scenario, we must simulate world dynamics conditioned on an arbitrary number of agents’ actions given only partial egocentric visual observations of the world. To address this issue of partial observability, we first train generative models to estimate the overall world state given partial egocentric observations. To enable accurate simulation of multiple sets of actions on this world state, we then propose to learn a compositional world model for multi-agent cooperation by factorizing the naturally composable joint actions of multiple agents and compositionally generating the video. By leveraging this compositional world model, in combination with Vision Language Models to infer the actions of other agents, we can use a tree search procedure to integrate these modules and facilitate online cooperative planning. To evaluate the efficacy of our methods, we create two challenging embodied multi-agent long-horizon cooperation tasks using the ThreeDWorld simulator and conduct experiments with 2-4 agents. The results show our compositional world model is effective and the framework enables the embodied agents to cooperate efficiently with different agents across various tasks and an arbitrary number of agents, showing the promising future of our proposed framework. More videos can be found at <https://vis-www.cs.umass.edu/combo/>.


**Keywords:** Multi-Agent Planning · Compositional World Model · Embodied Intelligence · Generative Models

## 1 Introduction

Building cooperative embodied agents that can engage in and help humans in multi-agent tasks is a valuable yet challenging endeavor. To cooperatively plan in a multi-agent scenario, in contrast to learning world dynamics in a single-agent

---

\* denotes equal contribution.

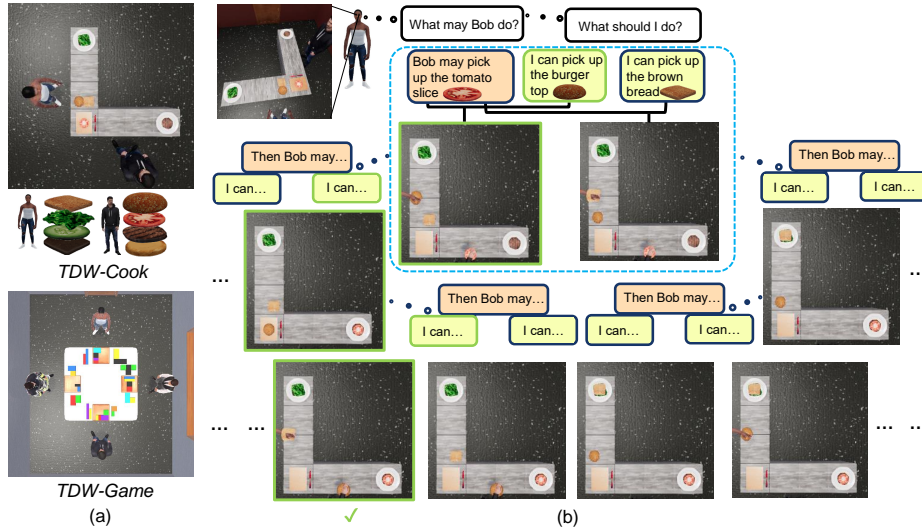

**Fig. 1:** (a) Two challenging embodied multi-agent planning tasks *TDW-Cook* and *TDW-Game*, where 2-4 agents cooperate to finish some dishes according to the recipe or finish puzzles according to the visual clue. (b) The agent needs to *infer other agents' intents*, *propose possible actions*, and accurately *simulate how the world may be affected by multiple sets of actions* to make efficient cooperation in the long run.

scenario, there is an additional challenge to simulate world dynamics conditioned on an arbitrary number of agents' actions given only partial egocentric observations of the world.

Large generative models have brought remarkable advances to various domains, including language understanding and generation [9, 11, 47, 65], image understanding and generation [14, 15, 26, 30, 42, 43, 60], and even video generation [7, 18, 22, 25, 28, 37, 66, 75, 76]. Many have explored how to leverage these powerful foundation models for embodied AI, [1, 31, 33, 41, 67, 69] leverage Large Language Models for decision-making, [80] incorporates LLMs to build modular embodied agents for cooperation and communication, [14, 36, 70] uses Multimodal Language Models to build capable vision agents, [17, 38] use Video Models to generate visual plans for robots, [10, 16, 19, 76] explores modeling world dynamics with video models to improve single-agent planning. However, how to leverage Multimodal Language Models and Video Models to help build embodied agents capable of planning under a visual cooperation task is under-explored where it's important to accurately simulate the world dynamics conditioned on an arbitrary number of agents' actions given only partial egocentric observations at each step for efficient cooperation.

We propose to learn a compositional world model for multi-agent cooperation by factorizing the naturally composable joint actions of an arbitrary number of agents and compositionally generating the video to enable accurate simulation of multiple sets of actions on the world state. To address the partial observ-

ability issue, we leverage a learned generative model to estimate the overall world state given partial egocentric observations. By leveraging the compositional world model, in combination with Vision Language Models, we propose **COMBO**, a novel **C**ompositional **w**orld **M**odel-based **emB**odied multi-agent planning framework to facilitate online cooperative planning. **COMBO** first estimates the overall world state from partial egocentric observations, then utilizes Vision Language Models to act as an Action Proposer to propose possible actions, an Intent Tracker to infer other agents’ intents, and an Outcome Evaluator to evaluate the different possible outcomes. In combination with the compositional world model to simulate the effect of joint actions on the world state, **COMBO** uses a tree search procedure to integrate these modules and empowers embodied agents to imagine how different actions may affect the world with other agents in the long run and plan more cooperatively.

We build two challenging embodied multi-agent long-horizon cooperation tasks on ThreeDWorld [20]: *TDW-Game* and *TDW-Cook* where 2-4 decentralized agents must cooperate to finish several puzzles according to the visual clue or dishes according to the recipe given only partial egocentric views of the world as shown in Fig. 1, requiring extensive visual cooperation. The agents need to estimate the overall world state given partial egocentric observations, infer other agents’ intents, and accurately simulate how the world state may be affected by multiple sets of actions to make efficient cooperation in the long run. Our extensive experiments show our learned compositional world model delivers accurate video synthesis conditioned on multiple sets of actions from an arbitrary number of agents and **COMBO** enables the embodied agents to cooperate efficiently with different agents across various tasks and an arbitrary number of agents. In sum, our contribution includes:

- We propose to learn a compositional world model for multi-agent cooperation by factorizing joint actions of an arbitrary number of agents and compositionally generating the video to enable accurate simulation of multiple sets of actions on the world state.
- We introduce **COMBO**, a **C**ompositional **w**orld **M**odel-based **emB**odied multi-agent planning framework to empower the agents to imagine how different actions may affect the world with other agents in the long run and plan more cooperatively.
- We create two challenging embodied multi-agent planning tasks with 2-4 agents, conduct experiments, and show our framework enables the embodied agents to cooperate efficiently with different agents across various tasks and an arbitrary number of agents.

## 2 Related Work

### 2.1 Multi-Agent Planning

Multi-agent planning has a long-standing history [62], with various tasks and methods have been introduced [2–4, 12, 34, 35, 44, 52, 54, 56, 63, 71, 80]. For embodied intelligence, [52, 53] explored the social perception of the agents during

householding tasks, [80] studied communication and cooperation of two agents in a multi-room house. However, these works didn't dig into the explicit challenge of modeling the world dynamics conditioned on an arbitrary number of agents' actions given partial egocentric observations of the world, which is essential for the agents to cooperate efficiently in long-horizon cooperation-extensive visual tasks. In contrast, we learn a compositional world model for multi-agent cooperation and propose a compositional world model-based embodied multi-agent planning framework to empower the embodied agents to imagine and plan more cooperatively with only partial egocentric observations.

## 2.2 Large Generative Models for Embodied AI


With the recent advance of large generative models, numerous works have explored how they can help build better agents [64, 68, 72, 77], especially in embodied environments [39, 40, 45, 48, 57, 59, 73, 74, 81, 82]. Specifically, [1, 21, 31–33, 41, 49, 50, 55, 58, 67, 69, 79] leverage Large Language Models to help decision-making. [8, 14, 36, 51, 70] use multimodal language models to facilitate embodied agents to plan end-to-end in visual worlds. [6, 29] use diffusion models for decision-making. [16, 17, 19, 38, 76] use video models to help the robot make visual plans, however, they assume the observation is static and non-partial and neglect the challenge of learning world dynamics conditioned on multiple sets of actions of an arbitrary number of agents. We learn a compositional world model for multi-agent cooperation to enable accurate simulation of multiple sets of actions on the world and leverage a learned generative model to estimate the overall world state given partial egocentric observations to address the partial observability issue.

## 3 Problem Statement

Embodied multi-agent cooperation problem can be formalized as a decentralized partially observable Markov decision process (DEC-POMDP) [5, 46, 61], defined by  $(n, S, \{A_i\}, \{O_i\}, T, G, h)$ , where:

- $n$  denotes the number of agents;
- $S$  is a finite set of states;
- $A_i$  is the action set for agent  $i$ ;
- $O_i$  is the observation set for agent  $i$ , including partial egocentric visual observation the agent receives through its sensors;
- $T(s, a, s') = p(s'|s, a)$  is the joint transition model which defines the probability that after taking joint action  $a \in A = A_1 \times \dots \times A_n$  in  $s \in S$ , the new state  $s' \in S$  is achieved;
- $G$  is the final goal state;
- $h$  is the planning horizon.

Starting from an initial state  $S_0 \in S$ ,  $n$  decentralized agents need to plan their actions  $a_i \in A_i$  given partial egocentric RGBD observations  $o_i \in O_i$  each step to achieve the goal state  $G$  using a minimal number of steps.

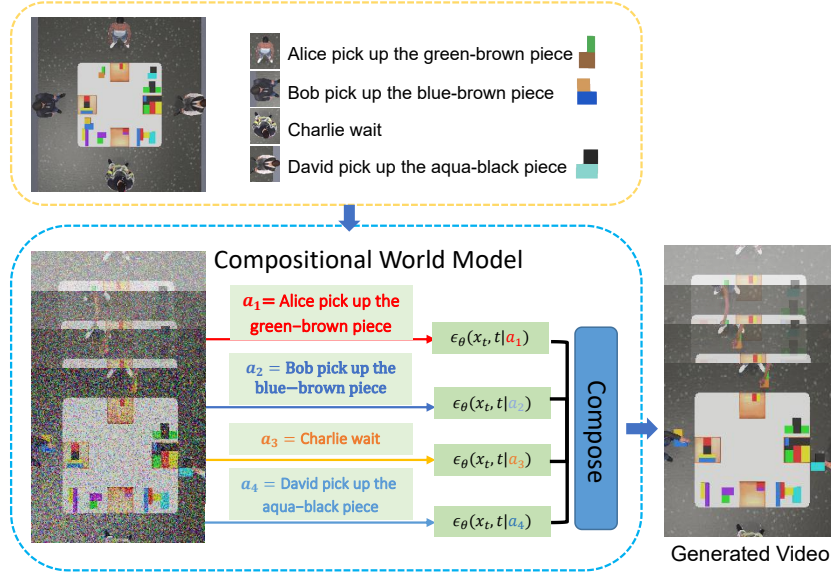

**Fig. 2: Compositional World Model.** Given a text condition of a joint action of multiple agents  $a$ , we first factorize it into several components corresponding to each agent  $a_i$ , then the compositional world model generates multiple scores conditioned on the text components, then composed to generate the final output video.

## 4 Compositional World Model

To cooperatively plan in a multi-agent scenario, in contrast to learning world dynamics in a single-agent scenario, there is an additional challenge to simulate world dynamics conditioned on an arbitrary number of agents' actions. We propose to learn a compositional world model for multi-agent cooperation as shown in Fig. 2 by factorizing the naturally composable joint actions of an arbitrary number of agents and compositionally generating the video to enable accurate simulation of multiple sets of actions on the world state. We first discuss how we learn the composable video diffusion model to act as a compositional world model in Sec. 4.1, then introduce the Agent-Dependent Loss Scaling we designed for the challenging situation where we need to accurately model multiple agents' manipulating multiple objects to improve the video synthesis performance in Sec. 4.2.

### 4.1 Composable Video Diffusion Models

Text-guided video diffusion models learn to model the distribution of videos conditioned on text prompts  $P_\theta(x|a)$ , where the text prompts  $a$  in our scenario corresponds to the joint actions of  $n$  agents  $a = (a_1, \dots, a_n) \in A = A_1 \times \dots \times A_n$ , which can be naturally factorized into  $n$  components  $a_1, \dots, a_n$  corresponding

to the action of each agent. We propose to learn the text-guided video diffusion model as a composition of individual video diffusion models conditioned on each text component  $a_i$ :

$$P_\theta(x|a) = P(x|a_1, \dots, a_n) \propto P_\theta(x) \prod_{i=1}^n \frac{P_\theta(x|a_i)}{P_\theta(x)} \quad (1)$$

Leveraging the interpretation that diffusion models are functionally similar to Energy-Based Models [15, 43], we can train the model to learn a set of score functions  $\epsilon(x_t, t|c_i)$  and compose them as in Equation 2, which corresponds to the production of the probability densities in Equation 1.

$$\hat{\epsilon}(x_t, t|a) = \epsilon_\theta(x_t, t) + \sum_{i=1}^n \epsilon_\theta(x_t, t|a_i) - \epsilon_\theta(x_t, t) \quad (2)$$

Then the sampling process changes to

$$x_{t-1} \sim \mathcal{N}(x_t - \hat{\epsilon}(x_t, t|a), \sigma_t^2 I) \quad (3)$$

We train this composable video diffusion model with two stages. In stage one, we learn to model the distribution of  $P_\theta(x|a_i)$  by training with only conditions corresponding to a single agent’s action component using the standard denoising diffusion training objective

$$L_{MSE} = \sum_{i=1}^n \|\epsilon_\theta(x, t|a_i) - \epsilon\|^2 \quad (4)$$


Then in stage two, we fine-tune the model to specifically learn compositional generation to model  $P_\theta(x|a)$  by training with conditions containing joint actions of multiple agents using the composed score function loss

$$L_{Composed} = \|\bar{\epsilon}(x_t, t|a) - \epsilon\|^2 = \left\| \frac{1}{n} \sum_{i=1}^n \epsilon_\theta(x_t, t|a_i) - \epsilon \right\|^2 \quad (5)$$

After the two-stage training, we can sample from the composed distribution with the composed score function at inference time given conditions of joint action  $a = (a_1, \dots, a_n)$  as

$$\hat{\epsilon}(x_t, t|a) = \epsilon_\theta(x_t, t) + \sum_{i=1}^n \omega(\epsilon_\theta(x_t, t|a_i) - \epsilon_\theta(x_t, t)) \quad (6)$$

where  $\omega$  is the guidance weight controlling the temperature scaling on the conditions. When the condition corresponds to a single action component, the above sampling procedure reduces to the classifier-free guidance [27].

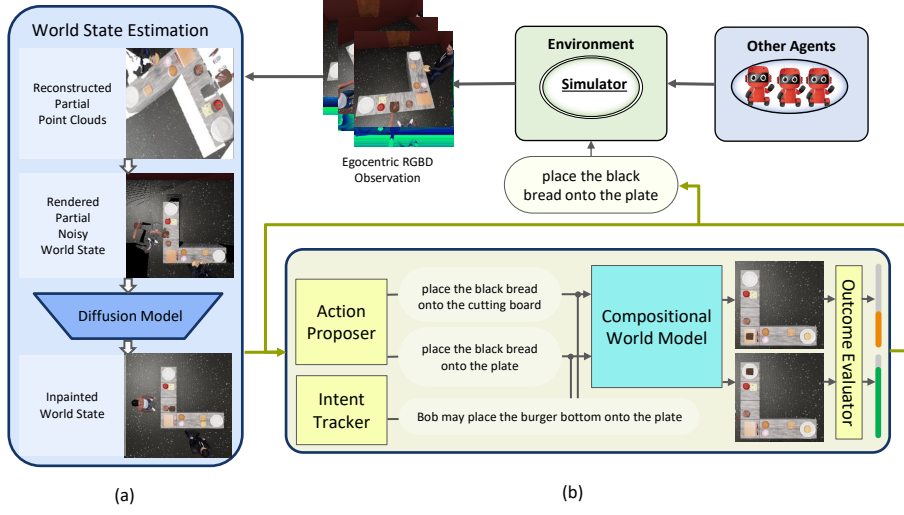

**Fig. 3:** (a) Given partial egocentric RGBD observations, *COMBO* first reconstructs and inpaints the top-down orthographic image as the overall world state estimation. (b) *COMBO* then leverage the planning sub-modules built with Vision Language Models to propose actions, infer other agents’ intents, and evaluate the outcomes simulated with the compositional world model to plan online with a tree search procedure to cooperate in the long run.

## 4.2 Agent-Dependent Loss Scaling

The performance of stage one training impacts the final compositional generation performance a lot given the accurate modeling of  $P(x|a_i)$  is the basis for modeling  $P(x|a)$ . We have employed a technique named *Agent-Dependent Loss Scaling* to assist in stage one training.

Formally, we define an agent-dependent loss coefficient matrix  $C \in \mathbb{R}^{n \times H \times W}$  for  $n$  agents and  $H \times W$  pixel, and change the Equation 4 to

$$L_{MSE} = \sum_{i=1}^n C_i \cdot \|\epsilon_{\theta}(x, t|a_i) - \epsilon\|^2 \quad (7)$$

We simply set the loss coefficient matrix based on each agent’s reachable region in the image to supervise the model to focus more on the related pixels. We have observed that even with this straightforward loss coefficient approach, there is a significant improvement in the model’s accuracy of modeling  $P_{\theta}(x|a_i)$ .

## 5 Compositional World Model for Multi-Agent Planning

To plan efficiently in the multi-agent cooperation problem, we still need to address the challenge of partial egocentric observation and model complex world

dynamics in the long run. We propose **COMBO**, a novel **C**ompositional **w**orld **M**odel-based **e**m**B**odied multi-agent planning framework, shown in Fig. 3. After receiving the egocentric observations during the last execution step, **COMBO** first estimates the overall world state to plan on, as discussed in Sec. 5.1. **COMBO** then utilizes Vision Language Models to act as an Action Proposer to propose possible actions, an Intent Tracker to infer other agents’ intents, and an Outcome Evaluator to evaluate the different possible outcomes, as detailed in Sec. 5.2. In combination with the compositional world model to simulate the effect of joint actions on the world state  $s_{i+1} = CWM(s_i, a)$  introduced in Sec. 4, we discuss the tree search procedure to integrate these planning sub-modules in Sec. 5.3. **COMBO** empowers embodied agents to imagine how different plans may affect the world with other agents in the long run and plan cooperatively.

### 5.1 World State Estimation with Partial Egocentric Views

Directly planning based on partial egocentric views presents a considerable challenge. To address this, we initially reconstruct partial point clouds from multiple egocentric RGBD views  $o_i$  captured from different perspectives. These point clouds are then transformed into a unified top-down orthographic image representation, serving as the world state. This representation is constructed by overlaying the views in chronological order. It is important to note that our world is inherently dynamic, with other agents actively interacting, resulting in a top-down orthographic image representation that is both noisy and incomplete, as depicted in Fig. 3 (a). To refine this representation, we employ a diffusion model to inpaint the partial and noisy orthographic image, thereby enhancing the estimation of the world state  $s_i$  for subsequent planning. This approach allows us to effectively represent and rectify the world state, enabling more accurate planning in multi-agent environments.

### 5.2 Planning Sub-modules with Vision Language Models

**Action Proposer** Given the estimated overall world state  $s_i$  and the long horizon goal  $G$ , the Action Proposer first searches over the potential action spaces  $A_i$ , and then proposes multiple possible actions  $a_{i,1...p} = AP(s_i, G)$  to explore on. We implement this module by querying a VLM to generate the possible actions in the text given the task goal and encoded image world state as context. We finetune LLaVA on randomly collected rollouts with possible actions labeled to construct this module.

**Intent Tracker** Inferring what other agents may do given observation history is important for effective multi-agent cooperation. We implement this module  $a_{-i} = IT(s_i, G)$  by keeping the estimated image world state from the last  $k$  steps and then feed into the VLM together with the task goal and to query for the possible actions of other agents  $a_{-i}$ . We construct this module by finetuning LLaVA on collected short rollouts with other agents’ actions labeled.

**Outcome Evaluator** It’s vital to have a way to assess the value of the achieved state from different plans so the search can be effectively deepened utilizing

pruning. We implement an Outcome Evaluator to fulfill this functionality  $v = OE(s, G)$  by generating a heuristic score  $v$  for each image state  $s$  given the task goal  $G$ . To construct this module, we finetune LLaVA to describe the state of each object in the image and the corresponding heuristic score representing steps left to achieve the task goal considering all objects.

### 5.3 Planning Procedure with Tree Search

---

**Algorithm 1** *COMBO* Planning Procedure for Agent  $i$ .

---

```

1: Input: Estimated world state  $s_0$  from  $o_i$ , task goal  $G$ 
2: Sub-modules: Action Proposer  $AP(s, G)$ , Intent Tracker  $IT(s, G)$ , Compositional
   World Model  $CWM(s, a)$ , Outcome Evaluator  $OE(s, G)$ 
3: Parameters: Action Proposes  $P$ , Planning Beams  $B$ , Rollout Depths  $D$ 
4: plans  $\leftarrow [[s_0]]$ 
5: new_plans  $\leftarrow [[s_0]]$ 
6: for  $d = 1 \dots D$  do
7:   plans  $\leftarrow$  new_plans[1...B]      # Keeps Only B Plan Beams with Best Scores
8:   new_plans  $\leftarrow []$ 
9:   for plan in plans do
10:     $s \leftarrow$  plan[-1]                # Get the Last Image State in the Plan Beam
11:     $a_{i,1:P} \leftarrow AP(s, G)$       # Generate  $P$  Different Action Proposals
12:     $a_{-i} \leftarrow IT(s, G)$          # Infer Other Agents' Possible Actions
13:    for  $p = 1 \dots P$  do
14:       $a \leftarrow (a_{i,p}, a_{-i})$ 
15:       $s_{\text{next}} \leftarrow CWM(s, a)$  # Simulate Next State Conditioned on Joint Actions
16:      new_plans.append(plan +  $s_{\text{next}}$ )
17:    end for
18:  end for
19:  new_plans  $\leftarrow$  sorted(new_plans,  $OE(s, G)$ )  # Sort Plans by the Score of
   the Final State
20: end for
21: plan  $\leftarrow$  new_plans[1]            # Return the Plan with the Best Score

```

---

With powerful generative sub-modules implemented so far, we can use an effective tree search algorithm to integrate them into achieving the best planning performance. Formally, we need to search for a sequence of actions that compose the plan to achieve the task goal with a minimal number of steps. To sample the long-horizon plans, we can chain the sub-modules to expand future states from current state  $s_i$  with  $s_{i+1} = CWM(s_i, AP(s_i, G), IT(s_i, G))$ . By recursively deploying these chained modules we can expand the plans until achieving the goal state. However this is impractical due to the large search space, we implement a limited tree search procedure instead by always keeping the  $B$  best-scored plan beams and exploring  $P$  action proposals at each plan step for a maximum of  $D$  rollout steps. We show the complete **COMBO** planning procedure in Algorithm 1.

Due to the uncertainty of other agents, *COMBO* replans at every step to reflect the fast-changing world state. As similarly observed in [16], when searching for the best plan, the Outcome Evaluator may leverage the irregular artifacts of the Compositional World Model to get artificially high scores, such as where key objects are teleported to desired positions. To mitigate this artificial exploitation issue, the Outcome Evaluator will use the default score from the last state if the new state generated from the Compositional World Model suspiciously increases the score above a threshold.

## 6 Experiments

### 6.1 Experimental Setup

We build two challenging embodied multi-agent planning tasks *TDW-Game* and *TDW-Cook* on ThreeDWorld [20], where 2-4 decentralized agents must cooperate to finish some long-horizon goals, as illustrated in Fig. 1. All the agents have an observation space of egocentric  $336 \times 336$  RGBD images and the corresponding camera matrix. Both tasks have a maximum planning horizon of 60 steps. In *TDW-Game*, 3-4 agents cooperate to pass and place 6-8 puzzle pieces scattered randomly on the table into the correct puzzle box according to visual clues such as the shape. The location of the puzzle box and pieces are randomly initialized across different episodes. The action space includes

- wait
- pick up  $\langle obj \rangle$
- place  $\langle obj \rangle$  onto  $\langle loc \rangle$

In *TDW-Cook*, 2 agents cooperate to pass, cut, and place 6-8 out of 10 possible food items randomly scattered on the table to make some dishes according to the recipe. The location of the food items and the recipe are randomly initialized across different episodes. Specifically, there is only one cutting board where agents can pass or cut objects, making cooperation vital for efficient plans. The action space includes

- wait
- pick up  $\langle obj \rangle$
- cut  $\langle obj \rangle$
- place  $\langle obj \rangle$  onto  $\langle loc \rangle$

**Metrics** We evaluate the agent’s cooperation ability by task success rate and average steps of the successful episodes when cooperating with different agents across 10 episodes. An episode is done when the goal state is reached and considered successful or the maximum planning horizon is reached and considered failed. Specifically, we implement two different agent policies as cooperators on both tasks to reliably evaluate the agents. In *TDW-Game*, Agent 1 takes the policy of always passing the unwanted puzzle pieces in a clockwise manner, while Agent 2 takes the policy of always passing the unwanted puzzle pieces in

		<i>TDW-Game</i>		<i>TDW-Cook</i>	
Cooperating with Agent 1		Agent 2	Agent 1	Agent 2	
<b>Recurrent World Models</b> [23]	Success Rate	0	0	0	0
	Average Steps	/	/	/	/
<b>MAPPO</b> [78]	Success Rate	0	0	0	0
	Average Steps	/	/	/	/
<b>CoELA (Oracle Vision)</b> [80]	Success Rate	1.0	0.8	0.5	0.2
	Average Steps	17.8	26.1	38.2	29.5
<b>LLaVA</b> [42]	Success Rate	0.9	1.0	1.0	0.9
	Average Steps	26.0	31.1	31.5	36.7
<b>COMBO (w/o <i>IT</i>)</b>	Success Rate	0.8	0.7	0.9	0.9
	Average Steps	15.6	17.4	24.8	21.0
<b>COMBO (Ours)</b>	Success Rate	<b>1.0</b>	<b>1.0</b>	<b>1.0</b>	<b>1.0</b>
	Average Steps	16.8	18.1	<b>21.3</b>	<b>21.7</b>
<b>Oracle Cooperator (Oracle Vision)</b>	Success Rate	1.0	1.0	1.0	1.0
	Average Steps	14.9	16.8	23.4	19.3

**Table 1: Main results on *TDW-Game* and *TDW-Cook*.** We report the mean success rate and average steps of the successful episodes over 10 episodes here. *COMBO* (w/o *IT*) denotes *COMBO* without the Intent Tracker module. **Oracle Cooperator** has access to the Oracle state of the world and other agents’ policies. Agent 1 and Agent 2 are cooperators with different policies, as detailed in Sec. 6.1.

a counter-clockwise manner. In *TDW-Cook*, Agent 1 takes a “selfish” policy of always operating objects in its own recipe first, while Agent 2 takes an “altruism” policy of always prioritizing operating objects in the cooperator’s recipe.

**Baselines** We compare our methods to several multi-agent planning methods:

- Recurrent World Models [23], using VAE to encode the visual observations and a generative recurrent neural network to learn the world model. An evolution-trained simple policy is used as a controller.
- MAPPO [78], a MARL baseline where agents with shared weight Actor and Critic are trained jointly with PPO.
- CoELA (Oracle Vision) [80], an LLM-based agent with access to the Oracle vision perception of the state re-implemented due to the lack of ground truth segmentation needed to train the Perception Module of CoELA.
- LLaVA [42], LLaVA-v1.5-7B fine-tuned with the same collected rollouts to train the Action Proposer in our **COMBO**, directly learn a mapping from the visual observation and task goal to action.
- Oracle Cooperator (Oracle Vision) has access to the Oracle state of the environment and other agents’ policies, acting as a strong baseline.

**Implementation details** The video diffusion model of the compositional world model is built upon AVDC [38] codebase, with the architectural modification of introducing a cross attention layer to the text condition in the ResNet block and replacing the Perceiver with an MLP to enhance the text conditioning.

We use the base resolution  $128 \times 128$  for the video diffusion model and train a super-resolution diffusion model to get the final  $336 \times 336$  images. We use the T5-XXL encoder to pre-process all the text conditions for a better contextual representation. All vision language models used in the main experiments are LLaVA-v1.5-7B. The planning parameters are set to Action Proposes  $P=3$ , Planning Beams  $B=3$ , and Rollout Depths  $D=3$  unless other specified. More details are in Appendix A.



**Fig. 4: Joint action-conditioned video generation.** Our Compositional World Model can simulate world dynamics conditioned on the joint action of multiple agents accurately while **AVDC** struggles with simulating which agents should act, and **COMBO w.o ADLS** may simulate actions incorrectly.

## 6.2 Results

**COMBO can cooperate efficiently with different cooperators** As shown in Tab. 1, both agents of different policies achieve the best performance when cooperating with *COMBO* on both tasks, finishing all the tasks within the limited horizon and cost the least steps. Both Recurrent World Models and MAPPO perform poorly due to the difficulty of the multi-agent long-horizon task with only egocentric visual observations. Compared to LLM Agent CoELA and VLM Agent LLaVA, *COMBO* with a compositional world model to explicitly model the world dynamics and plan accordingly achieves more efficient cooperation.

**Intent Tracker contributes to efficient cooperation** Comparing the results of *COMBO (w.o IT)* and *COMBO* in Tab. 1, we can see the Intent Tracker

	<i>TDW-Game</i>			<i>TDW-Cook</i>		
	Single	Multiple	Plan	Single	Multiple	Plan
AVDC	65%	20%	29.7(80%)	85%	25%	34.5(90%)
COMBO w.o <i>ADLS</i>	70%	55%	26.9(100%)	85%	70%	28.3(100%)
COMBO	<b>95%</b>	<b>75%</b>	<b>17.5(100%)</b>	<b>100%</b>	<b>100%</b>	<b>21.5(100%)</b>

**Table 2: Human evaluation of generated videos from different World Models and the corresponding plan performance.** **Single** denotes the accuracy of synthesized videos conditioned on a single action of an agent among 20 samples. **Multiple** denotes the accuracy of synthesized videos conditioned on multiple actions of multiple agents among 20 samples. **Plan** denotes the average steps (success rate) across cooperating with both Agent 1 and Agent 2 over 10 episodes. Best performances are in **bold**.

Action Proposals <i>P</i>	Rollout Depth <i>D</i>	Plan Beam <i>B</i>	Success Rate	Average Steps
3	1	1	50%	27.8
2	2	2	70%	18.1
3	3	3	100%	17.5

**Table 3: Plan performance improves with more compute budgets.** We report the mean success rate and average steps of the successful episodes cooperating with Agent 1 and Agent 2 over 5 episodes on *TDW-Game* here.


	<i>3-agent</i>	<i>4-agent</i>
LLaVA [42]	27.4 (95%)	28.7(95%)
COMBO	<b>15.0 (100%)</b>	<b>17.5 (100%)</b>
Oracle	13.5(100%)	15.9 (100%)

**Table 4: Results on *TDW-Game* with different number of agents.** We report the mean success rate and average steps of the successful episodes cooperating with Agent 1 and Agent 2 over 10 episodes here.

module is an important module that empowers the agent to infer other agents’ intents and consider them during planning for better cooperation in the long run.

**Compositional World Model is crucial to make cooperative plans** We compared the generated video quality with AVDC [38], a video diffusion model designed for robotics tasks, and ablate on the effect of the Agent-Dependent Scaling Loss (COMBO w.o. *ADSL*) in Tab. 2 and Fig. 4. Compared to AVDC, our compositional world model can accurately simulate which agents are acting and what interactions are described in the text condition, leading to a large performance gain in the accuracy of modeling agent actions on the world state. Removing the Agent-Dependent Scaling Loss leads to considerable accuracy degradation, showing the effectiveness of the introduced technique. Moreover, with the compositional world model, the overall plan performance boosts to 17.5 steps for *TDW-Game* compared to 29.7 steps with AVDC.

**More computation budgets lead to better Plan** We study the effect of computation budgets on the long-horizon plan quality in Tab. 3, where we can see more computation budgets with more action proposals, larger plan beams, and deeper rollout depth leads to higher success rate and less average steps. A qualitative example of generated plans with different computation budgets is shown in Fig. 5, where more searches can obtain better plans in the long run.

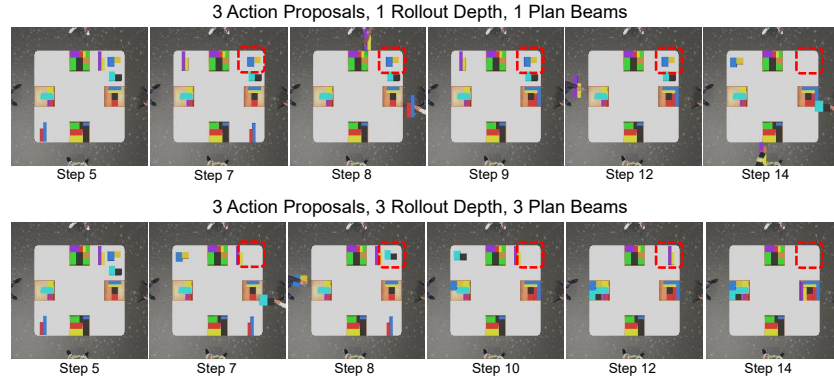

**Fig. 5: More Computation budgets leads to better plan.** With increased computation budgets (lower part), *COMBO* can search for a better plan where Alice first clears the common region with David so that he can pass the next puzzle piece to Alice instead of having to wait, leading to a better world state after same number of steps.

*COMBO* can generalize to an arbitrary number of agents *COMBO* trained with only data of four agents playing *TDW-Game* can surprisingly generalize to three agents version well as shown in Tab. 4, showing the strong generalization and promising future of the compositional world model-based modularized planning framework for multi-agent cooperation.

## 7 Conclusion

In this work, we learn a compositional world model for embodied multi-agent cooperation by factorizing the naturally composable joint actions of an arbitrary number of agents and compositionally generating the video to enable accurate simulation of multi-agent world dynamics. We then propose *COMBO*, a novel Compositional World Model-based embodied multi-agent planning framework to empower the agents to infer other agents’ intents and imagine different plan outcomes in the long run. Our experiments on two challenging embodied multi-agent cooperation tasks show *COMBO* can enable the embodied agents to cooperate efficiently with different agents across various tasks and an arbitrary number of agents.

**Future Work** Our method leverages tree search combined with Large Generative Models to devise long-horizon plans. The necessity for multiple inferences using large models leads to a relatively slow inference speed, restricting the applicability of our method in scenarios demanding rapid response. Exploring the development of more efficient models could potentially mitigate this drawback and enhance the practicality of our approach in time-sensitive environments.

## References

1. Ahn, M., Brohan, A., Brown, N., Chebotar, Y., Cortes, O., David, B., Finn, C., Gopalakrishnan, K., Hausman, K., Herzog, A., et al.: Do as i can, not as i say: Grounding language in robotic affordances. arXiv preprint arXiv:2204.01691 (2022)
2. Amato, C., Konidaris, G., Kaelbling, L.P., How, J.P.: Modeling and planning with macro-actions in decentralized pomdps. *Journal of Artificial Intelligence Research* **64**, 817–859 (2019)
3. Baker, B., Kanitscheider, I., Markov, T., Wu, Y., Powell, G., McGrew, B., Mor-datch, I.: Emergent tool use from multi-agent autocurricula. In: International Conference on Learning Representations (2020), <https://openreview.net/forum?id=SkxpxJBKwS>
4. Bard, N., Foerster, J.N., Chandar, S., Burch, N., Lanctot, M., Song, H.F., Parisotto, E., Dumoulin, V., Moitra, S., Hughes, E., et al.: The hanabi challenge: A new frontier for ai research. *Artificial Intelligence* **280**, 103216 (2020)
5. Bernstein, D.S., Givan, R., Immerman, N., Zilberstein, S.: The complexity of decentralized control of markov decision processes. *Mathematics of operations research* **27**(4), 819–840 (2002)
6. Black, K., Nakamoto, M., Atreya, P., Walke, H.R., Finn, C., Kumar, A., Levine, S.: Zero-shot robotic manipulation with pre-trained image-editing diffusion models. In: The Twelfth International Conference on Learning Representations (2024), <https://openreview.net/forum?id=c0chJTSbci>
7. Blattmann, A., Rombach, R., Ling, H., Dockhorn, T., Kim, S.W., Fidler, S., Kreis, K.: Align your latents: High-resolution video synthesis with latent diffusion models. In: Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition. pp. 22563–22575 (2023)
8. Brohan, A., Brown, N., Carbajal, J., Chebotar, Y., Chen, X., Choromanski, K., Ding, T., Driess, D., Dubey, A., Finn, C., et al.: Rt-2: Vision-language-action models transfer web knowledge to robotic control. arXiv preprint arXiv:2307.15818 (2023)
9. Brown, T., Mann, B., Ryder, N., Subbiah, M., Kaplan, J.D., Dhariwal, P., Nee-lakantan, A., Shyam, P., Sastry, G., Askell, A., et al.: Language models are few-shot learners. *Advances in neural information processing systems* **33**, 1877–1901 (2020)
10. Bruce, J., Dennis, M., Edwards, A., Parker-Holder, J., Shi, Y., Hughes, E., Lai, M., Mavalankar, A., Steigerwald, R., Apps, C., et al.: Genie: Generative interactive environments. arXiv preprint arXiv:2402.15391 (2024)
11. Bubeck, S., Chandrasekaran, V., Eldan, R., Gehrke, J., Horvitz, E., Kamar, E., Lee, P., Lee, Y.T., Li, Y., Lundberg, S., Nori, H., Palangi, H., Ribeiro, M.T., Zhang, Y.: Sparks of artificial general intelligence: Early experiments with gpt-4 (2023)
12. Carroll, M., Shah, R., Ho, M.K., Griffiths, T., Seshia, S., Abbeel, P., Dragan, A.: On the utility of learning about humans for human-ai coordination. *Advances in neural information processing systems* **32** (2019)
13. Devlin, J., Chang, M.W., Lee, K., Toutanova, K.: BERT: Pre-training of deep bidirectional transformers for language understanding. In: Burstein, J., Doran, C., Solorio, T. (eds.) *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*. pp. 4171–4186. Association for Computational Linguistics, Minneapolis, Minnesota (Jun 2019). <https://doi.org/10.18653/v1/N19-1423>, <https://aclanthology.org/N19-1423>

14. Driess, D., Xia, F., Sajjadi, M.S.M., Lynch, C., Chowdhery, A., Ichter, B., Wahid, A., Tompson, J., Vuong, Q., Yu, T., Huang, W., Chebotar, Y., Sermanet, P., Duckworth, D., Levine, S., Vanhoucke, V., Hausman, K., Toussaint, M., Greff, K., Zeng, A., Mordatch, I., Florence, P.: Palm-e: An embodied multimodal language model. In: arXiv preprint arXiv:2303.03378 (2023)
15. Du, Y., Durkan, C., Strudel, R., Tenenbaum, J.B., Dieleman, S., Fergus, R., Sohl-Dickstein, J., Doucet, A., Grathwohl, W.S.: Reduce, reuse, recycle: Compositional generation with energy-based diffusion models and mcmc. In: International conference on machine learning. pp. 8489–8510. PMLR (2023)
16. Du, Y., Yang, M., Florence, P., Xia, F., Wahid, A., Ichter, B., Sermanet, P., Yu, T., Abbeel, P., Tenenbaum, J.B., et al.: Video language planning. arXiv preprint arXiv:2310.10625 (2023)
17. Du, Y., Yang, S., Dai, B., Dai, H., Nachum, O., Tenenbaum, J., Schuurmans, D., Abbeel, P.: Learning universal policies via text-guided video generation. *Advances in Neural Information Processing Systems* **36** (2024)
18. Esser, P., Chiu, J., Atighehchian, P., Granskog, J., Germanidis, A.: Structure and content-guided video synthesis with diffusion models. In: *Proceedings of the IEEE/CVF International Conference on Computer Vision*. pp. 7346–7356 (2023)
19. Finn, C., Goodfellow, I., Levine, S.: Unsupervised learning for physical interaction through video prediction. *Advances in neural information processing systems* **29** (2016)
20. Gan, C., Schwartz, J., Alter, S., Mrowca, D., Schrimpf, M., Traer, J., Freitas, J.D., Kubilius, J., Bhandwaldar, A., Haber, N., Sano, M., Kim, K., Wang, E., Lingelbach, M., Curtis, A., Feiglis, K.T., Bear, D., Gutfreund, D., Cox, D.D., Torralba, A., DiCarlo, J.J., Tenenbaum, J.B., Mcdermott, J., Yamins, D.L.: ThreeDWorld: A platform for interactive multi-modal physical simulation. In: *Thirty-fifth Conference on Neural Information Processing Systems Datasets and Benchmarks Track (Round 1)* (2021), <https://openreview.net/forum?id=db1InWAwW2T>
21. Gramopadhye, M., Szafir, D.: Generating executable action plans with environmentally-aware language models. arXiv preprint arXiv:2210.04964 (2022)
22. Gupta, A., Tian, S., Zhang, Y., Wu, J., Martín-Martín, R., Fei-Fei, L.: Maskvit: Masked visual pre-training for video prediction. In: *The Eleventh International Conference on Learning Representations* (2023), <https://openreview.net/forum?id=QAV2CcLEDh>
23. Ha, D., Schmidhuber, J.: Recurrent world models facilitate policy evolution. *Advances in neural information processing systems* **31** (2018)
24. Hansen, N.: The cma evolution strategy: A tutorial. arXiv preprint arXiv:1604.00772 (2016)
25. Ho, J., Chan, W., Saharia, C., Whang, J., Gao, R., Gritsenko, A., Kingma, D.P., Poole, B., Norouzi, M., Fleet, D.J., et al.: Imagen video: High definition video generation with diffusion models. arXiv preprint arXiv:2210.02303 (2022)
26. Ho, J., Jain, A., Abbeel, P.: Denoising diffusion probabilistic models. *Advances in neural information processing systems* **33**, 6840–6851 (2020)
27. Ho, J., Salimans, T.: Classifier-free diffusion guidance. arXiv preprint arXiv:2207.12598 (2022)
28. Ho, J., Salimans, T., Gritsenko, A., Chan, W., Norouzi, M., Fleet, D.J.: Video diffusion models. arXiv:2204.03458 (2022)
29. Hong, M., Kang, M., Oh, S.: Diffused task-agnostic milestone planner. *Advances in Neural Information Processing Systems* **36** (2024)

30. Huang, S., Dong, L., Wang, W., Hao, Y., Singhal, S., Ma, S., Lv, T., Cui, L., Mohammed, O.K., Liu, Q., et al.: Language is not all you need: Aligning perception with language models. *arXiv preprint arXiv:2302.14045* (2023)
31. Huang, W., Abbeel, P., Pathak, D., Mordatch, I.: Language models as zero-shot planners: Extracting actionable knowledge for embodied agents. In: *International Conference on Machine Learning*. pp. 9118–9147. PMLR (2022)
32. Huang, W., Xia, F., Shah, D., Driess, D., Zeng, A., Lu, Y., Florence, P., Mordatch, I., Levine, S., Hausman, K., et al.: Grounded decoding: Guiding text generation with grounded models for robot control. *arXiv preprint arXiv:2303.00855* (2023)
33. Huang, W., Xia, F., Xiao, T., Chan, H., Liang, J., Florence, P., Zeng, A., Thompson, J., Mordatch, I., Chebotar, Y., et al.: Inner monologue: Embodied reasoning through planning with language models. *arXiv preprint arXiv:2207.05608* (2022)
34. Jaderberg, M., Czarnecki, W.M., Dunning, I., Marris, L., Lever, G., Castaneda, A.G., Beattie, C., Rabinowitz, N.C., Morcos, A.S., Ruderman, A., et al.: Human-level performance in 3d multiplayer games with population-based reinforcement learning. *Science* **364**(6443), 859–865 (2019)
35. Jain, U., Weihs, L., Kolve, E., Farhadi, A., Lazebnik, S., Kembhavi, A., Schwing, A.: A cordial sync: Going beyond marginal policies for multi-agent embodied tasks. In: *Computer Vision–ECCV 2020: 16th European Conference, Glasgow, UK, August 23–28, 2020, Proceedings, Part V 16*. pp. 471–490. Springer (2020)
36. Jiang, Y., Gupta, A., Zhang, Z., Wang, G., Dou, Y., Chen, Y., Fei-Fei, L., Anandkumar, A., Zhu, Y., Fan, L.: Vima: General robot manipulation with multimodal prompts. In: *Fortieth International Conference on Machine Learning* (2023)
37. Khachatryan, L., Movsisyan, A., Tadevosyan, V., Henschel, R., Wang, Z., Navasardyan, S., Shi, H.: Text2video-zero: Text-to-image diffusion models are zero-shot video generators. *arXiv preprint arXiv:2303.13439* (2023)
38. Ko, P.C., Mao, J., Du, Y., Sun, S.H., Tenenbaum, J.B.: Learning to act from actionless videos through dense correspondences (2023)
39. Kolve, E., Mottaghi, R., Han, W., Vanderbilt, E., Weihs, L., Herrasti, A., Deitke, M., Ehsani, K., Gordon, D., Zhu, Y., et al.: Ai2-thor: An interactive 3d environment for visual ai. *arXiv preprint arXiv:1712.05474* (2017)
40. Li, C., Zhang, R., Wong, J., Gokmen, C., Srivastava, S., Martín-Martín, R., Wang, C., Levine, G., Lingelbach, M., Sun, J., et al.: Behavior-1k: A benchmark for embodied ai with 1,000 everyday activities and realistic simulation. In: *Conference on Robot Learning*. pp. 80–93. PMLR (2023)
41. Li, S., Puig, X., Paxton, C., Du, Y., Wang, C., Fan, L., Chen, T., Huang, D.A., Akyürek, E., Anandkumar, A., et al.: Pre-trained language models for interactive decision-making. *Advances in Neural Information Processing Systems* **35**, 31199–31212 (2022)
42. Liu, H., Li, C., Wu, Q., Lee, Y.J.: Visual instruction tuning. *arXiv preprint arXiv:2304.08485* (2023)
43. Liu, N., Li, S., Du, Y., Torralba, A., Tenenbaum, J.B.: Compositional visual generation with composable diffusion models. In: *European Conference on Computer Vision*. pp. 423–439. Springer (2022)
44. Lowe, R., Tamar, A., Harb, J., Pieter Abbeel, O., Mordatch, I.: Multi-agent actor-critic for mixed cooperative-competitive environments. *Advances in neural information processing systems* **30** (2017)
45. Misra, D., Bennett, A., Blukis, V., Niklasson, E., Shatkhin, M., Artzi, Y.: Mapping instructions to actions in 3d environments with visual goal prediction. *arXiv preprint arXiv:1809.00786* (2018)


46. Oliehoek, F.A., Amato, C., et al.: A concise introduction to decentralized POMDPs, vol. 1. Springer (2016)
47. OpenAI: Gpt-4 technical report (2023)
48. Padmakumar, A., Thomason, J., Shrivastava, A., Lange, P., Narayan-Chen, A., Gella, S., Piramuthu, R., Tur, G., Hakkani-Tur, D.: Teach: Task-driven embodied agents that chat. In: Proceedings of the AAAI Conference on Artificial Intelligence. vol. 36, pp. 2017–2025 (2022)
49. Pallagani, V., Muppasani, B., Murugesan, K., Rossi, F., Horesh, L., Srivastava, B., Fabiano, F., Loreggia, A.: Plansformer: Generating symbolic plans using transformers. arXiv preprint arXiv:2212.08681 (2022)
50. Park, J.S., O’Brien, J.C., Cai, C.J., Morris, M.R., Liang, P., Bernstein, M.S.: Generative agents: Interactive simulacra of human behavior. arXiv preprint arXiv:2304.03442 (2023)
51. Patel, D., Eghbalzadeh, H., Kamra, N., Iuzzolino, M.L., Jain, U., Desai, R.: Pre-trained language models as visual planners for human assistance. arXiv preprint arXiv:2304.09179 (2023)
52. Puig, X., Shu, T., Li, S., Wang, Z., Liao, Y.H., Tenenbaum, J.B., Fidler, S., Torralba, A.: Watch-and-help: A challenge for social perception and human-ai collaboration. In: International Conference on Learning Representations (2021)
53. Puig, X., Shu, T., Tenenbaum, J.B., Torralba, A.: Nopa: Neurally-guided online probabilistic assistance for building socially intelligent home assistants. arXiv preprint arXiv:2301.05223 (2023)
54. Puig, X., Undersander, E., Szot, A., Cote, M.D., Yang, T.Y., Partsey, R., Desai, R., Clegg, A.W., Hlavac, M., Min, S.Y., et al.: Habitat 3.0: A co-habitat for humans, avatars and robots. arXiv preprint arXiv:2310.13724 (2023)
55. Raman, S.S., Cohen, V., Rosen, E., Idrees, I., Paulius, D., Tellex, S.: Planning with large language models via corrective re-prompting. arXiv preprint arXiv:2211.09935 (2022)
56. Samvelyan, M., Rashid, T., Schroeder de Witt, C., Farquhar, G., Nardelli, N., Rudner, T.G., Hung, C.M., Torr, P.H., Foerster, J., Whiteson, S.: The starcraft multi-agent challenge. In: Proceedings of the 18th International Conference on Autonomous Agents and MultiAgent Systems. pp. 2186–2188 (2019)
57. Savva, M., Kadian, A., Maksymets, O., Zhao, Y., Wijmans, E., Jain, B., Straub, J., Liu, J., Koltun, V., Malik, J., et al.: Habitat: A platform for embodied ai research. In: Proceedings of the IEEE/CVF international conference on computer vision. pp. 9339–9347 (2019)
58. Sharma, P., Torralba, A., Andreas, J.: Skill induction and planning with latent language. arXiv preprint arXiv:2110.01517 (2021)
59. Shridhar, M., Thomason, J., Gordon, D., Bisk, Y., Han, W., Mottaghi, R., Zettlemoyer, L., Fox, D.: Alfred: A benchmark for interpreting grounded instructions for everyday tasks. In: Proceedings of the IEEE/CVF conference on computer vision and pattern recognition. pp. 10740–10749 (2020)
60. Sohl-Dickstein, J., Weiss, E., Maheswaranathan, N., Ganguli, S.: Deep unsupervised learning using nonequilibrium thermodynamics. In: Bach, F., Blei, D. (eds.) Proceedings of the 32nd International Conference on Machine Learning. Proceedings of Machine Learning Research, vol. 37, pp. 2256–2265. PMLR, Lille, France (07–09 Jul 2015), <https://proceedings.mlr.press/v37/sohl-dickstein15.html>
61. Spaan, M.T., Gordon, G.J., Vlassis, N.: Decentralized planning under uncertainty for teams of communicating agents. In: Proceedings of the fifth international joint conference on Autonomous agents and multiagent systems. pp. 249–256 (2006)

62. Stone, P., Veloso, M.: Multiagent systems: A survey from a machine learning perspective. *Autonomous Robots* **8**, 345–383 (2000)
63. Suarez, J., Du, Y., Isola, P., Mordatch, I.: Neural mmo: A massively multiagent game environment for training and evaluating intelligent agents. *arXiv preprint arXiv:1903.00784* (2019)
64. Sumers, T., Yao, S., Narasimhan, K., Griffiths, T.L.: Cognitive architectures for language agents. *arXiv preprint arXiv:2309.02427* (2023)
65. Touvron, H., Martin, L., Stone, K., Albert, P., Almahairi, A., Babaei, Y., Bashlykov, N., Batra, S., Bhargava, P., Bhosale, S., et al.: Llama 2: Open foundation and fine-tuned chat models. *arXiv preprint arXiv:2307.09288* (2023)
66. Villegas, R., Babaeizadeh, M., Kindermans, P.J., Moraldo, H., Zhang, H., Saffar, M.T., Castro, S., Kunze, J., Erhan, D.: Phenaki: Variable length video generation from open domain textual descriptions. In: *International Conference on Learning Representations* (2023), <https://openreview.net/forum?id=v0EXS39n0F>
67. Wang, G., Xie, Y., Jiang, Y., Mandlekar, A., Xiao, C., Zhu, Y., Fan, L., Anandkumar, A.: Voyager: An open-ended embodied agent with large language models. *arXiv preprint arXiv:2305.16291* (2023)
68. Wang, L., Ma, C., Feng, X., Zhang, Z., Yang, H., Zhang, J., Chen, Z., Tang, J., Chen, X., Lin, Y., et al.: A survey on large language model based autonomous agents. *arXiv preprint arXiv:2308.11432* (2023)
69. Wang, Z., Cai, S., Chen, G., Liu, A., Ma, X., Liang, Y.: Describe, explain, plan and select: interactive planning with llms enables open-world multi-task agents. In: *Thirty-seventh Conference on Neural Information Processing Systems* (2023)
70. Wang, Z., Cai, S., Liu, A., Ma, X., Liang, Y.: JARVIS-1: Open-world multi-task agents with memory-augmented multimodal language models. In: *Second Agent Learning in Open-Endedness Workshop* (2023), <https://openreview.net/forum?id=xzPkZyH10W>
71. Wen, M., Kuba, J., Lin, R., Zhang, W., Wen, Y., Wang, J., Yang, Y.: Multi-agent reinforcement learning is a sequence modeling problem. *Advances in Neural Information Processing Systems* **35**, 16509–16521 (2022)
72. Xi, Z., Chen, W., Guo, X., He, W., Ding, Y., Hong, B., Zhang, M., Wang, J., Jin, S., Zhou, E., et al.: The rise and potential of large language model based agents: A survey. *arXiv preprint arXiv:2309.07864* (2023)
73. Xia, F., Zamir, A.R., He, Z., Sax, A., Malik, J., Savarese, S.: Gibson env: Real-world perception for embodied agents. In: *Proceedings of the IEEE conference on computer vision and pattern recognition*. pp. 9068–9079 (2018)
74. Xiang, F., Qin, Y., Mo, K., Xia, Y., Zhu, H., Liu, F., Liu, M., Jiang, H., Yuan, Y., Wang, H., et al.: Sapien: A simulated part-based interactive environment. In: *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. pp. 11097–11107 (2020)
75. Yan, W., Zhang, Y., Abbeel, P., Srinivas, A.: Videogpt: Video generation using vq-vae and transformers. *arXiv preprint arXiv:2104.10157* (2021)
76. Yang, S., Du, Y., Ghasemipour, S.K.S., Tompson, J., Kaelbling, L.P., Schuurmans, D., Abbeel, P.: Learning interactive real-world simulators. In: *The Twelfth International Conference on Learning Representations* (2024), <https://openreview.net/forum?id=sFyTZEqmUY>
77. Yang, S., Nachum, O., Du, Y., Wei, J., Abbeel, P., Schuurmans, D.: Foundation models for decision making: Problems, methods, and opportunities. *arXiv preprint arXiv:2303.04129* (2023)

78. Yu, C., Velu, A., Vinitsky, E., Gao, J., Wang, Y., Bayen, A., Wu, Y.: The surprising effectiveness of ppo in cooperative multi-agent games. *Advances in Neural Information Processing Systems* **35**, 24611–24624 (2022)
79. Yuan, S., Chen, J., Fu, Z., Ge, X., Shah, S., Jankowski, C.R., Yang, D., Xiao, Y.: Distilling script knowledge from large language models for constrained language planning. *arXiv preprint arXiv:2305.05252* (2023)
80. Zhang, H., Du, W., Shan, J., Zhou, Q., Du, Y., Tenenbaum, J.B., Shu, T., Gan, C.: Building cooperative embodied agents modularly with large language models (2023)
81. Zhou, Q., Chen, S., Wang, Y., Xu, H., Du, W., Zhang, H., Du, Y., Tenenbaum, J.B., Gan, C.: Hazard challenge: Embodied decision making in dynamically changing environments (2024)
82. Zhu, Y., Gordon, D., Kolve, E., Fox, D., Fei-Fei, L., Gupta, A., Mottaghi, R., Farhadi, A.: Visual semantic planning using deep successor representations. In: *Proceedings of the IEEE international conference on computer vision*. pp. 483–492 (2017)

## A Additional Experiment Details

### A.1 Task

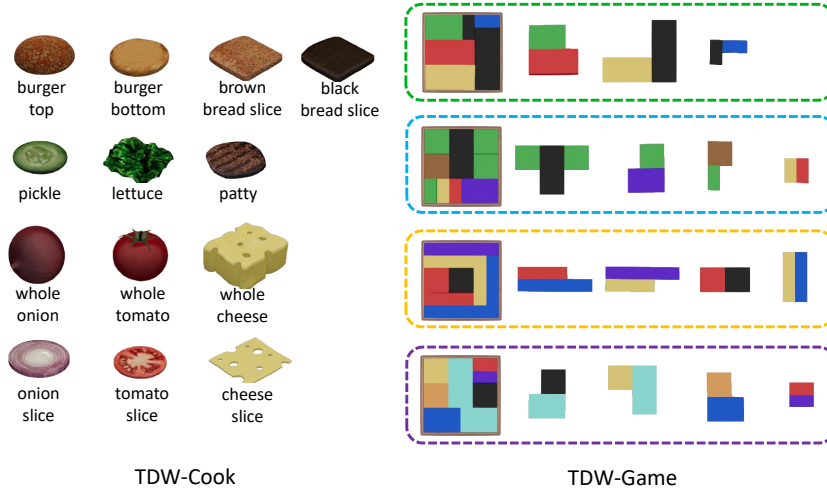

**Fig. 6: Objects of *TDW-Cook* and *TDW-Game*.** Left: 13 food items that may occur on the table while 10 of them (except for the third row) may occur in the recipe. Right: 4 puzzles containing 3 to 4 pieces each with different colors and shapes.

We build two challenging embodied multi-agent planning tasks *TDW-Game* and *TDW-Cook* on ThreeDWorld [20], where 2-4 decentralized agents must co-operate to finish some long-horizon goals. The object assets of the two tasks are illustrated in Fig. 6.

### A.2 Compositional World Models

*Dataset Collection* We collect random rollouts with a scripted planner and generated 107k videos of *TDW-Game* and 50k videos of *TDW-Cook*.

*Model Parameters* The parameters of our inpainting diffusion model, super-resolution diffusion model, and video diffusion model are shown in Tab. 5.

*Agent-dependent Loss Scale* We use a simple method to set the loss scale. If agent  $i$  is located in the upper half of the image, then we set  $C_{i,1:H/2,1:W} = 2$  and others are 1. Similarly, the same approach is applied to other situations or conditions.

	Inpainting	Super-Resolution	Video Diffusion Model
<b>num_parameters</b>	84M	38M	198M
<b>input_resolution</b>	$336 \times 336$	$128 \times 128$	$128 \times 128$
<b>output_resolution</b>	$336 \times 336$	$336 \times 336$	$128 \times 128$
<b>base_channels</b>	64	64	128
<b>num_res_block</b>	2	2	2
<b>attention_resolutions</b>	(16,)	(16,)	(8, 16)
<b>channel_mult</b>	(1, 2, 4, 6, 8)	(1, 2, 3, 4, 5)	(1, 2, 3, 4, 5)

Table 5: Model Parameters.

*Compute* We train the world model for 50k steps in the first stage with 384 batch-size on 192 V-100 GPUs in 1 day. And then fine-tune the model for 25k steps in the second stage with 120 batch-size on 120 V-100 GPUs in 1 day. Both the inpainting model and the super-resolution model are trained for 60k steps with 288 batch-size on 24 V-100 GPUs in 1 day.

*Sampling* We use DDIM sampling across the experiments with guidance weight 5 for the text-guided video diffusion model.

### A.3 Baselines


**MAPPO** Our task is multi-agent reinforcement learning with decentralized observation and control, as different agents have disjoint observations to produce their actions. We followed the training procedure in [78]. Each agent is an actor-critic network where the actor and critic share a common convolutional backbone. We pre-define a set of all possible actions for each environment and let the PPO agent choose among them. We design rewards to reflect the steps left to finish the episode in a similar spirit to the Outcome Evaluator’s heuristics score design.

However, in our setting, the embodied multi-agent simulation samples are relatively slow, creating a higher demand for sample efficiency of the method. We conducted a grid search on hyper-parameters of learning rate in  $\{1e^{-6}, 5e^{-5}, 1e^{-3}\}$ , batch size in  $\{2, 64\}$ . However, the results are poor and the behavior either falls to near-random or collapses to a single action, which verifies the challenge of cooperative planning on ego-centric RGBD observations.

**Recurrent World Models** We followed the training procedure in [23], firstly training a variational autoencoder (VAE) on the same data collected for training *COMBO* to encode the egocentric observations in the *TDW-Game* and *TDW-Cook* environments into a 32-dimensional latent vector  $z \in \mathbb{R}^{32}$ . Then, we train a mixture density network combined with a recurrent neural network (MDN-RNN) for predicting the future latent vector given a textual action which is encoded by BERT [13], the current egocentric observation and the current hidden state

of the RNN, which is modeling  $P(z_{t+1}|a_t, z_t, h_t)$ . Finally, we train two simple controllers using the covariance-matrix adaptation evolution strategy (CMA-ES) [24] to maximize the expected cumulative reward of a rollout by interacting with the actual environments.

The recurrent world model failed to model world dynamics accurately conditioned on a single action, as shown in Fig. 7. Specifically, we predict the latent code  $z_{t+1}$  from MDN-RNN and use the decoder of the VAE to generate the image of the next time step. Additionally, the simple controller doesn't work well on a task that requires complex planning as it keeps collapsing to single actions in our experiments.

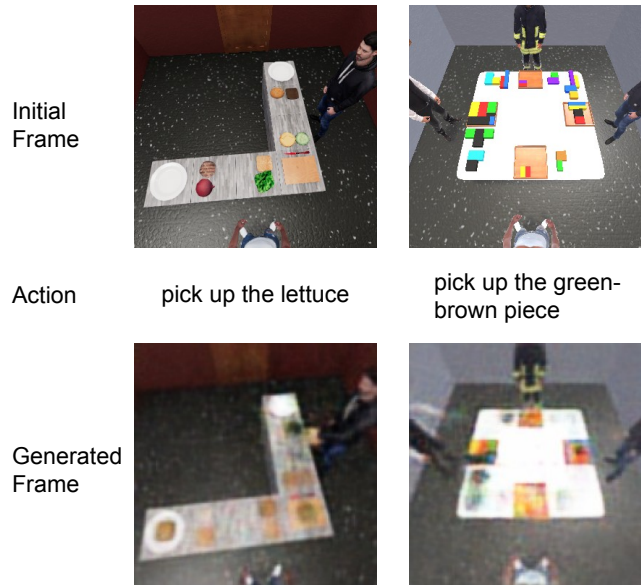

**Fig. 7: Recurrent world models failed to model world dynamics conditioned on single actions accurately.**