

Generating Daylight-driven Architectural Design via Diffusion Models

Pengzhi Li
Tsinghua University
lpz21@mails.tsinghua.edu.cn

Baijuan Li
SAUP, Shenzhen University
2060321010@email.szu.edu.cn

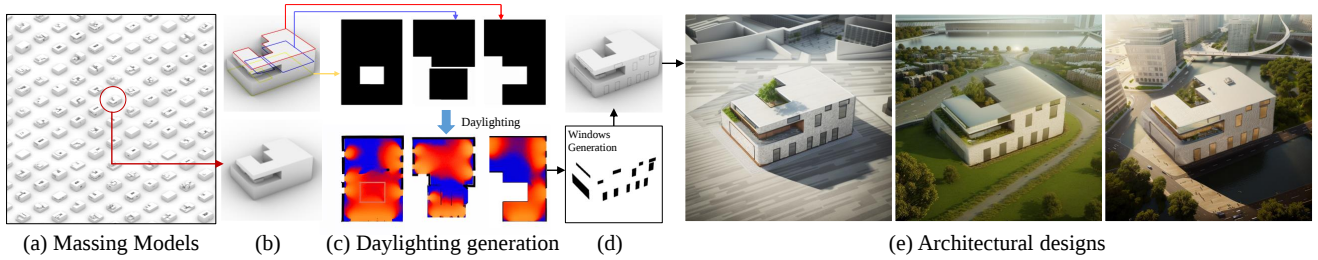


Figure 1. We propose a novel AI-aided architectural design method. We first generate numerous massing models as shown in (a). Then, a specific massing model (b) is selected. Following this, guided by a daylight-driven strategy, we refine the architectural façade depicted in (d), achieving efficient generations of the architectural design in (e) by using diffusion models.

Abstract

In recent years, the rapid development of large-scale models has made new possibilities for interdisciplinary fields such as architecture. In this paper, we present a novel daylight-driven AI-aided architectural design method. Firstly, we formulate a method for generating massing models, producing architectural massing models using random parameters quickly. Subsequently, we integrate a daylight-driven façade design strategy, accurately determining window layouts and applying them to the massing models. Finally, we seamlessly combine a large-scale language model with a text-to-image model, enhancing the efficiency of generating visual architectural design renderings. Experimental results demonstrate that our approach supports architects' creative inspirations and pioneers novel avenues for architectural design development. Project page: <https://zrealli.github.io/DDADesign/>.

1. Introduction

As an interdisciplinary field encompassing engineering and art, architecture blends elements of technology and creativity. The distinctive interdisciplinary adds complexity to the architectural design process [6, 7], necessitating the simultaneous consideration of aesthetic design and functional layout. This complexity results in the initial stages of architectural design demanding significant time and effort.

Traditionally, architects commence with fundamental floor sketches, gradually evolving them into massing models, often relying on manual work within 3D modeling software. However, this process inevitably involves numerous time-consuming revisions and adjustments.

In recent years, with the advancement of deep learning techniques, several studies have introduced methods capable of autonomously generating architectural floorplans [21, 32, 34]. These methods can automatically produce functional layouts based on the outlines of floorplans. However, these approaches primarily focus on developing floorplans for residential buildings while neglecting crucial architectural factors such as daylighting [10, 35]. Furthermore, they cannot encompass the entirety of the architectural design process. Recently, significant progress has been made in large-scale text-to-image models [22, 26, 28, 30, 31]. These models exhibit potent content generation abilities and exceptional aesthetic expression skills, presenting novel opportunities for reimagining design [3, 14, 16, 18, 25]. Leveraging text prompts, we can generate entirely new architectural designs from sketches. This approach holds immense potential while also being a challenging and fascinating task.

In this paper, we propose a novel AI-aided architectural design method to generate preliminary architectural designs from massing models. Unlike S2A [14], which relies on using predicted depth map [27] to generate massing models, it's difficult to obtain consistent and accurate edge depth

maps [11, 12, 15] from single-frame perspective images. Therefore, we utilize 3D modeling software to achieve more precise massing generation. We first introduce a method for generating massing models, drawing inspiration from traditional architectural design strategies that involve iteratively adding and subtracting volumes to refine the design. We visualize this strategy within Grasshopper and, by adjusting random parameters, are able to generate a diverse array of massing models swiftly. Subsequently, we present a façade generation approach centered around daylighting. Given the lack of readily available daylighting data, we undertake a series of steps to construct a dedicated dataset of daylighting maps for training the LoRA (Low-Rank Adaptation) model [8]. We then input representative sectional profiles of massing models into the trained model to generate corresponding daylighting maps. This process accurately determines window layouts and precisely integrates them onto the massing models.

Finally, we categorize key architectural terms into four major groups and employ the advanced language model GPT-4 [23] to generate corresponding text prompts randomly. These prompts are then fed into the Stable Diffusion v1.5 model [28]. To ensure alignment between the generated architectural designs and the contours of the massing models, we integrate additional and conditional controls into the diffusion model using ControlNet [36]. This enhancement aims to attain more precise outcomes in an architectural generation. Experimental results show that our approach efficiently assists architects in swiftly conceptualizing and creating initial design proposals. This paves a new pathway for the advancement of the architectural design. We summarize our main contributions as follows:

- We present a novel AI-aided architectural design method driven by daylight, enabling an end-to-end generation from massing models to architectural designs. This process offers support for architects’ creative inspirations.
- We are the first to incorporate daylight factors into deep learning-based architectural generation methods and present a strategy for constructing an architectural daylighting dataset.
- We seamlessly integrate large-scale language models with text-to-image models, enhancing the efficiency of generating visual architectural design renderings.

2. Method

As shown in Fig. 2, we describe our architectural design pipeline. Next, we describe each part in detail.

2.1. Massing model generation

In the initial stages of architectural design ideation, designers commonly utilize massing models to refine the architectural form. This process involves techniques like massing addition and subtraction. We draw inspiration from these

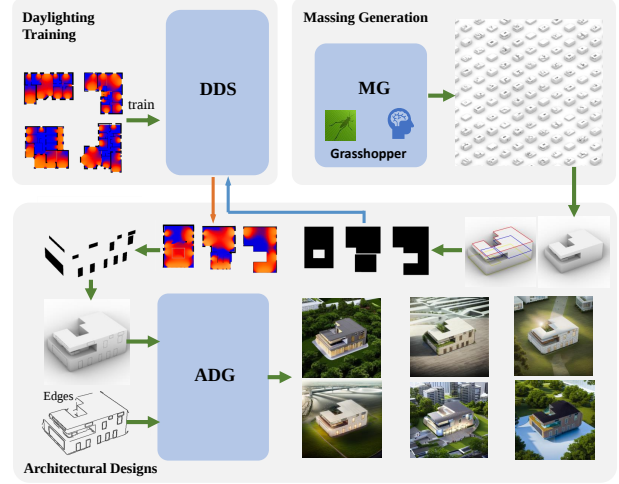


Figure 2. Our pipeline shows an AI-aided architectural design workflow. Massing Generation (MG) is the module for generating architectural massing models, DDS is the daylight-driven strategy, and Architectural Design (ADG) is the module utilizing large-scale models to generate architectural designs.

widely employed spatial design methods in architecture and formulate a parametric algorithm. As shown in Fig. 3, our algorithm comprises two key components, focusing on manipulating massing by adding and subtracting massings.

We first establish an initial cubic massing model for the approach focused on massing addition. We implement additive modifications to this massing by employing translation and scaling actions. Subsequently, a Boolean union operation is conducted on all the massings, resulting in the initial massings used for architectural generation. Conversely, we define a cubic space for the massing subtraction approach where all three dimensions (x, y, z) are set to a maximum value according to the initial massing. Within this space, the generation of cubes for the ‘massing subtraction’ is guided by specific parameters. To enhance precise control, we ensure that the initial points used for massing generation align precisely with the edges. We use the Rhino-grasshopper platform [19] to implement our algorithm to facilitate parameter control through a visual graphical user interface. More comprehensive understanding and specifics regarding parameter control can be found in the supplementary materials.

2.2. Daylight-driven strategy

Architectural façade design [7, 17, 20, 33] is a crucial step in the process of architectural design. As a significant factor influencing façade design, daylight has a notable impact on indoor comfort and energy efficiency. However, previous researches focus on the automated generation of architectural floorplans [9, 21, 24, 32, 34], and most efforts have concentrated solely on rational spatial layout, neglecting the

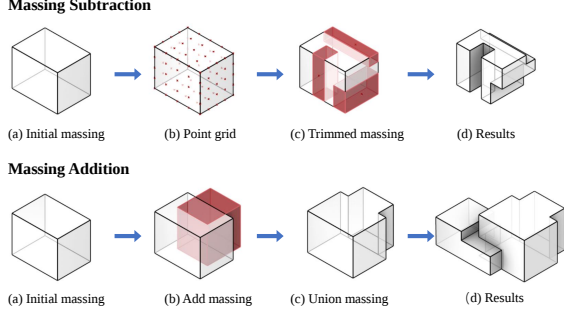


Figure 3. We demonstrate the processes of addition and subtraction in the generation of massing models. The generation of new massing models is founded upon these fundamental operations.

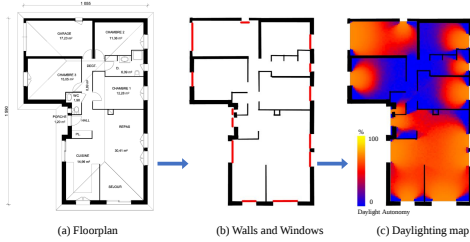


Figure 4. We illustrate the process of generating our daylighting data. First, the floorplan (a) is decomposed into three vector components (b): interior walls, exterior walls, and windows (red). Subsequently, daylight parameters and algorithms are employed to compute the corresponding daylighting maps.

importance of daylighting in architecture. To address this issue, we introduce a daylight-driven approach to architectural façade design, aiming to effectively utilize daylighting data for optimizing façade design.

However, to the best of our knowledge, there is currently no existing daylighting dataset. Considering the rapid advancement of diffusion models in image-related tasks [1, 2, 5, 13, 14, 29] and the introduction of LoRA [8] technology, which eliminates the necessity for extensive training data, only a small amount of data is required for fine-tuning diffusion models to achieve the generation of similar image content. Therefore, we collect approximately 100 floorplans of various types of buildings. As shown in Fig. 4, these floorplans are further disassembled into vectorized drawings of windows, exterior walls, and interior walls. Subsequently, we employ the solar irradiation parameters specific to the Guangdong province within the Grasshopper software to conduct daylight analysis on these floorplans. This process produces plausible daylighting maps. Additionally, in the supplementary materials, we explain our devised daylighting map generation procedure and approach, realized through a plugin named ‘Honey-bee’ within the Grasshopper software. These daylighting maps assist the model in learning the distribution of window placements on building façades.

Subsequently, we employ the Stable Diffusion v1.5 model [28], utilizing the generated daylighting map data as training input. Through integrating LoRA [8] technology for model fine-tuning, we successfully obtain a precise LoRA [8] model tailored for developing rational daylighting maps. As illustrated in Fig. 2, we input the sectional profiles of each floor level of the architectural massing model and employ ControlNet [36] to control the plane outlines, culminating in producing corresponding daylight analysis visuals. Subsequently, utilizing these daylighting maps as references, we can accurately draw the window placements on the architectural massing. This daylight-driven design approach not only assists architects in completing façade designs but also ensures the rationality of indoor daylighting, which the previous studies overlook.

2.3. Architectural design generation

We represent the diffusion process of a pre-trained model [28] as follows:

$$I_T, I_{T-1}, \dots, I_0. I_{t-1} = D(I_t|y), \quad (1)$$

the D is an update process: $\mathcal{I} \times \mathcal{C} \rightarrow \mathcal{I}$, $\mathcal{I} \in \mathbb{R}^{H \times W \times C}$ represents the image space, and $\mathcal{C}$ is the condition space, and $y \in \mathcal{C}$ is a text prompt. From T to 0, I_T gradually changes from a Gaussian noise distribution being transformed into the desired image by y .

The role of text prompts y is crucial during the process of architectural generation. However, for architectural generation, the core vocabulary encompasses many essential terms [4]. We categorize them into four categories: architectural types, architectural styles, architectural landscapes, and architectural materials. Recent developments in large-scale language models, such as GPT-4 [23], which have been trained on extensive multimodal datasets, have achieved remarkable breakthroughs. To achieve text-controlled architectural generation, within GPT-4 [23], by inputting instructions like “Generate N architectural design prompts, including architectural types, architectural styles, architectural landscape...” we can access a multitude of phrases for use in architectural generation. Let A, B, C, and D denote the type, style, landscape, and material, respectively. The architectural design component ADG can be defined as:

$$\{P_0, P_1, \dots, P_K\} = ADG(A, B, C, D, K) \quad (2)$$

where K is the number of prompts to generate. P_i is the i -th prompt.

Furthermore, to maintain the generated results close to the appearance of the massing model, we use ControlNet [36] to add more conditions in the stable diffusion model [28] to control the precise architectural designs.

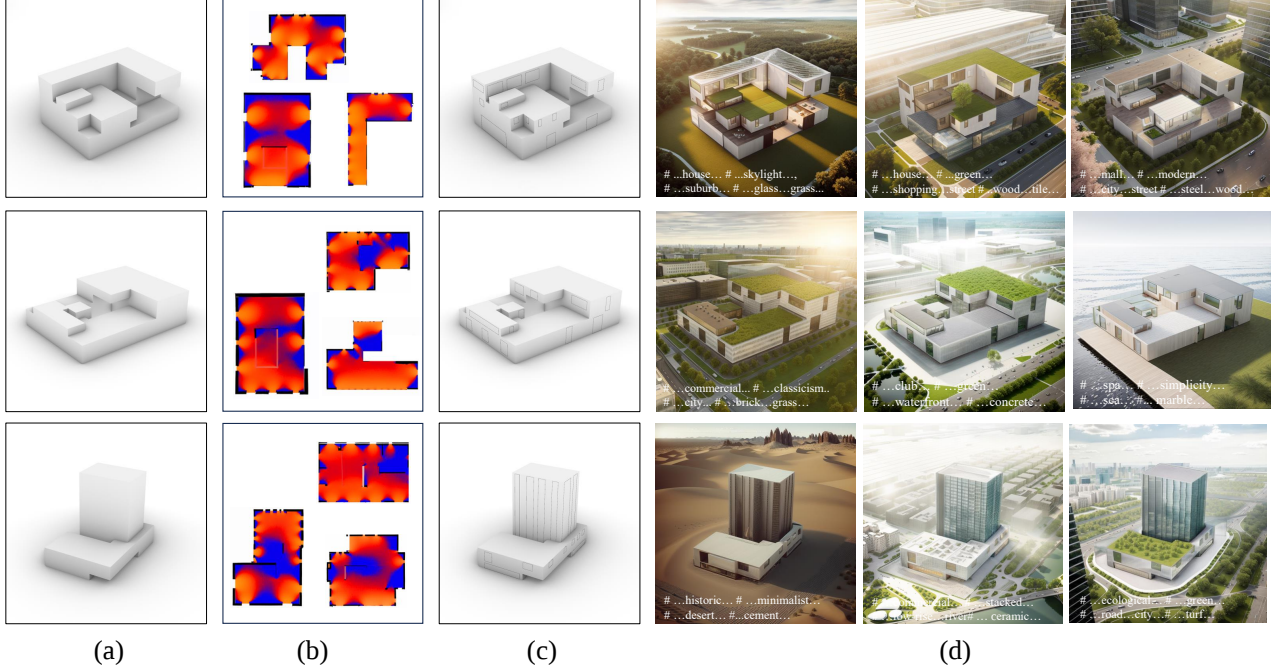


Figure 5. More architectural designs. (a) is the generated massing model, (b) illustrates the daylighting map corresponding to (a). (c) shows the massing model following façade optimization, and (d) displays the visual renderings of the architectural design. ‘#’ divides the text prompts into four corresponding categories.

3. Experimental Results

We utilize random parameters to generate a series of massing models, employing them as the foundational elements for architectural design. As illustrated in Fig. 5, our approach involves the initial extraction of three representative sectional profiles based on contour lines. Subsequently, we generate corresponding daylighting maps using the trained LoRA [8] model. Due to the stochastic nature of the diffusion model, we meticulously filter the generated daylighting maps, ensuring the emergence of more plausible architectural façade designs. Based on the filtered daylighting maps, we create façade window profiles in (c). We generate many distinctive architectural design proposals in the final stages, leveraging diverse architectural text prompts. A subset of these results is showcased in (d), where these design proposals demonstrate remarkable performance concerning exterior proportions and visual renderings. Our approach is a valuable tool for architects to expedite the realization of architectural concepts and creativity, providing robust support for their creative endeavors.

User study: Since our method aims to improve the design efficiency of architects, we survey 50 architects from different backgrounds about the improvements our method brings to practical design. We set several questions, such as whether the daylighting generation strategy is reason-

Table 1. User studies show that our framework is effective.

Questions	Positive	Negative	Neutral
Daylighting strategy?	64%	22%	14%
Design efficiency?	88%	4%	8%
Design inspiration?	84%	4%	12%
Design rationality?	72%	8%	20%

able, whether the design efficiency is improved, whether design inspiration, the rationality of architectural design, and whether they are willing to use it. As shown in Tab. 1, our method is recognized by most professional architects, further verifying the practical applicability of our approach.

4. Future work

In the future, we aim to extend our design strategies to encompass more architectural physical factors and validate them across a more comprehensive range of architectural typologies. Enhancing the model’s generation stability is a pivotal direction for future research. We are eagerly anticipating the emergence of more innovative achievements within architectural design.

5. Conclusion

This paper makes significant contributions to the exploration and advancement of architectural design. By employing a massing model generation approach and introducing an innovative daylight-driven AI-aided architectural design method, we successfully generate from massing models to preliminary architectural designs. Furthermore, we combine large-scale language models with text-to-image models efficiently produce architectural renderings. We firmly believe that this study provides crucial guidance and insight for future architectural design development.

6. Supplementary materials


In the supplementary materials, we primarily provide additional technical details to augment the content of the main text. Firstly, we showcase a selection of datasets mentioned in the section regarding daylight-driven strategies in Figure 6. This dataset includes floorplans and computationally derived daylighting maps. Subsequently, we illustrate various control parameters employed during the massing model generation process in Figure 7. Additionally, Figure 8 explains our devised daylighting map generation procedure and approach, realized through a plugin named ‘Honeybee’ within the Grasshopper software.

References

- [1] Omri Avrahami, Ohad Fried, and Dani Lischinski. Blended latent diffusion. *ACM Transactions on Graphics (TOG)*, 42(4):1–11, 2023. [1](#), [2](#)
- [2] Tim Brooks, Aleksander Holynski, and Alexei A Efros. Instructpix2pix: Learning to follow image editing instructions. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 18392–18402, 2023. [3](#)
- [3] Stanislas Chaillou. Archigan: Artificial intelligence x architecture. In *Architectural intelligence: Selected papers from the 1st international conference on computational design and robotic fabrication (CDRF 2019)*, pages 117–127. Springer, 2020. [1](#)
- [4] Francis DK Ching. *A visual dictionary of architecture*. John Wiley & Sons, 2011. [3](#)
- [5] Guillaume Couairon, Jakob Verbeek, Holger Schwenk, and Matthieu Cord. Diffedit: Diffusion-based semantic image editing with mask guidance. *arXiv preprint arXiv:2210.11427*, 2022. [3](#)
- [6] Vasco Granadeiro, José P Duarte, João R Correia, and Vítor MS Leal. Building envelope shape design in early stages of the design process: Integrating architectural design systems and energy simulation. *Automation in construction*, 32:196–209, 2013. [1](#)
- [7] Seyed Morteza Hosseini, Masi Mohammadi, Alexander Rosemann, Torsten Schröder, and Jos Lichtenberg. A morphological approach for kinetic façade design process to improve visual and thermal comfort. *Building and environment*, 153:186–204, 2019. [1](#), [2](#)
- [8] Edward J Hu, Yelong Shen, Phillip Wallis, Zeyuan Allen-Zhu, Yuanzhi Li, Shean Wang, Lu Wang, and Weizhu Chen. Lora: Low-rank adaptation of large language models. *arXiv preprint arXiv:2106.09685*, 2021. [2](#), [3](#), [4](#)
- [9] Ruizhen Hu, Zeyu Huang, Yuhan Tang, Oliver Van Kaick, Hao Zhang, and Hui Huang. Graph2plan: Learning floor-plan generation from layout graphs. *ACM Transactions on Graphics (TOG)*, 39(4):118–1, 2020. [2](#)
- [10] Martin Kischkoweit-Lopin. An overview of daylighting systems. *Solar Energy*, 73(2):77–82, 2002. [1](#)
- [11] Pengzhi Li and Zhiheng Li. Efficient temporal denoising for improved depth map applications. In *Proc. Int. Conf. Learn. Representations, Tiny papers*, 2023. [2](#)
- [12] Pengzhi Li, Yikang Ding, Linge Li, Jingwei Guan, and Zhiheng Li. Towards practical consistent video depth estimation. In *Proceedings of the 2023 ACM International Conference on Multimedia Retrieval*, pages 388–397, 2023. [2](#)
- [13] Pengzhi Li, Qinxuan Huang, Yikang Ding, and Zhiheng Li. Layerdiffusion: Layered controlled image editing with diffusion models. In *SIGGRAPH Asia 2023 Technical Communications*, pages 1–4. 2023. [3](#)
- [14] Pengzhi Li, Baijuan Li, and Zhiheng Li. Sketch-to-architecture: Generative ai-aided architectural design. In *Proceedings of the 31st Pacific Conference on Computer Graphics and Applications*. The Eurographics Association, 2023. [1](#), [3](#)
- [15] Pengzhi Li, Yikang Ding, Haohan Wang, Chengshuai Tang, and Zhiheng Li. The devil is in the edges: Monocular depth estimation with edge-aware consistency fusion. *arXiv preprint arXiv:2404.00373*, 2024. [2](#)
- [16] Wenjie Liao, Xinzhen Lu, Yuli Huang, Zhe Zheng, and Yuanqing Lin. Automated structural design of shear wall residential buildings using generative adversarial networks. *Automation in Construction*, 132:103931, 2021. [1](#)
- [17] Yaik-Wah Lim, Mohd Zin Kandar, Mohd Hamdan Ahmad, Dilshan Remaz Ossen, and Aminatuzuhariah Megat Abdullah. Building façade design for daylighting quality in typical government office building. *Building and Environment*, 57:194–204, 2012. [2](#)
- [18] Liane Makatura, Michael Foshey, Bohan Wang, Felix HahnLein, Pingchuan Ma, Bolei Deng, Megan Tjandra-suwita, Andrew Spielberg, Crystal Elaine Owens, Peter Yichen Chen, et al. How can large language models help humans in design and manufacturing? *arXiv preprint arXiv:2307.14377*, 2023. [1](#)
- [19] Robert McNeel et al. Rhinoceros 3d, version 6.0. *Robert McNeel & Associates*, Seattle, WA, 2010. [2](#)
- [20] Saviz Moghtadernejad, M Saeed Mirza, and Luc E Chouinard. Facade design stages: Issues and considerations. *Journal of Architectural Engineering*, 25(1):04018033, 2019. [2](#)
- [21] Nelson Nauata, Sepidehsadat Hosseini, Kai-Hung Chang, Hang Chu, Chin-Yi Cheng, and Yasutaka Furukawa. Housegan++: Generative adversarial layout refinement network towards intelligent computational agent for professional archi-

- texts. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 13632–13641, 2021. 1, 2
- [22] Alex Nichol, Prafulla Dhariwal, Aditya Ramesh, Pranav Shyam, Pamela Mishkin, Bob McGrew, Ilya Sutskever, and Mark Chen. Glide: Towards photorealistic image generation and editing with text-guided diffusion models. *arXiv preprint arXiv:2112.10741*, 2021. 1
- [23] OpenAI. Gpt-4 technical report, 2023. 2, 3
- [24] Wamiq Para, Paul Guerrero, Tom Kelly, Leonidas J Guibas, and Peter Wonka. Generative layout modeling using constraint graphs. In *Proceedings of the IEEE/CVF international conference on computer vision*, pages 6690–6700, 2021. 2
- [25] Wamiq Para, Paul Guerrero, Tom Kelly, Leonidas J Guibas, and Peter Wonka. Generative layout modeling using constraint graphs. In *Proceedings of the IEEE/CVF international conference on computer vision*, pages 6690–6700, 2021. 1
- [26] Aditya Ramesh, Prafulla Dhariwal, Alex Nichol, Casey Chu, and Mark Chen. Hierarchical text-conditional image generation with clip latents. *arXiv preprint arXiv:2204.06125*, 2022. 1
- [27] René Ranftl, Katrin Lasinger, David Hafner, Konrad Schindler, and Vladlen Koltun. Towards robust monocular depth estimation: Mixing datasets for zero-shot cross-dataset transfer. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 44(3), 2022. 1
- [28] Robin Rombach, Andreas Blattmann, Dominik Lorenz, Patrick Esser, and Björn Ommer. High-resolution image synthesis with latent diffusion models. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 10684–10695, 2022. 1, 2, 3
- [29] Nataniel Ruiz, Yuanzhen Li, Varun Jampani, Yael Pritch, Michael Rubinstein, and Kfir Aberman. Dreambooth: Fine tuning text-to-image diffusion models for subject-driven generation. *arXiv preprint arXiv:2208.12242*, 2022. 3
- [30] Chitwan Saharia, William Chan, Saurabh Saxena, Lala Li, Jay Whang, Emily L Denton, Kamyar Ghasemipour, Raphael Gontijo Lopes, Burcu Karagol Ayan, Tim Salimans, et al. Photorealistic text-to-image diffusion models with deep language understanding. *Advances in neural information processing systems*, 35:36479–36494, 2022. 1
- [31] Chitwan Saharia, William Chan, Saurabh Saxena, Lala Li, Jay Whang, Emily L Denton, Kamyar Ghasemipour, Raphael Gontijo Lopes, Burcu Karagol Ayan, Tim Salimans, et al. Photorealistic text-to-image diffusion models with deep language understanding. *Advances in Neural Information Processing Systems*, 35:36479–36494, 2022. 1
- [32] Mohammad Amin Shabani, Sepidehsadat Hosseini, and Yasutaka Furukawa. Housediffusion: Vector floorplan generation via a diffusion model with discrete and continuous denoising. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 5466–5475, 2023. 1, 2
- [33] Cheng Sun, Yiran Zhou, and Yunsong Han. Automatic generation of architecture facade for historical urban renovation using generative adversarial network. *Building and Environment*, 212:108781, 2022. 2
- [34] Jiahui Sun, Wenming Wu, Ligang Liu, Wenjie Min, Gaofeng Zhang, and Liping Zheng. Wallplan: synthesizing floorplans by learning to generate wall graphs. *ACM Transactions on Graphics (TOG)*, 41(4):1–14, 2022. 1, 2
- [35] Liang Wong. A review of daylighting design and implementation in buildings. *Renewable and Sustainable Energy Reviews*, 74:959–968, 2017. 1
- [36] Lvmin Zhang, Anyi Rao, and Maneesh Agrawala. Adding conditional control to text-to-image diffusion models. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 3836–3847, 2023. 2, 3

Some daylighting maps

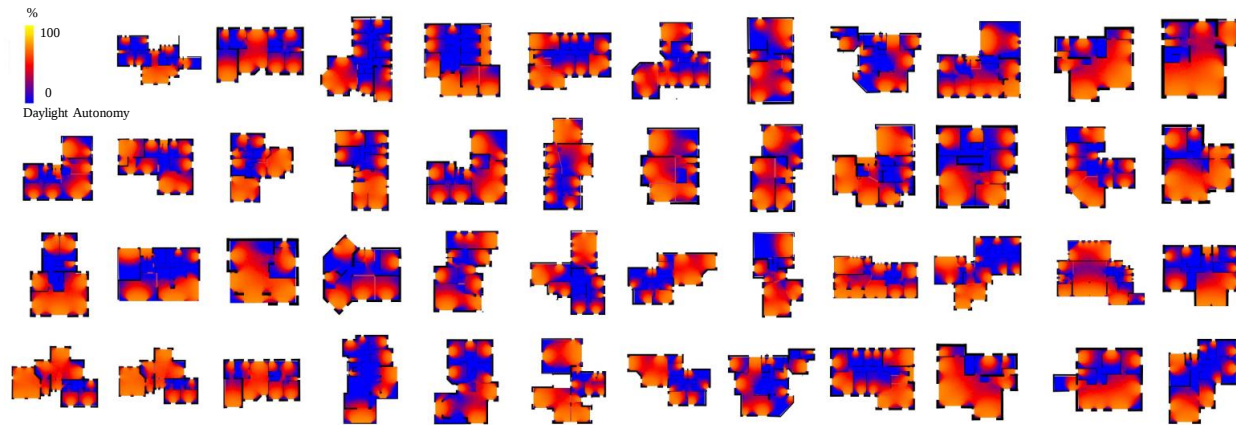


Some floorplans



Figure 6. We present more results of daylighting data generation. The upper figure showcases partial results of daylighting maps, while the lower figure shows some collected floorplans.

Massing Subtraction

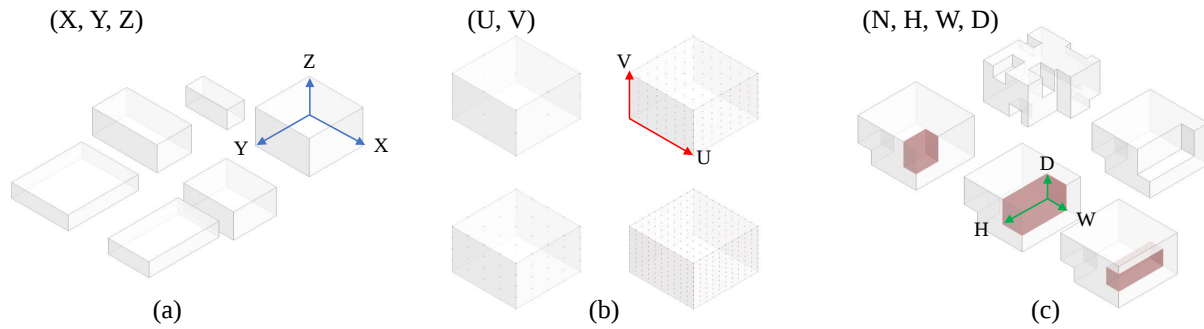

Massing Addition

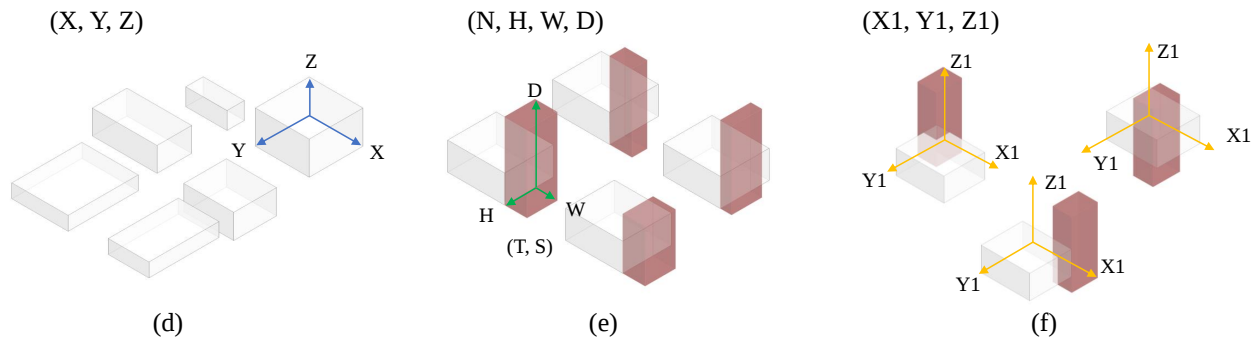


Figure 7. In step (a), we initiate the process by defining a cube with fixed dimensions XYZ. Subsequently, in step (b), we perform a surface segmentation on this cube along the UV directions. This segmentation generates a mesh composed of points in the UV coordinate system. During the subsequent massing block generation phase, we randomly select these points as the central points for generating the massing blocks. Then, in step (c), we utilize the parameter N to determine the number of subtraction operations to be executed on the massing. Additionally, we employ the parameters D, H, and W to individually control the dimensions used for partitioning the massings' height, length, and width. Adjusting these parameters allows us to manage the entirety of the massing subtraction process precisely. Like step (a), for massing addition, we proceed with step (d). Subsequently, in step (e), we similarly employ the parameters (N, H, W, D) to regulate the creation of massing blocks intended for addition. These blocks are positioned along the outline at the base of the cube. Following this, we apply translation (T) and scaling (S) operations to establish a new coordinate system (X1, Y1, Z1). This new system effectively encapsulates each newly generated massing's size throughout the steps. These procedures allow us to control massing subtraction and addition precisely.

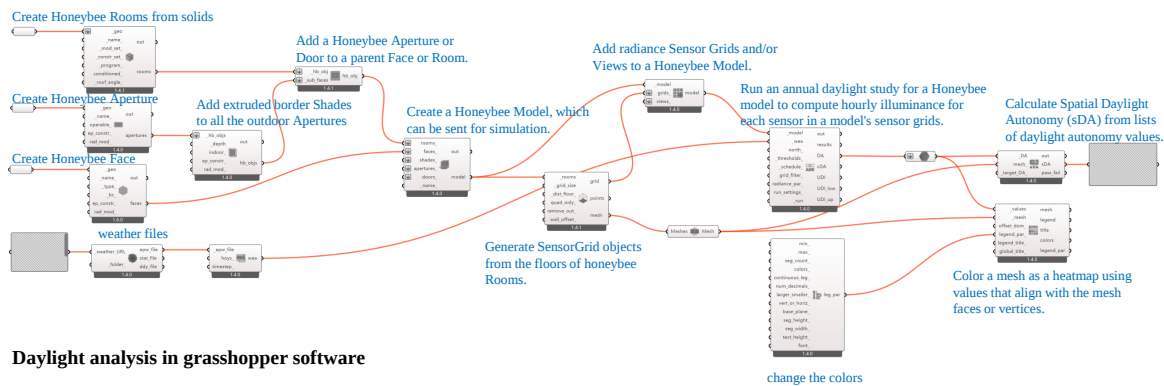


Figure 8. We employ a visual programming approach within Grasshopper to comprehensively demonstrate our daylighting data generation methodology. The blue text labels above each box signify instructions for each respective operation.