

Temporal Scaling Law for Large Language Models

Yizhe Xiong^{1,2} Xiansheng Chen³ Xin Ye³ Hui Chen^{1,2*} Zijia Lin³
Haoran Lian⁴ Jianwei Niu⁴ Guiguang Ding^{1,2*}

¹Tsinghua University

²Beijing National Research Center for Information Science and Technology (BNRist)

³Kuaishou Technology ⁴Beihang University

{xiongyizhe2001, yexin0807}@gmail.com chenxiansheng@pku.edu.cn

huichen@mail.tsinghua.edu.cn {lianhaoran, niujianwei}@buaa.edu.cn

linzijia07@tsinghua.org.cn dinggg@tsinghua.edu.cn

Abstract

Recently, Large Language Models (LLMs) are widely adopted in a wide range of tasks, leading to increasing attention towards the research on how scaling LLMs affects their performance. Existing works, termed as Scaling Laws, have discovered that the loss of LLMs scales as power laws with model size, computational budget, and dataset size. However, the performance of LLMs throughout the training process remains untouched. In this paper, we propose the novel concept of Temporal Scaling Law and study the loss of LLMs from the temporal dimension. We first investigate the imbalance of loss on each token positions and develop a reciprocal-law across model scales and training stages. We then derive the temporal scaling law by studying the temporal patterns of the reciprocal-law parameters. Results on both in-distribution (IID) data and out-of-distribution (OOD) data demonstrate that our temporal scaling law accurately predicts the performance of LLMs in future training stages. Moreover, the temporal scaling law reveals that LLMs learn uniformly on different token positions, despite the loss imbalance. Experiments on pre-training LLMs in various scales show that this phenomenon verifies the default training paradigm for generative language models, in which no re-weighting strategies are attached during training. Overall, the temporal scaling law provides deeper insight into LLM pre-training.

1 Introduction

Large Language Model (LLM) marks a paradigm shift in the scope of natural language processing, demonstrating unprecedented capabilities in accomplishing complicated tasks, ranging from text generation (Brown et al., 2020) to language understanding (Devlin et al., 2019). A cornerstone of this remarkable progress lies in the scalability of the Transformer architecture (Vaswani et al., 2017),

which has facilitated the development of increasingly large models. Moreover, the accessibility of large-scale training is significantly enhanced by the abundance of data gathered from the Internet, which enables the construction of giant training datasets to improve model performance (Radford et al., 2019). Due to the scalability of both the model structure and the size of training data, LLMs with billion-parameters (Brown et al., 2020) and even trillion-parameters (OpenAI, 2023) are widely adopted in a wide range of tasks.

The scalability of LLMs has been extensively studied in terms of variables like model size, computational budget, and dataset size (Kaplan et al., 2020). Prior works in this domain, which are commonly referred to as “scaling laws” (Kaplan et al., 2020; Henighan et al., 2020), have proposed empirical principles to characterize the exponential patterns among these variables. These scaling laws demonstrate that the pre-training loss improves predictably with scalable factors, i.e., model size, computational budget, and dataset size. Recently, similar explorations have expanded to diverse models and settings, such as for multi-modal models (Cherti et al., 2023; Aghajanyan et al., 2023) and in transfer learning (Hernandez et al., 2021). This has enabled researchers to predict the performance of LLMs in different scenarios, facilitating the understanding of the behavior of LLMs.

Prior works of scaling laws in the realm of LLMs have concentrated on predicting the performance of *fully-trained LLMs* after completing training on given hyperparameters and resource (Kaplan et al., 2020; Henighan et al., 2020; Cherti et al., 2023; Aghajanyan et al., 2023). However, a critical aspect that remains underexplored is the *temporal dimension of LLM behaviors during training*. Understanding the optimization trajectory during the training process of LLMs enhances our comprehension of their behavioral patterns and holds extensive potential for practical applications. Firstly, the

* Corresponding author.

ability to accurately predict the entire training trajectory during the preparation of LLM pre-training facilitates the direct selection of data mixture proportions and training hyperparameters for the target LLM within a short training period. This approach addresses the recognized issue that data mixture proportions (Xie et al., 2023a) and regularization hyperparameters (Yang et al., 2022) are not transferable as model size scales. Furthermore, from the perspective of the LLM pre-training process, this predictive capability could provide a theoretical basis for implementing precise early stopping mechanisms, thereby optimizing computational resource management. Despite its significance, prior work has not explored predicting LLM training from the temporal perspective.

In this paper, we propose the novel concept of **Temporal Scaling Law** for Large Language Models. Specifically, in decoder-based generative models, the generation loss attributed to tokens in different positions is imbalanced. By carefully investigating this phenomenon, we discovered that the loss patterns associated with each token conform to a reciprocal-law across different model scales and training stages. We further examine the evolution of the curve parameters for the reciprocal-law and identify the temporal patterns for how these curve parameters change. We term this phenomenon as the temporal scaling law. To further demonstrate the practical values of our proposed temporal scaling law, we employ the temporal patterns to predict future *test loss* using only the *test loss* from the initial training periods. Results on both the in-distribution (IID) validation set and the out-of-distribution (OOD) validation set show that our methodology marks a significant improvement over baseline approaches.

Our temporal scaling law presents a novel approach to understanding the learning dynamics of LLMs at the token level. We discovered that despite the existence of loss imbalance on tokens in different positions, the rate of loss decrease for each token is uniform after an initial training period. This uniformity in learning suggests that LLMs inherently adopt an equal learning approach for all token positions. Such an observation validates the effectiveness of the default training paradigm, in which no weighting strategies on different token positions are applied. To verify this, we compare the performance of pre-trained LLMs involving different re-weighting strategies with the default

paradigm. Experiments show that these strategies yield comparable performance to the default training paradigm. This validates our findings and provides deeper insights into LLM pre-training.

Overall, our contributions are threefold:

- First, we propose the concept of Temporal Scaling Law for Large Language Models, in which the temporal behaviors of large language models during pre-training are characterized mathematically.
- Second, we provide a method for predicting the pre-training trajectory (i.e., test loss decrease pattern) of LLMs precisely based on our proposed temporal scaling law.
- Lastly, based on our proposed temporal scaling law, we derive the learning dynamics at the token level and provide evidence that the default pre-training paradigm, in which no re-weighting operations are attached to different token positions, is effective enough. Experiment results on pre-training LLMs with different scales further validated our argument.

2 Related Works

2.1 Language Models

Language models are statistical models designed to model the probabilistic correlation in sequences of natural languages (Touvron et al., 2023). Language models have been fundamental in the field of natural language processing. Early language models relied on statistical methods, such as the n-gram models (Brown et al., 1992). The transition to neural network-based models marked a significant advancement. Early works (Bengio et al., 2003) introduced the concept of distributed representations. This was followed by the development of recurrent neural networks (RNNs) (Mikolov et al., 2010) and long short-term memory (LSTM) networks (Graves, 2013), which improved the handling of sequential data and long-range dependencies. These models have accomplished promising results on various downstream tasks at the time, and have inspired progress in the computer vision (Ding et al., 2021; Wang et al., 2023) and the multimedia fields (Chen et al., 2020) in the meantime.

The introduction of the Transformer architecture (Vaswani et al., 2017) led to the development of modern language models. Built upon the

scope of Transformers, representative works include BERT (Devlin et al., 2019), XLNet (Yang et al., 2019), RoBERTa (Liu et al., 2019), T5 (Raffel et al., 2020), and the GPT series (Radford et al., 2018, 2019). The advent of GPT-3 (Brown et al., 2020) marks the beginning of the large language model era, as transformer-based generative models are capable of accomplishing various tasks such as in-context learning. Further advancements in LLMs have led to popular works such as PaLM (Chowdhery et al., 2023), Pythia (Biderman et al., 2023), and LLaMA (Touvron et al., 2023). Currently, GPT-4 (OpenAI, 2023) has pushed the boundaries of LLMs further in terms of scale and capability.

Despite the extensive exploration of generative language models, no prior arts has carefully looked into the topic of loss on different token positions. We provide a thorough analysis of test loss behaviors on different tokens throughout the pre-training process and develop a temporal scaling law, offering novel insights for understanding LLMs.

2.2 Scaling Laws for Language Models

The concept of scaling laws for language models was proposed by (Kaplan et al., 2020). Their study revealed that the test loss for generative transformer models scales as a power-law with model size, dataset size, and the amount of compute used for training. Building upon this foundational study (Kaplan et al., 2020), further research has expanded the concept of scaling laws across diverse problem settings (Hernandez et al., 2021) and model architectures (Cherti et al., 2023; Aghajanyan et al., 2023). For instance, (Hernandez et al., 2021) has investigated scaling laws for transfer learning, and discovered that the effective data transferred for a model trained on natural language to a model trained on held-out data also follows a power-law. In the scope of multimodal models, (Cherti et al., 2023) found that scaling behavior differs when trained on different task-dependent datasets in different tasks, and (Aghajanyan et al., 2023) organized a scaling law which unified the contributions and interactions of different modalities during multi-modal pre-training.

Despite previous advancements, a critical point that remains underexplored is the temporal trajectory of LLM performance throughout training. According to (Kaplan et al., 2020), when LLMs are pre-trained with infinite dataset size and training

iterations, the test loss follows the power-law. However, this assumption of infinite training resource cannot be fulfilled in real-world, thus the power-law may not be accurate to portrait the temporal behaviors of LLM performance during pre-training. By studying the loss behavior on different token positions, we introduce a more accurate temporal scaling law for LLM test loss, allowing for precise tracking and prediction of LLM performance during the pre-training stage.

3 Temporal Scaling Law

3.1 Preliminaries

Pre-training Language Models. We mainly discuss the generation process of decoder-based generative language models. A generative language model is trained via next-token prediction. During the pre-training stage of generative language models, the text corpus is segmented into token sequences with an identical length. The token sequences are then fed to the model for calculating the prediction loss on each token position i . Formally, given a training text sequence T consisting of n tokens, i.e., $T = [t_1, \dots, t_{i-1}, t_i, \dots, t_n]$, when predicting token t_i , the language model takes the previous tokens $\mathbf{t} = [t_1, t_2, \dots, t_{i-1}]$ as input, and generates the probability distribution prediction for token t_i as \mathbf{p}_i . The loss \mathcal{L}_i on token t_i is calculated via the cross-entropy function. In the decoder structure of transformers (Vaswani et al., 2017), a look-ahead mask is applied in the multi-head attention (MHA) module to ensure that each token can only attend to previous tokens in the output sequence, preserving the causal order of the generated sequence. Thanks to the masked MHA in decoder blocks, we could calculate the loss on all tokens \mathbf{p}_i in a single forward pass. The loss \mathcal{L}_i on each token \mathbf{p}_i is then averaged to achieve the loss for sequence T :

$$\mathcal{L}_T = \frac{1}{n} \sum_{i=1}^n \mathcal{L}_i \quad (1)$$

3.2 Experiment setup.

In this article, we use experiment results to derive the temporal scaling law, and conduct predictions towards the future training process. Our experiment setup is listed below.

Train Dataset. We train large language models on the Pile dataset (Gao et al., 2021). Pile is

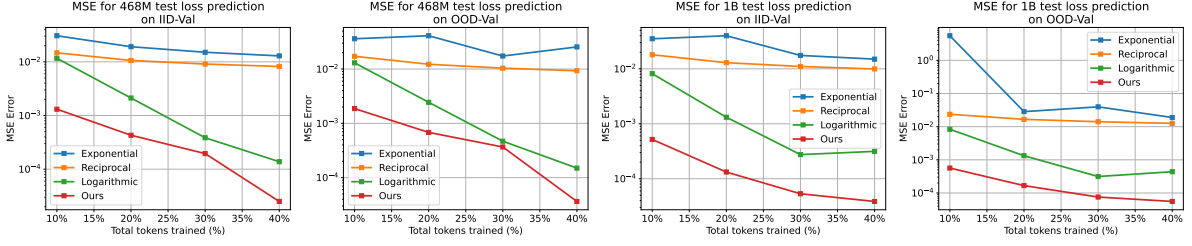


Figure 1: MSE error results for predicting the future test loss via the temporal scaling law after completing different proportions of the training process. Note that the y-axis representing the MSE error is in **log scale**.

a public large-scale monolingual corpus for language model pre-training consisting of 22 text domains. For all experiments, we tokenize it using the LLaMA tokenizer (Touvron et al., 2023) with a 32k vocabulary. We follow (Xie et al., 2023b) to re-calculate the sampling weight for each text domain. Following (Su et al., 2023), we apply the same multiplication weights for each text domain and generate the training data sequences according to each model.

Validation Dataset. We apply two validation datasets for test loss calculation. For the in-distribution (IID) dataset, we randomly sample 800 sequences (1024 consecutive tokens for each) for each text domain from the Pile validation set. For the out-of-distribution (OOD) dataset, we concatenate the validation set and the test set from the PG-19 dataset (Rae et al., 2020) and chunk the result into sequences of 1024 tokens. We refer to these validation datasets as IID-Val and OOD-Val, respectively. When calculating test loss, we forward all sequences in the validation dataset and average the results. It is worth noting that calculating test loss is equivalent to calculating the perplexity (PPL) for the validation dataset, since PPL can be easily acquired via test loss:

$$\text{PPL}(X) = \exp\left\{-\frac{1}{t} \sum_i^t \log p_\theta(x_i | x_{<i})\right\} \quad (2)$$

Models. We train two generative language models with 468M and 1.2B parameters, respectively. The architectures of models are identical to the 410M and 1.0B parameter models outlined in (Biderman et al., 2023). The differences between model parameters can be ascribed to the different vocabulary sizes in different tokenizers.

Training. We follow LLaMA (Touvron et al., 2023) and apply the AdamW optimizer (Loshchilov and Hutter, 2019) with a learning rate of $3e-4$, $2k$ warmup steps. Like most open-source LLMs (Touvron et al., 2023; Biderman et al., 2023), we use

the cosine learning rate decay schedule (Loshchilov and Hutter, 2017) for all experiments. All models are pre-trained with 400B tokens. To capture the temporal progression, we create checkpoints at intervals of every 1B tokens during the training phase, and use the checkpoints for test loss evaluation.

Metrics for Prediction Error Evaluation. We fit and predict future test loss with our proposed temporal scaling law. We empirically choose the coefficient of determination (R^2) and the mean squared error (MSE) to evaluate the quality of our fits and predictions. R^2 demonstrates the proportion of the variability of the original data that proposed model could explain. Formally, we have:

$$R^2 = 1 - \frac{\sum_i (y_i - f_i)^2}{\sum_i (y_i - \bar{y})^2}, \quad (3)$$

where $\{y_i\}$ is the original data with average \bar{y} and f_i is the fit for the original data. MSE directly shows the error of the estimator, regardless of the fluctuation of the original data:

$$\text{MSE} = \frac{1}{n} \sum_{i=1}^n (y_i - f_i)^2. \quad (4)$$

A perfect fit has $R^2 = 1$ and $\text{MSE} = 0$.

3.3 Temporal Scaling Law

The original scaling law (Kaplan et al., 2020) has validated that the temporal loss projection of LLMs during pre-training follows a power-law under the assumption that training tokens are infinite and the LLM is trained with infinite training steps. However, in real-world applications, the maximum step of the training schedule is limited. To validate the effectiveness of existing scaling laws from the temporal perspective, we pre-train 468M and 1B models following Sec. 3.2, and predict the test loss trajectory via common forms of the scaling laws using test loss data from limited training periods. As shown in Fig. 1, simply applying the power-law

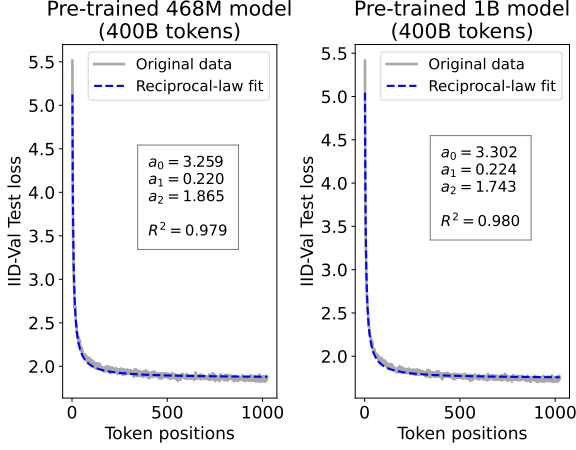


Figure 2: Graph of actual loss and fitting curve across different token positions for the 468M and 1B models on the IID-Val. The loss on different token positions follows a simple reciprocal-law.

from the original scaling law (Kaplan et al., 2020) (refer to “Exponential” in Fig. 1) to the test loss yields significant MSE error for both the 468M and the 1B model under both IID and OOD validation sets. Additionally, simply applying the reciprocal ($\mathcal{L} = \frac{a_0}{1+a_1t} + a_2$) and the logarithmic ($\mathcal{L} = \log(a_1 + a_2t) + a_3$) functions also leads to considerably large MSE errors. These results indicate that under real-world limitations where training steps are limited during LLM pre-training, the temporal loss projection cannot be depicted simply from the test loss.

We propose to investigate the temporal scaling law from a smaller granularity and look into the inherent patterns of the loss on every token positions. Language models are statistical models trained to model the probabilistic process of next-token prediction. Formally, for a sequence of words $W_n = (w_1, w_2, \dots, w_n)$, the probability of the word w_{n+1} given the preceding words is denoted as $P(w_{n+1}|w_1, w_2, \dots, w_n)$. Intuitively and statistically, in a consecutive sequence, we have:

$$P(w_{n+1}|W_n) \gtrsim P(w_n|W_{n-1}) \quad (5)$$

since the next word has a longer context than the current word. To illustrate this pattern, we plot the results of test loss for tokens in different positions, as validated on our IID-Val, using both our 468M and 1.2B models after completing the training stage. As shown in Fig. 2, both models, although varying in scales, follow the same pattern that test loss for tokens with shorter context are commonly higher than that for tokens with longer context. For both

models, the loss values for tokens near the end of the sequence seem to converge at a certain value. We find that this trend can be fit with a simple reciprocal-law:

$$\mathcal{L}_i = \frac{a_0}{1 + a_1(i-1)} + a_2, \quad (6)$$

where \mathcal{L}_i is the loss on token position i ($1 \leq i \leq n$), and a_0 , a_1 , and a_2 are fitting parameters. The fit for data from our 468M and 1B model are presented in Fig. 2. By applying this fit to test loss results of all checkpoints across the training phase, we find that over 99% of them can be fit with our reciprocal-law with $R^2 > 0.95$, well demonstrating its generality. The conclusion still holds when evaluated on the OOD-Val.

To analyse the pattern from the temporal viewpoint, we acquired the tuple (a_0, a_1, a_2) for all checkpoints across the training phase $[(a_0^{n_1}, a_1^{n_1}, a_2^{n_1}), (a_0^{n_2}, a_1^{n_2}, a_2^{n_2}), \dots, (a_0^N, a_1^N, a_2^N)]$. We present the original (a_0, a_1, a_2) data with respect to the number of tokens trained (denoted as N) for the 468M model in Fig. 3. In the reciprocal law, a_2 is the converging factor denoting the converge value of loss on each token as context lengthens. a_0 denotes the loss gap between the first token and the last token, and a_1 is the scaling factor along sequence length. The fit for (a_0, a_1, a_2) throughout training are plotted in Fig. 3. For a_0 and a_1 , we empirically choose $\mathcal{T}_{sep} = \frac{2}{5}N$ (which yields the best overall R^2 values for both a_0 and a_1) as the separation point, after which the values of a_0 and a_1 stay stable. For the training periods before s , we find that a_0 holds a logarithmic correlation with $\log(N)$, and a_1 holds a reciprocal rule with $N < \mathcal{T}_{sep}$:

$$\begin{aligned} a_0^N &= \alpha_0 \log(\alpha_1 \log(N) + \alpha_2) + \alpha_3, \\ a_1^N &= \frac{\beta_0}{1 + \beta_1 N} + \beta_2. \end{aligned} \quad (7)$$

For $N \geq \mathcal{T}_{sep}$, we simply apply:

$$a_0^N = a_0^{\mathcal{T}_{sep}}, a_1^N = a_1^{\mathcal{T}_{sep}}, (N \geq \mathcal{T}_{sep}). \quad (8)$$

For parameter a_2 , as it is the converge value of token losses, we find that the temporal pattern of a_2 holds strong correlations with the learning rate schedule, for which we employed the popular cosine scheduler. As a result, we find that a_2 can be fit with a combination of the cosine and the logarithmic correlation. By applying the same separation

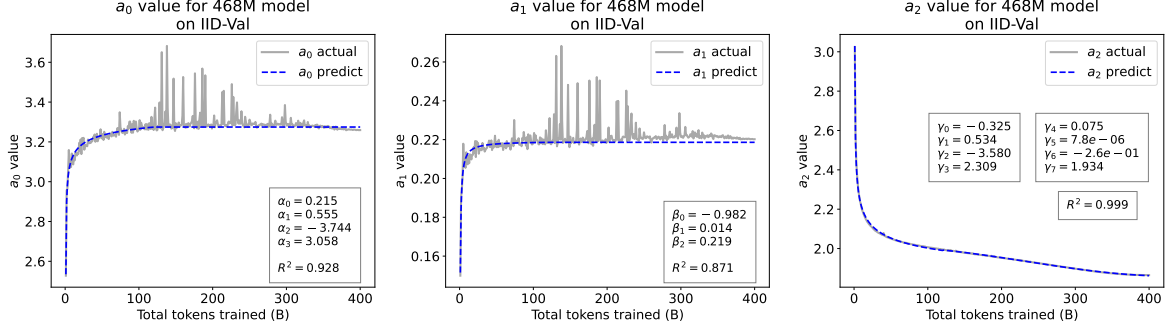


Figure 3: The fitting curve for a_0 , a_1 , and a_2 on IID-Val throughout the pre-training stage of the 468M model.

point \mathcal{T}_{sep} with a_0 and a_1 , we have:

$$\begin{aligned} a_2^N &= \gamma_0 \log(\gamma_1 \log(N) + \gamma_2) + \gamma_3, (N < \mathcal{T}_{sep}) \\ a_2^N &= \gamma_4 \cos(\gamma_5 N + \gamma_6) + \gamma_7, (N \geq \mathcal{T}_{sep}) \end{aligned} \quad (9)$$

where \mathcal{T}_{tot} is the total number of tokens used for training. As shown in Tab. 1, our fit captures the primary patterns of parameter evolution and ignores the insignificant fluctuations. From the fit for a_2 , we find that $\gamma_5 \approx \frac{\pi}{\mathcal{T}_{tot}}$. This further validates our speculation that a_2 has a strong correlation with the learning rate decay. We leave the values of the fitting parameters for our 468M and 1.2B model in the Appendix.

After acquiring a_0^N , a_1^N , and a_2^N , we could in turn measure the pattern of the total test loss \mathcal{L}_N by averaging the loss on each token:

$$\mathcal{L}^N = \frac{1}{n} \sum_{i=1}^n \frac{a_0^N}{1 + a_1^N \cdot (i-1)} + a_2^N. \quad (10)$$

As listed in Tab. 1, the fit for training loss can also achieve $R^2 > 0.99$, demonstrating the validity of our temporal scaling law.

Overall, we summarize our temporal scaling law as follows:

- For LLM pre-training, the loss for tokens in different positions follows a reciprocal-law.
- The temporal patterns of the reciprocal-law can be captured by fitting the change of the parameters in the reciprocal-law.
- The temporal pattern of the overall test loss is derived by averaging the loss in all token positions acquired by the reciprocal-law.

3.4 Test Loss Prediction

The primary value of scaling laws lies in their ability to predict training outcomes (Kaplan et al.,

	IID-Val	OOD-Val
468M	0.9988	0.9987
1B	0.9995	0.9995

Table 1: R^2 results for simply fitting the test loss with our temporal scaling law.

2020). From the temporal perspective, accurate predictions towards the in-coming training periods can assist in tuning data mixture proportions, selecting hyperparameters, and determining the precise point of early stopping. In this section, we derive practical methods from our temporal scaling law to accurately predict overall loss in the in-coming training stages.

To predict the overall loss, the priority is to predict the temporal trajectory of a_0^N , a_1^N , and a_2^N . Suppose the gathered test loss data for total trained tokens $N < \mathcal{T}_{train}$ are available, we could fit for a_0^N and a_1^N with the corresponding temporal scaling law:

$$\begin{aligned} \tilde{a}_0^N &= \tilde{\alpha}_0 \log(\tilde{\alpha}_1 \log(N) + \tilde{\alpha}_2) + \tilde{\alpha}_3, \\ \tilde{a}_1^N &= \frac{\tilde{\beta}_0}{1 + \tilde{\beta}_1 N} + \tilde{\beta}_2, \end{aligned} \quad (11)$$

in which $\tilde{\alpha}$ and $\tilde{\beta}$ are fit using \mathcal{L}_i^N , ($N < \min(\mathcal{T}_{train}, \mathcal{T}_{sep})$). We simply apply Eq. (8) for $N \geq \mathcal{T}_{sep}$. For a_2^N , we decouple the terms in Eq. (9). In the early training stages, we assume that loss decreases quickly and simply adopt the logarithmic correlation. In the later training stages, we adopt the cosine correlation, as training is more stable and the loss decrease is only related to the learning rate decay. Formally, we first fit the data within $N < \min(\mathcal{T}_{train}, \mathcal{T}_{sep})$ by:

$$\tilde{a}_2^N = f_{\log}(N) = \tilde{\gamma}_0 \log(\tilde{\gamma}_1 \log(N) + \tilde{\gamma}_2) + \tilde{\gamma}_3, \quad (12)$$

and apply this equation to all $N < \mathcal{T}_{sep}$. For $N \geq \mathcal{T}_{sep}$, we directly adopt the discovery that a_2 is

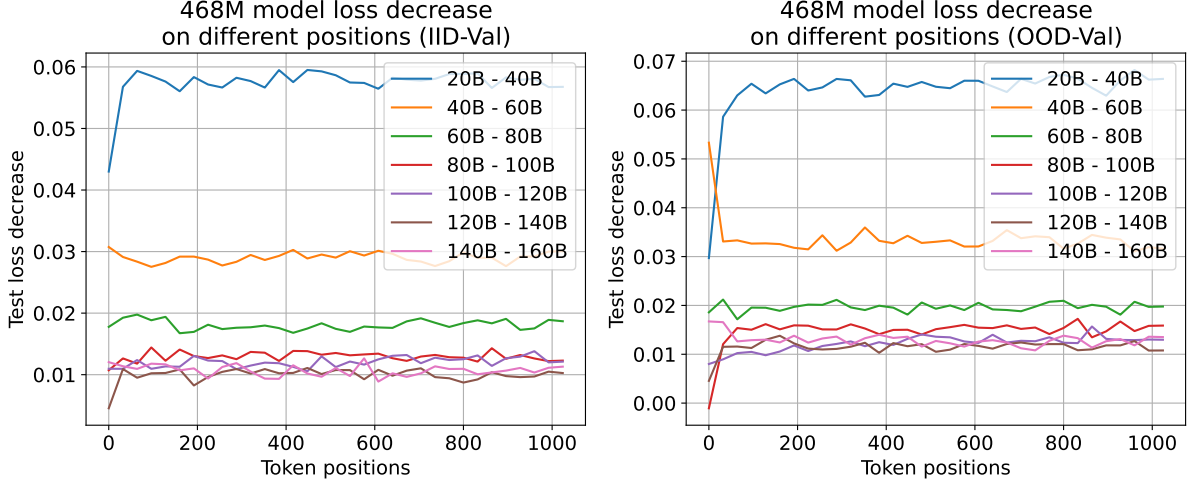


Figure 4: Loss decrease on different token positions in the given training period (measured in total tokens trained) for the 468M model. We average the loss over 32 neighboring tokens to mitigate fluctuations. After an initial training period, the loss decrease is uniform across all token positions.

strongly correlated with the learning rate decay, and assert that the following formula would fit for a_2^N :

$$\tilde{a}_2^N = f_{\cos}(N) = \tilde{\gamma}_4 \cos\left[\frac{\pi}{\mathcal{T}_{tot}}(N - \mathcal{T}_w)\right] + \tilde{\gamma}_5, \quad (13)$$

where \mathcal{T}_w is the number of tokens used for warmup. In occasions where $\mathcal{T}_{train} < \mathcal{T}_{sep}$, we estimate $\tilde{\gamma}_4$ and $\tilde{\gamma}_5$ by adding boundary conditions at the separation point \mathcal{T}_{sep} :

$$\frac{df_{\log}(N)}{dN} \Big|_{N=\mathcal{T}_{sep}} = \frac{df_{\cos}(N)}{dN} \Big|_{N=\mathcal{T}_{sep}}, \quad (14)$$

$$f_{\log}(\mathcal{T}_{sep}) = f_{\cos}(\mathcal{T}_{sep}).$$

In occasions where $\mathcal{T}_{train} \geq \mathcal{T}_{sep}$, we provide an alternative which yields lower prediction errors in data abundant scenarios. Specifically, we simply apply Eq. (14), and fit the data for error terms ϵ_4 and ϵ_5 on $\tilde{\gamma}_4$ and $\tilde{\gamma}_5$, respectively:

$$\tilde{a}_2^N = (\tilde{\gamma}_4 + \epsilon_4) \cos\left[\frac{\pi}{\mathcal{T}_{tot}}(N - \mathcal{T}_w)\right] + (\tilde{\gamma}_5 + \epsilon_5). \quad (15)$$

After acquiring estimations of \tilde{a}_0^N , \tilde{a}_1^N , and \tilde{a}_2^N , we could estimate the average test loss $\tilde{\mathcal{L}}_N$ for each training timepoint, and in turn estimate the temporal change of test loss.

Experiments. We estimate the test loss after 10%, 20% 30% and 40% of the training process. As a comparison, we choose the reciprocal relations, the logarithmic relations, and the power relations (which is equivalent to the power-law proposed in (Kaplan et al., 2020)) as baselines, and fit the curve with the same proportion of data. The results

are shown in Fig. 1. On different model scales and data budgets, while the baselines hardly generate reliable results, predicting the test loss with our method derived from the temporal scaling law yields accurate results with $\text{MSE} < 10^{-3}$ in most cases. The prediction results provides strong evidence for the reliability of our temporal scaling law, demonstrating its significant potential for practical applications.

4 Revisit the Training Paradigm with Token Position Loss

The temporal scaling law has afforded the possibility to study LLM pre-training in a fine-grained manner. In this section, we will look into the learning dynamics of LLMs across token positions.

4.1 Learning Dynamics Across Token Positions

The underlying principle of language models, as noted in Sec. 3.3, suggests a fundamental bias in learning difficulty based on token position. Specifically, head tokens (with shorter context) are generally harder to predict than tail tokens (with longer context), due to the increased uncertainty caused by limited contextual information available for earlier tokens in a sequence. However, as suggested by the temporal scaling law, parameters a_0 and a_1 retain a constant value after the separation point \mathcal{T}_{sep} . Therefore, we have:

$$\frac{\partial \mathcal{L}_i^N}{\partial N} = \frac{\partial a_2}{\partial N}, \quad (16)$$

		BoolQ	HellaSwag	LAMBADA	OpenBookQA	PIQA	SIQA	StoryCloze	Winogrande	Avg
<i>468M</i>										
Baseline	0-shot	58.26	45.50	43.74	31.00	69.21	41.45	64.67	55.56	51.17
	1-shot	53.00	45.06	41.88	31.80	68.17	44.42	63.82	54.78	50.37
	5-shot	45.57	45.60	41.92	32.80	68.55	46.26	64.24	55.64	50.07
	Avg	<u>52.28</u>	<u>45.39</u>	42.51	31.87	<u>68.64</u>	<u>44.04</u>	64.24	55.33	50.54
Head Suppression	0-shot	57.83	45.71	45.29	30.60	68.93	41.66	65.10	55.25	51.30
	1-shot	51.47	45.39	43.28	32.80	67.74	44.22	64.40	55.41	50.59
	5-shot	46.85	45.69	41.98	32.00	68.82	46.52	64.62	55.49	50.25
	Avg	52.05	45.60	<u>43.52</u>	<u>31.80</u>	68.50	44.13	64.71	55.38	<u>50.71</u>
Body Suppression	0-shot	58.50	45.30	44.03	31.60	68.72	41.20	65.21	55.01	51.20
	1-shot	50.00	44.90	42.21	31.40	69.10	44.06	63.82	55.64	50.14
	5-shot	47.43	45.17	41.04	30.20	68.17	46.01	64.19	56.27	49.81
	Avg	51.98	45.12	42.43	31.07	68.66	43.76	64.41	55.64	50.38
Tail Suppression	0-shot	57.00	45.11	45.31	30.20	67.90	41.20	64.78	54.70	50.78
	1-shot	51.90	45.02	43.41	33.20	68.12	44.32	63.98	55.80	50.72
	5-shot	49.82	45.70	43.61	31.60	68.12	46.57	65.15	56.35	50.87
	Avg	52.91	45.28	44.11	31.67	68.05	44.03	<u>64.64</u>	<u>55.62</u>	50.79
<i>1B</i>										
Baseline	0-shot	63.12	53.85	53.35	33.40	71.71	43.45	68.89	58.33	55.76
	1-shot	61.35	53.80	52.16	34.40	72.20	46.42	68.31	57.14	55.72
	5-shot	59.79	54.55	53.79	34.80	72.09	47.75	68.68	60.46	56.49
	Avg	<u>61.42</u>	<u>54.07</u>	53.10	34.20	<u>72.00</u>	45.87	68.63	58.64	55.99
Head Suppression	0-shot	60.49	54.29	53.46	34.60	71.44	42.99	68.36	57.70	55.42
	1-shot	59.72	54.46	52.34	34.20	71.82	45.50	67.77	57.85	55.46
	5-shot	59.66	54.72	52.14	34.20	71.98	47.59	69.05	59.35	56.09
	Avg	59.96	54.49	<u>52.65</u>	34.33	71.75	45.36	68.39	<u>58.30</u>	55.65
Body Suppression	0-shot	63.27	53.68	52.86	34.40	71.82	42.53	67.61	56.83	55.38
	1-shot	59.88	53.51	50.81	35.40	72.25	45.19	67.77	57.14	55.24
	5-shot	58.56	54.07	51.54	34.60	72.09	46.52	69.21	59.19	55.72
	Avg	60.57	53.75	51.74	<u>34.80</u>	72.05	44.75	68.20	57.72	55.45
Tail Suppression	0-shot	61.44	54.11	53.44	35.40	71.44	43.50	68.63	58.41	55.80
	1-shot	61.93	53.82	51.33	36.80	71.44	46.06	68.36	57.14	55.86
	5-shot	61.35	54.13	51.29	34.40	71.60	47.34	68.84	59.27	56.03
	Avg	61.57	54.02	52.02	35.53	71.49	<u>45.63</u>	<u>68.61</u>	58.27	<u>55.89</u>

Table 2: Pre-trained model performance on common sense reasoning benchmarks under different weighting strategies. **Bold** and underline represents the best and the second-best averaged results, correspondingly.

which is unrelated to token position i , suggesting that LLMs learn equally on different token positions, despite the learning difficulty bias.

To validate this observation, we plot the actual loss decrease observed during training along different token positions in Fig. 4. As shown in Fig. 4, test loss decrease on both the IID-Val and the OOD-Val stabilizes after training for 100B tokens, even earlier than the separation point (120B tokens in our training schedule). Therefore, we can imply from this uniformity that the learning is equalized for the head tokens and the tail tokens after an initial pre-training stage, which corresponds to our observation directly from the temporal scaling law.

4.2 Weighting Tokens by Position

The most common paradigm for training generative language models is to average the loss on all token positions before conducting backward propagation (Vaswani et al., 2017; Biderman et al., 2023; Touvron et al., 2023). Although the initial loss val-

ues on different token positions are different, this training paradigm finally yields a stable learning dynamic on all token positions. We hypothesize that simply averaging the losses on all tokens is an effective solution when calculating the final loss.

To validate the hypothesis, we conduct LLM pre-training with three simple position-based weighting strategies: Head suppression (weight loss the foremost 10% of tokens by 0.5x), Body suppression (weight loss on the central 80% of tokens by 0.5x), and Tail suppression (weight loss on the last 10% of tokens by 0.5x), and evaluate the performance on the widely adopted Common Sense Reasoning benchmark. We apply the pre-training settings as in Sec. 3.2. We first pre-train the models with 100B tokens without weighting tokens to stabilize training. Then we attach the re-weighting strategies and pre-train the remaining 300B tokens. Following (Touvron et al., 2023; Brown et al., 2020; Rae et al., 2021; Hoffmann et al., 2022; Su

et al., 2023), we employ 8 widely used benchmark datasets for evaluating the task of common sense reasoning, including BoolQ (Clark et al., 2019), HellaSwag (Zellers et al., 2019), LAMBADA (Paperno et al., 2016), OpenBookQA (Mihaylov et al., 2018), PIQA (Bisk et al., 2020), SIQA (Sap et al., 2019), StoryCloze (Mostafazadeh et al., 2016), Winogrande (Sakaguchi et al., 2021). We report model performance in terms of accuracy for 0-shot, 1-shot, and 5-shots settings, following (Touvron et al., 2023; Brown et al., 2020; Su et al., 2023). As shown in Tab. 2, despite being weighted on different token positions when calculating the integrated loss, all position-based weighting strategies acquire comparable average results to the baseline method, in which no weighting strategies are attached. On individual tasks, the baseline even achieves top-2 accuracies among 12 of 16 settings, surpassing all weighting variants. This indicates that weighting different tokens by position during LLM pre-training probably cannot yield better results than the default training paradigm, further demonstrating that it is unnecessary to re-weight tokens by their positions during LLM pre-training.

5 Conclusion

Our research introduces the novel concept of Temporal Scaling Law within the context of Large Language Models (LLMs), shifting the focus from static attributes of model scalability to the dynamic, temporal aspects of training. We analyze the loss patterns associated with each token and discovered that these patterns conform to a reciprocal-law across different scales and stages of training. Utilizing the reciprocal-law, we could precisely predict the pre-training trajectory for the test loss (or perplexity) of LLMs, marking a significant improvement over baseline methods. This capability is crucial for numerous possible applications during training, like tuning data mixture proportions, selecting hyperparameters, and determining the precise point for early stopping. With the temporal scaling law, we provide empirical evidence supporting that LLMs enjoy an equalized learning approach across different token positions. Our findings validate the existing training paradigms where no position-based re-weighting strategies are applied to different token positions.

Limitations. Our temporal scaling law is derived on the mainstream structure of LLMs, the GPT-based decoder transformers. The applicabil-

ity of our findings to other architectures, such as Mixed of Experts models, remains to be explored. Furthermore, our research primarily focuses on the pre-training stage. The dynamics in other scenarios, such as transfer learning, are not covered. We leave the further investigations to our future research.

References

- Armen Aghajanyan, Lili Yu, Alexis Conneau, Wei-Ning Hsu, Karen Hambardzumyan, Susan Zhang, Stephen Roller, Naman Goyal, Omer Levy, and Luke Zettlemoyer. 2023. [Scaling laws for generative mixed-modal language models](#). In *International Conference on Machine Learning, ICML 2023, 23-29 July 2023, Honolulu, Hawaii, USA*, volume 202 of *Proceedings of Machine Learning Research*, pages 265–279. PMLR.
- Yoshua Bengio, Réjean Ducharme, Pascal Vincent, and Christian Janvin. 2003. [A neural probabilistic language model](#). *J. Mach. Learn. Res.*, 3:1137–1155.
- Stella Biderman, Hailey Schoelkopf, Quentin Gregory Anthony, Herbie Bradley, Kyle O’Brien, Eric Hallahan, Mohammad Aflah Khan, Shivanshu Purohit, USVSN Sai Prashanth, Edward Raff, Aviya Skowron, Lintang Sutawika, and Oskar van der Wal. 2023. [Pythia: A suite for analyzing large language models across training and scaling](#). In *International Conference on Machine Learning, ICML 2023, 23-29 July 2023, Honolulu, Hawaii, USA*, volume 202 of *Proceedings of Machine Learning Research*, pages 2397–2430. PMLR.
- Yonatan Bisk, Rowan Zellers, Ronan Le Bras, Jianfeng Gao, and Yejin Choi. 2020. [PIQA: reasoning about physical commonsense in natural language](#). In *The Thirty-Fourth AAAI Conference on Artificial Intelligence, AAAI 2020, The Thirty-Second Innovative Applications of Artificial Intelligence Conference, IAAI 2020, The Tenth AAAI Symposium on Educational Advances in Artificial Intelligence, EAAI 2020, New York, NY, USA, February 7-12, 2020*, pages 7432–7439. AAAI Press.
- Peter F. Brown, Vincent J. Della Pietra, Peter V. de Souza, Jennifer C. Lai, and Robert L. Mercer. 1992. Class-based n-gram models of natural language. *Comput. Linguistics*, 18(4):467–479.
- Tom B. Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, Sandhini Agarwal, Ariel Herbert-Voss, Gretchen Krueger, Tom Henighan, Rewon Child, Aditya Ramesh, Daniel M. Ziegler, Jeffrey Wu, Clemens Winter, Christopher Hesse, Mark Chen, Eric Sigler, Mateusz Litwin, Scott Gray, Benjamin Chess, Jack Clark, Christopher Berner, Sam McCandlish, Alec Radford, Ilya Sutskever, and Dario Amodei. 2020. [Language models are few-shot learners](#). In *Advances in Neural Information Processing Systems 33*:

- Annual Conference on Neural Information Processing Systems 2020, NeurIPS 2020, December 6-12, 2020, virtual.*
- Hui Chen, Guiguang Ding, Xudong Liu, Zijia Lin, Ji Liu, and Jungong Han. 2020. [IMRAM: iterative matching with recurrent attention memory for cross-modal image-text retrieval](#). In *2020 IEEE/CVF Conference on Computer Vision and Pattern Recognition, CVPR 2020, Seattle, WA, USA, June 13-19, 2020*, pages 12652–12660. Computer Vision Foundation / IEEE.
- Mehdi Cherti, Romain Beaumont, Ross Wightman, Mitchell Wortsman, Gabriel Ilharco, Cade Gordon, Christoph Schuhmann, Ludwig Schmidt, and Jenia Jitsev. 2023. [Reproducible scaling laws for contrastive language-image learning](#). In *IEEE/CVF Conference on Computer Vision and Pattern Recognition, CVPR 2023, Vancouver, BC, Canada, June 17-24, 2023*, pages 2818–2829. IEEE.
- Aakanksha Chowdhery, Sharan Narang, Jacob Devlin, Maarten Bosma, Gaurav Mishra, Adam Roberts, Paul Barham, Hyung Won Chung, Charles Sutton, Sebastian Gehrmann, Parker Schuh, Kensen Shi, Sasha Tsvyashchenko, Joshua Maynez, Abhishek Rao, Parker Barnes, Yi Tay, Noam Shazeer, Vinodkumar Prabhakaran, Emily Reif, Nan Du, Ben Hutchinson, Reiner Pope, James Bradbury, Jacob Austin, Michael Isard, Guy Gur-Ari, Pengcheng Yin, Toju Duke, Anselm Levskaya, Sanjay Ghemawat, Sunipa Dev, Henryk Michalewski, Xavier Garcia, Vedant Misra, Kevin Robinson, Liam Fedus, Denny Zhou, Daphne Ippolito, David Luan, Hyeontaek Lim, Barret Zoph, Alexander Spiridonov, Ryan Sepassi, David Dohan, Shivani Agrawal, Mark Omernick, Andrew M. Dai, Thanumalayan Sankaranarayanan Pillai, Marie Pellat, Aitor Lewkowycz, Erica Moreira, Rewon Child, Oleksandr Polozov, Katherine Lee, Zongwei Zhou, Xuezhi Wang, Brennan Saeta, Mark Diaz, Orhan Firat, Michele Catasta, Jason Wei, Kathy Meier-Hellstern, Douglas Eck, Jeff Dean, Slav Petrov, and Noah Fiedel. 2023. [Palm: Scaling language modeling with pathways](#). *J. Mach. Learn. Res.*, 24:240:1–240:113.
- Christopher Clark, Kenton Lee, Ming-Wei Chang, Tom Kwiatkowski, Michael Collins, and Kristina Toutanova. 2019. [Boolq: Exploring the surprising difficulty of natural yes/no questions](#). In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, NAACL-HLT 2019, Minneapolis, MN, USA, June 2-7, 2019, Volume 1 (Long and Short Papers)*, pages 2924–2936. Association for Computational Linguistics.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2019. [BERT: pre-training of deep bidirectional transformers for language understanding](#). In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, NAACL-HLT 2019, Minneapolis, MN, USA, June 2-7, 2019, Volume 1 (Long and Short Papers)*, pages 4171–4186. Association for Computational Linguistics.
- Xiaohan Ding, Xiangyu Zhang, Ningning Ma, Jungong Han, Guiguang Ding, and Jian Sun. 2021. [Repvgg: Making vgg-style convnets great again](#). In *IEEE Conference on Computer Vision and Pattern Recognition, CVPR 2021, virtual, June 19-25, 2021*, pages 13733–13742. Computer Vision Foundation / IEEE.
- Leo Gao, Stella Biderman, Sid Black, Laurence Golding, Travis Hoppe, Charles Foster, Jason Phang, Horace He, Anish Thite, Noa Nabeshima, Shawn Presser, and Connor Leahy. 2021. [The pile: An 800gb dataset of diverse text for language modeling](#). *CoRR*, abs/2101.00027.
- Alex Graves. 2013. [Generating sequences with recurrent neural networks](#). *CoRR*, abs/1308.0850.
- Tom Henighan, Jared Kaplan, Mor Katz, Mark Chen, Christopher Hesse, Jacob Jackson, Heewoo Jun, Tom B. Brown, Prafulla Dhariwal, Scott Gray, Chris Hallacy, Benjamin Mann, Alec Radford, Aditya Ramesh, Nick Ryder, Daniel M. Ziegler, John Schulman, Dario Amodei, and Sam McCandlish. 2020. [Scaling laws for autoregressive generative modeling](#). *CoRR*, abs/2010.14701.
- Danny Hernandez, Jared Kaplan, Tom Henighan, and Sam McCandlish. 2021. [Scaling laws for transfer](#). *CoRR*, abs/2102.01293.
- Jordan Hoffmann, Sebastian Borgeaud, Arthur Mensch, Elena Buchatskaya, Trevor Cai, Eliza Rutherford, Diego de Las Casas, Lisa Anne Hendricks, Johannes Welbl, Aidan Clark, Tom Hennigan, Eric Noland, Katie Millican, George van den Driessche, Bogdan Damoc, Aurelia Guy, Simon Osindero, Karen Simonyan, Erich Elsen, Jack W. Rae, Oriol Vinyals, and Laurent Sifre. 2022. [Training compute-optimal large language models](#). *CoRR*, abs/2203.15556.
- Jared Kaplan, Sam McCandlish, Tom Henighan, Tom B. Brown, Benjamin Chess, Rewon Child, Scott Gray, Alec Radford, Jeffrey Wu, and Dario Amodei. 2020. [Scaling laws for neural language models](#). *CoRR*, abs/2001.08361.
- Yinhan Liu, Myle Ott, Naman Goyal, Jingfei Du, Mandar Joshi, Danqi Chen, Omer Levy, Mike Lewis, Luke Zettlemoyer, and Veselin Stoyanov. 2019. [Roberta: A robustly optimized BERT pretraining approach](#). *CoRR*, abs/1907.11692.
- Ilya Loshchilov and Frank Hutter. 2017. [SGDR: stochastic gradient descent with warm restarts](#). In *5th International Conference on Learning Representations, ICLR 2017, Toulon, France, April 24-26, 2017, Conference Track Proceedings*. OpenReview.net.
- Ilya Loshchilov and Frank Hutter. 2019. [Decoupled weight decay regularization](#). In *7th International Conference on Learning Representations, ICLR 2019, New Orleans, LA, USA, May 6-9, 2019*. OpenReview.net.

- Todor Mihaylov, Peter Clark, Tushar Khot, and Ashish Sabharwal. 2018. [Can a suit of armor conduct electricity? A new dataset for open book question answering](#). In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing, Brussels, Belgium, October 31 - November 4, 2018*, pages 2381–2391. Association for Computational Linguistics.
- Tomás Mikolov, Martin Karafiát, Lukás Burget, Jan Cernocký, and Sanjeev Khudanpur. 2010. [Recurrent neural network based language model](#). In *INTERSPEECH 2010, 11th Annual Conference of the International Speech Communication Association, Makuhari, Chiba, Japan, September 26-30, 2010*, pages 1045–1048. ISCA.
- Nasrin Mostafazadeh, Nathanael Chambers, Xiaodong He, Devi Parikh, Dhruv Batra, Lucy Vanderwende, Pushmeet Kohli, and James F. Allen. 2016. [A corpus and evaluation framework for deeper understanding of commonsense stories](#). *CoRR*, abs/1604.01696.
- OpenAI. 2023. [GPT-4 technical report](#). *CoRR*, abs/2303.08774.
- Denis Paperno, Germán Kruszewski, Angeliki Lazaridou, Quan Ngoc Pham, Raffaella Bernardi, Sandro Pezzelle, Marco Baroni, Gemma Boleda, and Raquel Fernández. 2016. [The LAMBADA dataset: Word prediction requiring a broad discourse context](#). In *Proceedings of the 54th Annual Meeting of the Association for Computational Linguistics, ACL 2016, August 7-12, 2016, Berlin, Germany, Volume 1: Long Papers*. The Association for Computer Linguistics.
- Alec Radford, Karthik Narasimhan, Tim Salimans, Ilya Sutskever, et al. 2018. Improving language understanding by generative pre-training.
- Alec Radford, Jeffrey Wu, Rewon Child, David Luan, Dario Amodei, Ilya Sutskever, et al. 2019. Language models are unsupervised multitask learners. *OpenAI blog*, 1(8):9.
- Jack W. Rae, Sebastian Borgeaud, Trevor Cai, Katie Millican, Jordan Hoffmann, H. Francis Song, John Aslanides, Sarah Henderson, Roman Ring, Susannah Young, Eliza Rutherford, Tom Hennigan, Jacob Menick, Albin Cassirer, Richard Powell, George van den Driessche, Lisa Anne Hendricks, Mari-beth Rauh, Po-Sen Huang, Amelia Glaese, Johannes Welbl, Sumanth Dathathri, Saffron Huang, Jonathan Uesato, John Mellor, Irina Higgins, Antonia Creswell, Nat McAleese, Amy Wu, Erich Elsen, Siddhant M. Jayakumar, Elena Buchatskaya, David Budden, Esme Sutherland, Karen Simonyan, Michela Paganini, Laurent Sifre, Lena Martens, Xiang Lorraine Li, Adhiguna Kuncoro, Aida Nematzadeh, Elena Gribovskaya, Domenic Donato, Angeliki Lazaridou, Arthur Mensch, Jean-Baptiste Lespiau, Maria Tsim-poukelli, Nikolai Grigorev, Doug Fritz, Thibault Sotiaux, Mantas Pajarskas, Toby Pohlen, Zhitao Gong, Daniel Toyama, Cyprien de Masson d’Autume, Yujia Li, Tayfun Terzi, Vladimir Mikulik, Igor Babuschkin, Aidan Clark, Diego de Las Casas, Aurelia Guy, Chris Jones, James Bradbury, Matthew J. Johnson, Blake A. Hechtman, Laura Weidinger, Iason Gabriel, William Isaac, Edward Lockhart, Simon Osindero, Laura Rimell, Chris Dyer, Oriol Vinyals, Kareem Ayoub, Jeff Stanway, Lorrayne Bennett, Demis Hassabis, Koray Kavukcuoglu, and Geoffrey Irving. 2021. [Scaling language models: Methods, analysis & insights from training gopher](#). *CoRR*, abs/2112.11446.
- Jack W. Rae, Anna Potapenko, Siddhant M. Jayakumar, Chloe Hillier, and Timothy P. Lillicrap. 2020. [Compressive transformers for long-range sequence modelling](#). In *8th International Conference on Learning Representations, ICLR 2020, Addis Ababa, Ethiopia, April 26-30, 2020*. OpenReview.net.
- Colin Raffel, Noam Shazeer, Adam Roberts, Katherine Lee, Sharan Narang, Michael Matena, Yanqi Zhou, Wei Li, and Peter J. Liu. 2020. [Exploring the limits of transfer learning with a unified text-to-text transformer](#). *J. Mach. Learn. Res.*, 21:140:1–140:67.
- Keisuke Sakaguchi, Ronan Le Bras, Chandra Bhagavatula, and Yejin Choi. 2021. [Winogrande: an adversarial winograd schema challenge at scale](#). *Commun. ACM*, 64(9):99–106.
- Maarten Sap, Hannah Rashkin, Derek Chen, Ronan Le Bras, and Yejin Choi. 2019. [Sociallqa: Commonsense reasoning about social interactions](#). *CoRR*, abs/1904.09728.
- Zhenpeng Su, Xing Wu, Xue Bai, Zijia Lin, Hui Chen, Guiguang Ding, Wei Zhou, and Songlin Hu. 2023. [Infoentropy loss to mitigate bias of learning difficulties for generative language models](#). *CoRR*, abs/2310.19531.
- Hugo Touvron, Thibaut Lavril, Gautier Izacard, Xavier Martinet, Marie-Anne Lachaux, Timothée Lacroix, Baptiste Rozière, Naman Goyal, Eric Hambro, Faisal Azhar, Aurélien Rodriguez, Armand Joulin, Edouard Grave, and Guillaume Lample. 2023. [Llama: Open and efficient foundation language models](#). *CoRR*, abs/2302.13971.
- Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N. Gomez, Lukasz Kaiser, and Illia Polosukhin. 2017. [Attention is all you need](#). In *Advances in Neural Information Processing Systems 30: Annual Conference on Neural Information Processing Systems 2017, December 4-9, 2017, Long Beach, CA, USA*, pages 5998–6008.
- Ao Wang, Hui Chen, Zijia Lin, Hengjun Pu, and Guiguang Ding. 2023. [Repvit: Revisiting mobile CNN from vit perspective](#). *CoRR*, abs/2307.09283.
- Sang Michael Xie, Hieu Pham, Xuanyi Dong, Nan Du, Hanxiao Liu, Yifeng Lu, Percy Liang, Quoc V. Le, Tengyu Ma, and Adams Wei Yu. 2023a. [Doremi: Optimizing data mixtures speeds up language model pretraining](#). In *Advances in Neural Information Processing Systems 36: Annual Conference on Neural*

Information Processing Systems 2023, NeurIPS 2023, New Orleans, LA, USA, December 10 - 16, 2023.

Sang Michael Xie, Hieu Pham, Xuanyi Dong, Nan Du, Hanxiao Liu, Yifeng Lu, Percy Liang, Quoc V. Le, Tengyu Ma, and Adams Wei Yu. 2023b. [Doremi: Optimizing data mixtures speeds up language model pretraining](#). *CoRR*, abs/2305.10429.

Greg Yang, Edward J. Hu, Igor Babuschkin, Szymon Sidor, Xiaodong Liu, David Farhi, Nick Ryder, Jakub Pachocki, Weizhu Chen, and Jianfeng Gao. 2022. [Tensor programs V: tuning large neural networks via zero-shot hyperparameter transfer](#). *CoRR*, abs/2203.03466.

Zhilin Yang, Zihang Dai, Yiming Yang, Jaime G. Carbonell, Ruslan Salakhutdinov, and Quoc V. Le. 2019. [Xlnet: Generalized autoregressive pretraining for language understanding](#). In *Advances in Neural Information Processing Systems 32: Annual Conference on Neural Information Processing Systems 2019, NeurIPS 2019, December 8-14, 2019, Vancouver, BC, Canada*, pages 5754–5764.

Rowan Zellers, Ari Holtzman, Yonatan Bisk, Ali Farhadi, and Yejin Choi. 2019. [Hellaswag: Can a machine really finish your sentence?](#) In *Proceedings of the 57th Conference of the Association for Computational Linguistics, ACL 2019, Florence, Italy, July 28- August 2, 2019, Volume 1: Long Papers*, pages 4791–4800. Association for Computational Linguistics.