

Evaluation of Few-Shot Learning for Classification Tasks in the Polish Language

Tsimur Hadeliya, Dariusz Kajtoch
ML Research at Allegro, Poznań, Poland
{firstname.lastname}@allegro.com

Abstract

We introduce a few-shot benchmark consisting of 7 different classification tasks native to the Polish language. We conducted an empirical comparison with 0 and 16 shots between fine-tuning, linear probing, SetFit, and in-context learning (ICL) using various pre-trained commercial and open-source models. Our findings reveal that ICL achieves the best performance, with commercial models like GPT-3.5 and GPT-4 attaining the best performance. However, there remains a significant 14 percentage points gap between our best few-shot learning score and the performance of HerBERT-large fine-tuned on the entire training dataset. Among the techniques, SetFit emerges as the second-best approach, closely followed by linear probing. We observed the worst and most unstable performance with non-linear head fine-tuning. Results for ICL indicate that continual pre-training of models like Mistral-7b or Llama-2-13b on Polish corpora is beneficial. This is confirmed by the improved performances of Bielik-7b and Trurl-13b, respectively. To further support experiments in few-shot learning for Polish, we are releasing handcrafted templates for the ICL.

1 Introduction

Few-shot learning enables models to grasp concepts from a limited number of examples (Tunstall et al., 2022; Ye et al., 2021; Kwon et al., 2023), reducing the resources needed for data curation and training. This efficiency lowers the barriers to introducing new tasks, allowing for quicker deployment and more exploration. Over time, researchers have developed new methods for learning from a few examples. Progress has been driven mainly by fine-tuning pre-trained transformer-based models (Schick and Schütze, 2021a,b; Tam et al., 2021; Tunstall et al., 2022; Liu et al., 2022; Karimi Mahabadi et al., 2022; Aly et al., 2023; Albalak et al., 2023) or employing in-context learning

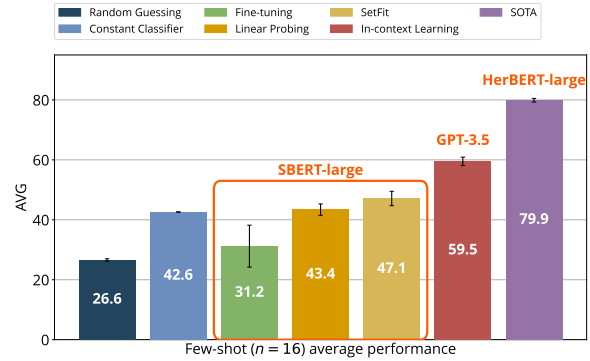


Figure 1: **Summary of average performance on the few-shot classification benchmark for different training techniques and 16 shots.** The last bar on the right reports results for the HerBERT-large fine-tuned on the whole train dataset. We observe that ICL with GPT-3.5 achieves the best average performance followed by SetFit, Linear probing, and fine-tuning with a much smaller SBERT-large model. The gap between HerBERT-large and GPT-3.5 is around 20.4 percentage points

(ICL) in Large Language Models (LLMs) (Brown et al., 2020; Ahuja et al., 2023; Asai et al., 2023). While few-shot benchmarks show clear progress in English, it is accompanied by both novel techniques and progress in the development of pre-trained models. For practitioners working with non-English data that advancement is always inspiring but does not fully answer the question: *What approach or model should I use for a given task in language X?* This is grounded by the fact that different languages possess different resources (e.g. pre-trained models) and datasets.

In this paper, we aim to evaluate various few-shot learning methodologies and assess the capability of pre-trained models in processing and understanding the Polish language. Unlike many studies that depend on multilingual or cross-lingual analysis with translated datasets, we emphasize native Polish language datasets to avoid potential translation and cultural biases (Ruder and Sil, 2021; Artetxe et al., 2020; Ponti et al., 2020). We

have developed a Polish language classification benchmark, incorporating 7 existing datasets: PAC, Polemo2, DYK, CDSC-E, NKJP-NER, CBD, and CST-Wikinews (Augustyniak et al., 2022; Rybak et al., 2020). These datasets were carefully chosen to represent a broad spectrum of characteristics, such as input length, domain specificity, and the number of classes. In our study, we used a few-shot benchmark to compare fine-tuning, linear probing, SetFit (Tunstall et al., 2022), and in-context learning using various pre-trained models. Figure 1 summarizes the average performance for 16-shots. We hope this paper will benefit researchers focused on the Polish language and practitioners selecting suitable models for their tasks.

We summarize the contributions of this work as follows:

- We utilized existing datasets to establish an evaluation benchmark comprising 7 different datasets for few-shot classification in the Polish language. We also created a collection of 71 manually crafted template prompts for in-context learning.
- We conducted a comparative study of fine-tuning, linear probing, SetFit, and ICL across various transformer-based models, revealing that ICL excels in highly scarce few-shot scenarios with only 16-shots. However, we observe a significant difference of 14.0 percentage points between the best-performing model, namely the zero-shot GPT-4, and the performance achieved by fine-tuning HerBERT-large on the entire dataset.
- We illustrate, with Bielik-7b and Trurl-2-13b, that continual pre-training in the target language is the zero-shot regime. For 16-shots, only Trurl-2-13b is better than its English counterpart. We also observe that continual pre-training on the target domain needs to be done with caution which is demonstrated by the lower performance of Krakowiak-7b-v2 which descends from Mistral-7b.

2 Related Work

Few-shot benchmarks Comparing models in a few-shot regime is not free from many nuances (Bragg et al., 2021; Ye et al., 2021; Alex et al., 2021; Zheng et al., 2022). The FewGLUE benchmark (Schick and Schütze, 2021b) randomly

samples the same number of examples per task from the GLUE benchmark and provides several tens of thousands of unlabeled samples. Similarly, the CrossFit (Ye et al., 2021) uses a fixed number of examples per class. A small development set is also provided. The FLEX (Bragg et al., 2021) argues that the benchmark should include a variable number of examples and lack of development set among other factors. The RAFT benchmark (Alex et al., 2022) focuses on naturally occurring tasks and uses an evaluation setup that mirrors deployment.

Few-shot learning Over the years, numerous few-shot learning methods have been suggested. This discussion will focus on the most critical ones. First, ICL, used with large language models like GPT-3 (Brown et al., 2020), requires no modifications to the model. Demonstrations are joined with task instruction and forward through the model which generated the answer. As these models improve, they also become more effective at solving few-shot tasks. Another approach involves various forms of fine-tuning of pre-trained models. For instance, the PET (Schick and Schütze, 2021a) and iPET (Schick and Schütze, 2021b) methods transform training examples into cloze questions and fine-tune the model on a small collection of examples, which is then used to softly annotate a pool of unlabeled examples. These methods rely on handcrafted task instructions and verbalizers, which the PERFECT method (Karimi Mahabadi et al., 2022) replaces with task-specific adapters and does not depend on unlabeled data, similar to ADAPET (Tam et al., 2021). Additionally, parameter-efficient fine-tuning has shown cutting-edge results as demonstrated in studies like (Logan IV et al., 2022), T-Few (Liu et al., 2022), and AuT-Few (Aly et al., 2023). Lastly, combining an embedding model with a linear classifier can yield good results with far fewer parameters, as seen with the SetFit method (Tunstall et al., 2022), which begins with contrastive learning to enhance data comprehension and then trains a linear classifier on these refined, static embeddings.

Large Language Models (LLMs) In recent years, there has been significant growth in both commercial and open-source models (Jiang et al., 2023; Touvron et al., 2023; Team et al., 2024). Although many architectures are available (Tay et al., 2023), the success of GPT-like models (Brown

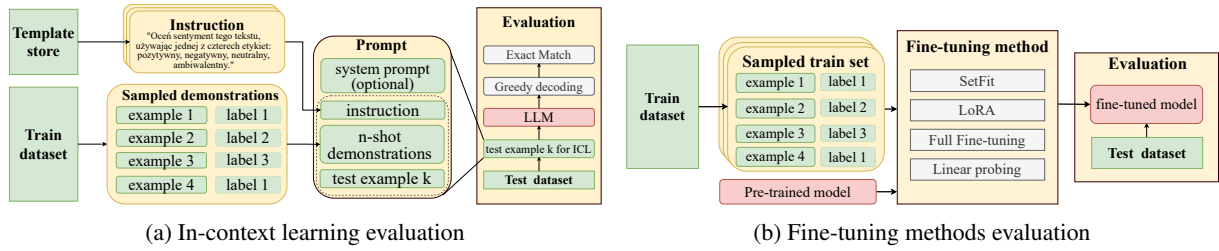


Figure 2: **Training and evaluation process of few-shot (as example 4-shot) learning.** Both methods begin by sampling n (as n -shot) examples from the task’s training data using a fixed random seed. We use 5 random seeds for reproducibility and to measure variance. **(a)** The sampled examples serve as in-context demonstrations. The evaluation prompt combines manually written instructions, demonstrations, and an optional system prompt. The model uses greedy decoding to generate a label for the test example. An exact match compares the generated label with the golden labels. Predictions without a matching label receive a special label. **(b)** The sampled examples form the training dataset for the specified fine-tuning method (the Full Fine-tuning method utilizes the entire dataset). Subsequently, the fine-tuned model is evaluated on the test dataset in the conventional manner.

et al., 2020; Ouyang et al., 2022; OpenAI et al., 2024) demonstrates the dominance of decoder-only architectures in generative tasks and ICL. Another key feature of modern models is their scale. Currently, there appears to be no limit to the benefits of scaling, leading to increasingly larger models (Fedus et al., 2022; Chowdhery et al., 2022; Rae et al., 2022; Thoppilan et al., 2022) and alternative scaling strategies such as Mixture-of-Experts (MoE) (Shazeer et al., 2017; Fedus et al., 2022; Jiang et al., 2024). Some research suggests that scaling endows models with new capabilities not present in smaller versions (Wei et al., 2022b), though this remains a topic of ongoing research (Schaeffer et al., 2023). Another significant research area for LLMs involves fine-tuning methods (Sanh et al., 2022; Chung et al., 2022; Wei et al., 2022a) to enable few-shot learning and the use of natural language instructions. Reinforcement Learning (RL) methods (Christiano et al., 2023; Ouyang et al., 2022) allows the integration of human feedback to improve the model’s ability to generate coherent responses, although these methods are still challenging to train. New methods that could enhance or replace RL are being proposed (An et al., 2023; Rafailov et al., 2023).

Multilingual capabilities of LLMs Dominant studies on the performance of LLMs are done for the English language. Little was known about the multi-lingual capabilities of these models. Lately, a few papers studied this topic with both open-source and commercial models. ChatGPT’s performance is generally better for tasks formulated in English than other languages (Lai et al., 2023; Ahuja et al., 2023; Zhang et al., 2023; Asai et al., 2023). How-

ever, a closer look at the data reveals that it strongly depends on the language and task. Typically, the performance gap is larger for low-resource languages. Following the same works, similar observations were made for the BLOOM (Scao et al., 2023) and BLOOMZ (Muennighoff et al., 2023) multi-lingual models. Analogous behavior is noticed for English-dominant models like Llama-2 (Bandarkar et al., 2023).

3 Problem Statement

Few-shot learning aims to learn a model from just a handful of labeled training examples. The special case is zero-shot learning where no labeled data is provided for training. We use n to denote the number of total training examples.

Research in Polish NLP is lacking comparative evaluations among various few-shot techniques and pre-trained models. Additionally, the complexity of these methods and the computational resource requirements should be considered. Many non-English languages demonstrate cross-lingual capabilities but are often evaluated using translated datasets, which may introduce translation and cultural biases. Moreover, these methods are not routinely compared with simple baselines. In our study, we perform a comparative analysis of selected few-shot learning methods and pre-trained models on Polish classification tasks. We compare our results with both simple baselines and state-of-the-art (SOTA) results on the entire dataset. Our focus is on classification tasks due to their wide application across numerous fields and the simplicity of evaluation.

Name	Input	#Test examples	#Classes	#Instructions	Avg. len	Dataset Domain
Lepiszcz						
PAC	text	3453	2	13	185	legal texts
DYK	text pair	1029	2	14	288	Wikipedia
CDSC-E	text pair	1000	3	8	144	image captions
Polemo2	text	820	4	11	758	online reviews
KLEJ						
CBD	text	1000	2	9	93	social media
NKJP-NER	text	2058	6	9	85	national corpus
Other						
CST-Wikinews	text pair	384	12	7	232	Wikinews

Table 1: **Descriptions and basic statistics of datasets used as a benchmark for evaluation of few-shot learning capabilities.** The #Instructions denote the number of handcrafted instructions for the in-context learning method. While creating a benchmark, we choose a dataset based on the parameters listed in the column. This helped us to prepare a diversified classification benchmark, with data from different domains, different number of classes, and length distribution.

4 Methodology

4.1 Datasets

Numerous classification datasets are available for the Polish language. For the construction of the benchmark, 7 such datasets were selected, which vary in domain and class quantity. The PAC, Polemo2, DYK, and CDSC-E datasets constitute a subset of the Lepiszcz benchmark (Augustyniak et al., 2022). Meanwhile, the NKJP-NER and CBD datasets are incorporated within the KLEJ benchmark (Rybak et al., 2020). Additionally, the CST-Wikinews dataset comprises 1,530 training sentence pairs extracted from Polish Wikipedia, annotated with 12 distinct relational categories between the first and second sentences, such as inclusion, description, and summarization¹. The datasets also exhibit variation in the average length of examples. Table 1 provides a summary of these datasets. Links to open-source artifacts can be found in the Appendix B.

Evaluation metrics For datasets endowed with binary labels, the F1 score for the positive class is reported, whereas Accuracy is employed for the other datasets. Such a combination of metrics is used to have consistency with the results from the KLEJ benchmark (Rybak et al., 2020).

4.2 Experimental setup

We adopt a methodology analogous to that described in (Schick and Schütze, 2021b). For each

dataset, we sample a random subset comprising $n = 16$ instances from the training set. We wanted the number to be as maximal as possible and still possible to process by the ICL method. It is critical to ensure that the derived subset is balanced (where feasible) and that the labels are sequenced in an alternating fashion. The entirety of the validation dataset is utilized for the hyperparameter selection. In the absence of a predefined validation set, the training set is partitioned into a 20% validation subset and an 80% training subset. Consequently, our analysis concentrates on the upper-performance limit in few-shot scenarios, given the disproportionately large size of the validation dataset. The experiment is conducted 5 times with varying random subsets. We set the following random seeds in our experiments: [18, 22, 37, 69, 98]. For each approach, the arithmetic mean and standard deviation are documented. Additionally, for the ICL, we also report the zero-shot performance.

4.3 Models

Our study concentrates on the evaluation of transformer-based models with specific attributes, encompassing: (a) medium-sized models, such as Polish Sentence BERT-large and HerBERT-large; (b) Polish open-source LLMs, notably GPT-2-xl, Trurl-2, Bielik-7b, and Krakowiak-v2; (c) English open-source LLMs, such as Llama-2 and Mistral-7b; and (d) commercial LLMs, including PaLM-2, GPT-3.5, and GPT-4. The selection criteria are predicated on language support and the incorporation of instruction tuning (Mishra et al., 2022; Sanh

¹<https://huggingface.co/datasets/clarin-pl/cst-wikinews>

	AVG	PAC	Polemo2	CBD	NKJP-NER	DYK	CDSC-E	CST-Wiknews
XGBoost	32.4 $\pm$ 3.1	56.4 $\pm$ 16.7	38.5 $\pm$ 3.4	19.7 $\pm$ 6.0	20.9 $\pm$ 4.7	22.6 $\pm$ 5.1	57.5 $\pm$ 10.4	11.4 $\pm$ 1.5
Random Guessing	26.6 $\pm$ 0.4	57.5 $\pm$ 0.7	24.8 $\pm$ 1.0	20.9 $\pm$ 1.6	16.8 $\pm$ 0.8	25.5 $\pm$ 1.7	33.6 $\pm$ 0.7	6.9 $\pm$ 0.9
Constant Classifier	42.9	80.6	41.3	23.6	34.3	28.9	74.4	16.9
/SF/ SBERT-large	47.1 $\pm$ 2.4	68.8 $\pm$ 6.5	69.9 $\pm$ 10.7	44.4 $\pm$ 5.4	30.7 $\pm$ 6.5	27.7 $\pm$ 2.9	72.3 $\pm$ 5.7	16.2 $\pm$ 3.2
/LP/ SBERT-large	43.4 $\pm$ 1.9	67.5 $\pm$ 7.0	60.3 $\pm$ 4.6	40.1 $\pm$ 4.3	30.4 $\pm$ 5.9	27.2 $\pm$ 1.8	62.8 $\pm$ 5.8	15.3 $\pm$ 3.0
/FT/ SBERT-large	31.2 $\pm$ 7.0	33.6 $\pm$ 31.3	47.0 $\pm$ 5.8	32.0 $\pm$ 30.7	28.1 $\pm$ 7.7	6.4 $\pm$ 10.3	61.0 $\pm$ 17.6	10.1 $\pm$ 4.3
/ICL _{n=16} / GPT-3.5	59.5 $\pm$ 1.4	73.9 $\pm$ 3.6	81.9 $\pm$ 2.1	64.1 $\pm$ 1.9	46.1 $\pm$ 2.9	64.1 $\pm$ 1.8	66.7 $\pm$ 7.6	19.8 $\pm$ 2.7
/ICL _{n=0} / GPT-4	65.9	83.3	82.6	60.6	58.8	81.3	76.0	18.8
HerBERT-large	79.9 $\pm$ 0.6	91.1 $\pm$ 0.0	90.9 $\pm$ 0.0	53.2 $\pm$ 3.2 (72.0)	94.0 $\pm$ 0.0	68.8 $\pm$ 2.1 (75.8)	93.4 $\pm$ 0.0	67.9 $\pm$ 1.0

Table 2: **Evaluation results summary on the test dataset.** We employed a dataset comprising 16 training examples per task, utilizing 5 distinct random seeds for analysis. Subscripts denote standard deviation. The acronyms SF, LP, FT, and ICL represent SetFit, Linear Probing, Fine-Tuning, and In-context Learning, respectively. The outcomes for the GPT model family pertain to in-context learning. For GPT-4 model we report zero-shot performance. The terminal row delineates the performance metrics after fine-tuning across the entire training dataset. Parenthetically, we reference the results derived from the KLEJ benchmark ².

et al., 2022; Wei et al., 2022a) during the pretraining phase. Details on model artifacts can be found in the Appendix D.

4.4 Training schemes

The experiments conducted can be divided into two categories: few-shot ICL and few-shot parameter-efficient learning. The former focuses on generating labels using only demonstrations and task descriptions in the input, without updating the model weights. The latter involves fine-tuning the model for a new task using only n examples. These approaches are depicted in Figure 2. Below, we provide more detailed descriptions for each method.

Baseline The baseline model comprises an *XGBoost* (Chen and Guestrin, 2016) algorithm, trained utilizing hashed Term Frequency-Inverse Document Frequency (TF-IDF) features. Initially, text tokenization is conducted via spaCy (Honribal and Montani, 2017). Subsequently, each token is hashed employing the Fowler-Noll-Vo (FNV) algorithm and then mapped to a predetermined vocabulary dimension. Performance metrics are also presented for *Random Guessing*, entailing random label selection, and for the *Constant Classifier* method, which consistently predicts the label maximizing the test score.

Linear probing In this approach, each example is projected onto a constant embedding using a

pre-trained model, followed by training a Logistic Regression classifier on these embeddings. During the training process, embeddings are frozen and not normalized.

SetFit SetFit represents an effective fine-tuning methodology for few-shot learning (Tunstall et al., 2022), combining metric learning with linear probing. The implementation of SetFit is conducted in conjunction with LoRA (Hu et al., 2022) applied to all linear layers.

Fine-tuning The fine-tuning of the backbone transformer model is executed using cross-entropy loss, integrating a non-linear classification head. Throughout the training phase, only the LoRA modules (applied to all linear layers) alongside the head parameters are adjusted. The same learning rate is applied for both the backbone and the head components.

In-context learning In-context learning functions without the alteration of model parameters (Radford et al., 2019; Brown et al., 2020). Instructions and examples are provided as input to the language generation model, from which an appropriate label is anticipated as generated output. Further details are available in Appendix E.

4.5 Prompt Engineering

For each dataset, we systematically hand-crafted diverse prompts derived from the dataset characteristics and anticipated label categories. We mostly followed PromptSource (Bach et al., 2022) and Natural Instructions (Mishra et al., 2022; Wang et al., 2022), without employing automated prompt generation methods (Zhou et al., 2023; Deng et al., 2022; Shin et al., 2020; Prasad et al., 2023; Pryzant et al., 2023; Anonymous, 2024a,b; Fernando et al., 2023). The construction of each prompt entailed 3 distinct segments. It starts with universal system directive in Polish, specifically: *"Rozwiązujesz zadanie klasyfikacji dla języka polskiego."*. This was followed by optional task-specific instruction and subsequent demonstrations. Refer to Figure 3 for an exhaustive depiction. The prompts are cataloged in the Appendix H.

```
1 instruction: 'Oceń czy następujący zapis jest
   ↳ uczciwy lub nieuczciwy.'
2 demonstration: '{text} => {labels}'
3 label_mapping:
4   0: nieuczciwy
5   1: uczciwy
```

Figure 3: **Example building blocks of the prompt for in-context learning.** Every prompt start with system instruction: *"Rozwiązujesz zadanie klasyfikacji dla języka polskiego."*. Then, follows a **instruction** and a sequence of demonstrations. Every block is joined with a newline character. The **demonstration** part specifies the way to format examples. Specifically, {text} and {labels} are substituted with text and true labels from the dataset, respectively. Label mapping is used to map textual labels into numeric values.

Response cleansing In the domain of ICL, each model produces a response that is subsequently classified into one of the predefined labels using some heuristics. We assume that the label is present in the response. Minimal postprocessing is employed, encompassing conversion to lowercase, removal of diacritics, and elimination of extraneous whitespace. There was no pursuit of more advanced methodologies, such as instructing language models to generate outputs conforming to a specific JSON schema. If the label is absent in the response, it is treated as invalid. When we calculate the metrics, we replace invalid responses with a class different from ground truth to lower the metrics automatically.

5 Results & Discussion

Table 2 summarizes the outcomes from various training methodologies. The HerBERT-large model, fine-tuned on the entire training dataset using Focal Loss (Lin et al., 2020)³, is also included. Scores from the KLEJ benchmark for the CBD and DYK tasks are shown in parentheses⁴.

We found that nearly all models outperform the simple XGBoost baseline significantly. An exception is the fine-tuning performance on PAC and DYK tasks, which lags behind. Additionally, almost all models surpass the Random Guessing baseline, including XGBoost. However, the Constant Classifier sets a notable threshold due to the severe imbalance in the PAC and CDSC-E datasets, which all models except GPT-4 fail to exceed. For the other datasets, the average performance is better than the Constant Classifier baseline.

ICL with commercial LLMs achieves the highest performance across the models and techniques. The second-best method is SetFit, followed by Linear probing. The poorest performance and greatest uncertainties are associated with fine-tuning. We note that linear probing is the most computationally efficient method. On the other hand, ICL requires large models and is computationally expensive.

ICL using commercial models like GPT-4 shows superior performance. However, there is a gap of 14pp between zero-shot GPT-4 and HerBERT-large trained on the full dataset. Notably, GPT-4 surpasses comprehensive fine-tuning on the DYK task by 5.5 percentage points, reaching 81.3 points. This discrepancy warrants further investigation into potential dataset leakage, as GPT-3.5 shows much lower performance.

5.1 Linear probing

Table 3 presents the outcomes of employing a linear probing methodology across various embedding models. The investigation prioritized 5 open-source and 4 commercial backbones. SBERT-large exhibits exceptional efficacy in the CBD and NKJP-NER tasks, securing the top positions within the linear probing models for these datasets. For the DYK and CDSC-E datasets, HerBERT-large is identified as the most effective performer in this segment.

Among the linear probing models, no single model consistently surpasses the rest across all

³Additional experiments were conducted with scripts from the Lepiszcz benchmark <https://github.com/dkajtoch/LEPISZCZE>, resulting in similar outcomes.

⁴<https://klejbenchmark.com/leaderboard/>

tasks; however, SBERT-large and HerBERT-large demonstrate robust performance in distinct datasets. When considering the standard deviation, the performance of all models tends to converge on an average scale. Nonetheless, a pronounced disparity is observed in the Polemo2 task, where SBERT-large significantly outshines HerBERT-large, yet shows comparable performance to RoBERTa-large.

On average, the Gecko embeddings underperform relative to other backbones, exhibiting performance akin to that of the Llama-2-70b model. This finding starkly contrasts with the superior average performance achieved by the multilingual variant of the Gecko embeddings⁵.

Embedding-based few-shot learning is generally plagued by high variance, occasionally escalating to 12 percentage points. This variance stems from the sampling of demonstrations and the fine-tuning process. In the context of embeddings, the validation dataset offers limited utility.

5.1.1 Scaling

Linear probing represents a straightforward and cost-efficient method among the available techniques. This elicits the question, *How many examples are required to achieve a predetermined performance level?* In Figure 4, the average performance of SBERT-large and Ada across various training example counts is illustrated. An almost perfect logarithmic relationship is observed between the average score and the quantity of examples. With the increment in the number of examples, the uncertainty diminishes, and Ada exhibits marginally superior performance compared to the SBERT-large model.

5.2 Fine-tuning

Table 4 presents the results of fine-tuning for $n = 16$ training instances across various backbones. Generally, achieving a stable model using the fine-tuning approach proved to be challenging, leading to ambiguous comparisons between backbone efficacies. Conversely, SetFit demonstrated consistent performance across HerBERT-based backbones. In the context of this limited training scenario, the superiority of Sentence BERT over the original

⁵Determining whether the enhanced performance of the multilingual version is attributable to linguistic factors is complex. Both versions are predicated on the identical Gecko iteration but were released at different times. Subsequent versions also underwent API modifications and necessitated specifying `task_name=CLASSIFICATION`.

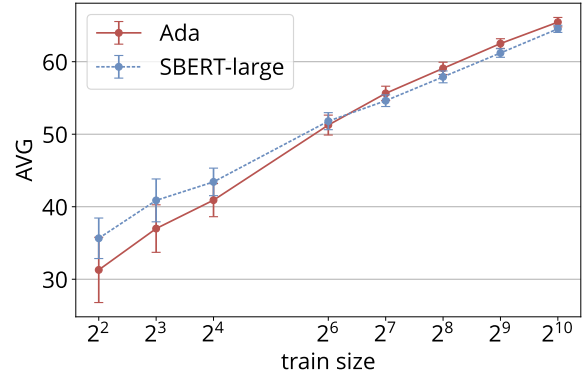


Figure 4: Average performance of the linear probing method based on Ada and SBERT-large embeddings as a function of train dataset size.

BERT remains uncertain due to significant variability. It is imperative to highlight that both fine-tuning methodologies employed LoRA approximation across all linear layers, necessitating cautious interpretation compared with comprehensive parameter fine-tuning.

5.3 In-context learning

Prior methodologies concentrated on models characterized by a constrained set of hyperparameters, such as learning rate, batch size, and training steps. In contrast, ICL employs pre-trained models that necessitate no further training, yet a text prompt furnishes an exponential array of choices. Presently, it is feasible to differentiate between models based on various attributes, including size, corpus language, and data formats employed for fine-tuning, such as instruction tuning.

Few-shot Table 5 provides a detailed comparative analysis of the few-shot ($n = 16$) ICL performance of various language models across distinct classification tasks. Commercially developed models such as GPT-3.5, achieving an average score of 59.5, and Bison-text, with 53.4, exhibit good performance metrics. GPT-3.5, in particular, demonstrates superior capability, notably in the Polemo2 task, achieving an 81.9 score. Conversely, Bison-text does very well on the PAC task, scoring 83.7. However, it does poorly on the CBD task, getting a 0.0 score. This poor performance is because it fails to produce suitable responses. This failure is linked to breaking Google’s rules about content related to cyberbullying, which includes inappropriate language.

Further exploration into task-specific perfor-

	AVG	PAC	Polemo2	CBD	NKJP-NER	DYK	CDSC-E	CST-Wikinews
SBERT-large	43.4 $\pm$ 1.9	67.5 $\pm$ 7.0	60.3 $\pm$ 4.6	40.1 $\pm$ 4.3	30.4 $\pm$ 5.9	27.2 $\pm$ 1.8	62.8 $\pm$ 5.8	15.3 $\pm$ 3.0
HerBERT-large	43.0 $\pm$ 2.4	72.6 $\pm$ 10.3	47.0 $\pm$ 3.1	33.8 $\pm$ 10.1	27.8 $\pm$ 3.3	<u>34.6 $\pm$ 2.8</u>	<u>71.0 $\pm$ 6.1</u>	14.2 $\pm$ 2.7
RoBERTa-large	41.4 $\pm$ 2.4	67.8 $\pm$ 11.3	57.9 $\pm$ 4.4	37.4 $\pm$ 6.1	27.6 $\pm$ 3.9	25.1 $\pm$ 3.0	59.2 $\pm$ 7.5	14.5 $\pm$ 2.7
GPT-2-large	39.8 $\pm$ 1.7	72.0 $\pm$ 2.9	48.3 $\pm$ 4.6	36.4 $\pm$ 4.1	25.2 $\pm$ 4.3	28.6 $\pm$ 3.1	54.4 $\pm$ 7.5	13.6 $\pm$ 3.0
Llama-2-70b*	38.1 $\pm$ 2.2	67.6 $\pm$ 12.5	41.4 $\pm$ 2.9	28.4 $\pm$ 2.5	24.2 $\pm$ 2.0	30.7 $\pm$ 3.0	61.1 $\pm$ 6.1	13.5 $\pm$ 4.2
Ada	40.9 $\pm$ 2.3	<u>72.9 $\pm$ 6.3</u>	55.2 $\pm$ 5.0	30.7 $\pm$ 4.2	29.1 $\pm$ 2.5	25.4 $\pm$ 4.1	58.2 $\pm$ 11.7	14.8 $\pm$ 3.9
DaVinci	42.7 $\pm$ 2.6	67.6 $\pm$ 7.0	58.9 $\pm$ 1.3	36.9 $\pm$ 9.7	30.1 $\pm$ 6.6	29.9 $\pm$ 2.7	60.1 $\pm$ 11.2	15.5 $\pm$ 3.5
Gecko	37.7 $\pm$ 1.7	61.8 $\pm$ 4.5	42.9 $\pm$ 6.4	23.7 $\pm$ 1.3	24.8 $\pm$ 4.3	25.0 $\pm$ 3.8	68.8 $\pm$ 6.3	<u>17.0 $\pm$ 2.8</u>
Gecko multilingual	44.0 $\pm$ 2.3	72.2 $\pm$ 5.6	<u>60.8 $\pm$ 2.6</u>	41.0 $\pm$ 3.3	28.4 $\pm$ 2.8	27.4 $\pm$ 2.3	62.1 $\pm$ 12.6	16.2 $\pm$ 5.7

Table 3: **Evaluation results on the test dataset for linear probing.** We used 16 train examples per task and 5 random seeds. Subscripts denote standard deviation. *Llama-2 embeddings were generated with 4-bit quantization.

	AVG	PAC	Polemo2	CBD	NKJP-NER	DYK	CDSC-E	CST-Wikinews
with non-linear head								
SBERT-large	31.2 $\pm$ 7.0	33.6 $\pm$ 31.3	47.0 $\pm$ 5.8	32.0 $\pm$ 30.7	28.1 $\pm$ 7.7	6.4 $\pm$ 10.3	61.0 $\pm$ 17.6	10.1 $\pm$ 4.3
HerBERT-large	25.9 $\pm$ 8.6	26.7 $\pm$ 23.4	29.5 $\pm$ 9.7	30.8 $\pm$ 36.6	25.2 $\pm$ 3.8	16.2 $\pm$ 29.7	44.4 $\pm$ 26.7	8.7 $\pm$ 3.7
RoBERTa-large	24.2 $\pm$ 4.5	6.2 $\pm$ 11.5	36.4 $\pm$ 4.3	15.3 $\pm$ 10.5	21.3 $\pm$ 6.1	27.2 $\pm$ 0.4	54.5 $\pm$ 26.0	8.7 $\pm$ 2.8
SetFit								
SBERT-large	47.1 $\pm$ 2.4	68.8 $\pm$ 6.5	69.9 $\pm$ 10.7	44.4 $\pm$ 5.4	30.7 $\pm$ 6.5	27.7 $\pm$ 2.9	72.3 $\pm$ 5.7	16.2 $\pm$ 3.2
HerBERT-large	44.1 $\pm$ 3.9	70.7 $\pm$ 11.9	46.0 $\pm$ 11.2	42.5 $\pm$ 10.9	25.8 $\pm$ 11.6	40.6 $\pm$ 4.7	67.2 $\pm$ 14.5	15.7 $\pm$ 1.9

Table 4: **Evaluation results for the fine-tuning technique on the test dataset.** We used 16 train examples per task and 5 random seeds. Subscripts denote standard deviation. All models used LoRA approximation across all linear layers.

mances reveals the Polemo2 task as a significant challenge, largely due to the constraints related to the models’ context size. This constraint leads to zero scores in models such as Bielek-7b-instruct, Trurl-2-13b, and GPT-2-xl, each posting an average performance score of 31.7, 22.5, and 19.3, respectively. The considerable uncertainty metrics, like ± 12.0 for Trurl’s PAC task and ± 22.5 for Krakowiak’s PAC, underscore the variability and challenges inherent in securing stable few-shot learning outcomes. In stark contrast, Mistral-7b-instruct, though fine-tuned for English, attains a moderate average score of 46.5, with a notably high score of 77.6 in the CDSC-E task, indicating potential cross-lingual learning capabilities. Llama-2-13b-chat, on the other hand, significantly

underperforms with an average score of merely 12.2. Mistral-7b-instruct emerges as the superior model among open-source variants, despite not being specifically fine-tuned for Polish, reflecting the complex dynamics of few-shot learning in a multilingual environment where language-specific fine-tuning and intrinsic model capabilities are crucial. Bielek-7b-instruct which is based on the same architecture and initial weights attains significantly worse performance. Further analysis is needed to understand Mistral’s performance.

Zero-shot Table 6 presents a comparative analysis of zero-shot in-context learning performance across various language models on different classification tasks, revealing significant disparities. GPT-4 emerges as the clear leader, boasting the

	AVG	PAC	Polemo2	CBD	NKJP-NER	DYK	CDSC-E	CST-Wikinevs
GPT-3.5	59.5 $\pm$ 1.4	73.9 $\pm$ 3.6	81.9 $\pm$ 2.1	64.1 $\pm$ 1.9	46.1 $\pm$ 2.9	64.1 $\pm$ 1.8	66.7 $\pm$ 7.6	19.8 $\pm$ 2.7
Bison-text	53.4 $\pm$ 1.3	83.7 $\pm$ 1.4	81.8 $\pm$ 2.8	0.0 $\pm$ 0.0	45.7 $\pm$ 3.6	76.6 $\pm$ 0.7	66.4 $\pm$ 7.3	19.5 $\pm$ 2.2
Bielik-7b-instruct	31.7 $\pm$ 1.5	76.1 $\pm$ 4.7	0.0 $\pm$ 0.0	23.7 $\pm$ 0.1	23.2 $\pm$ 2.2	38.3 $\pm$ 3.8	55.0 $\pm$ 10.7	5.4 $\pm$ 1.3
Trurl-2-13b	22.5 $\pm$ 4.0	66.7 $\pm$ 12.0	0.0 $\pm$ 0.0	12.1 $\pm$ 6.6	15.9 $\pm$ 11.3	30.8 $\pm$ 1.4	26.1 $\pm$ 21.8	6.3 $\pm$ 3.2
Krakowiak-7b-v2	22.5 $\pm$ 5.5	57.9 $\pm$ 22.5	14.4 $\pm$ 18.5	0.0 $\pm$ 0.0	13.8 $\pm$ 1.0	28.9 $\pm$ 0.1	38.0 $\pm$ 24.5	4.8 $\pm$ 4.7
GPT-2-xl	19.3 $\pm$ 4.0	24.8 $\pm$ 24.7	0.0 $\pm$ 0.0	0.0 $\pm$ 0.0	14.0 $\pm$ 11.2	16.9 $\pm$ 1.8	74.0 $\pm$ 0.5	5.2 $\pm$ 5.7
Mistral-7b-instruct	46.5 $\pm$ 2.1	48.8 $\pm$ 6.8	73.5 $\pm$ 6.1	34.4 $\pm$ 8.6	28.2 $\pm$ 1.8	45.1 $\pm$ 1.6	77.6 $\pm$ 6.5	17.9 $\pm$ 2.4
Llama-2-13b-chat	12.2 $\pm$ 6.8	47.8 $\pm$ 41.7	0.0 $\pm$ 0.0	0.2 $\pm$ 0.4	3.9 $\pm$ 7.7	20.0 $\pm$ 8.8	12.1 $\pm$ 18.9	1.1 $\pm$ 2.4

Table 5: **Evaluation results for the ICL on the test dataset.** We used 16 train examples per task and 5 random seeds. Subscripts denote standard deviation. Highlighted scores for the Polemo2 task are 0.0 since 16 demonstrations do not fit into the context of selected models.

	AVG	PAC	Polemo2	CBD	NKJP-NER	DYK	CDSC-E	CST-Wikinevs
GPT-4	65.9	83.3 ₀	82.6 ₀₀₉	60.6 ₀₂₈	58.8 ₀₀₄	81.3 ₀₀₂	76.0 ₀	18.8 ₀₀₃
GPT-3.5	55.4	82.2 ₀₁₄	81.6 ₀₀₅	50.0 ₀₄₆	44.9 ₀₀₁	53.1 ₀	62.9 ₀	13.3 ₀₀₃
Bison-text	52.2	80.2 ₀₀₆	80.7 ₀₀₉	42.6 ₀₇₇	47.5 ₀₂₇	61.6 ₀₁₆	35.0 ₀₀₁	17.7 ₀₀₃
Bielik-7b-instruct	51.5	78.1 ₀₃₄	77.3 ₀	53.9 ₀	31.0 ₀₁	49.0 ₀₀₁	65.3 ₀	6.0 ₀₂₃
Trurl-2-13b	50.2	74.1 ₀₆₄	79.5 ₀₀₁	50.0 ₀₀₁	33.6 ₀₃₈	49.7 ₀₁₅	50.2 ₀₀₁	14.6 ₀₈₃
Krakowiak-7b-v2	43.9	80.6 ₀₀₁	65.0 ₀₁₈	23.6 ₀	16.7 ₀₂₄	41.4 ₀₀₂	74.4 ₀	6.0 ₀₃₄
GPT-2-xl	13.7	27.0 ₆₁₉	5.1 ₈₂₇	2.9 ₇₉₄	13.3 ₅₁₃	18.9 ₃	29.1 ₅₁₉	0.0 ₉₉₂
Mistral-7b-instruct	50.7	78.8 ₀₃₆	70.0 ₀₄₃	40.2 ₀₀₁	36.8 ₀₅₄	52.7 ₀₀₁	65.2 ₀	11.7 ₀₇₈
Llama-2-13b-chat	33.7	56.1 ₀₆₉	62.7 ₀₄₈	10.1 ₅₀₈	4.6 ₇₈₅	37.3 ₀₂₄	63.1 ₀₂₉	1.8 ₇₉₇

Table 6: **Zero-shot evaluation results for the ICL on the test dataset.** The subscript indicates a fraction of the test set with invalid predictions. We only provide results for templates with a minimal number of invalid predictions. Highlighted scores (orange) denote the same performance as the Constant Classifier.

highest average performance of 65.9 points and leading in every individual task. Following GPT-4, GPT-3.5 shows solid performance with an overall average of 55.4. Models like Bison-text, Bielik-7b-instruct, and Mistral-7b-instruct demonstrate competitive capabilities, with averages around 52.2, 51.5, and 50.7 respectively, while Krakowiak-7b-v2 shows variable performance, excelling in specific tasks but having a lower overall average. Despite Krakowiak’s commendable scores, its performance on tasks such as PAC, CBD, and CDSC-E is akin to that of a constant classifier, highlighting limitations in its predictive diversity. The markedly lower performance of older models like GPT-2-xl, with an average score of 13.7 points, illustrates the

rapid evolution and significant enhancements in model capabilities. Llama-2-13b-chat has the lowest average of 33.7 among a few billion parameter models.

Our study shows that in the second group of models, the ones made especially for Polish work better. Notably, Bielik-7b-instruct, a derivative of the Mistral-7B-v0.1 architecture fine-tuned on Polish instructions, demonstrates enhanced capabilities. Mistral-7b-instruct, which is fine-tuned in English is slightly worse. However, Krakowiak-7b-v2, which also derives from Mistral-7b-v0.1, does not outperform Mistral-7b-instruct. This suggests that continual fine-tuning on the target language must be approached with caution.

The second-best Polish-based model is Trurl-2-13b, which is built on the Llama-2-13b framework. A comparative analysis with Llama-2-13b-chat from the third cohort illustrates the effectiveness of fine-tuning on a Polish corpus, leading to improved overall metrics and a reduction in erroneous predictions. This underscores the significance of targeted fine-tuning in enhancing model performance in language-specific applications.

5.3.1 Scaling for Llama

Figure 5 depicts the average performance across different scales within the Llama-2 model family, underscoring the influence of instruction fine-tuning on performance metrics. In the zero-shot paradigm, instruction fine-tuning augments performance, with larger models yielding enhanced results. Conversely, within the few-shot learning framework ($n = 16$), the advantages of model scaling are not evident. Furthermore, in this few-shot context, instruction fine-tuning seems to negatively impact the outcomes. This is consistent with observations made in (Ahuja et al., 2023; Asai et al., 2023).

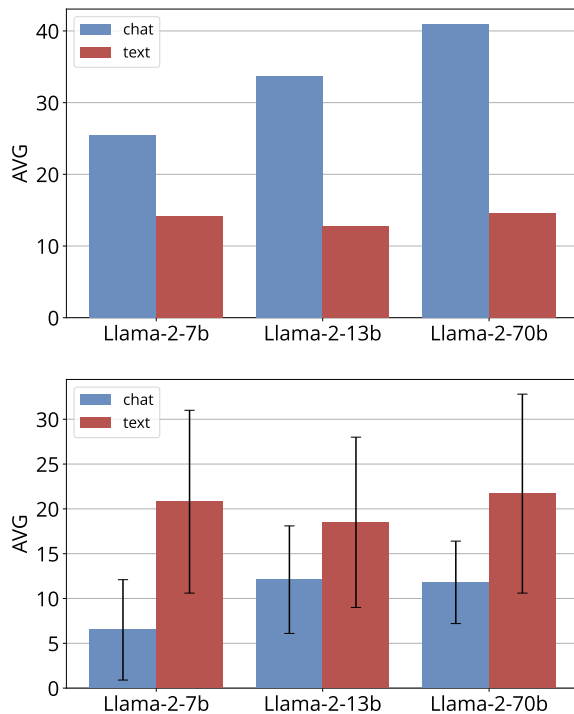


Figure 5: Average performance (AVG) for Llama-2 family models. The upper figure denotes the zero-shot performance. The lower figure denotes a few-shot performance with 16 shots. The *text* model is trained with language modeling on the general corpus. The *chat* are continually trained on instruction datasets.

6 Conclusion

In this study, we introduced a few-shot benchmark for the Polish language, consisting of 7 different classification tasks. We conducted an empirical comparison between models trained with linear probing, fine-tuning, SetFit, and in-context learning. Our results show that ICL achieves the best performance for both 0 and 16 shots. However, there is a significant 14 pp gap between the zero-shot performance of GPT-4 and HerBERT-large trained on the entire dataset.

Our findings indicate that SetFit is the most effective fine-tuning technique, allowing the use of much smaller models compared to ICL. Nevertheless, there is a substantial 12.4 pp performance difference between SBERT-large and ChatGPT for 16 shots. The least effective method turned out to be simple fine-tuning with a non-linear classification head, while better results were achieved using linear probing on top of frozen embeddings.

Interestingly, we observed the highest variability in results among different LLMs employing ICL. Commercial models like PaLM-2, GPT-3.5, and GPT-4 show excellent comprehension of Polish and outperform open-source models. However, Mistral-7b-instruct also performs exceptionally well, despite not being specifically trained on Polish corpora. The same cannot be said for Llama-2.

Our tests confirm that continual pre-training of Mistral or Llama-2 on Polish corpora yields better zero-shot results in our benchmark. Both Trurl-13b and Bielik-7b-instruct perform better than Llama-2-13b-chat and Mistral-7b-instruct. However, in the few-shot regime, only Trurl-2-13b is better than its English counterpart. Additionally, the example of Krakowiak-7b, which was fine-tuned from Mistral-7b, demonstrates that fine-tuning must be approached with care to avoid degrading performance.

7 Future work

In the future, we plan to examine the generation quality of LLMs, including whether they use Polish, English, or a mixture of both in their responses. We also intend to evaluate additional open-source LLMs and integrate a wider range of tasks into our benchmark, beyond classification. Furthermore, assessing the performance of auto-prompting techniques and comparing PEFT with prompt engineering using LLMs in the few-shot regime will be of interest.

Additionally, our findings prompt intriguing inquiries. Why does Mistral-7b-instruct perform so well in Polish, even though it was not specifically trained on a large-scale Polish corpus? This contributes to the broader research on adapting pre-trained LLMs to non-English languages (Zhao et al., 2024; Zhu et al., 2023; Chen et al., 2024; Csaki et al., 2023; Rostami et al., 2024; Basile et al., 2023) and in-context cross-lingual transfer (Etxaniz et al., 2023; Zhang et al., 2023; Lai et al., 2023; Asai et al., 2023; Ahuja et al., 2023; Bandarkar et al., 2023).

8 Limitations

Our goal was to develop an evaluation methodology that reflects real-world situations and defines the maximum potential of few-shot learning for tasks in the Polish language. Previous studies (Perez et al., 2021; Alex et al., 2022) have shown that using a validation dataset for hyperparameter tuning may overestimate the capabilities of "true few-shot learning," with results varying greatly depending on the chosen seed or template. The number of few-shot examples was quite small and unevenly distributed across tasks. We have datasets ranging from 8 examples per class (PAC, DYK) to 1 (CST-Wikinews), affecting the interpretation of results and leading to potential label biases.

Although automatic evaluation metrics are widely used and convenient for assessing models, human evaluation remains the definitive standard for certain tasks. In this study, we used two metrics influenced by automatic evaluation. For the ICL, we considered the label name as the definitive truth, ignoring synonyms or terms with similar meanings within the task. For greedy decoding, we applied exact match metrics with minimal preprocessing. Our analysis indicates that this method is unlikely to significantly affect the results, but the challenge of automatic evaluation remains, particularly with generative LLMs.

Our benchmark uses diverse, classification-only datasets to measure model performance in different areas, including datasets of varying lengths and number of classes. However, it is limited to open-source Polish datasets, introducing several challenges. For instance, the CBD dataset had noisy data and low quality, while the clarity of the CST-Wikinews dataset was questionable, even to the original authors. Additionally, the availability of datasets in Polish is much less than in English, lim-

iting our ability to create a comprehensive benchmark.

The list of few-shot techniques in the NLP is extensive and continues to grow each year. We selectively chose a few based on ease of use, recognition, potential benefit, and computational effort required. For instance, we did not perform any text-to-text fine-tuning with LLMs, which might have yielded better results than prompt engineering. Similarly, the number of open-source LLMs suitable for ICL is increasing rapidly.

9 Reproducibility

Publicly available datasets were utilized to establish the benchmark, with references to these datasets delineated in the Appendix B. The models employed in this investigation include both open-source variants and those accessible via paid subscriptions through their respective APIs (see Appendix D). The provision of commercial models was facilitated through platforms such as Google and Azure, with specific versions of these models being fixed for the duration of the study. To ensure experimental consistency, fixed random seeds were used, and the output generation from the language models was performed at a temperature setting of 0 to maintain deterministic behavior (see Appendix E). Additionally, the values of the hyperparameters used for fine-tuning experiments are provided in Appendix C.

Acknowledgements

We express our gratitude to Allegro.pl Sp. z o.o. for providing the funding for computational resources.

All content represents the opinion of the authors, which is not necessarily shared or endorsed by their respective employers.

References

- Kabir Ahuja, Harshita Diddee, Rishav Hada, Millicent Ochieng, Krithika Ramesh, Prachi Jain, Akshay Nambi, Tanuja Ganu, Sameer Segal, Maxamed Axmed, Kalika Bali, and Sunayana Sitaram. 2023. [Mega: Multilingual evaluation of generative ai](#).
- Alon Albalak, Colin Raffel, and William Yang Wang. 2023. [Improving few-shot generalization by exploring and exploiting auxiliary data](#). In *Thirty-seventh Conference on Neural Information Processing Systems*.
- Neel Alex, Eli Lifland, Lewis Tunstall, Abhishek Thakur, Pegah Maham, C. Jess Riedel, Emmie

- Hine, Carolyn Ashurst, Paul Sedille, Alexis Carlier, Michael Noetel, and Andreas Stuhlmüller. 2021. [RAFT: A real-world few-shot text classification benchmark](#). In *Thirty-fifth Conference on Neural Information Processing Systems Datasets and Benchmarks Track (Round 2)*.
- Neel Alex, Eli Lifland, Lewis Tunstall, Abhishek Thakur, Pegah Maham, C. Jess Riedel, Emmie Hine, Carolyn Ashurst, Paul Sedille, Alexis Carlier, Michael Noetel, and Andreas Stuhlmüller. 2022. [Raft: A real-world few-shot text classification benchmark](#).
- Rami Aly, Xingjian Shi, Kaixiang Lin, Aston Zhang, and Andrew Wilson. 2023. [Automated few-shot classification with instruction-finetuned language models](#). In *Findings of the Association for Computational Linguistics: EMNLP 2023*, pages 2414–2432, Singapore. Association for Computational Linguistics.
- Gaon An, Junhyeok Lee, Xingdong Zuo, Norio Kosaka, Kyung-Min Kim, and Hyun Oh Song. 2023. [Direct preference-based policy optimization without reward modeling](#).
- Anonymous. 2024a. [Connecting large language models with evolutionary algorithms yields powerful prompt optimizers](#). In *The Twelfth International Conference on Learning Representations*.
- Anonymous. 2024b. [Large language models as optimizers](#). In *The Twelfth International Conference on Learning Representations*.
- Mikel Artetxe, Gorka Labaka, and Eneko Agirre. 2020. [Translation artifacts in cross-lingual transfer learning](#). In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 7674–7684, Online. Association for Computational Linguistics.
- Akari Asai, Sneha Kudugunta, Xinyan Velocity Yu, Terra Blevins, Hila Gonen, Machel Reid, Yulia Tsvetkov, Sebastian Ruder, and Hannaneh Hajishirzi. 2023. [Buffet: Benchmarking large language models for few-shot cross-lingual transfer](#).
- Lukasz Augustyniak, Kamil Tagowski, Albert Sawczyn, Denis Janiak, Roman Bartusiak, Adrian Szymczak, Arkadiusz Janz, Piotr Szymański, Marcin Wątroba, Mikołaj Morzy, Tomasz Kajdanowicz, and Maciej Piasecki. 2022. [This is the way: designing and compiling lepiszcze, a comprehensive nlp benchmark for polish](#). In *Advances in Neural Information Processing Systems*, volume 35, pages 21805–21818. Curran Associates, Inc.
- Stephen Bach, Victor Sanh, Zheng Xin Yong, Albert Webson, Colin Raffel, Nihal V. Nayak, Abheesht Sharma, Taewoon Kim, M Saiful Bari, Thibault Fevry, Zaid Alyafeai, Manan Dey, Andrea Santilli, Zhiqing Sun, Srulik Ben-david, Canwen Xu, Gunjan Chhablani, Han Wang, Jason Fries, Maged Alshaibani, Shanya Sharma, Urmish Thakker, Khalid Almubarak, Xiangru Tang, Dragomir Radev, Mike Tian-jian Jiang, and Alexander Rush. 2022. [PromptSource: An integrated development environment and repository for natural language prompts](#). In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics: System Demonstrations*, pages 93–104, Dublin, Ireland. Association for Computational Linguistics.
- Lucas Bandarkar, Davis Liang, Benjamin Muller, Mikel Artetxe, Satya Narayan Shukla, Donald Husa, Naman Goyal, Abhinandan Krishnan, Luke Zettlemoyer, and Madian Khabsa. 2023. [The belebele benchmark: a parallel reading comprehension dataset in 122 language variants](#).
- Pierpaolo Basile, Elio Musacchio, Marco Polignano, Lucia Siciliani, Giuseppe Fiameni, and Giovanni Semeraro. 2023. [Llamantino: Llama 2 models for effective text generation in italian language](#).
- Jonathan Bragg, Arman Cohan, Kyle Lo, and Iz Beltagy. 2021. [FLEX: Unifying evaluation for few-shot NLP](#). In *Advances in Neural Information Processing Systems*.
- Tom B. Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, Sandhini Agarwal, Ariel Herbert-Voss, Gretchen Krueger, Tom Henighan, Rewon Child, Aditya Ramesh, Daniel M. Ziegler, Jeffrey Wu, Clemens Winter, Christopher Hesse, Mark Chen, Eric Sigler, Mateusz Litwin, Scott Gray, Benjamin Chess, Jack Clark, Christopher Berner, Sam McCandlish, Alec Radford, Ilya Sutskever, and Dario Amodei. 2020. [Language models are few-shot learners](#).
- Pinzhen Chen, Shaoxiong Ji, Nikolay Bogoychev, Andrey Kutuzov, Barry Haddow, and Kenneth Heafield. 2024. [Monolingual or multilingual instruction tuning: Which makes a better alpaca](#). In *Findings of the Association for Computational Linguistics: EACL 2024*, pages 1347–1356, St. Julian’s, Malta. Association for Computational Linguistics.
- Tianqi Chen and Carlos Guestrin. 2016. [XGBoost: A scalable tree boosting system](#). In *Proceedings of the 22nd ACM SIGKDD International Conference on Knowledge Discovery and Data Mining, KDD ’16*, pages 785–794, New York, NY, USA. ACM.
- Aakanksha Chowdhery, Sharan Narang, Jacob Devlin, Maarten Bosma, Gaurav Mishra, Adam Roberts, Paul Barham, Hyung Won Chung, Charles Sutton, Sebastian Gehrmann, Parker Schuh, Kensen Shi, Sasha Tsvyashchenko, Joshua Maynez, Abhishek Rao, Parker Barnes, Yi Tay, Noam Shazeer, Vinodkumar Prabhakaran, Emily Reif, Nan Du, Ben Hutchinson, Reiner Pope, James Bradbury, Jacob Austin, Michael Isard, Guy Gur-Ari, Pengcheng Yin, Toju Duke, Anselm Levskaya, Sanjay Ghemawat, Sunipa Dev, Henryk Michalewski, Xavier Garcia, Vedant Misra, Kevin Robinson, Liam Fedus, Denny Zhou, Daphne Ippolito, David Luan, Hyeontaek Lim,

- Barret Zoph, Alexander Spiridonov, Ryan Sepassi, David Dohan, Shivani Agrawal, Mark Omernick, Andrew M. Dai, Thanumalayan Sankaranarayanan Pillai, Marie Pellat, Aitor Lewkowycz, Erica Moreira, Rewon Child, Oleksandr Polozov, Katherine Lee, Zongwei Zhou, Xuezhi Wang, Brennan Saeta, Mark Diaz, Orhan Firat, Michele Catasta, Jason Wei, Kathy Meier-Hellstern, Douglas Eck, Jeff Dean, Slav Petrov, and Noah Fiedel. 2022. [Palm: Scaling language modeling with pathways](#).
- Paul Christiano, Jan Leike, Tom B. Brown, Miljan Martić, Shane Legg, and Dario Amodei. 2023. [Deep reinforcement learning from human preferences](#).
- Hyung Won Chung, Le Hou, Shayne Longpre, Barret Zoph, Yi Tay, William Fedus, Yunxuan Li, Xuezhi Wang, Mostafa Dehghani, Siddhartha Brahma, Albert Webson, Shixiang Shane Gu, Zhuyun Dai, Mirac Suzgun, Xinyun Chen, Aakanksha Chowdhery, Alex Castro-Ros, Marie Pellat, Kevin Robinson, Dasha Valter, Sharan Narang, Gaurav Mishra, Adams Yu, Vincent Zhao, Yanping Huang, Andrew Dai, Hongkun Yu, Slav Petrov, Ed H. Chi, Jeff Dean, Jacob Devlin, Adam Roberts, Denny Zhou, Quoc V. Le, and Jason Wei. 2022. [Scaling instruction-finetuned language models](#).
- Zoltan Csaki, Pian Pawakapan, Urmish Thakker, and Qiantong Xu. 2023. [Efficiently adapting pretrained language models to new languages](#).
- Mingkai Deng, Jianyu Wang, Cheng-Ping Hsieh, Yihan Wang, Han Guo, Tianmin Shu, Meng Song, Eric Xing, and Zhiting Hu. 2022. [RLPrompt: Optimizing discrete text prompts with reinforcement learning](#). In *Proceedings of the 2022 Conference on Empirical Methods in Natural Language Processing*, pages 3369–3391, Abu Dhabi, United Arab Emirates. Association for Computational Linguistics.
- Julen Etxaniz, Gorka Azkune, Aitor Soroa, Oier Lopez de Lacalle, and Mikel Artetxe. 2023. [Do multilingual language models think better in english?](#)
- William Fedus, Barret Zoph, and Noam Shazeer. 2022. [Switch transformers: Scaling to trillion parameter models with simple and efficient sparsity](#).
- Chrisantha Fernando, Dylan Banarse, Henryk Michalewski, Simon Osindero, and Tim Rocktäschel. 2023. [Promptbreeder: Self-referential self-improvement via prompt evolution](#).
- Matthew Honnibal and Ines Montani. 2017. spaCy 2: Natural language understanding with Bloom embeddings, convolutional neural networks and incremental parsing. To appear.
- Edward J Hu, yelong shen, Phillip Wallis, Zeyuan Allen-Zhu, Yuanzhi Li, Shean Wang, Lu Wang, and Weizhu Chen. 2022. [LoRA: Low-rank adaptation of large language models](#). In *International Conference on Learning Representations*.
- Albert Q. Jiang, Alexandre Sablayrolles, Arthur Mensch, Chris Bamford, Devendra Singh Chaplot, Diego de las Casas, Florian Bressand, Gianna Lengyel, Guillaume Lample, Lucile Saulnier, Léo Renard Lavaud, Marie-Anne Lachaux, Pierre Stock, Teven Le Scao, Thibaut Lavril, Thomas Wang, Timothée Lacroix, and William El Sayed. 2023. [Mistral 7b](#).
- Albert Q. Jiang, Alexandre Sablayrolles, Antoine Roux, Arthur Mensch, Blanche Savary, Chris Bamford, Devendra Singh Chaplot, Diego de las Casas, Emma Bou Hanna, Florian Bressand, Gianna Lengyel, Guillaume Bour, Guillaume Lample, Léo Renard Lavaud, Lucile Saulnier, Marie-Anne Lachaux, Pierre Stock, Sandeep Subramanian, Sophia Yang, Szymon Antoniak, Teven Le Scao, Théophile Gervet, Thibaut Lavril, Thomas Wang, Timothée Lacroix, and William El Sayed. 2024. [Mistral of experts](#).
- Rabeeh Karimi Mahabadi, Luke Zettlemoyer, James Henderson, Lambert Mathias, Marzieh Saeidi, Veselin Stoyanov, and Majid Yazdani. 2022. [Prompt-free and efficient few-shot learning with language models](#). In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 3638–3652, Dublin, Ireland. Association for Computational Linguistics.
- Woosuk Kwon, Zhuohan Li, Siyuan Zhuang, Ying Sheng, Lianmin Zheng, Cody Hao Yu, Joseph E. Gonzalez, Hao Zhang, and Ion Stoica. 2023. [Efficient memory management for large language model serving with pagedattention](#). In *Proceedings of the ACM SIGOPS 29th Symposium on Operating Systems Principles*.
- Viet Dac Lai, Nghia Trung Ngo, Amir Pouran Ben Veyseh, Hieu Man, Franck Dernoncourt, Trung Bui, and Thien Huu Nguyen. 2023. [Chatgpt beyond english: Towards a comprehensive evaluation of large language models in multilingual learning](#).
- Tsung-Yi Lin, Priya Goyal, Ross Girshick, Kaiming He, and Piotr Dollár. 2020. [Focal loss for dense object detection](#). *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 42(2):318–327.
- Haokun Liu, Derek Tam, Muqeeth Mohammed, Jay Mohata, Tenghao Huang, Mohit Bansal, and Colin Raffel. 2022. [Few-shot parameter-efficient fine-tuning is better and cheaper than in-context learning](#). In *Advances in Neural Information Processing Systems*.
- Robert Logan IV, Ivana Balazevic, Eric Wallace, Fabio Petroni, Sameer Singh, and Sebastian Riedel. 2022. [Cutting down on prompts and parameters: Simple few-shot learning with language models](#). In *Findings of the Association for Computational Linguistics: ACL 2022*, pages 2824–2835, Dublin, Ireland. Association for Computational Linguistics.
- Swaroop Mishra, Daniel Khashabi, Chitta Baral, and Hannaneh Hajishirzi. 2022. [Cross-task generalization via natural language crowdsourcing instructions](#).

In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 3470–3487, Dublin, Ireland. Association for Computational Linguistics.

Niklas Muennighoff, Thomas Wang, Lintang Sutawika, Adam Roberts, Stella Biderman, Teven Le Scao, M Saiful Bari, Sheng Shen, Zheng Xin Yong, Hailey Schoelkopf, Xiangru Tang, Dragomir Radev, Alham Fikri Aji, Khalid Almubarak, Samuel Albanie, Zaid Alyafeai, Albert Webson, Edward Raff, and Colin Raffel. 2023. [Crosslingual generalization through multitask finetuning](#). In *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 15991–16111, Toronto, Canada. Association for Computational Linguistics.

OpenAI, Josh Achiam, Steven Adler, Sandhini Agarwal, Lama Ahmad, Ilge Akkaya, Florencia Leoni Aleman, Diogo Almeida, Janko Altmenschmidt, Sam Altman, Shyamal Anadkat, Red Avila, Igor Babuschkin, Suchir Balaji, Valerie Balcom, Paul Baltescu, Haiming Bao, Mohammad Bavarian, Jeff Belgum, Irwan Bello, Jake Berdine, Gabriel Bernadett-Shapiro, Christopher Berner, Lenny Bogdonoff, Oleg Boiko, Madelaine Boyd, Anna-Luisa Brakman, Greg Brockman, Tim Brooks, Miles Brundage, Kevin Button, Trevor Cai, Rosie Campbell, Andrew Cann, Brittany Carey, Chelsea Carlson, Rory Carmichael, Brooke Chan, Che Chang, Fotis Chantzis, Derek Chen, Sully Chen, Ruby Chen, Jason Chen, Mark Chen, Ben Chess, Chester Cho, Casey Chu, Hyung Won Chung, Dave Cummings, Jeremiah Currier, Yunxing Dai, Cory Decareaux, Thomas Degry, Noah Deutsch, Damien Deville, Arka Dhar, David Dohan, Steve Dowling, Sheila Dunning, Adrien Ecoffet, Atty Eleti, Tyna Eloundou, David Farhi, Liam Fedus, Niko Felix, Simón Posada Fishman, Juston Forte, Isabella Fulford, Leo Gao, Elie Georges, Christian Gibson, Vik Goel, Tarun Gogineni, Gabriel Goh, Rapha Gontijo-Lopes, Jonathan Gordon, Morgan Grafstein, Scott Gray, Ryan Greene, Joshua Gross, Shixiang Shane Gu, Yufei Guo, Chris Hallacy, Jesse Han, Jeff Harris, Yuchen He, Mike Heaton, Johannes Heidecke, Chris Hesse, Alan Hickey, Wade Hickey, Peter Hoeschele, Brandon Houghton, Kenny Hsu, Shengli Hu, Xin Hu, Joost Huizinga, Shantanu Jain, Shawn Jain, Joanne Jang, Angela Jiang, Roger Jiang, Haozhun Jin, Denny Jin, Shino Jomoto, Billie Jonn, Heewoo Jun, Tomer Kaftan, Łukasz Kaiser, Ali Kamali, Ingmar Kanitscheider, Nitish Shirish Keskar, Tabarak Khan, Logan Kilpatrick, Jong Wook Kim, Christina Kim, Yongjik Kim, Jan Hendrik Kirchner, Jamie Kiros, Matt Knight, Daniel Kokotajlo, Łukasz Kondraciuk, Andrew Kondrich, Aris Konstantinidis, Kyle Kosic, Gretchen Krueger, Vishal Kuo, Michael Lampe, Ikai Lan, Teddy Lee, Jan Leike, Jade Leung, Daniel Levy, Chak Ming Li, Rachel Lim, Molly Lin, Stephanie Lin, Mateusz Litwin, Theresa Lopez, Ryan Lowe, Patricia Lue, Anna Makanju, Kim Malfacini, Sam Manning, Todor Markov, Yaniv Markovski, Bianca Martin, Katie Mayer, Andrew Mayne, Bob McGrew, Scott Mayer

McKinney, Christine McLeavey, Paul McMillan, Jake McNeil, David Medina, Aalok Mehta, Jacob Menick, Luke Metz, Andrey Mishchenko, Pamela Mishkin, Vinnie Monaco, Evan Morikawa, Daniel Mossing, Tong Mu, Mira Murati, Oleg Murk, David Mély, Ashvin Nair, Reiichiro Nakano, Rajeev Nayak, Arvind Neelakantan, Richard Ngo, Hyeonwoo Noh, Long Ouyang, Cullen O’Keefe, Jakub Pachocki, Alex Paino, Joe Palermo, Ashley Pantuliano, Giambattista Parascandolo, Joel Parish, Emy Parparita, Alex Passos, Mikhail Pavlov, Andrew Peng, Adam Perelman, Filipe de Avila Belbute Peres, Michael Petrov, Henrique Ponde de Oliveira Pinto, Michael, Pokorny, Michelle Pokrass, Vitchyr H. Pong, Tolly Powell, Alethea Power, Boris Power, Elizabeth Proehl, Raul Puri, Alec Radford, Jack Rae, Aditya Ramesh, Cameron Raymond, Francis Real, Kendra Rimbach, Carl Ross, Bob Rotsted, Henri Roussez, Nick Ryder, Mario Saltarelli, Ted Sanders, Shibani Santurkar, Girish Sastry, Heather Schmidt, David Schnurr, John Schulman, Daniel Selsam, Kyla Sheppard, Toki Sherbakov, Jessica Shieh, Sarah Shoker, Pranav Shyam, Szymon Sidor, Eric Sigler, Maddie Simens, Jordan Sitkin, Katarina Slama, Ian Sohl, Benjamin Sokolowsky, Yang Song, Natalie Staudacher, Felipe Petroski Such, Natalie Summers, Ilya Sutskever, Jie Tang, Nikolas Tezak, Madeleine B. Thompson, Phil Tillet, Amin Tootoonchian, Elizabeth Tseng, Preston Tuggle, Nick Turley, Jerry Tworek, Juan Felipe Cerón Uribe, Andrea Vallone, Arun Vijayvergiya, Chelsea Voss, Carroll Wainwright, Justin Jay Wang, Alvin Wang, Ben Wang, Jonathan Ward, Jason Wei, CJ Weinmann, Akila Welihinda, Peter Welinder, Jiayi Weng, Lilian Weng, Matt Wiethoff, Dave Willner, Clemens Winter, Samuel Wolrich, Hannah Wong, Lauren Workman, Sherwin Wu, Jeff Wu, Michael Wu, Kai Xiao, Tao Xu, Sarah Yoo, Kevin Yu, Qiming Yuan, Wojciech Zaremba, Rowan Zellers, Chong Zhang, Marvin Zhang, Shengjia Zhao, Tianhao Zheng, Juntang Zhuang, William Zhuk, and Barret Zoph. 2024. [Gpt-4 technical report](#).

Long Ouyang, Jeff Wu, Xu Jiang, Diogo Almeida, Carroll L. Wainwright, Pamela Mishkin, Chong Zhang, Sandhini Agarwal, Katarina Slama, Alex Ray, John Schulman, Jacob Hilton, Fraser Kelton, Luke Miller, Maddie Simens, Amanda Askell, Peter Welinder, Paul Christiano, Jan Leike, and Ryan Lowe. 2022. [Training language models to follow instructions with human feedback](#).

Ethan Perez, Douwe Kiela, and Kyunghyun Cho. 2021. [True few-shot learning with language models](#).

Edoardo Maria Ponti, Goran Glavaš, Olga Majewska, Qianchu Liu, Ivan Vulić, and Anna Korhonen. 2020. [XCOPA: A multilingual dataset for causal common-sense reasoning](#). In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 2362–2376, Online. Association for Computational Linguistics.

Archiki Prasad, Peter Hase, Xiang Zhou, and Mohit Bansal. 2023. [GrIPS: Gradient-free, edit-based instruction search for prompting large language models](#).

- In *Proceedings of the 17th Conference of the European Chapter of the Association for Computational Linguistics*, pages 3845–3864, Dubrovnik, Croatia. Association for Computational Linguistics.
- Reid Pryzant, Dan Iter, Jerry Li, Yin Lee, Chenguang Zhu, and Michael Zeng. 2023. [Automatic prompt optimization with “gradient descent” and beam search](#). In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, pages 7957–7968, Singapore. Association for Computational Linguistics.
- Alec Radford, Jeffrey Wu, Rewon Child, David Luan, Dario Amodei, Ilya Sutskever, et al. 2019. Language models are unsupervised multitask learners. *OpenAI blog*, 1(8):9.
- Jack W. Rae, Sebastian Borgeaud, Trevor Cai, Katie Millican, Jordan Hoffmann, Francis Song, John Aslanides, Sarah Henderson, Roman Ring, Susannah Young, Eliza Rutherford, Tom Hennigan, Jacob Menick, Albin Cassirer, Richard Powell, George van den Driessche, Lisa Anne Hendricks, Mari-beth Rauh, Po-Sen Huang, Amelia Glaese, Johannes Welbl, Sumanth Dathathri, Saffron Huang, Jonathan Uesato, John Mellor, Irina Higgins, Antonia Creswell, Nat McAleese, Amy Wu, Erich Elsen, Siddhant Jayakumar, Elena Buchatskaya, David Budden, Esme Sutherland, Karen Simonyan, Michela Paganini, Laurent Sifre, Lena Martens, Xiang Lorraine Li, Adhiguna Kuncoro, Aida Nematzadeh, Elena Gribovskaya, Domenic Donato, Angeliki Lazaridou, Arthur Mensch, Jean-Baptiste Lespiau, Maria Tsim-poukelli, Nikolai Grigorev, Doug Fritz, Thibault Sotiaux, Mantas Pajarskas, Toby Pohlen, Zhitao Gong, Daniel Toyama, Cyprien de Masson d’Autume, Yujia Li, Tayfun Terzi, Vladimir Mikulik, Igor Babuschkin, Aidan Clark, Diego de Las Casas, Aurelia Guy, Chris Jones, James Bradbury, Matthew Johnson, Blake Hechtman, Laura Weidinger, Iason Gabriel, William Isaac, Ed Lockhart, Simon Osindero, Laura Rimell, Chris Dyer, Oriol Vinyals, Kareem Ayoub, Jeff Stanway, Lorraine Bennett, Demis Hassabis, Koray Kavukcuoglu, and Geoffrey Irving. 2022. [Scaling language models: Methods, analysis & insights from training gopher](#).
- Rafael Rafailov, Archit Sharma, Eric Mitchell, Stefano Ermon, Christopher D. Manning, and Chelsea Finn. 2023. [Direct preference optimization: Your language model is secretly a reward model](#).
- Pedram Rostami, Ali Salemi, and Mohammad Javad Dousti. 2024. [Persianmind: A cross-lingual persian-english large language model](#).
- Sebastian Ruder and Avi Sil. 2021. [Multi-domain multilingual question answering](#). In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing: Tutorial Abstracts*, pages 17–21, Punta Cana, Dominican Republic & Online. Association for Computational Linguistics.
- Piotr Rybak, Robert Mroczkowski, Janusz Tracz, and Ireneusz Gawlik. 2020. [KLEJ: Comprehensive benchmark for Polish language understanding](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 1191–1201, Online. Association for Computational Linguistics.
- Victor Sanh, Albert Webson, Colin Raffel, Stephen H. Bach, Lintang Sutawika, Zaid Alyafeai, Antoine Chaffin, Arnaud Stiegler, Teven Le Scao, Arun Raja, Manan Dey, M Saiful Bari, Canwen Xu, Urmish Thakker, Shanya Sharma Sharma, Eliza Szczechla, Taewoon Kim, Gunjan Chhablani, Nihal Nayak, Debajyoti Datta, Jonathan Chang, Mike Tian-Jian Jiang, Han Wang, Matteo Manica, Sheng Shen, Zheng Xin Yong, Harshit Pandey, Rachel Bawden, Thomas Wang, Trishala Neeraj, Jos Rozen, Abheesht Sharma, Andrea Santilli, Thibault Evry, Jason Alan Fries, Ryan Teehan, Tali Bers, Stella Biderman, Leo Gao, Thomas Wolf, and Alexander M. Rush. 2022. [Multi-task prompted training enables zero-shot task generalization](#).
- Teven Le Scao, Angela Fan, Christopher Akiki, Ellie Pavlick, Suzana Ilić, Daniel Hesslow, Roman Castagné, Alexandra Sasha Luccioni, François Yvon, Matthias Gallé, Jonathan Tow, Alexander M. Rush, Stella Biderman, Albert Webson, Pawan Sasanka Ammanamanchi, Thomas Wang, Benoît Sagot, Niklas Muennighoff, Albert Villanova del Moral, Olatunji Ruwase, Rachel Bawden, Stas Bekman, Angelina McMillan-Major, Iz Beltagy, Huu Nguyen, Lucile Saulnier, Samson Tan, Pedro Ortiz Suarez, Victor Sanh, Hugo Laurençon, Yacine Jernite, Julien Launay, Margaret Mitchell, Colin Raffel, Aaron Gokaslan, Adi Simhi, Aitor Soroa, Alham Fikri Aji, Amit Alfassy, Anna Rogers, Ariel Kreisberg Nitzav, Canwen Xu, Chenghao Mou, Chris Emezue, Christopher Klamm, Colin Leong, Daniel van Strien, David Ifeoluwa Adelani, Dragomir Radev, Eduardo González Ponferrada, Efrat Levkovizh, Ethan Kim, Eyal Bar Natan, Francesco De Toni, Gérard Dupont, Germán Kruszewski, Giada Pistilli, Hady Elsahar, Hamza Benyamina, Hieu Tran, Ian Yu, Idris Abdulmumin, Isaac Johnson, Itziar Gonzalez-Dios, Javier de la Rosa, Jenny Chim, Jesse Dodge, Jian Zhu, Jonathan Chang, Jörg Frohberg, Joseph Tobing, Joydeep Bhattacharjee, Khalid Almubarak, Kimbo Chen, Kyle Lo, Leandro Von Werra, Leon Weber, Long Phan, Loubna Ben allal, Ludovic Tanguy, Manan Dey, Manuel Romero Muñoz, Maraim Masoud, María Grandury, Mario Šaško, Max Huang, Maximin Coavoux, Mayank Singh, Mike Tian-Jian Jiang, Minh Chien Vu, Mohammad A. Jauhar, Mustafa Ghaleb, Nishant Subramani, Nora Kassner, Nuru-laqilla Khamis, Olivier Nguyen, Omar Espejel, Ona de Gibert, Paulo Villegas, Peter Henderson, Pierre Colombo, Priscilla Amuok, Quentin Lhoest, Rheza Harliman, Rishi Bommasani, Roberto Luis López, Rui Ribeiro, Salomey Osei, Sampo Pyysalo, Sebastian Nagel, Shamik Bose, Shamsuddeen Hassan Muhammad, Shanya Sharma, Shayne Longpre, So-maieh Nikpoor, Stanislav Silberberg, Suhas Pai, Syd-

- ney Zink, Tiago Timponi Torrent, Timo Schick, Tristan Thrush, Valentin Danchev, Vassilina Nikoulina, Veronika Laippala, Violette Lepercq, Vrinda Prabhu, Zaid Alyafeai, Zeerak Talat, Arun Raja, Benjamin Heinzerling, Chenglei Si, Davut Emre Taşar, Elizabeth Salesky, Sabrina J. Mielke, Wilson Y. Lee, Abheesht Sharma, Andrea Santilli, Antoine Chaffin, Arnaud Stiegler, Debajyoti Datta, Eliza Szczechla, Gunjan Chhablani, Han Wang, Harshit Pandey, Hendrik Strobelt, Jason Alan Fries, Jos Rozen, Leo Gao, Lintang Sutawika, M Saiful Bari, Maged S. Al-shaibani, Matteo Manica, Nihal Nayak, Ryan Teehan, Samuel Albanie, Sheng Shen, Srulik Ben-David, Stephen H. Bach, Taewoon Kim, Tali Bers, Thibault Fevry, Trishala Neeraj, Urmish Thakker, Vikas Raunak, Xiangru Tang, Zheng-Xin Yong, Zhiqing Sun, Shaked Brody, Yallow Uri, Hadar Tojarieh, Adam Roberts, Hyung Won Chung, Jaesung Tae, Jason Phang, Ofir Press, Conglong Li, Deepak Narayanan, Hatim Bourfoune, Jared Casper, Jeff Rasley, Max Ryabinin, Mayank Mishra, Minjia Zhang, Mohammad Shoeybi, Myriam Peyrounette, Nicolas Patry, Nouamane Tazi, Omar Sanseviero, Patrick von Platen, Pierre Cornette, Pierre François Lavallée, Rémi Lacroix, Samyam Rajbhandari, Sanchit Gandhi, Shaden Smith, Stéphane Requena, Suraj Patil, Tim Dettmers, Ahmed Baruwa, Amanpreet Singh, Anastasia Cheveleva, Anne-Laure Ligozat, Arjun Subramonian, Aurélie Névél, Charles Lovering, Dan Garrette, Deepak Tunuguntla, Ehud Reiter, Ekaterina Taktasheva, Ekaterina Voloshina, Eli Bogdanov, Genta Indra Winata, Hailey Schoelkopf, Jan-Christoph Kalo, Jekaterina Novikova, Jessica Zosa Forde, Jordan Clive, Jungo Kasai, Ken Kawamura, Liam Hazan, Marine Carpuat, Miruna Clinciu, Naejin Kim, Newton Cheng, Oleg Serikov, Omer Antverg, Oskar van der Wal, Rui Zhang, Ruochen Zhang, Sebastian Gehrmann, Shachar Mirkin, Shani Pais, Tatiana Shavrina, Thomas Scialom, Tian Yun, Tomasz Limisiewicz, Verena Rieser, Vitaly Protasov, Vladislav Mikhailov, Yada Pruksachatkun, Yonatan Belinkov, Zachary Bamberger, Zdeněk Kasner, Alice Rueda, Amanda Pestana, Amir Feizpour, Ammar Khan, Amy Faranak, Ana Santos, Anthony Hevia, Antigona Uldreadj, Arash Aghagol, Arezoo Abdollahi, Aycha Tammour, Azadeh HajiHosseini, Bahareh Behroozi, Benjamin Ajibade, Bharat Saxena, Carlos Muñoz Ferrandis, Daniel McDuff, Danish Contractor, David Lansky, Davis David, Douwe Kiela, Duong A. Nguyen, Edward Tan, Emi Baylor, Ezinwanne Ozoani, Fatima Mirza, Frankline Onon-iwu, Habib Rezanejad, Hessie Jones, Indrani Bhat-tacharya, Irene Solaiman, Irina Sedenko, Isar Nejadgholi, Jesse Passmore, Josh Seltzer, Julio Bonis Sanz, Livia Dutra, Mairon Samagaio, Maraim Elbadri, Margot Mieskes, Marissa Gerchick, Martha Akinlolu, Michael McKenna, Mike Qiu, Muhammed Ghauri, Mykola Burynok, Nafis Abrar, Nazneen Rajani, Nour Elkott, Nour Fahmy, Olanrewaju Samuel, Ran An, Rasmus Kromann, Ryan Hao, Samira Alizadeh, Sarmad Shubber, Silas Wang, Sourav Roy, Sylvain Viguier, Thanh Le, Tobi Oyeade, Trieu Le, Yoyo Yang, Zach Nguyen, Abhinav Ramesh Kashyap, Alfredo Palasciano, Alison Callahan, Anima Shukla, Antonio Miranda-Escalada, Ayush Singh, Benjamin Beilharz, Bo Wang, Caio Brito, Chenxi Zhou, Chirag Jain, Chuxin Xu, Clémentine Fourier, Daniel León Perrián, Daniel Molano, Dian Yu, Enrique Manjavacas, Fabio Barth, Florian Fuhrmann, Gabriel Altay, Giyaseddin Bayrak, Gully Burns, Helena U. Vrabec, Imane Bello, Ishani Dash, Jihyun Kang, John Giorgi, Jonas Golde, Jose David Posada, Karthik Rangasai Sivaraman, Lokesh Bulchandani, Lu Liu, Luisa Shinzato, Madeleine Hahn de Bykhovetz, Maiko Takeuchi, Marc Pàmies, Maria A Castillo, Marianna Nezhurina, Mario Sängler, Matthias Samwald, Michael Cullan, Michael Weinberg, Michiel De Wolf, Mina Mihaljcic, Minna Liu, Moritz Freidank, Myungsun Kang, Natasha Seelam, Nathan Dahlberg, Nicholas Michio Broad, Nikolaus Muellner, Pascale Fung, Patrick Haller, Ramya Chandrasekhar, Renata Eisenberg, Robert Martin, Rodrigo Canalli, Rosaline Su, Ruisi Su, Samuel Cahyawijaya, Samuele Garda, Shlok S Deshmukh, Shubhanshu Mishra, Sid Kiblawi, Simon Ott, Sinee Sang-aaroonsiri, Srishti Kumar, Stefan Schweter, Sushil Bharati, Tanmay Laud, Théo Gigant, Tomoya Kainuma, Wojciech Kusa, Yanis Labrak, Yash Shailesh Bajaj, Yash Venkatraman, Yifan Xu, Yingxin Xu, Yu Xu, Zhe Tan, Zhongli Xie, Zifan Ye, Mathilde Bras, Younes Belkada, and Thomas Wolf. 2023. [Bloom: A 176b-parameter open-access multilingual language model](#).
- Rylan Schaeffer, Brando Miranda, and Sanmi Koyejo. 2023. [Are emergent abilities of large language models a mirage?](#)
- Timo Schick and Hinrich Schütze. 2021a. [Exploiting cloze-questions for few-shot text classification and natural language inference](#). In *Proceedings of the 16th Conference of the European Chapter of the Association for Computational Linguistics: Main Volume*, pages 255–269, Online. Association for Computational Linguistics.
- Timo Schick and Hinrich Schütze. 2021b. [It’s not just size that matters: Small language models are also few-shot learners](#). In *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 2339–2352, Online. Association for Computational Linguistics.
- Noam Shazeer, Azalia Mirhoseini, Krzysztof Maziarczyk, Andy Davis, Quoc Le, Geoffrey Hinton, and Jeff Dean. 2017. [Outrageously large neural networks: The sparsely-gated mixture-of-experts layer](#).
- Taylor Shin, Yasaman Razeghi, Robert L. Logan IV, Eric Wallace, and Sameer Singh. 2020. [AutoPrompt: Eliciting Knowledge from Language Models with Automatically Generated Prompts](#). In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 4222–4235, Online. Association for Computational Linguistics.
- Derek Tam, Rakesh R. Menon, Mohit Bansal, Shashank Srivastava, and Colin Raffel. 2021. [Improving and](#)

- simplifying pattern exploiting training. In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pages 4980–4991, Online and Punta Cana, Dominican Republic. Association for Computational Linguistics.
- Yi Tay, Mostafa Dehghani, Vinh Q. Tran, Xavier Garcia, Jason Wei, Xuezhi Wang, Hyung Won Chung, Siamak Shakeri, Dara Bahri, Tal Schuster, Huaixiu Steven Zheng, Denny Zhou, Neil Houlsby, and Donald Metzler. 2023. [UL2: Unifying language learning paradigms](#).
- Gemma Team, Thomas Mesnard, Cassidy Hardin, Robert Dadashi, Surya Bhupatiraju, Shreya Pathak, Laurent Sifre, Morgane Rivière, Mihir Sanjay Kale, Juliette Love, Pouya Tafti, Léonard Hussenot, Aakanksha Chowdhery, Adam Roberts, Aditya Barua, Alex Botev, Alex Castro-Ros, Ambrose Slone, Amélie Héliou, Andrea Tacchetti, Anna Bulanova, Antonia Paterson, Beth Tsai, Bobak Shahriari, Charline Le Lan, Christopher A. Choquette-Choo, Clément Crepy, Daniel Cer, Daphne Ippolito, David Reid, Elena Buchatskaya, Eric Ni, Eric Noland, Geng Yan, George Tucker, George-Christian Muraru, Grigory Rozhdestvenskiy, Henryk Michalewski, Ian Tenney, Ivan Grishchenko, Jacob Austin, James Keeling, Jane Labanowski, Jean-Baptiste Lespiau, Jeff Stanway, Jenny Brennan, Jeremy Chen, Johan Ferret, Justin Chiu, Justin Mao-Jones, Katherine Lee, Kathy Yu, Katie Millican, Lars Lowe Sjoesund, Lisa Lee, Lucas Dixon, Machel Reid, Maciej Mikula, Mateo Wirth, Michael Sharman, Nikolai Chinaev, Nithum Thain, Olivier Bachem, Oscar Chang, Oscar Wahltinez, Paige Bailey, Paul Michel, Petko Yotov, Pier Giuseppe Sessa, Rahma Chaabouni, Ramona Comanescu, Reena Jana, Rohan Anil, Ross McIlroy, Ruibo Liu, Ryan Mullins, Samuel L Smith, Sebastian Borgeaud, Sertan Girgin, Sholto Douglas, Shree Pandya, Siamak Shakeri, Soham De, Ted Klimenko, Tom Hennigan, Vlad Feinberg, Wojciech Stokowiec, Yu hui Chen, Zafarali Ahmed, Zhitao Gong, Tris Warkentin, Ludovic Peran, Minh Giang, Clément Farabet, Oriol Vinyals, Jeff Dean, Koray Kavukcuoglu, Demis Hassabis, Zoubin Ghahramani, Douglas Eck, Joelle Barral, Fernando Pereira, Eli Collins, Armand Joulin, Noah Fiedel, Evan Senter, Alek Andreev, and Kathleen Kenealy. 2024. [Gemma: Open models based on gemini research and technology](#).
- Romal Thoppilan, Daniel De Freitas, Jamie Hall, Noam Shazeer, Apoorv Kulshreshtha, Heng-Tze Cheng, Alicia Jin, Taylor Bos, Leslie Baker, Yu Du, YaGuang Li, Hongrae Lee, Huaixiu Steven Zheng, Amin Ghafouri, Marcelo Menegali, Yanping Huang, Maxim Krikun, Dmitry Lepikhin, James Qin, Dehao Chen, Yuanzhong Xu, Zhifeng Chen, Adam Roberts, Maarten Bosma, Vincent Zhao, Yanqi Zhou, Chung-Ching Chang, Igor Krivokon, Will Rusch, Marc Pickett, Pranesh Srinivasan, Laichee Man, Kathleen Meier-Hellstern, Meredith Ringel Morris, Tulsee Doshi, Renelito Delos Santos, Toju Duke, Johnny Soraker, Ben Zevenbergen, Vinodkumar Prabhakaran, Mark Diaz, Ben Hutchinson, Kristen Olson, Alejandra Molina, Erin Hoffman-John, Josh Lee, Lora Aroyo, Ravi Rajakumar, Alena Butryna, Matthew Lamm, Viktoriya Kuzmina, Joe Fenton, Aaron Cohen, Rachel Bernstein, Ray Kurzweil, Blaise Agüera-Arcas, Claire Cui, Marian Croak, Ed Chi, and Quoc Le. 2022. [Lamda: Language models for dialog applications](#).
- Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, Soumya Batra, Prajjwal Bhargava, Shruti Bhosale, Dan Bikel, Lukas Blecher, Cristian Canton Ferrer, Moya Chen, Guillem Cucurull, David Esiobu, Jude Fernandes, Jeremy Fu, Wenyin Fu, Brian Fuller, Cynthia Gao, Vedanuj Goswami, Naman Goyal, Anthony Hartshorn, Saghar Hosseini, Rui Hou, Hakan Inan, Marcin Kardas, Viktor Kerkez, Madian Khabsa, Isabel Kloumann, Artem Korenev, Punit Singh Koura, Marie-Anne Lachaux, Thibaut Lavril, Jenya Lee, Diana Liskovich, Yinghai Lu, Yuning Mao, Xavier Martinet, Todor Mihaylov, Pushkar Mishra, Igor Molybog, Yixin Nie, Andrew Poulton, Jeremy Reizenstein, Rashi Rungta, Kalyan Saladi, Alan Schelten, Ruan Silva, Eric Michael Smith, Ranjan Subramanian, Xiaoqing Ellen Tan, Binh Tang, Ross Taylor, Adina Williams, Jian Xiang Kuan, Puxin Xu, Zheng Yan, Iliyan Zarov, Yuchen Zhang, Angela Fan, Melanie Kambadur, Sharan Narang, Aurelien Rodriguez, Robert Stojnic, Sergey Edunov, and Thomas Scialom. 2023. [Llama 2: Open foundation and fine-tuned chat models](#).
- Lewis Tunstall, Nils Reimers, Unso Eun Seo Jo, Luke Bates, Daniel Korat, Moshe Wasserblat, and Oren Pereg. 2022. [Efficient few-shot learning without prompts](#).
- Yizhong Wang, Swaroop Mishra, Pegah Alipoormolabashi, Yeganeh Kordi, Amirreza Mirzaei, Atharva Naik, Arjun Ashok, Arut Selvan Dhanasekaran, Anjana Arunkumar, David Stap, Eshaan Pathak, Giannis Karamanolakis, Haizhi Lai, Ishan Purohit, Ishani Mondal, Jacob Anderson, Kirby Kuznia, Krima Doshi, Kuntal Kumar Pal, Maitreya Patel, Mehrad Moradshahi, Mihir Parmar, Mirali Purohit, Neeraj Varshney, Phani Rohitha Kaza, Pulkit Verma, Ravsehaj Singh Puri, Rushang Karia, Savan Doshi, Shailaja Keyur Sampat, Siddhartha Mishra, Sujan Reddy A, Sumanta Patro, Tanay Dixit, and Xudong Shen. 2022. [Super-NaturalInstructions: Generalization via declarative instructions on 1600+ NLP tasks](#). In *Proceedings of the 2022 Conference on Empirical Methods in Natural Language Processing*, pages 5085–5109, Abu Dhabi, United Arab Emirates. Association for Computational Linguistics.
- Jason Wei, Maarten Bosma, Vincent Y. Zhao, Kelvin Guu, Adams Wei Yu, Brian Lester, Nan Du, Andrew M. Dai, and Quoc V. Le. 2022a. [Finetuned language models are zero-shot learners](#).
- Jason Wei, Yi Tay, Rishi Bommasani, Colin Raffel, Barret Zoph, Sebastian Borgeaud, Dani Yogatama, Maarten Bosma, Denny Zhou, Donald Metzler, Ed H.

Chi, Tatsunori Hashimoto, Oriol Vinyals, Percy Liang, Jeff Dean, and William Fedus. 2022b. [Emergent abilities of large language models](#).

Qinyuan Ye, Bill Yuchen Lin, and Xiang Ren. 2021. [CrossFit: A few-shot learning challenge for cross-task generalization in NLP](#). In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pages 7163–7189, Online and Punta Cana, Dominican Republic. Association for Computational Linguistics.

Xiang Zhang, Senyu Li, Bradley Hauer, Ning Shi, and Grzegorz Kondrak. 2023. [Don't trust ChatGPT when your question is not in English: A study of multilingual abilities and types of LLMs](#). In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, pages 7915–7927, Singapore. Association for Computational Linguistics.

Jun Zhao, Zhihao Zhang, Luhui Gao, Qi Zhang, Tao Gui, and Xuanjing Huang. 2024. [Llama beyond english: An empirical study on language capability transfer](#).

Yanan Zheng, Jing Zhou, Yujie Qian, Ming Ding, Chonghua Liao, Li Jian, Ruslan Salakhutdinov, Jie Tang, Sebastian Ruder, and Zhilin Yang. 2022. [FewNLU: Benchmarking state-of-the-art methods for few-shot natural language understanding](#). In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 501–516, Dublin, Ireland. Association for Computational Linguistics.

Yongchao Zhou, Andrei Ioan Muresanu, Ziwen Han, Keiran Paster, Silviu Pitis, Harris Chan, and Jimmy Ba. 2023. [Large language models are human-level prompt engineers](#). In *The Eleventh International Conference on Learning Representations*.

Wenhao Zhu, Yunzhe Lv, Qingxiu Dong, Fei Yuan, Jingjing Xu, Shujian Huang, Lingpeng Kong, Jiajun Chen, and Lei Li. 2023. [Extrapolating large language models to non-english by aligning languages](#).

A Table with the results from all experiments

This table presents collected in one place results from all experiments mentioned in the paper. Results for baseline HerBERT-large in red color denotes results reported on KLEJ benchmark (and they are strongly differ with our experiments). For ICL zero-shot experiments subscript indicates a fraction of the test set with invalid predictions. For experiments with "±" in subscript, we use subscript to denote standard deviation.

	PAC	Polemo2	CBD	NKJP-NER	DYK	CDSC-E	CST-Wiknews
Baselines							
XGBoost	56.4 ± 16.7	38.5 ± 3.4	19.7 ± 6.0	20.9 ± 4.7	22.6 ± 5.1	57.5 ± 10.4	11.4 ± 1.5
Random Guessing	57.5 ± 0.7	24.8 ± 1.0	20.9 ± 1.6	16.8 ± 0.8	25.5 ± 1.7	33.6 ± 0.7	6.9 ± 0.9
Constant Classifier	80.6	41.3	23.6	34.3	28.9	74.4	16.9
HerBERT-large	91.1 ± 0.0	90.9 ± 0.0	53.2 ± 3.2 (72.0)	94.0 ± 0.0	68.8 ± 2.1 (75.8)	93.4 ± 0.0	67.9 ± 1.0
Linear probing							
SBERT-large	67.5 ± 7.0	60.3 ± 4.6	40.1 ± 4.3	30.4 ± 5.9	27.2 ± 1.8	62.8 ± 5.8	15.3 ± 3.0
HerBERT-large	72.6 ± 10.3	47.0 ± 3.1	33.8 ± 10.1	27.8 ± 3.3	34.6 ± 2.8	71.0 ± 6.1	14.2 ± 2.7
RoBERTa-large	67.8 ± 11.3	57.9 ± 4.4	37.4 ± 6.1	27.6 ± 3.9	25.1 ± 3.0	59.2 ± 7.5	14.5 ± 2.7
GPT-2-large	72.0 ± 2.9	48.3 ± 4.6	36.4 ± 4.1	25.2 ± 4.3	28.6 ± 3.1	54.4 ± 7.5	13.6 ± 3.0
Llama-2-70b*	67.6 ± 12.5	41.4 ± 2.9	28.4 ± 2.5	24.2 ± 2.0	30.7 ± 3.0	61.1 ± 6.1	13.5 ± 4.2
Ada	72.9 ± 6.3	55.2 ± 5.0	30.7 ± 4.2	29.1 ± 2.5	25.4 ± 4.1	58.2 ± 11.7	14.8 ± 3.9
DaVinci	67.6 ± 7.0	58.9 ± 1.3	36.9 ± 9.7	30.1 ± 6.6	29.9 ± 2.7	60.1 ± 11.2	15.5 ± 3.5
Gecko	61.8 ± 4.5	42.9 ± 6.4	23.7 ± 1.3	24.8 ± 4.3	25.0 ± 3.8	68.8 ± 6.3	17.0 ± 2.8
Gecko multilingual	72.2 ± 5.6	60.8 ± 2.6	41.0 ± 3.3	28.4 ± 2.8	27.4 ± 2.3	62.1 ± 12.6	16.2 ± 5.7
Fine-tuning with non-linear head							
SBERT-large	33.6 ± 31.3	47.0 ± 5.8	32.0 ± 30.7	28.1 ± 7.7	6.4 ± 10.3	61.0 ± 17.6	10.1 ± 4.3
HerBERT-large	26.7 ± 23.4	29.5 ± 9.7	30.8 ± 36.6	25.2 ± 3.8	16.2 ± 29.7	44.4 ± 26.7	8.7 ± 3.7
RoBERTa-large	6.2 ± 11.5	36.4 ± 4.3	15.3 ± 10.5	21.3 ± 6.1	27.2 ± 0.4	54.5 ± 26.0	8.7 ± 2.8
SetFit							
SBERT-large	68.8 ± 6.5	69.9 ± 10.7	44.4 ± 5.4	30.7 ± 6.5	27.7 ± 2.9	72.3 ± 5.7	16.2 ± 3.2
HerBERT-large	70.7 ± 11.9	46.0 ± 11.2	42.5 ± 10.9	25.8 ± 11.6	40.6 ± 4.7	67.2 ± 14.5	15.7 ± 1.9
In-context learning							
/ICL _{n=0} / GPT-4	83.3 ₀	82.6 ₀₀₉	60.6 ₀₂₈	58.8 ₀₀₄	81.3 ₀₀₂	76.0 ₀	18.8 ₀₀₃
/ICL _{n=0} / GPT-3.5	82.2 ₀₁₄	81.6 ₀₀₅	50.0 ₀₄₆	44.9 ₀₀₁	53.1 ₀	62.9 ₀	13.3 ₀₀₃
/ICL _{n=16} / GPT-3.5	73.9 ± 3.6	81.9 ± 2.1	64.1 ± 1.9	46.1 ± 2.9	64.1 ± 1.8	66.7 ± 7.6	19.8 ± 2.7
/ICL _{n=0} / Bison-text	80.2 ₀₀₆	80.7 ₀₀₉	42.6 ₀₇₇	47.5 ₀₂₇	61.6 ₀₁₆	35.0 ₀₀₁	17.7 ₀₀₃
/ICL _{n=16} / Bison-text	80.2 ₀₀₆	80.7 ₀₀₉	42.6 ₀₇₇	47.5 ₀₂₇	61.6 ₀₁₆	35.0 ₀₀₁	17.7 ₀₀₃
/ICL _{n=0} / Llama-2-7b	34.6 ₆₅₉	12.3 ₃₇₉	0.5 ₇₄₄	14.0 ₃₁₀	27.5 ₀₁₄	6.6 ₀	3.9 ₄₀₉
/ICL _{n=16} / Llama-2-7b	52.8 ± 13.7	0.0 ± 0.0	20.5 ± 2.5	11.8 ± 8.3	31.9 ± 1.9	26.2 ± 28.0	2.1 ± 0.0
/ICL _{n=0} / Llama-2-13b	37.1 ₆₀₆	8.9 ₅₄	1.0 ₆₈₆	13.2 ₂₂₅	17.2 ₁₃₆	6.6 ₀₀₃	4.7 ₀₃₆
/ICL _{n=16} / Llama-2-13b	38.9 ± 24.5	0.0 ± 0.0	15.1 ± 6.5	0.7 ± 0.5	38.1 ± 4.3	34.4 ± 24.0	2.1 ± 0.0
/ICL _{n=0} / Llama-2-70b	41.8 ₅₇₆	11.3 ₆₇₈	0.3 ₆₆₂	21.4 ₃₂₄	19.2 ₀₅₅	6.6 ₀	1.6 ₈₅₉
/ICL _{n=16} / Llama-2-70b	58.9 ± 9.1	0.0 ± 0.0	20.7 ± 8.6	21.5 ± 10.0	40.7 ± 20.1	6.6 ± 0.0	3.3 ± 1.2
/ICL _{n=0} / Llama-2-7b-chat	69.6 ₁₄₆	46.7 ₃₀₆	7.9 ₆₀₁	11.4 ₂₇₆	29.1 ₀	8.9 ₇₈₉	4.7 ₃₈₈
/ICL _{n=16} / Llama-2-7b-chat	30.8 ± 38.2	0.0 ± 0.0	0.4 ± 1.0	1.3 ± 2.7	12.7 ± 9.8	0.0 ± 0.0	0.0 ± 0.0
/ICL _{n=0} / Llama-2-13b-chat	56.1 ₀₆₉	62.7 ₀₄₈	10.1 ₅₀₈	4.6 ₇₈₅	37.3 ₀₂₄	63.1 ₀₂₉	1.8 ₇₉₇
/ICL _{n=16} / Llama-2-13b-chat	47.8 ± 41.7	0.0 ± 0.0	0.2 ± 0.4	3.9 ± 7.7	20.0 ± 8.8	12.1 ± 18.9	1.1 ± 2.4
/ICL _{n=0} / Llama-2-70b-chat	73.4 ₀₉₀	79.8 ₀₀₂	30.8 ₁₂₂	37.3 ₀₈₇	28.9 ₀	19.8 ₀	17.2 ₀₁₆
/ICL _{n=16} / Llama-2-70b-chat	38.4 ± 28.6	0.0 ± 0.0	10.2 ± 6.4	16.7 ± 13.0	0.0 ± 0.0	5.8 ± 1.9	11.5 ± 4.0
/ICL _{n=0} / Trurl-2-13b	74.1 ₀₆₄	79.5 ₀₀₁	50.0 ₀₀₁	33.6 ₀₃₈	49.7 ₀₁₅	50.2 ₀₀₁	14.6 ₀₈₃
/ICL _{n=16} / Trurl-2-13b	66.7 ± 12.0	0.0 ± 0.0	12.1 ± 6.6	15.9 ± 11.3	30.8 ± 1.4	26.1 ± 21.8	6.3 ± 3.2
/ICL _{n=0} / Krakowiak-7b-v2	80.6 ₀₀₁	65.0 ₀₁₈	23.6 ₀	16.7 ₀₂₄	41.4 ₀₀₂	74.4 ₀	6.0 ₀₃₄
/ICL _{n=16} / Krakowiak-7b-v2	57.9 ± 22.5	14.4 ± 18.5	0.0 ± 0.0	13.8 ± 1.0	28.9 ± 0.1	38.0 ± 24.5	4.8 ± 4.7
/ICL _{n=0} / Bielik-7b-instruct	78.1 ₀₃₄	77.3 ₀	53.9 ₀	31.0 ₀₁	49.0 ₀₀₁	65.3 ₀	6.0 ₀₂₃
/ICL _{n=16} / Bielik-7b-instruct	76.1 ± 4.7	0.0 ± 0.0	23.7 ± 0.1	23.2 ± 2.2	38.3 ± 3.8	55.0 ± 10.7	5.4 ± 1.3
/ICL _{n=0} / Mistral-7b-instruct	78.8 ₀₃₆	70.0 ₀₄₃	40.2 ₀₀₁	36.8 ₀₅₄	52.7 ₀₀₁	65.2 ₀	11.7 ₀₇₈

Continue of previous page table							
	PAC	Polemo2	CBD	NKJP-NER	DYK	CDSC-E	CST-Wiknews
/ICL _{n=16} / Mistral-7b-instruct	48.8 $\pm$ 6.8	73.5 $\pm$ 6.1	34.4 $\pm$ 8.6	28.2 $\pm$ 1.8	45.1 $\pm$ 1.6	77.6 $\pm$ 6.5	17.9 $\pm$ 2.4
/ICL _{n=0} / GPT-2-xl	27.0 _{.619}	5.1 _{.827}	2.9 _{.794}	13.3 _{.513}	18.9 _{.3}	29.1 _{.519}	0.0 _{.992}
/ICL _{n=16} / GPT-2-xl	24.8 $\pm$ 24.7	0.0 $\pm$ 0.0	0.0 $\pm$ 0.0	14.0 $\pm$ 11.2	16.9 $\pm$ 1.8	74.0 $\pm$ 0.5	5.2 $\pm$ 5.7

B Datasets

Table 8 describes the source names of datasets as cataloged within the HuggingFace datasets repository.

Abbrev.	HuggingFace name
PAC	allegro/abusive-clauses-pl
DYK	allegro/klej-dyk
CDSC-E	allegro/klej-cdsc-e
Polemo2	clarin-pl/polemo2-official
CBD	allegro/klej-cbd
NKJP-NER	allegro/klej-nkjp-ner
CST-Wikinews	clarin-pl/cst-wikinews

Table 8: Abbreviation and name of the HuggingFace equivalent used in this paper.

C Hyper-parameter tuning

For each task and random seed, we search for the best hyperparameters using Optuna with Tree-structured Parzen Estimator (TPE). We set up 100 total trials and 25 warmup trials. The exception was linear probing with logistic regression where we set 20 trials and 5 warmups. We chose the macro-F1 score as the target metric for each task. A list of hyperparameters can be found in Table 9. For fine-tuning with non-linear head, we used a fixed batch size of 8 and a single Nvidia V100 GPU. For SetFit we used a single Nvidia A100 80GB GPU.

Method	Optuna
XGBoost	si("n_estimators", 50, 1000, 50) si("max_depth", 4, 15, 1) su("subsample", 0.5, 1.0) sl("learning_rate", 1.0e-07, 1.0) si("vocab_size", 10, 1000, 50)
Logistic regression	sc("solver", ["lbfgs", "liblinear", "newton-cg"]) sf("C", 1e-05, 100)
SetFit	sf("learning_rate", 1e-6, 1e-3, log=True) si("num_epochs", 1, 5) sc("batch_size", [4, 8, 16, 32]) sc("num_iterations", [5, 10, 20])
LoRA	si("lora_alpha", 8, 16, 4) si("r", 8, 16, 4) su("lora_dropout", 0.0, 0.5)
Fine-tuning with non-linear head	sc("lr", [1e-06, 5e-06, 1e-05, 5e-05, 1e-04, 5e-04, 1e-03, 3e-03]) sc("weight_decay", [0.0, 1e-04, 1e-03, 1e-02, 1e-01]) sc("classifier_dropout", [0.0, 0.1, 0.2, 0.3, 0.4, 0.5]) sc("max_epochs", [2, 5, 10, 20, 50, 70, 100]) sc("eps", [1e-08, 1e-07, 1e-06, 1e-05, 1e-04])

Table 9: List of hyperparameters for each training method using Optuna Python notation. We use short-hand notation: suggest_int (si), suggest_uniform (su), suggest_loguniform (sl), suggest_categorical (sc), suggest_float (sf).

D Pretrained models

Table 10 summarizes the model naming convention we used in the paper and their corresponding versions and providers. Commercial models from Google and Microsoft were accessed via API.

Model	Version	Provider	Language	Context
SBERT-large	Voicelab/sbert-large-cased-pl	HF	PL	512
HerBERT-large	allegro/herbert-large-cased	HF	PL	512
RoBERTa-large	sdadas/polish-roberta-large-v2	HF	PL	512
GPT-2-xl	sdadas/polish-gpt2-xl	HF	PL	1536
Krakowiak-v2-7b	szymonrucinski/krakowiak-v2-7b	HF	PL	32768
Trurl-13b	Voicelab/trurl-2-13b	HF	PL	4096
Mistral-7b-instruct	mistralai/Mistral-7B-Instruct-v0.2	HF	EN	32768
Bielik-7b-instruct	speakleash/Bielik-7B-Instruct-v0.1	HF	PL	4096
Llama-2-7b	Llama 2 7b	Meta	EN	4096
Llama-2-13b	Llama 2 13b	Meta	EN	4096
Llama-2-70b	Llama 2 70b	Meta	EN	4096
Llama-2-7b-chat	Llama 2 7b-chat	Meta	EN	4096
Llama-2-13b-chat	Llama 2 13b-chat	Meta	EN	4096
Llama-2-70b-chat	Llama 2 70b-chat	Meta	EN	4096
Ada	text-embedding-ada-002	MS Azure	EN	8191
DaVinci	text-search-davinci-doc-001	MS Azure	EN	-
GPT-3.5	gpt-35-turbo (version=0301)	MS Azure	Unknown	18384
GPT-4	gpt-4 (version=0613)	MS Azure	Unknown	8192
Gecko	textembedding-gecko@001	Google	EN	-
Gecko Multilingual	textembedding-gecko-multilingual@001	Google	Multi	-
Bison-text	text-bison@001	Google	Unknown	8192
Not covered in the paper				
Trurl-7b	Voicelab/trurl-2-7b	HF	PL	4096
Krakowiak-7b	szymonrucinski/krakowiak-7b	HF	PL	2048
mT0-{small,base, large,xl,xll}	bigscience/mt0-{x}	HF	Multi	∞
XGLM-{564M,1.7B, 2.9B,4.5B,7.5B}	facebook/xglm-{x}	HF	Multi	2048
Gemma-{2b,7b}-it	google/gemma-{x}-it	HF	EN	8192
OpenChat	openchat/openchat-3.5-0106	HF	EN	8192
Mixtral	mistralai/Mixtral-8x7B-Instruct-v0.1	HF	EN,FR,IT,ES,DE	32768
Starling	berkeley-nest/Starling-LM-7B-alpha	HF	EN	8192
DBRX	databricks/dbrx-instruct	HF	EN	32768
Text-DaVinci	text-davinci-003	MS Azure	EN	-
Bison-chat	chat-bison@001	Google	Unknown	8192

Table 10: Information on pre-trained models used in the paper or left for future exploration. The penultimate column indicates which language was used for final fine-tuning. We are not sure how commercial models were pre-trained so we left *Unknown* indicator. Abbreviations: HF - HuggingFace, MS - Microsoft.

E In-context learning

Each LLM under evaluation was configured to operate deterministically with parameters set to temperature=0 and max_tokens=20, while other parameters remained at their default values. Access to GPT-3.5 predictions was facilitated through the guidance⁶ library, and PaLM 2 predictions were obtained via the Vertex AI API⁷. The official repository llama⁸ was utilized for interfacing with Llama-2, which had its context length parameter fixed at 4096 tokens. In comparison, GPT-3.5 and Bison-text were configured with context lengths of 16,384⁹ and 8,192¹⁰ tokens, respectively. Inference for other open-source models was conducted using the vLLM library (Kwon et al., 2023).

Regarding computational resources, the Llama-2-7B model execution was supported by a single A100 40GB GPU. The Llama-2-13B model required 4 L4 GPUs, whereas the Llama-2-70B model utilized 8 L4 GPUs, demonstrating the scalable nature of the hardware deployment in correspondence with the increasing model size and computational demands.

⁶<https://github.com/guidance-ai/guidance/tree/0.0.64>

⁷<https://github.com/googleapis/python-aiplatform/tree/v1.29.0>

⁸<https://github.com/facebookresearch/llama>

⁹<https://platform.openai.com/docs/models/gpt-3-5>

¹⁰<https://cloud.google.com/vertex-ai/docs/generative-ai/learn/models>

F Sample prompts

In the following, we illustrate a sample few-shot ($n = 2$) prompt utilized for the NKJP-NER task, employing models such as GPT-4/GPT-3.5, Llama-chat, and Mistral-instruct. Each model employs special characters to delineate roles within the prompt. The Krakowiak-v2 and Trurl are based on Mistral and Llama respectively.

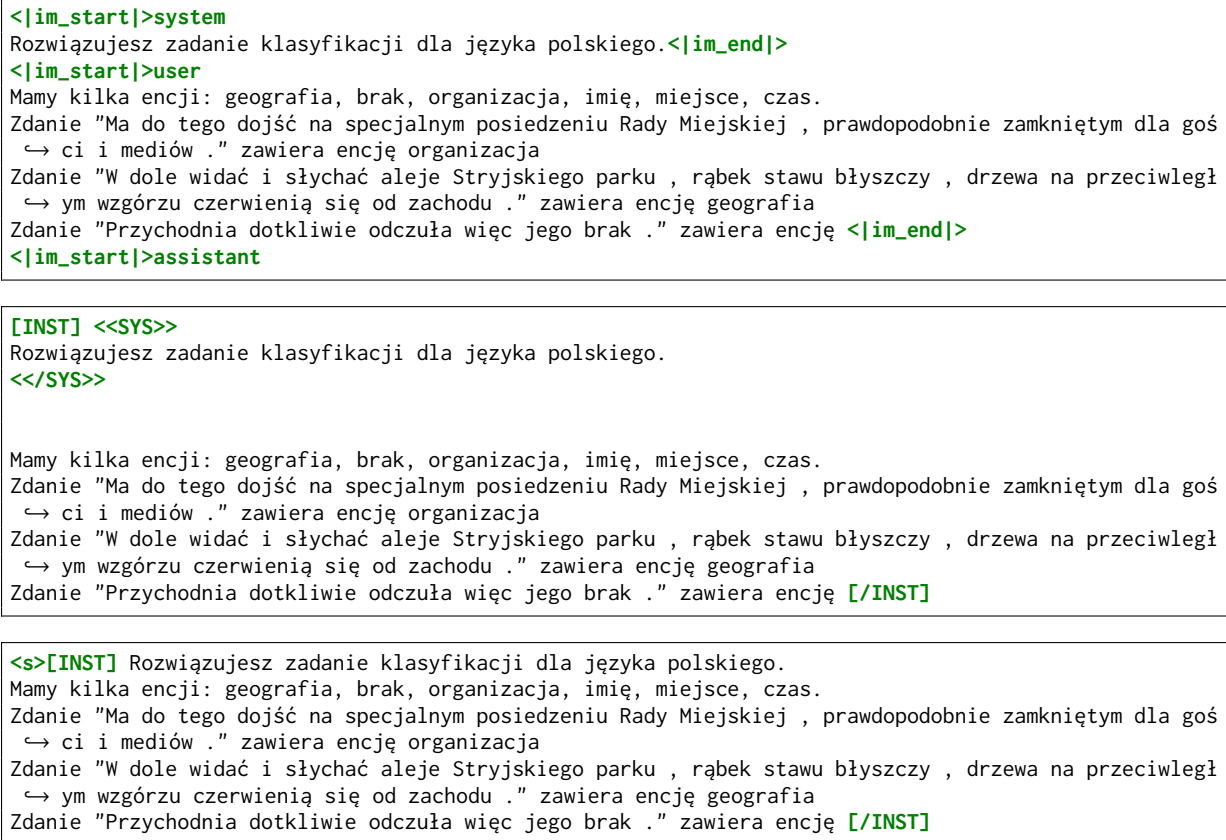


Figure 6: Sample prompt with two examples for the GPT-4/GPT-3.5 models (top), Llama-2-chat (middle) and Mistral-instruct (bottom).

G AI assistant

We used the GPT-4 model from OpenAI to improve the language quality of this manuscript.

H Prompt templates

H.1 PAC

```
f535ad28-8896-43a3-aa4c-f41c296848de:
  instruction: 'Czy następująca klauzula jest uczciwa?'
  demonstration: '{text} Ocena: {labels}'
  label_mapping:
    0: Nie
    1: Tak

a68bdcea-0c7f-42a8-8987-4d7114b43658:
  instruction: ''
  demonstration: '{text}. Fragment tekstu jest {labels}'
  label_mapping:
    0: klauzulą abuzywną
    1: bezpiecznym postanowieniem umowy

e3fb857a-7bd9-4268-8915-c7f494374ca6:
  instruction: ''
```

```
demonstration: 'Klauzula: {text} Ocena: {labels}'
label_mapping:
  0: niedozwolona
  1: dozwolona

35a1ac4a-c0a9-4138-ab0d-cd759cdc805f:
instruction: 'Oceń czy następujący zapis jest uczciwy lub nieuczciwy.'
demonstration: '{text} => {labels}'
label_mapping:
  0: nieuczciwy
  1: uczciwy

735df98d-2732-4d82-9b49-39de04a435e8:
instruction: 'Do jakiej klasy przypisałbyś następującą klauzulę?'

Klasy:

- uczciwa

- nieuczciwa'
demonstration: '{text} => {labels}'
label_mapping:
  0: nieuczciwa
  1: uczciwa

5d80ad77-791b-4acc-9676-84d2d3d94966:
instruction: 'Klauzule abuzywne to postanowienia w umowach konsumenckich, które nie są
uzgodnione indywidualnie z klientem. Czy fragment jest klauzulą abuzywną?'
demonstration: '{text} => {labels}'
label_mapping:
  0: Tak
  1: Nie

e9ef6dcc-e21e-4efd-827e-d7cd35a97ce4:
instruction: 'Klauzule abuzywne to postanowienia w umowach konsumenckich, które nie są
uzgodnione indywidualnie z klientem. Czy fragment jest klauzulą abuzywną? Tak lub
Nie?'
demonstration: '{text} => {labels}'
label_mapping:
  0: Tak
  1: Nie

39855489-6f18-49f3-92a8-1cdcccf0cc67:
instruction: 'Wybierz czy klauzula jest "uczciwa" lub "nieuczciwa"'
demonstration: '{text} => {labels}'
label_mapping:
  0: nieuczciwa
  1: uczciwa

ceb5e55e-cb6f-47ab-b4f0-059192837c26:
instruction: ''
demonstration: 'Następujący zapis {text} w umowie konsumenckiej jest {labels}'
label_mapping:
  0: nieuczciwy
  1: uczciwy

3ad789e3-6a21-4db9-8fba-c051c37cf449:
instruction: 'Dokończ zdanie: "Następujący zapis w umowie konsumenckiej jest".'
demonstration: 'Zapis: {text} {labels}'
label_mapping:
  0: nieuczciwy
  1: uczciwy

871270fa-33aa-4677-b6ce-1869632a694c:
instruction: 'Dokończ zdanie.'
demonstration: 'Zapis {text} to {labels}'
label_mapping:
  0: klauzula abuzywna
  1: bezpieczne postanowienie umowne
```

```
df724698-89eb-4634-8d62-a04406b8da26:
  instruction: 'Czy tekst jest bezpiecznym postanowieniem umowy?'
  demonstration: '{text} => {labels}'
  label_mapping:
    0: Nie
    1: Tak

559e1bca-12e4-4d42-a305-60de9010cefc:
  instruction: 'Czy tekst jest bezpiecznym postanowieniem umowy? Tak lub Nie?'
  demonstration: '{text} => {labels}'
  label_mapping:
    0: Nie
    1: Tak
```

H.2 DYK

```
8102fdda-4584-4f50-8eab-ca7e6904c70e:
  instruction: ''
  demonstration: 'Pytanie: {sentence_1} Odpowiedź: {sentence_2} Czy to prawda? {labels}'
  label_mapping:
    0: Nie
    1: Tak

37294e9a-d241-4f37-b680-df58dc625ee8:
  instruction: ''
  demonstration: 'Pytanie: {sentence_1} Odpowiedź: {sentence_2} Poprawny: {labels}'
  label_mapping:
    0: Nie
    1: Tak

5cc8dd02-287a-422b-8c1c-9583fcb5af1b:
  instruction: 'Oceń czy sugerowana odpowiedź pasuje do postawionego pytania.'
  demonstration: 'Pytanie: {sentence_1} Odpowiedź: {sentence_2} Ocena: {labels}'
  label_mapping:
    0: Nie
    1: Tak

1e8316a2-4611-40dd-9877-25c09bb4f895:
  instruction: 'Oceń czy sugerowana odpowiedź pasuje do postawionego pytania.'
  demonstration: 'Pytanie: {sentence_1} Odpowiedź: {sentence_2} Ocena: {labels}'
  label_mapping:
    0: nie pasuje
    1: pasuje

0030485b-d576-4533-aa04-8840744e13c2:
  instruction: 'Oceń czy sugerowana odpowiedź pasuje do postawionego pytania.'
  demonstration: 'Pytanie: {sentence_1} Odpowiedź: {sentence_2} Ocena: {labels}'
  label_mapping:
    0: '0'
    1: '1'

ddee4860-8329-40e5-af83-7972e17e6715:
  instruction: ''
  demonstration: 'Czy tekst: {sentence_2} odpowiada na pytanie: {sentence_1}.
    Tak lub Nie? {labels}'
  label_mapping:
    0: Nie
    1: Tak

05838165-f7b0-44bf-876d-4b3431c11dfc:
  instruction: 'Czy sugerowana odpowiedź poprawnie odpowiada na pytanie? Tak lub Nie?'
  demonstration: 'Pytanie: {sentence_1} Odpowiedź: {sentence_2} {labels}'
  label_mapping:
    0: Nie
    1: Tak

f52e97a6-546f-4f72-b026-d6ccff0fd857:
  instruction: 'Zadanie polega na przypisaniu jednej z dwóch etykiet "Tak" lub "Nie"
    do pary pytanie, odpowiedź.'
  demonstration: 'Pytanie: {sentence_1} Odpowiedź: {sentence_2} {labels}'
  label_mapping:
    0: Nie
    1: Tak
```

489d39ba-d7a6-4c3f-9529-caba81bea564:

instruction: 'Mając pytanie oceń czy odpowiedź jest "prawdziwa" lub "fałszywa".'

demonstration: 'Pytanie: {sentence_1} Odpowiedź: {sentence_2} {labels}'

label_mapping:

0: fałszywa

1: prawdziwa

d78aafd2-848c-45a5-b227-09b4f0f2c000:

instruction: 'Proszę przeczytać poniższe pytanie oraz odpowiedź i zdecydować, czy podana odpowiedź jest prawdziwa (P) czy fałszywa (F).'

demonstration: 'Pytanie: {sentence_1} Odpowiedź: {sentence_2} {labels}'

label_mapping:

0: F

1: P

723df916-959c-4765-936f-684f9186e161:

instruction: 'Proszę przeczytać poniższe pytanie oraz odpowiedź i zdecydować, czy podana odpowiedź jest prawdziwa (P) czy fałszywa (F).'

demonstration: 'Pytanie: {sentence_1} Odpowiedź: {sentence_2} {labels}'

label_mapping:

0: fałszywa

1: prawdziwa

b3626557-c0d0-48b9-bdd0-21cb6ebc1205:

instruction: 'Przeanalizuj krok po kroku czy podany tekst jest poprawną odpowiedzią na pytanie. Na końcu zwróć "tak" lub "nie".'

demonstration: 'Pytanie: {sentence_1} Tekst: {sentence_2} {labels}'

label_mapping:

0: Nie

1: Tak

4c7c5c30-61eb-49ff-89a1-8faa8e2c4c20:

instruction: ''

demonstration: 'Czy następujący kawałek tekstu: {sentence_2} zawiera w sobie odpowiedź na pytanie: {sentence_1}? Tak lub Nie? {labels}'

label_mapping:

0: Nie

1: Tak

a963d2e0-fce6-4d06-ad38-e28f176bc688:

instruction: ''

demonstration: 'Jeśli {sentence_1} jest pytaniem to czy {sentence_2} jest pasującą odpowiedzią? {labels}'

label_mapping:

0: Nie

1: Tak

H.3 CDSC-E

063792d7-e23f-4111-a64d-b8b59057ed80:

instruction: ''

demonstration: 'Zdanie "{sentence_1}" odnosi się do zdania "{sentence_2}" jako {labels}'

label_mapping:

0: sprzeczne

1: zgodne

2: neutralne

7a650332-ec38-4811-8401-5889df51c80f:

instruction: ''

demonstration: 'Relacja "{sentence_1}" do zdania "{sentence_2}" jest {labels}'

label_mapping:

0: sprzeczna

1: zgodna

2: neutralna

05e4cd72-59a1-44fd-9d33-2a655aacc56f:

instruction: 'Która etykieta opisuje relację między zdaniami.

Etykiety:

- neutralna

```

- zgodna

- sprzeczna'
demonstration: 'Zdania: {sentence_1}; {sentence_2} Etykieta: {labels}'
label_mapping:
  0: sprzeczna
  1: zgodna
  2: neutralna

7c5cd177-5e97-4efc-805f-86d0b5e1e6f0:
instruction: 'Czy pierwsze zdanie pociąga za sobą drugie zdanie? Tak, Nie lub Może?'
demonstration: 'Zdanie1: {sentence_1}

Zdanie2: {sentence_2}

{labels}'
label_mapping:
  0: Nie
  1: Tak
  2: Może

a97257d8-db60-4fbe-bdc9-c198fea17706:
instruction: ''
demonstration: 'Załóżmy, że {sentence_1}. Czy możemy wywnioskować iż {sentence_2}? Tak,
Nie lub Może? {labels}'
label_mapping:
  0: Nie
  1: Tak
  2: Może

5d6b1071-9e49-422a-b649-6e04ef6dae65:
instruction: ''
demonstration: '{sentence_1}. Czy można powiedzieć że {sentence_2}? Tak, Nie lub Może?
{labels}'
label_mapping:
  0: Nie
  1: Tak
  2: Może

6ffe622f-cef2-4798-ae3e-dbfdabb0d384:
instruction: 'Mając kontekst odpowiedz na pytanie zdanie to prawda, fałsz lub żadne.'
demonstration: 'Kontekst: {sentence_1}

Zdanie: {sentence_2}

Odpowiedź: {labels}'
label_mapping:
  0: Fałsz
  1: Prawda
  2: Żadne

f397d997-4f5f-4e08-8ce4-356f9905ea4d:
instruction: 'Logiczne wynikanie.'
demonstration: 'Zdanie1: {sentence_1}

Zdanie2: {sentence_2}

{labels}'
label_mapping:
  0: sprzeczne
  1: zgodne
  2: neutralne

```

H.4 Polemo2

```

5882074e-1e5c-479e-b138-abdeab4e4996:
instruction: ''
demonstration: 'Recenzja {text} jest {labels}'
label_mapping:
  0: neutralna

```

- 1: negatywna
- 2: pozytywna
- 3: niejednoznaczna

18d75cc9-c3c0-462e-a4c5-d35bee7e810b:

```
instruction: ''
demonstration: 'Tekst {text} ma sentyment {labels}'
label_mapping:
  0: neutralny
  1: negatywny
  2: pozytywny
  3: niejednoznaczny
```

a034ba19-d751-4b02-a0a2-f98e4a9d43d7:

```
instruction: 'Oceń sentyment tego tekstu, używając jednej z czterech etykiet:
pozytywny, negatywny, neutralny, ambiwalentny.'
demonstration: 'Tekst do oceny: {text} Ocena: {labels}'
label_mapping:
  0: neutralny
  1: negatywny
  2: pozytywny
  3: ambiwalentny
```

18576914-803b-4c87-812c-240a59596e37:

```
instruction: 'Czy wydzwięk następującego tekstu jest pozytywny, negatywny, neutralny,
ambiwalentny?'
demonstration: '{text} => {labels}'
label_mapping:
  0: neutralny
  1: negatywny
  2: pozytywny
  3: ambiwalentny
```

bc7b3799-4e1d-4375-a6c0-5d0e52be5750:

```
instruction: 'Która z etykiet najlepiej określa sentyment tekstu?
```

Etykiety:

- neutralny

- negatywny

- pozytywny

- ambiwalentny'

```
demonstration: 'Tekst: {text} Etykieta: {labels}'
```

```
label_mapping:
  0: neutralny
  1: negatywny
  2: pozytywny
  3: ambiwalentny
```

80c3a8cc-fe0b-441f-bd1f-abdcfc48d870:

```
instruction: 'Czy to zdanie było neutralne, pozytywne, negatywne lub ambiwalentne?'
demonstration: '{text}
```

Odpowiedź: {labels}'

```
label_mapping:
  0: neutralne
  1: negatywne
  2: pozytywne
  3: ambiwalentne
```

c49953e5-f4cf-4a86-a6c2-65d85db7f478:

```
instruction: 'Mając opinię stwierdź czy jest ona neutralna, negatywna, pozytywna lub ambiwalentna?'
demonstration: 'Opinia: "{text}"
```

{labels}'

```
label_mapping:
  0: neutralna
```

```

1: negatywna
2: pozytywna
3: ambiwalentna

1e5de596-8d20-48fc-8615-2052a5559a77:
instruction: 'Jaki wydźwięk ma recenzja?'
demonstration: 'Recenzja: "{text}"

{labels}'
label_mapping:
0: neutralny
1: negatywny
2: pozytywny
3: ambiwalentny

a71195d9-f51f-408d-b25b-ea53dbd64421:
instruction: 'Jaki wydźwięk ma recenzja? neutralny, negatywny, pozytywny
lub ambiwalentny?'
demonstration: '{text} => {labels}'
label_mapping:
0: neutralny
1: negatywny
2: pozytywny
3: ambiwalentny

cf1247a0-463c-4ca6-b8e8-a1c8864f50e9:
instruction: 'Przypisz sentyment do zdania.'
demonstration: '{text} => {labels}'
label_mapping:
0: neutralny
1: negatywny
2: pozytywny
3: ambiwalentny

173978fb-8da7-4931-b9e6-2ea1682386d6:
instruction: 'Przypisz sentyment do zdania. Wybierz jedną z etykiet: neutralny,
pozytywny, negatywny, ambiwalentny.'
demonstration: '{text} => {labels}'
label_mapping:
0: neutralny
1: negatywny
2: pozytywny
3: ambiwalentny

```

H.5 CBD

```

3deddcad-cf5f-4efb-a1ac-8302a327a200:
instruction: 'Czy zdanie jest obraźliwe?'
demonstration: '{text} => {labels}'
label_mapping:
0: Nie
1: Tak

23b47eed-5a7d-4388-82a0-d832c285e159:
instruction: ''
demonstration: 'Tekst: {text} Etykieta: {labels}'
label_mapping:
0: nie obraźliwe
1: obraźliwe

62f33ae1-a7bf-4ab3-9192-afe3b5bc8e20:
instruction: 'Czy zdanie jest obraźliwe?'
demonstration: 'Tekst: {text} Etykieta: {labels}'
label_mapping:
0: nie obraźliwe
1: obraźliwe

f1cc2961-3a7b-4cc6-887e-c661089dd994:
instruction: 'Czy zdanie jest agresywne?'
demonstration: '{text} => {labels}'
label_mapping:
0: Nie
1: Tak

```

```

0d817d40-b514-4a40-b76a-dbdd5902bc3e:
  instruction: 'Czy zdanie jest agresywne? Tak lub Nie?'
  demonstration: '{text} => {labels}'
  label_mapping:
    0: Nie
    1: Tak

0b170e50-aec1-4843-98d6-6f51f01cc951:
  instruction: 'Czy tekst może być zaklasyfikowany jako cyberprzemoc?'
  demonstration: '{text} => {labels}'
  label_mapping:
    0: Nie
    1: Tak

83519157-5075-402c-815f-17f575f1fc5b:
  instruction: 'Czy tekst może być zaklasyfikowany jako cyberprzemoc? Tak lub Nie?'
  demonstration: '{text} => {labels}'
  label_mapping:
    0: Nie
    1: Tak

79929bb1-15a1-4232-b6da-e2a72c039446:
  instruction: 'Cyberprzemoc to stosowanie przemocy z wykorzystaniem internetu. Czy
    tekst to cyberprzemoc?'
  demonstration: '{text} => {labels}'
  label_mapping:
    0: Nie
    1: Tak

6ff460ac-1b85-4e60-b186-1360b0fca5a2:
  instruction: 'Wybierz jedną z etykiet pasującą do tekstu.

  Etykiety:

  - obraźliwe

  - nie obraźliwe'
  demonstration: 'Tekst: {text} {labels}'
  label_mapping:
    0: nie obraźliwe
    1: obraźliwe

```

H.6 NKJP-NER

```

0fbf54ee-bfdd-4a60-866b-8c3de8ac42d6:
  instruction: 'Mamy kilka encji: geografia, brak, organizacja, imię, miejsce, czas.'
  demonstration: 'Zdanie "{text}" zawiera encję {labels}'
  label_mapping:
    1: brak
    3: imię
    4: miejsce
    0: geografia
    2: organizacja
    5: czas

00486b42-3f72-481f-a350-2b60505d297e:
  instruction: ''
  demonstration: '{text}. To zdanie dotyczy {labels}'
  label_mapping:
    1: niczego
    3: osoby
    4: miejsca
    0: geografii
    2: organizacji
    5: czasu

46c1cd05-2f1d-4de3-8de6-0f689a09d56a:
  instruction: 'Zdanie zawiera fragment odnoszący się do encji.'
  demonstration: '"{text}"

  {labels}'

```

```

label_mapping:
  1: brak
  3: osoba
  4: miejsce
  0: geografia
  2: organizacja
  5: czas

abba041c-81a3-4392-bb02-abb28a8aa549:
  instruction: 'Którą z encji przypisałbyś zdaniu: brak, osoba, miejsce, geografia,
    organizacja, lub czas?'
  demonstration: '{text}'.

  Odpowiedź: {labels}'
label_mapping:
  1: brak
  3: osoba
  4: miejsce
  0: geografia
  2: organizacja
  5: czas

d5a15d7b-00b6-4533-ac5c-b9edaea9d484:
  instruction: 'Mamy zdanie, które może zawierać jednostkę referencyjną (encję).
    Która z nich pasuje najlepiej?'
  demonstration: '{text} => {labels}'
  label_mapping:
    1: żadna
    3: osoba
    4: miejsce
    0: geografia
    2: organizacja
    5: czas

657775d6-6547-419f-88b4-820373a3812a:
  instruction: 'Mamy zdanie, które może zawierać jednostkę referencyjną (encję).
    Która z nich pasuje najlepiej? osoba, miejsce, geografia, organizacja,
    czas lub żadna?'
  demonstration: '{text} => {labels}'
  label_mapping:
    1: żadna
    3: osoba
    4: miejsce
    0: geografia
    2: organizacja
    5: czas

b28326b4-d8e3-4a1e-845f-cdb031601873:
  instruction: 'W zdaniu może pojawić się referencja do osoby, miejsca, lokalizacji geograficznej,
    organizacji lub czasu. Która z nich lub żadna?'
  demonstration: '{text} => {labels}'
  label_mapping:
    1: żadna
    3: osoba
    4: miejsce
    0: lokalizacja geograficzna
    2: organizacja
    5: czas

ea5330fa-278e-4d87-ae69-7a427f546b7f:
  instruction: 'Zadanie polega na identyfikacji encji (lub brak) w tekście.

  Encje:

  - osoba

  - miejsce

  - geografia

```

```

- organizacja

- czas

- brak'
demonstration: 'Tekst: {text} Encja: {labels}'
label_mapping:
  1: brak
  3: osoba
  4: miejsce
  0: geografia
  2: organizacja
  5: czas

9bd0f669-c589-4419-9cbb-773d72df8dcd:
instruction: 'Przytoczony fragment zawiera odniesienie do encji.'
demonstration: '"{text}"'.

{labels}'
label_mapping:
  1: niczego
  3: osoby
  4: miejsca
  0: geografii
  2: organizacji
  5: czasu

```

H.7 CST-Wikinews

```

10876076-d6a2-4ec3-b82c-f59cf79c17fa:
instruction: ''
demonstration: 'Zdania {sentence_1} oraz {sentence_2} to {labels}'
label_mapping:
  0: brak relacji
  1: dalsze informacje
  2: krzyżowanie się
  3: opis
  4: parafraza
  5: spełnienie
  6: streszczenie
  7: tożsamość
  8: tło historyczne
  9: uszczegółowienie
  10: zawieranie
  11: źródło

8a0292ef-d678-4be6-bb95-0fe1b0cf136f:
instruction: ''
demonstration: 'Zdanie z Wikipedii "{sentence_1}" odnosi się do zdania
"{sentence_2}" jako {labels}'
label_mapping:
  0: brak relacji
  1: dalsze informacje
  2: krzyżowanie się
  3: opis
  4: parafraza
  5: spełnienie
  6: streszczenie
  7: tożsamość
  8: tło historyczne
  9: uszczegółowienie
  10: zawieranie
  11: źródło

f2fd82fd-f3d9-4de0-aeb5-1801d2b5128b:
instruction: ''
demonstration: 'Zdanie_1: {sentence_1} Zdanie_2: {sentence_2} Etykieta: {labels}'
label_mapping:
  0: brak relacji
  1: dalsze informacje
  2: krzyżowanie się

```

- 3: opis
- 4: parafraza
- 5: spełnienie
- 6: streszczenie
- 7: tożsamość
- 8: tło historyczne
- 9: uszczegółowienie
- 10: zawieranie
- 11: źródło

5f34a87c-760e-4839-8ba8-7e643de1d607:

instruction: 'Relacja między zdaniami.'

demonstration: 'Zdanie_1: {sentence_1} Zdanie_2: {sentence_2} Etykieta: {labels}'

label_mapping:

- 0: brak relacji
- 1: dalsze informacje
- 2: krzyżowanie się
- 3: opis
- 4: parafraza
- 5: spełnienie
- 6: streszczenie
- 7: tożsamość
- 8: tło historyczne
- 9: uszczegółowienie
- 10: zawieranie
- 11: źródło

a668bb22-b3c3-482c-809a-3f14eccdec1f:

instruction: 'Która etykieta opisuje relację między zdaniami.'

Etykiety:

- brak relacji
- dalsze informacje
- krzyżowanie się
- opis
- parafraza
- spełnienie
- streszczenie
- tożsamość
- tło historyczne
- uszczegółowienie
- zawieranie
- źródło

demonstration: 'Zdania: {sentence_1}; {sentence_2} Etykieta: {labels}'

label_mapping:

- 0: brak relacji
- 1: dalsze informacje
- 2: krzyżowanie się
- 3: opis
- 4: parafraza
- 5: spełnienie
- 6: streszczenie
- 7: tożsamość
- 8: tło historyczne
- 9: uszczegółowienie
- 10: zawieranie
- 11: źródło

debde233-ea35-4e23-9d2d-f49b2884f5b5:

```
instruction: ''
demonstration: 'Zdanie "{sentence_1}" ma się do zdania "{sentence_2}" jak {labels}'
label_mapping:
  0: brak relacji
  1: dalsze informacje
  2: krzyżowanie się
  3: opis
  4: parafraza
  5: spełnienie
  6: streszczenie
  7: tożsamość
  8: tło historyczne
  9: uszczegółowienie
  10: zawieranie
  11: źródło
```

2ced9c63-7221-48b6-8c72-a8a78bbd13a0:

```
instruction: 'Jakiego typu relacja występuje między parą zdań? Wybierz spośród:
  brak relacji, dalsze informacje, krzyżowanie się, opis, parafraza,
  spełnienie, streszczenie, tożsamość, tło historyczne, uszczegółowienie, zawieranie,
  źródło.'
demonstration: '"{sentence_1}", "{sentence_2}", {labels}"'
label_mapping:
  0: brak relacji
  1: dalsze informacje
  2: krzyżowanie się
  3: opis
  4: parafraza
  5: spełnienie
  6: streszczenie
  7: tożsamość
  8: tło historyczne
  9: uszczegółowienie
  10: zawieranie
  11: źródło
```