

DIRESA, a distance-preserving nonlinear dimension reduction technique based on regularized autoencoders

Geert De Paepe¹ and Lesley De Cruz^{1,2}

¹Department of Electronics and Informatics, Vrije Universiteit Brussel, Brussels, Belgium

²Observations Scientific Service, Royal Meteorological Institute, Brussels, Belgium

April 30, 2024

Abstract

In meteorology, finding similar weather patterns or analogs in historical datasets can be useful for data assimilation, forecasting, and postprocessing. In climate science, analogs in historical and climate projection data are used for attribution and impact studies. However, most of the time, those large weather and climate datasets are nearline. They must be downloaded, which takes a lot of bandwidth and disk space, before the computationally expensive search can be executed. We propose a dimension reduction technique based on autoencoder (AE) neural networks to compress those datasets and perform the search in an interpretable, compressed latent space. A distance-regularized Siamese twin autoencoder (DIRESA) architecture is designed to preserve distance in latent space while capturing the nonlinearities in the datasets. Using conceptual climate models of different complexities, we show that the latent components thus obtained provide physical insight into the dominant modes of variability in the system. Compressing datasets with DIRESA reduces the online storage and keeps the latent components uncorrelated, while the distance (ordering) preservation and reconstruction fidelity robustly outperform Principal Component Analysis (PCA) and other dimension reduction techniques such as UMAP or variational autoencoders.

1 Introduction

Today, weather and climate models and observation systems generate unprecedented volumes of data. For example, the Coupled Model Intercomparison Project phase 6 (CMIP6) represents more than 20 PB of climate model output data [1], and the world's Earth Observation data collections grow by around 100 PB per year [2].

These unwieldy archives of Earth system data provide enormous opportunities as well as challenges. They are usually stored in formats such as NetCDF, which has natively supported zlib-based compression since version 4.0. This compression technique does not consider the specific context of climate data, and as a result, many more bits of information are stored than are meaningful or necessary [3].

To allow for the full potential of this vast treasure of data to be unlocked, an approach is needed to reduce these datasets into a domain-aware and physically meaningful space. The approach presented in this work uses a Siamese twin AE with regularization terms to anchor the latent space to meaningful properties such as distance (ordering) preservation and statistical independence.

A major application that benefits from long records of reanalysis and climate model data is the search for analogs. Methods based on analogs, which rely on the retrieval of similar weather patterns, are used for forecasting [4], as Lorenz already proposed in 1969 [5], or for the calculation of the local attractor properties, such as the instantaneous dimension, a proxy for the predictability [6]. In analog data assimilation, the analogs can be searched in historical data archives [7] or constructed via generative machine learning methods, such as variational AE [8] or generative adversarial networks. Besides statistical and dynamical downscaling, higher resolution weather and climate information can be obtained using analog methods [9, 10] or

neural network-based techniques [11]. Finally, analogs are a cornerstone of a novel climate change attribution approach that accounts for changes in atmospheric circulation patterns [12].

As a downside to the growing datasets, however, looking up analogs in these vast records becomes increasingly computationally expensive as the dimensionality of the data and length of the dataset increases. As looking up analogs by minimizing Euclidian distance can be practically infeasible, many approaches have been proposed to quickly retrieve similar patterns of one or more atmospheric variables. These are based on dimensionality reduction (DR) techniques such as the popular classical method PCA (Principal Component Analysis). To capture the nonlinearity of the data, other techniques were developed [13]. UMAP (Uniform Manifold Approximation and Projection) is one such technique [14], which can be combined with advanced search algorithms to find the analog in a fast and accurate way [15]. DR is also combined with other data analysis techniques, such as clustering [16] [17], or topological techniques, such as persistent homology, for finding weather regimes.

Autoencoders are another technique, based on deep learning, to produce a lower-dimensional latent representation [18]. However, they lack the statistical independence of the latent space components and the ordering of these components. The latter can be overcome by adding a MaskLayer [19]. Decorrelation of the components can be achieved by adding a covariance regularization term on the latent space layer [20].

When using autoencoders, the Euclidian distance between two samples in the original space is not necessarily correlated with the distance in latent space. Our architecture uses a Siamese twin AE (see Figure 1) to preserve distance (ordering) in latent space. The two encoder branches share the weights and produce two different latent space representations. These are used for the distance loss term, similar to the invariance term used in [21], which ensures that the distance between samples in the dataset is reflected (preserved or correlated) in the distance between latent representations of those samples.

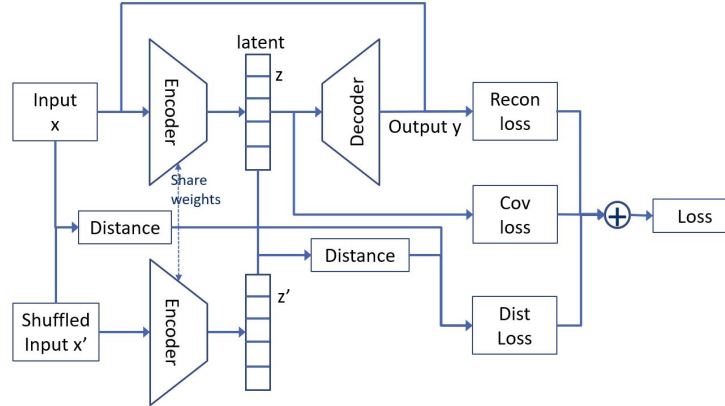


Figure 1: DIRESA: Distance regularized siamese twin AE

To better understand how the latent space relates to the dynamic variables, we demonstrate our method for a hierarchy of conceptual models, namely the well-known Lorenz '63 model and the MAOOAM coupled ocean-atmosphere model, before applying it to reanalysis and state-of-the-art climate model data. Starting with low-dimensional, well-understood models allows us to visualize the latent space and investigate the impact of the various terms of the loss function.

2 Data

2.1 Lorenz '63

The Lorenz '63 system [22] is a 3-dimensional simplified model for atmospheric convection. This system of three ordinary differential equations (ODE) displays chaos and features a strange attractor with the famous butterfly-wings shape for specific ranges of its parameters [23]. The 3-dimensional Lorenz butterfly is compressed into a 2-dimensional latent space by the

different DR techniques. The system of ODEs with parameters $\sigma = 10$, $r = 28$, and $b = 8/3$ was integrated using the 4th-order Runge-Kutta numerical scheme, from starting point (1,0,1) with a timestep of 0.0025. The first 1000 points are ignored as they are considered part of the transient. The next 100000 steps are split into a training dataset (first 80000), a validation (next 10000), and a test dataset (last 10000). Before feeding the data into the DR methods, it is scaled to $[0, 1]$. Important to remark is that the Hausdorff fractal dimension of the Lorenz butterfly is about 2.06, so it is theoretically impossible to map the 3-dimensional dataset into two dimensions while retaining all the information.

2.2 Modular Arbitrary-Order Ocean-Atmosphere Model

MAOOAM (Modular Arbitrary-Order Ocean-Atmosphere Model) is a quasigeostrophic coupled ocean-atmosphere model for midlatitudes [24, 25]. It features a 2-layer atmosphere that is mechanically and thermodynamically coupled to a shallow-water ocean layer in the β -plane (linearized Coriolis) approximation. The DDV2016 setup was used, with an atmospheric and oceanic resolution of $2x-2y$ and $2x-4x$, resulting in a 36-dimensional model, with ten wavenumbers for the atmospheric stream function and temperature and eight for the ocean stream function and temperature. The dataset was obtained by integrating the model with the 2nd-order Runge-Kutta numerical scheme (with nondimensional timestep 0.01) for $4e8$ timesteps, with a write-out every 100^{th} timestep (1 timestep is $1/f_0$ s, with f_0 the Coriolis parameter at 45°N , which is about 2.7 hours). The first 1M points (10^8 timesteps) are ignored as part of the transient, required due to the slow oceanic dynamics. For the following 3M points, which represent 92000 years of data, the wavenumbers are converted to a grid of 8×6 and four channels (for the four variables) and then split up into a training (first 2.4M), a validation (next 300K), and a test dataset (last 300K).

3 Methods

3.1 PCA and KPCA

PCA linearly transforms the data into new coordinates, the principal components [26, 27]. These components are the eigenvectors of the covariance matrix of the dataset. The amount of dataset variation in the direction of each eigenvector determines the ordering of the coordinates. As the covariance matrix is symmetric, the eigenvalues are real, and the eigenvectors are orthogonal. For dimensional reduction, the first principal components are taken as they explain most of the variance in the dataset.

In KPCA, the traditional PCA is combined with kernel methods [28]. The original data points are mapped non-linearly on a high dimensional Hilbert space, where the PCA is applied. The so-called kernel trick is used to avoid working in this higher dimension (and so being highly computationally expensive). The calculations are done in the original space, replacing the standard inner product with a kernel function representing the inner product in the Hilbert space.

3.2 UMAP

UMAP is based on manifold learning and topological data analysis [14]. It creates a fuzzy topological representation of the data, a weighted graph, by connecting the points within a certain radius, which is calculated locally based on the distance to the nearest neighbors. A stochastic gradient descent algorithm with a cross-entropy loss function searches for a low-dimensional representation with the closest possible similar fuzzy topological structure.

An important hyperparameter is the number of neighbors used to construct the initial graph. Low values will focus more on the local details, while high values will better represent the big picture. A second hyperparameter is the minimum distance between points in the latent space. A low value will pack similar points closer together, while with a large value, similar points will be further apart and focus more on the global picture.

3.3 Autoencoders

An AE is a deep-learning ANN that consists of two parts: an encoder that compresses the data into a latent representation and a decoder that decompresses this representation into its original form [29]. The AE is trained by minimizing the reconstruction loss, which ensures

that the output of the decoder is as similar as possible to the encoder’s input. We use the MSE between the encoder’s input and the decoder’s output as reconstruction loss, which can also be seen as a measure for the unexplained variance of the latent representation. After the training and testing of the neural network are done, the original dataset can be compressed with the encoder.

The power of AEs comes from the fact that neural networks use non-linear activation functions, allowing them to capture more complex relationships than PCA, which is a linear transformation. Contrary to PCA, however, the latent representation usually lacks interpretability, and its components are not independent or ordered in importance.

In a VAE, the latent components are not single numbers but probability distributions, usually Gaussian distributions [30]. The encoder has three output layers: one for the means, one for the variances (or logarithm of the variances) of the distributions, and one random sampling taken from those distributions that feed into the decoder submodel. A VAE is a generative method, as each sample of the latent distributions produces a different output after decoding. A VAE has two loss functions. The first one is the reconstruction loss, as in a standard AE. The second loss function contains a Kullback–Leibler divergence regularization term (KL loss), which forces the latent distributions to be standard normal distributions. The total loss function is the weighted average of both losses.

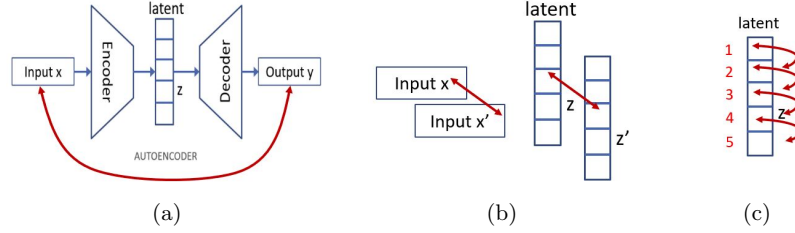


Figure 2: Requirements for the autoencoder. (a) Reconstructed data as close as possible to the original. (b) Distance in original space is related to distance in latent space. (c) Independence of latent components and ordering of the latent components in terms of importance.

3.4 DIRESA

Finally, we present the newly developed DIRESA DR technique. As one of the goals of this technique is to search for similar patterns, the distance between points in the original space should be reflected in their latent-space counterparts. Moreover, to provide insight into a system’s dynamics, the latent space should relate to a hierarchy of modes of variability, a kind of non-linear generalization of PCA. The AE should fulfil the following requirements (Figure 2):

1. Reconstructed dataset as close as possible to the original dataset
2. The distance between points in the original space is reflected in their distance in latent space
3. The latent components are independent of each other
4. The latent components are ordered in terms of importance

The DIRESA architecture (Figure 1) fulfils the above requirements. As in a standard AE, the reconstruction loss enforces the first requirement. We use the MSE between the original data, fed into the encoder, and the decoder output as reconstruction loss.

A shuffled version of the dataset is fed into the twin encoder, which shares the weights and biases with the original encoder. The random ordering of the shuffled dataset can be done beforehand on the complete dataset (and so does not change during training) or can be executed per batch during training by the data generator. We used the first option here to be independent of the batch size. A distance layer calculates the Euclidian distance $d(x, x')$ between the original and shuffled input and between the latent components of the two twins, $d(z, z')$. Minimizing the distance loss forces the relationship between those two. For DIRESA, several distance loss functions have been implemented. DIRESA_{MSE} uses the MSE between $d(x, x')$ and $d(z, z')$, meaning that distance is preserved between original and latent space.

DR	Recon MSE	Cov Loss	Dist Loss	KL Loss
PCA	0.00191			
KPCA	0.000269			
UMAP	0.000282			
AE	1.16e-05			
BNAE	5.21e-05			
CRAE	1.91e-05	7.95e-08		
VAE	8.82e-05			5.20e-06
DIRESA _{MSE}	0.000114	1.31e-05	0.000219	
DIRESA _{Corr}	0.000125	3.24e-06	0.00125	

Table 1: Model losses the Lorenz ’63 test dataset

The MSLE, which calculates the MSE between $\log(d(x, x') + 1)$ and $\log(d(z, z') + 1)$, is used for DIRESA_{MSLE}, focusing more on short than long distances. DIRESA_{Corr} uses a distance Pearson correlation loss: $Loss_{Corr} = 1 - corr(d(x, x'), d(z, z'))$, forcing the correlation between original and latent space distances. The distance Pearson correlation loss is calculated per batch (one figure per batch and not one figure per sample as in an MSE loss function), so the batch size must be large enough to have an accurate figure. A last distance loss function is used in DIRESA_{LogCorr}, where the correlation loss is computed on the logarithm of the distances plus one.

The independence of the latent components is forced by the covariance loss $Loss_{Cov} = \sum_{i \neq j} cov_{i,j}^2(z) / (L * (L - 1))$ which is the normalized squared sum of the non-diagonal terms of the covariance matrix, with L the number of dimensions of the latent space. The denominator keeps the loss function independent of the latent space dimension. The covariance matrix is calculated by batch, so again, it is essential to have the batch size big enough so that the batch covariance is a good approximation of the dataset covariance.

The total loss is a weighted average of the three different loss components. For lowering the weight factor tuning effort, annealing [31] is used for the covariance loss, meaning that the weight factor is 0 at the start and gradually increases. Annealing stops when the covariance loss reaches a point, where we consider the latent components independent. The covariance regularized AE (CRAE) is similar to DIRESA but with only the covariance loss and no distance loss (and so no twin encoder).

The last requirement, the ordering of the latent components, could be imposed by a *Masklayer*, but in practice, it was found to hamper the training of the neural network. So, the ordering is not imposed during training but is calculated afterwards. To achieve this, all encoded (latent) dataset elements are set to the average value except for one latent component. After repeating this process for all latent components and decoding them, the latent components can be ordered based on their variances in the decoded (original) space.

4 Results

4.1 Lorenz ’63

In our benchmark, we use nine different DR techniques to compress the 3-dimensional Lorenz butterfly into a 2-dimensional latent space: Principal Component Analysis (PCA), kernel PCA (KPCA), Uniform Manifold Approximation and Projection (UMAP), and six artificial neural networks (ANN): AE, AE with batch normalization on the latent space (BNAE), AE with covariance regularization on the latent space (CRAE), variational AE (VAE) and two distance regularized siamese twin AE (DIRESA).

The hyperparameters for the nine different DR techniques are listed in Table ???. Hyperparameter tuning is done using simulated annealing [32] for KernelPCA and UMAP. More information on the hyperparameter tuning can be found in the Supporting Information. All ANN methods have an encoder submodel with a 3-dimensional input layer, two hidden layers with 40 and 20 fully connected nodes, and an output layer with two fully connected nodes, see Table ??.

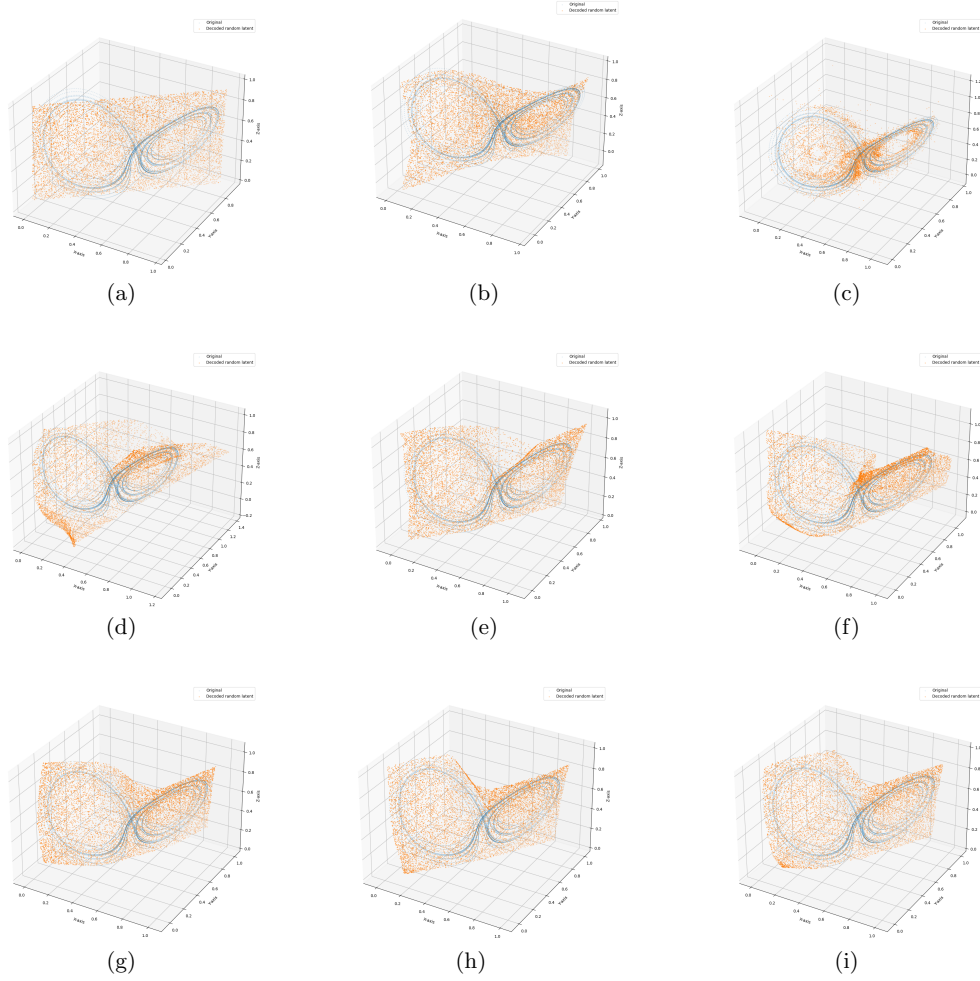


Figure 3: Test dataset (blue), next to the decoded random uniform latent components (orange) for PCA (3a), KPCA (3b), UMAP (3c), AE (3d), BNAE (3e), CRAE (3f), VAE (3g), DIRESA_{MSE} (3h) and DIRESA_{Corr} (3i)

4.1.1 Evaluation of latent and decoded samples

The different DR methods are evaluated quantitatively based on the loss function output of the test dataset (see Table 1). The properties of the latent space are assessed qualitatively by visualizing the decoding uniform random points in latent space (see Figure 3) and by visualizing the encoded test dataset in latent space (see Figure 4). In terms of reconstruction loss (or unexplained variance), PCA performs the worst (because of the linearity), and the latent space is decoded into a flat plane (see Figure 3a). A standard AE has the lowest reconstruction loss (the lowest unexplained variance). Still, the decoded random sample shown in Figure 3d is irregular and fails to generalize well outside the wings. BNAE, CRAE, and VAE are also doing well from a reconstruction loss point of view. Both DIRESA methods are doing better for the reconstruction loss than KPCA and UMAP, although a trade-off had to be made between the three different loss functions. The decoded latent space curves for both DIRESA variants follow the wings, and outside the wings, the curve is well generalized (see Figure 3h and 3i), which is also the case for BNAE (see Figure 3e) and VAE (see Figure 3g). Using an *MSE* or a *Corr* distance loss function makes little difference from a reconstruction point of view. Unlike the other methods, the UMAP decoded sample is more scattered (see Figure 3c) and does not lie in a 2-dimensional manifold.

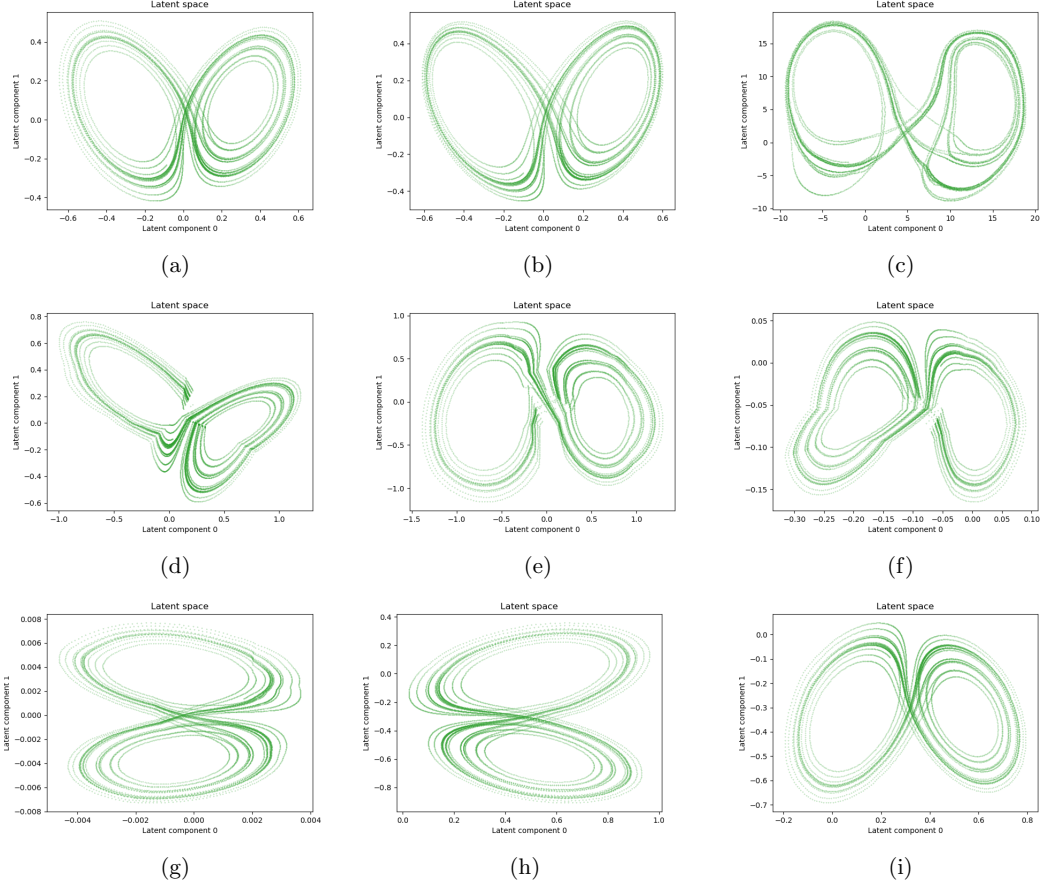


Figure 4: Encoded Lorenz test dataset for PCA (4a), KPCA (4b), UMAP (4c), AE (4d), BNAE (4e), CRAE (4f), VAE (4g), DIRESA_{MSE} (4h) and DIRESA_{Corr} (4i)

Figure 4 shows the mapping of the Lorenz test dataset into latent space. The encoded latent components are uncorrelated for all DR methods except for the standard AE (see Figure 4d). As we can see in Figure 4a and 4b, PCA and KPCA order the latent components by variance, which is not the case for the different ANNs, see Figure 4g for the VAE and Figure 4h for DIRESA, where the wing is rotated. The wing structure is well preserved with PCA, KPCA, VAE, and DIRESA methods, which is less the case for UMAP (see Figure 4c) and the AE. With a standard AE, no regularization is done on latent space, so we get different irregular pictures for other training runs. For BNAE, both latent components have a standard deviation of 1, so the wing structure is resized in one direction (see Figure 4e). CRAE has no distance regularization, so one wing is more prominent here than the other (see Figure 4f).

4.1.2 Distance ordering preservation

Table 2 shows how distance ordering is preserved between original and latent space for the different DR methods. We calculated the distances from all points of the test dataset to all other points and did the same for the corresponding points in latent space. The *Corr* column shows the average Pearson correlation between the Euclidean distances in original and latent space. The *LogCorr* shows the same but for the logarithm of the distances. When searching for analogs, we are only interested in the closest distances. In the right four columns of Table 2, a location parameter 50 has been set, meaning that only the 50 closest distances (in latent space) are considered. The *Can50* shows the mean Canberra stability indicator between the Euclidean distances. The Canberra stability indicator measures the difference between 2 ranked lists (smaller is better). A Canberra stability indicator of about 0 means the lists are ranked very similarly, while two random lists will result in a figure of around 1.42. Rank

DR	Corr	LogCorr	Can50	Pear50	Spear50	Ken50
PCA	0.997	0.996	0.117	0.839	0.889	0.834
KernelPCA	0.988	0.989	0.201	0.775	0.823	0.709
UMAP	0.918	0.892	0.300	0.711	0.751	0.603
AE	0.924	0.936	0.257	0.805	0.800	0.649
BNAE	0.987	0.987	0.155	0.853	0.874	0.769
CRAE	0.945	0.946	0.178	0.859	0.866	0.741
VAE	0.979	0.973	0.151	0.858	0.874	0.768
DIRESA _{MSE}	0.997	0.997	0.107	0.849	0.896	0.848
DIRESA _{Corr}	0.997	0.997	0.112	0.845	0.894	0.843

Table 2: Mean distance ordering preservation between original and latent space for the Lorenz '63 test dataset. The *Corr* and *LogCorr* columns show the Pearson correlation for Euclidean and logarithmic distances. The *Can50* column gives the Canberra stability indication (smaller is better), the *Pear50*, *Spear50* and *Ken50* show the Pearson, Spearman, and Kendall correlation with a location parameter of 50. The 3 best values are shaded in red; the best is dark red.

DR	Corr	LogCorr	Can50	Pear50	Spear50	Ken50
PCA	0.999	0.999	0.050	0.991	0.986	0.920
KernelPCA	0.992	0.993	0.157	0.894	0.898	0.750
UMAP	0.936	0.894	0.280	0.745	0.791	0.623
AE	0.938	0.947	0.233	0.845	0.833	0.670
BNAE	0.994	0.992	0.097	0.972	0.953	0.837
CRAE	0.964	0.964	0.151	0.930	0.914	0.768
VAE	0.982	0.977	0.107	0.964	0.948	0.827
DIRESA _{MSE}	0.999	0.999	0.040	0.995	0.990	0.935
DIRESA _{Corr}	0.999	0.999	0.045	0.994	0.989	0.928

Table 3: Median distance ordering preservation between original and latent space for the Lorenz '63 test dataset. Columns and shading as in Table 2.

differences at the top of the list are more penalized than differences in the bottom part. The *Pear50*, *Spear50* and *Ken50* columns are showing Pearson's r , Spearman's ρ and Kendall's τ correlation with a location parameter of 50 (in the Supporting Information Table ?? shows the same indices for a location parameter of 100). Table 3 shows the median of the same indicators. The three best scores are shown in red, and the best score is in dark red. The Supporting Information Table ?? shows the standard error of the mean for the different indicators. Table ?? shows the 2 sample t-test p-value for the mean distance between DIRESA and PCA. Figure 5 shows the scatter plots of the 50 closest distances (in latent space) for the different methods for 200 random samples of the test dataset. The points in the two wings' cross-section are where the distance ordering preservation is worst when mapped on a 2-dimensional curve.

Although all methods perform better than PCA concerning the reconstruction MSE, PCA outperforms almost all for the distance ordering preservation indicators, except for the DIRESA methods (which can also be seen in the scatter plots). KPCA, although grasping the curvature, does worse than PCA for distance ordering preservation. Standard AEs perform worse than the PCA on all scores because they lack regularization on latent space. Batch normalization on latent space significantly improves all scores. Looking at the median score, the DIRESA_{MSE} method scores best on all indicators, closely followed by DIRESA_{Corr} and PCA. For the mean scores, DIRESA_{MSE} scores best on 5 out of 6 indicators, showing that the best way to preserve distance ordering is to preserve the distance itself.

4.2 MAOOAM

For MAOOAM, the latent space dimension has been fixed to 10, based on a simulation with a standard AE (see Figure 6). When lowering the latent space dimension below 10, the reconstruction loss increases fast, which gives us an idea of the dimension of the attractor of the dynamical system.

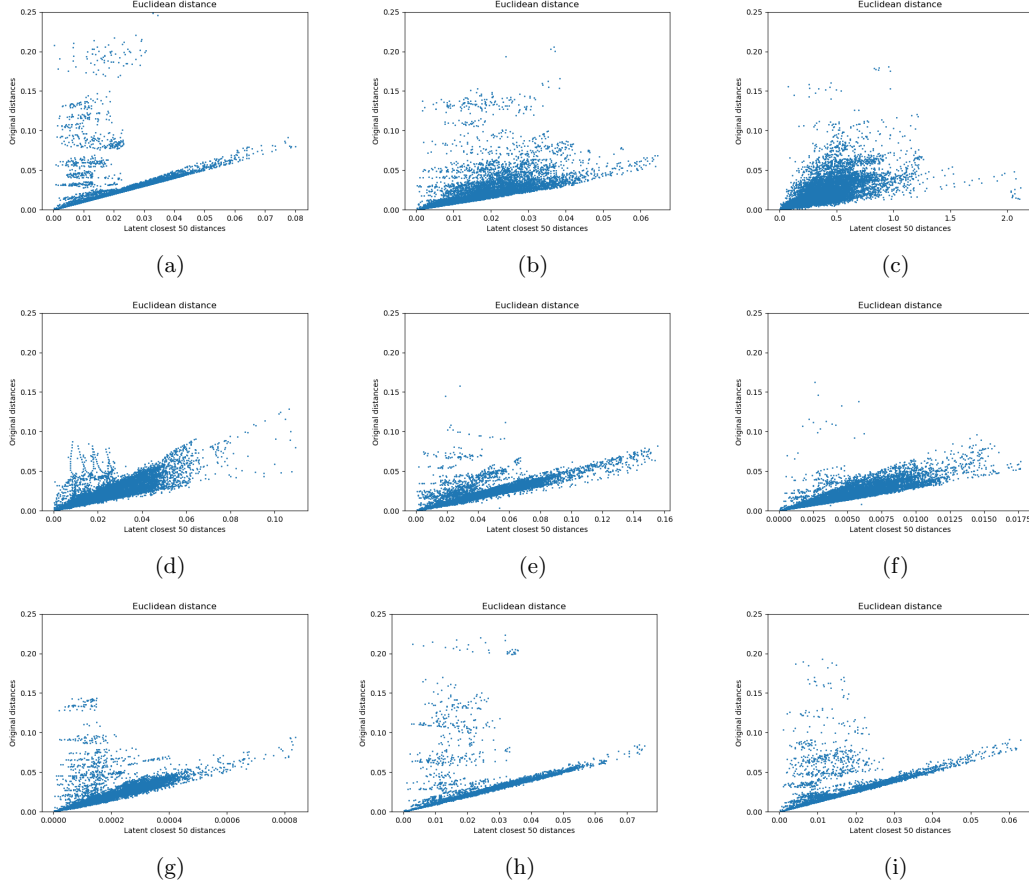


Figure 5: Scatter plots of 50 closest distances for 200 random samples of the test dataset for PCA (5a), KPCA (5b), UMAP (5c), AE (5d), BNAE (5e), CRAE (5f), VAE (5g), DIRESA_{MSE} (5h) and DIRESA_{Corr} (5i)

For MAOOAM, we will compare DIRESA with PCA. The complete DIRESA configuration can be found in the supporting information. The encoder of the DIRESA DR methods has one convolutional layer, followed by a MaxPooling and three fully connected layers, see Table ???. The values for all other hyperparameters can be found in ???.

4.2.1 Evaluation of latent and decoded samples

Figure 7 shows the pair plots for the latent components of the test dataset for PCA and DIRESA with MSE distance loss (after sorting by explained variance). The DIRESA pair plots look very similar to those of PCA. Figure 8 shows the time plots for the latent components of the test dataset for PCA and DIRESA with MSE distance loss. Again, the DIRESA time plot looks very similar to the PCA's. The first four latent components with the largest explained variance have a low-frequency pattern, while the last six latent components have a high frequency. Figure 9 shows the empirical orthogonal functions (or PCA eigenvectors) for the different variables together with the explained variance (overall and per variable). To get the decoded latent components for DIRESA, all latent components of the encoded test dataset are set to their mean except for one component, which is set firstly to the mean plus one standard deviation and secondly to the mean minus one standard deviation. Both are then decoded, and the difference is taken. The result is shown in Figure 10. Decoded components for a variable with an explained variance of less than 1.5 are faded. Again, we notice that the decoded latent DIRESA components (with MSE distance loss) are very similar to the PCA empirical orthogonal functions, except that the explained variance is higher. The

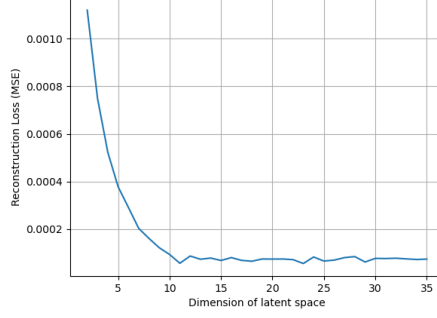


Figure 6: MAOOAM: AE Reconstruction loss in function of latent size

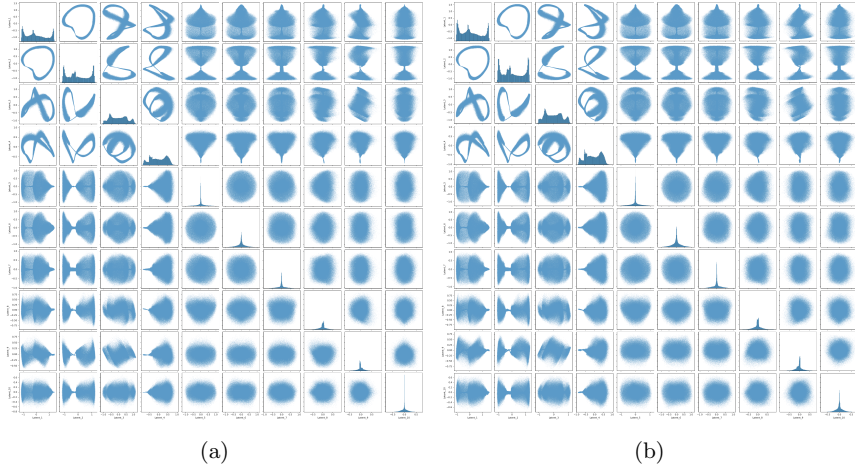


Figure 7: Pair plot for MAOOAM latent components for PCA (7a) and DIRESA_{MSE} (7b)

unexplained variance for PCA is 3.7%, and for DIRESA 2.7%, the difference is the biggest for the atmospheric temperature, where the unexplained variance for PCA is 9.3% and for DIRESA 4.1%. We observe a strong coupling between atmospheric and ocean variables for the low-frequency components. More than 95% of the ocean stream function variance is explained by the first two components and for the ocean temperature by the first four. There is no coupling between atmospheric and ocean variables for the high-frequency components, except for component 9, which couples the atmospheric stream function with the ocean temperature.

4.2.2 Distance ordering preservation

Table 4 shows the distance (ordering) preservation for PCA and DIRESA with four different distance loss functions: MSE, MSLE, correlation, and correlation of the logarithm of the distances. As it is computationally expensive to calculate distances from all points of the test dataset to all other points, we took 200 random samples from the test dataset and calculated the distance to all other points. 200 random samples are enough to distinguish the best DIRESA methods (in this case, DIRESA_{MSLE} and DIRESA_{LogCorr}) from PCA with a good p-value (see Supporting Information Table ??). The figures are shown for the same KPIs as in paragraph 4.1.2. Looking at all the distances, near and far, PCA and DIRESA methods are performing equally for the *Corr* KPI, and three out of the four DIRESA methods are giving slightly better figures for the *LogCorr* KPI (which provides more emphasis on the short distances). Looking at the 50 closest distances, all DIRESA methods outperform PCA for *Can50* and *Spear50*, and three out of four DIRESA methods outperform PCA for the *Pear50* and *Ken50* KPIs. Methods with a logarithmic distance loss function yield the best results.

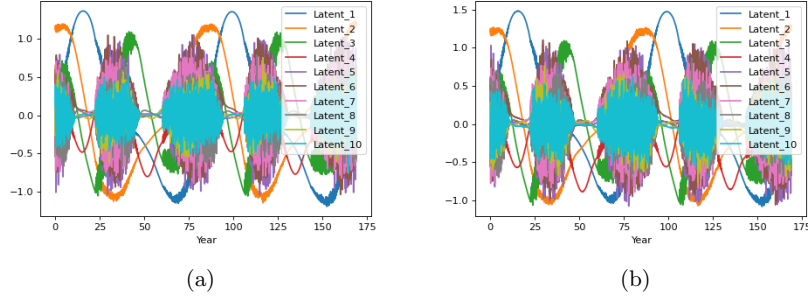


Figure 8: Time plot for MAOOAM latent components for PCA (8a) and DIRESA_{MSE} (8b)

DR	Corr	LogCorr	Can50	Pear50	Spear50	Ken50
PCA	0.999	0.998	0.570	0.432	0.398	0.292
DIRESA _{MSE}	0.999	0.999	0.565	0.429	0.401	0.292
DIRESA _{MSLE}	0.999	0.998	0.518	0.490	0.453	0.338
DIRESA _{Corr}	0.999	0.999	0.553	0.453	0.417	0.304
DIRESA _{LogCorr}	0.999	0.999	0.534	0.472	0.443	0.328

Table 4: Mean distance ordering preservation between original and latent space for 200 random samples of the MAOOAM test dataset. Columns and shading as in Table 2.

4.3 Conclusion

A deep ANN DR method, called DIRESA, has been developed to capture nonlinearities while preserving distance (ordering) and producing statistically independent latent components. The architecture is based on a Siamese twin AE, with three loss functions: reconstruction, covariance, and distance. An annealing method is used to automate the otherwise time-consuming process of tuning the different weights of the loss function.

DIRESA has been compared with PCA and state-of-the-art DR methods for two conceptual models, Lorenz '63 and MAOOAM, and significantly outperforms them in terms of distance (ordering) preservation KPIs and reconstruction fidelity. We have also shown that the latent components have a physical meaning as the dominant modes of variability in the system. DIRESA correctly identifies the major coupled modes associated with the low-frequency variability of the coupled ocean-atmosphere system.

In addition to the present study, we provide an open-source Python package, based on Tensorflow [33], to build DIRESA models with convolutional and/or dense layers with one line of code [34]. On top of that, the package allows the use of custom encoder and decoder submodels to build a DIRESA model. The DIRESA package acts as a meta-model, which can use submodels with various kinds of layers, such as attention layers, and more complicated designs, such as graph neural networks or hybrid quantum neural networks. Thanks to its extensible design, the DIRESA framework can handle more complex data types, such as three-dimensional, graph, or unstructured data.

Its flexibility and robust performance make DIRESA an indispensable new tool in weather and climate science. It has all the assets to become the method of choice to distil meaningful low-dimensional representations from the ever-increasing volumes of high-resolution climate data, for applications ranging from analog retrieval to attribution studies.

5 Data availability

The data used in this study is available on the open data portal Zenodo [35].

6 Code availability

The DIRESA package source code is available on the open data portal Zenodo [34]. Other programs and scripts are available from the corresponding author upon reasonable request. Documentation can be consulted at <https://diresa-learn.readthedocs.io>.

7 Acknowledgements

We thank Steven Caluwaerts for the opportunity to start working on this subject as part of the Postgraduate Studies in Weather and Climate Modeling at Ghent University. We would also like to thank Herwig De Smet for reviewing this document and Alex Deckmyn for using his code for solving the Lorenz '63 equations. LDC acknowledges support from the Belgian Science Policy Office (BELSPO) through the FED-tWIN program (Prf-2020-017) and project B2/233/P2/PRECIP-PREDICT. GDP and LDC acknowledge support from VUB through the project SRP74: LSDS. The funders played no role in the study design, data collection, analysis and interpretation of data, or the writing of this manuscript.

8 Author contributions

GDP: Data, Conceptualization, Investigation, Analysis, DIRESA Architecture, Software Development, Methodology, Writing, Visualization, Reviewing, Editing. LDC: Conceptualization, Analysis, Methodology, Writing, Reviewing, Editing, Supervision.

9 Competing interests

All authors declare no financial or non-financial competing interests.

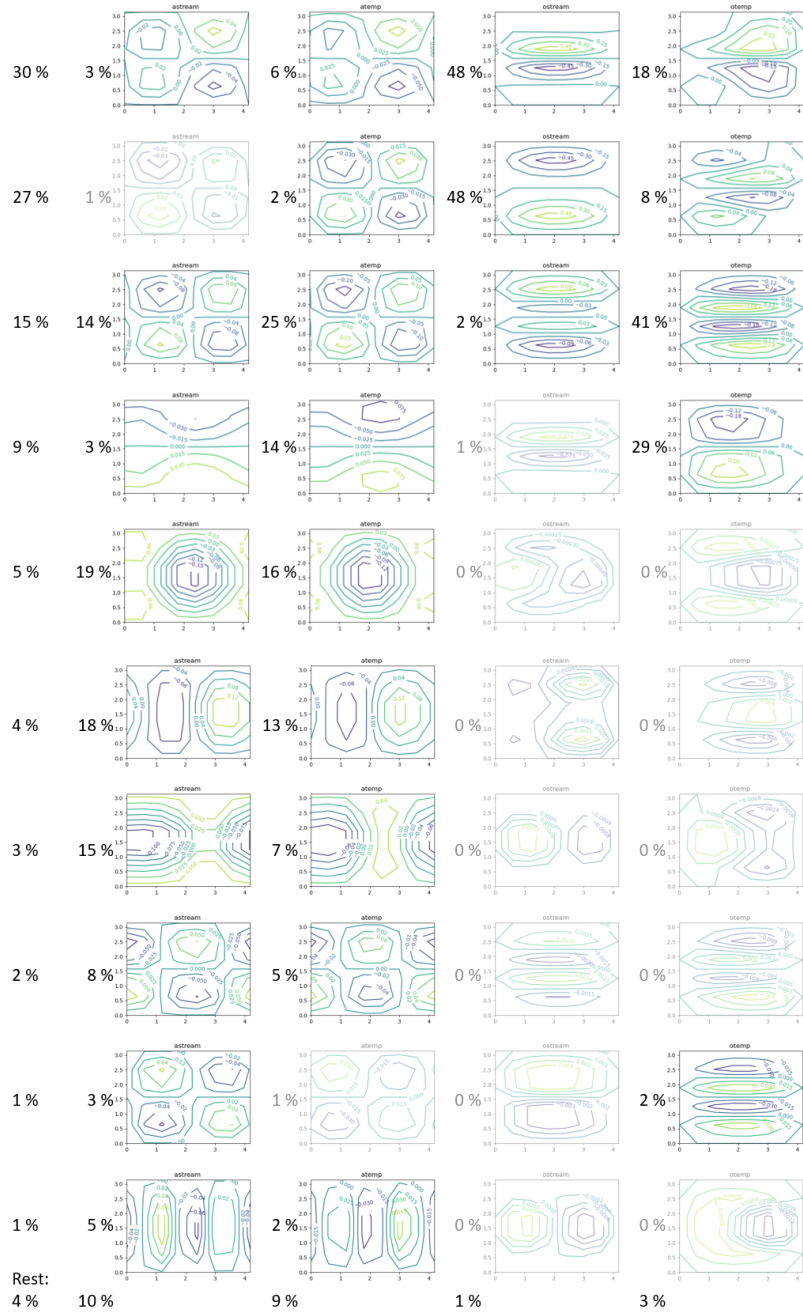


Figure 9: MAOOAM: PCA decoded latent components

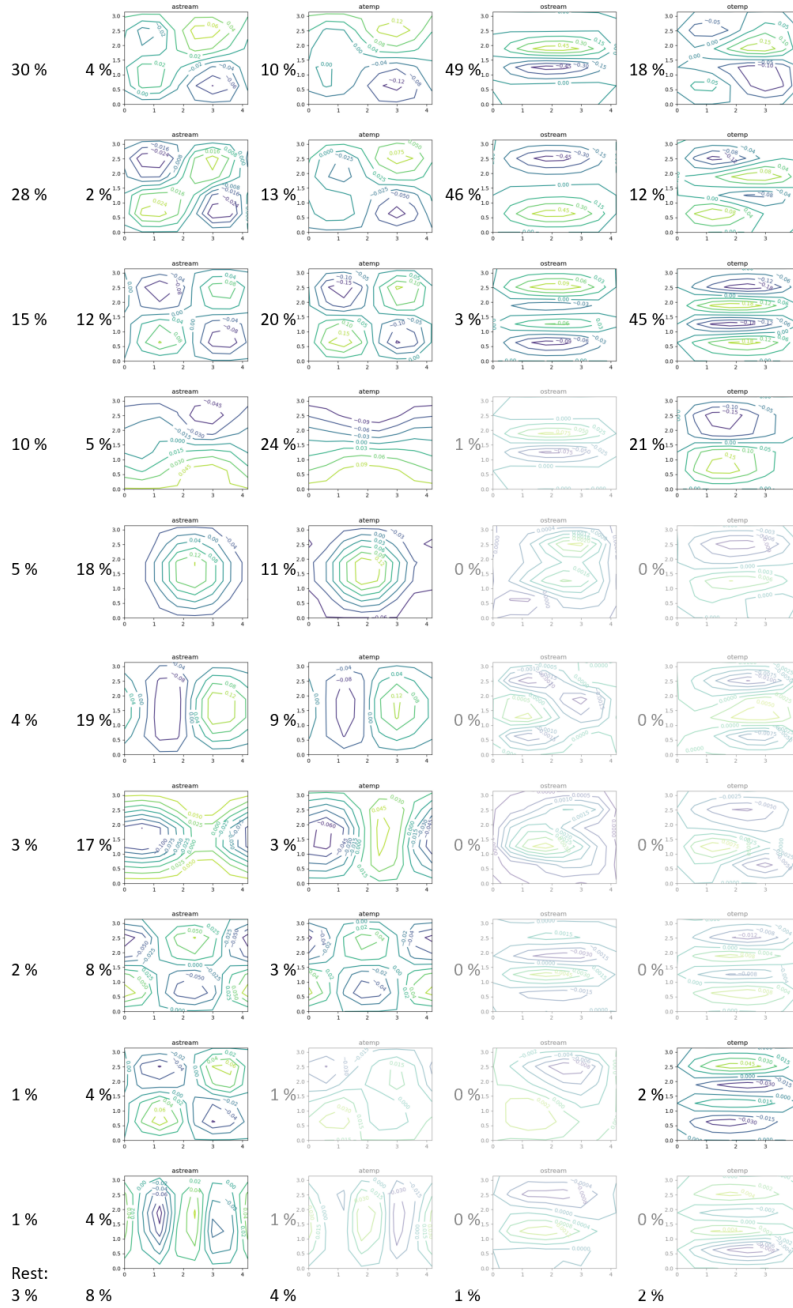


Figure 10: MAOOAM: DIRESA decoded latent components

References

- [1] Xin Li et al. “Big Data in Earth system science and progress towards a digital twin”. In: *Nature Reviews Earth & Environment* (2023), pp. 1–14.
- [2] R. Wilkinson et al. “Environmental impacts of Earth observation data in the constellation and cloud computing era”. In: *Science of The Total Environment* 909 (2024), p. 168584. ISSN: 0048-9697. DOI: 10.1016/j.scitotenv.2023.168584.
- [3] Milan Klöwer et al. “Compressing atmospheric data into its real information content”. In: *Nature Computational Science* 1.11 (2021), pp. 713–724.
- [4] HM Van den Dool. “A new look at weather forecasting through analogues”. In: *Monthly Weather Review* 117.10 (1989), pp. 2230–2247.
- [5] Edward N Lorenz. “Atmospheric predictability as revealed by naturally occurring analogues”. In: *Journal of Atmospheric Sciences* 26.4 (1969), pp. 636–646.
- [6] Davide Faranda, Gabriele Messori, and Pascal Yiou. “Dynamical proxies of North Atlantic predictability and extremes”. In: *Scientific Reports* 7.1 (2017), pp. 1–10.
- [7] Redouane Lguensat et al. “The analog data assimilation”. In: *Monthly Weather Review* 145.10 (2017), pp. 4093–4107.
- [8] L Minah Yang and Ian Grooms. “Machine learning techniques to construct patched analog ensembles for data assimilation”. In: *Journal of Computational Physics* 443 (2021), p. 110532.
- [9] Eduardo Zorita and Hans Von Storch. “The analog method as a simple statistical downscaling technique: Comparison with more complicated methods”. In: *Journal of Climate* 12.8 (1999), pp. 2474–2489.
- [10] Nicolas Ghilain et al. “Large ensemble of downscaled historical daily snowfall from an Earth system model to 5.5 km resolution over Dronning Maud Land, Antarctica”. In: *Earth System Science Data* 14.4 (2022), pp. 1901–1916.
- [11] Christopher M Rozoff and Stefano Alessandrini. “A Comparison between Analog Ensemble and Convolutional Neural Network Empirical-Statistical Downscaling Techniques for Reconstructing High-Resolution Near-Surface Wind”. In: *Energies* 15.5 (2022), p. 1718.
- [12] Davide Faranda et al. “A climate-change attribution retrospective of some impactful weather extremes of 2021”. In: *Weather and Climate Dynamics* 3.4 (2022), pp. 1311–1340.
- [13] Laurens Van Der Maaten, Eric Postma, Jaap Van den Herik, et al. “Dimensionality reduction: a comparative”. In: *J Mach Learn Res* 10.66-71 (2009), p. 13.
- [14] L. McInnes, J. Healy, and J. Melville. “UMAP: Uniform Manifold Approximation and Projection for Dimension Reduction”. In: *arXiv preprint* (Feb. 2018). arXiv: 1802.03426 [stat.ML].
- [15] Gabriele Franch et al. “MASS-UMAP: Fast and accurate analog ensemble search in weather radar archives”. In: *Remote Sensing* 11.24 (2019), p. 2922.
- [16] Robert Neal et al. “A flexible approach to defining weather patterns and their application in weather forecasting over Europe”. In: *Meteorological Applications* 23.3 (2016), pp. 389–400.
- [17] Ashesh Chattopadhyay, Pedram Hassanzadeh, and Saba Pasha. “Predicting clustered weather patterns: A test case for applications of convolutional neural networks to spatio-temporal climate data”. In: *Scientific Reports* 10.1 (2020), pp. 1–13.
- [18] Tyler Manning-Dahan. “PCA and Autoencoders”. In: *Montreal: Concordia University, INSE* 6220 (2018).

- [19] Remco Royen et al. “MaskLayer: Enabling scalable deep learning solutions by training embedded feature sets”. In: *Neural Networks* 137 (2021), pp. 43–53.
- [20] Saïd Ladjal, Alasdair Newson, and Chi-Hieu Pham. “A PCA-like autoencoder”. In: *arXiv preprint arXiv:1904.01277* (2019).
- [21] Adrien Bardes, Jean Ponce, and Yann LeCun. “Vicreg: Variance-invariance-covariance regularization for self-supervised learning”. In: *arXiv preprint* (2021). arXiv: 2105.04906.
- [22] Edward N Lorenz. “Deterministic nonperiodic flow”. In: *Journal of Atmospheric Sciences* 20.2 (1963), pp. 130–141.
- [23] Timothy N Palmer. “Extended-range atmospheric prediction and the Lorenz model”. In: *Bulletin of the American Meteorological Society* 74.1 (1993), pp. 49–66.
- [24] Lesley De Cruz, Jonathan Demaeyer, and Stéphane Vannitsem. “The modular arbitrary-order ocean-atmosphere model: MAOOAM v1.0”. In: *Geoscientific Model Development* 9.8 (2016), pp. 2793–2808.
- [25] Stéphane Vannitsem et al. “Low-frequency variability and heat transport in a low-order nonlinear coupled ocean–atmosphere model”. In: *Physica D: Nonlinear Phenomena* 309 (2015), pp. 71–85. DOI: 10.1016/j.physd.2015.07.006.
- [26] Karl Pearson. “LIII. On lines and planes of closest fit to systems of points in space”. In: *The London, Edinburgh, and Dublin philosophical magazine and journal of science* 2.11 (1901), pp. 559–572.
- [27] Harold Hotelling. “Analysis of a complex of statistical variables into principal components.” In: *Journal of Educational Psychology* 24.6 (1933), p. 417.
- [28] Bernhard Schölkopf, Alexander Smola, and Klaus-Robert Müller. “Kernel principal component analysis”. In: *International Conference on Artificial Neural Networks*. Springer. 1997, pp. 583–588.
- [29] Mark A Kramer. “Nonlinear principal component analysis using autoassociative neural networks”. In: *AIChE journal* 37.2 (1991), pp. 233–243.
- [30] Diederik P Kingma and Max Welling. “Auto-Encoding Variational Bayes”. In: *ArXiv preprint* (2022). arXiv: 1312.6114 [stat.ML].
- [31] Gunnar Behrens et al. “Non-Linear Dimensionality Reduction With a Variational Encoder Decoder to Understand Convective Processes in Climate Models”. In: *Journal of Advances in Modeling Earth Systems* 14.8 (2022), e2022MS003130.
- [32] Scott Kirkpatrick, C Daniel Gelatt Jr, and Mario P Vecchi. “Optimization by simulated annealing”. In: *Science* 220.4598 (1983), pp. 671–680.
- [33] Martín Abadi et al. *TensorFlow: Large-Scale Machine Learning on Heterogeneous Systems*. Software available from tensorflow.org. 2015. URL: <https://www.tensorflow.org/>.
- [34] Geert De Paepe. *DIRESA - distance-regularized Siamese twin autoencoder*. Mar. 2024. DOI: 10.5281/zenodo.10829310. URL: <https://doi.org/10.5281/zenodo.10829310>.
- [35] Geert De Paepe. *Conceptual climate models datasets used for DIRESA*. Mar. 2024. DOI: 10.5281/zenodo.10830011. URL: <https://doi.org/10.5281/zenodo.10830011>.

Supporting Information

Geert De Paepe¹ and Lesley De Cruz^{1,2}

¹Department of Electronics and Informatics, Vrije Universiteit Brussel, Brussels, Belgium

²Observations Scientific Service, Royal Meteorological Institute, Brussels, Belgium

April 30, 2024

This document provides supplementary information to ensure scientific reproducibility and results that further support our findings. The versions of the software packages and hardware used are listed in Section 1, while the approach used to tune the hyperparameters is detailed in Section 2. One of the key assets of this method is its fidelity in conserving distances, for which detailed results are found in Section 3.

1 Software and hardware details

We use the Sklearn-pandas machine learning library version 2.2.0 [1] to execute the PCA and KPCA calculations and the umap-learn python package version 0.5.3 [2] for the UMAP machine learning. We use the TensorFlow/Keras software library version 2.7.1 for the ANN DR models.

All ANN calculations were performed on NVIDIA A100 GPU nodes and AMD EPYC 7282 (Zen2) CPUs or on Tesla P100 GPU nodes and INTEL E5-2650v4 (Broadwell) of the VUB Hydra high-performance computing infrastructure. The PCA, KernelPCA, and UMAP calculations were performed on INTEL E5-2680v4 (Broadwell) or on INTEL Xeon Gold 6148 (Skylake) of the VUB Hydra high-performance computing infrastructure.

2 Hyperparameter tuning

2.1 Lorenz '63 DR hyperparameter tuning

For KernelPCA and UMAP, the hyperparameter tuning is done using simulated annealing. The hyperparameter tuning uses simulated annealing, which is an optimization metaheuristic. The name refers to the annealing process in metallurgy, where controlled cooling is done to get the material's right physical properties. The lower the temperature, the lesser the movements of the atoms. Simulated annealing is a local search heuristic, looking for a better solution in the neighborhood a the previous solution, which jumps from time to time to less good solutions to

DR	Parameter Type	Initial	Step Std Dev
KPCA	gamma	1.0	0.2
UMAP	min_dist; n_neighb	0.1; 150	0.02; 30
DR	Annealing Parameter	Value	
KPCA, UMAP	T_{min}	1e-5	
KPCA, UMAP	T_{max}	0.0003	
UMAP	n_iterations	200	
KPCA	n_iterations	100	

Table SI 1: Simulated annealing parameters for Lorenz '63 DR hyperparameter tuning

DR	Param Type	Param
PCA		
KPCA	kernel; gamma	rbf; 0.95
UMAP	min_dist; n_neighbors	0.02; 209
AE	batch_size	128
BNAE	batch_size	128
CRAE	batch_size	128
VAE	batch_size; KL_target	128; 2e-5
DIRESA _{MSE}	batch_size; dist_loss_weight; anneal_step; cov_target	512; 2.5; 0.2; 2e-5
DIRESA _{Corr}	batch_size; dist_loss_weight; anneal_step; cov_target	512; 1.0; 0.2; 2e-5
All ANN's	en(de)coder hidden layers activation; optimizer; lr_start; epochs lr_decay	dense [40, 20] relu/linear; adam; 0.005; 200; 0.5 every 10 epoch

Table SI 2: DR Configurations for the Lorenz '63 dataset

Layer	Output Shape	Activation	Nbr of Params
Input	(3)		0
Enc_Dense1	(40)	ReLu	160
Enc_Dense2	(20)		820
Enc_Out_Dense3	(2)	Linear	42
Dec_Dense3	(20)	ReLu	60
Dec_Dense2	(40)	ReLu	840
Dec_Out_Dense1	(3)	Linear	123

Table SI 3: ANN layers for the Lorenz '63 dataset

Layer	Output Shape	Activation	Nbr of Params
Input	(6, 8, 4)		0
Shuffled_Input	(6, 8, 4)		0
Enc.Conv2D(3,3)	(6, 8, 100)	ReLu	3700
Enc.MaxPooling2D	(3, 4, 100))		0
Enc.Flatten	(1200)		0
Enc.Dense1	(300)	ReLu	360300
Enc.Dense2	(100)	ReLu	30100
Enc.Out_Dense3	(10)	Linear	1010
Dist_Out	(2)		0
Dec.Dense3	(100)	ReLu	1100
Dec.Dense2	(300)	ReLu	30300
Dec.Dense1	(1200)	ReLu	361200
Dec.Reshape	(3, 4, 100)		0
Dec.UpSampling2D	(6, 8, 100)		0
Dec.Out_Conv2D(3,3)	(6, 8, 4)	Linear	3604

Table SI 4: DIRESA layers for the MAOOAM dataset

get out of local minima. The chance of such a jump lowers when the temperature is decreasing. The python *simanneal* package is used, which requires the initial temperature T_{\max} , the final temperature T_{\min} , and the number of iterations to be set next to the initial values and the step size (see Table SI 1. In our implementation, the step size is taken as a sample out of a normal distribution with a mean of 0 and a step standard deviation. The initial values were chosen based on the limited number of manual tuning runs to keep the number of iterations relatively low. The step standard deviation has been fixed to one-fifth of the initial values in order to have sufficient small steps and, at the same time, a sufficient reach for the parameter. The number of iterations is 200 for UMAP and 100 for KPCA (because of the high compute time). The annealing temperatures have been chosen in order to jump 10 percent of the time to less good solutions at the initial iterations and to almost zero at the end.

The hyperparameters for the nine different DR techniques are listed in Table SI 2. KernelPCA has been tuned using a Gaussian kernel to an optimal gamma of 0.95. For UMAP, the values for `min_dist` and `nbr_neighbors` are 0.02 and 209. The ANN methods have an encoder submodel with a 3-dimensional input layer, and two hidden layers with 40 and 20 fully connected nodes, see Table SI 3. The output layer has two fully connected nodes, corresponding to the size of the latent space. The decoder submodel mirrors the encoder. In the BNAE, the 2-dimensional fully connected layer in the encoder is followed by a batch normalization layer. In the VAE, the encoder has 3 (2-dimensional) output layers (for mean, variance, and sample). The hidden layers use a *relu* activation function, while the output layers use a *linear* one.

All methods are trained ten times (PCA and KernelPCA only once) with the training dataset, and the one with the smallest overall loss on the validation dataset has been chosen. The batch size for the ANNs is 128, except for DIRESA and CRAE, where it is 512, to have a covariance loss (and correlation distance loss) per batch, which is in the same order as the loss calculated over the total dataset. For the ANNs with multiple loss functions, the weight factor for the reconstruction loss is fixed to 1. For the VAE's KL loss weight factor, KL annealing is used, meaning that the weight factor is 0 at the start and gradually increases. The same annealing approach is used for the covariance loss weight factor for DIRESA and CRAE. The step to increase the annealing has been tuned to 0.2. Annealing stops when the covariance loss (or KL loss) reaches a target of 0.00002. At this point, the covariance of the latent components is below 0.005, and we consider them independent. Adam is used as the optimizer for the ANNs, and training is done during 200 epochs. The learning rate is divided by two every 10^{th} epoch after annealing is stopped or after the 50^{th} epoch for the ANN method without annealing.

Parameter	Value
batch_size	512
dist_loss_weight	1.0
anneal_step	0.2
cov_target	6.5e-5
optimizer	adam
epochs	200
lr_start	0.005
lr_decay	0.5 every 10 epoch

Table SI 5: DIRESA hyperparameters for the MAOOAM dataset

Model	Corr	LogCorr	Can50	Pear50	Spear50	Ken50
PCA	5.10e-5	5.86e-5	0.00169	0.00305	0.00215	0.00210
KernelPCA	0.000112	0.000108	0.00156	0.00284	0.00203	0.00189
UMAP	0.000503	0.000409	0.00127	0.00189	0.00170	0.00158
AE	0.000529	0.000439	0.00109	0.00160	0.00141	0.00134
BNAE	0.000141	0.000119	0.00146	0.00249	0.00192	0.00188
CRAE	0.000493	0.000469	0.00125	0.00195	0.00148	0.00156
VAE	0.000118	0.000150	0.00142	0.00252	0.00191	0.00187
DIRESA _{MSE}	4.80e-5	5.32e-5	0.00167	0.00298	0.00211	0.00210
DIRESA _{Corr}	4.66e-5	5.30e-5	0.00168	0.00302	0.00212	0.00210

Table SI 6: Distance preservation standard error of mean for the Lorenz '63 test dataset. Columns as in Table 2.

2.2 MAOOAM DIRESA hyperparameters

The DIRESA layers are listed in Table SI 4. The input layers have a shape of (8, 6, 4), corresponding to the four variables in each grid point. The encoder has one convolutional layer (with a 3 by 3 kernel), followed by a MaxPooling (with a 2 by 2 pooling size), a Flatten, and three fully connected layers. The last one has 10 nodes, corresponding to the size of the latent space. The decoder submodel mirrors the encoder. The hidden layers use a *relu* activation function, while the encoder and decoder output layers use a *linear* one. The third output has two values, the distance between the two inputs and between the two latent representations. The weight factors for the reconstruction and distance losses are fixed to 1, and for the covariance loss, weight annealing is used.

The DIRESA methods are trained ten times with the training dataset, and the one with the smallest overall loss on the validation dataset has been chosen. The batch size is 512; see Table SI 5. The weight factors for the reconstruction and distance losses are fixed to 1, and for the covariance loss, weight annealing is used. The step to increase the annealing is set to 0.2. Annealing stops when the covariance loss reaches a target of 0.000065. At this point, we consider the latent components independent. Adam is used as the optimizer, and training is done during 200 epochs. The learning rate is divided by two every 10th epoch after annealing is stopped.

3 Distance ordering preservation

3.1 Lorenz '63 distance preservation

Table SI 6 shows the standard error of the mean for the *Corr* and *LogCorr* distance KPIs and for the KPIs with a location parameter of 50: *Can50*, *Pear50*, *Spear50* and *Ken50*. Table SI 7 shows the 2 sample t-test p-values for the mean distance between DIRESA and PCA. Figure SI 1 shows the scatter plots of the distances (latent versus original space) for the different methods for 200 random samples of the test dataset.

Tables SI 8 and SI 9 show how distance ordering is preserved between original and latent space

Models	Can50	Pear50	Spear50	Ken50
DIRESA _{MSE} - PCA	2.59e-05	0.019	0.020	2.46e-06
DIRESA _{Corr} - PCA	0.036	0.162	0.098	0.002

Table SI 7: 2 sample t-test p-values for the mean distance between DIRESA and PCA for the Lorenz test dataset. Columns as in Table 2. Values below 5% are shaded in red.

DR	Can100	Pear100	Spear100	Ken100
PCA	0.115	0.854	0.894	0.836
KernelPCA	0.199	0.791	0.826	0.706
UMAP	0.271	0.749	0.774	0.624
AE	0.249	0.821	0.811	0.654
BNAE	0.148	0.874	0.883	0.773
CRAE	0.174	0.874	0.875	0.745
VAE	0.149	0.868	0.878	0.768
DIRESA _{MSE}	0.105	0.864	0.901	0.850
DDIRESA _{Corr}	0.109	0.859	0.899	0.846

Table SI 8: Mean distance ordering preservation between original and latent space for the Lorenz '63 test dataset. The *Can100* column gives the Canberra stability indication (smaller is better), the *Pear100*, *Spear100* and *Ken100* show the Pearson, Spearman, and Kendall correlation with a location parameter of 100. The 3 best values are shaded in red; the best is dark red.

DR	Can100	Pear100	Spear100	Ken100
PCA	0.050	0.991	0.988	0.920
KernelPCA	0.158	0.894	0.893	0.746
UMAP	0.253	0.771	0.798	0.629
AE	0.229	0.846	0.842	0.673
BNAE	0.097	0.971	0.955	0.837
CRAE	0.155	0.930	0.912	0.763
VAE	0.105	0.966	0.951	0.827
DIRESA _{MSE}	0.040	0.995	0.992	0.935
DIRESA _{Corr}	0.044	0.994	0.990	0.929

Table SI 9: Median distance ordering preservation between original and latent space for the Lorenz '63 test dataset. Columns and shading as in Table SI 8.

Model	Can100	Pear100	Spear100	Ken100
PCA	0.00165	0.00281	0.00208	0.00205
KernelPCA	0.00148	0.00259	0.00193	0.00178
UMAP	0.00119	0.00173	0.00157	0.00147
AE	0.00097	0.00125	0.00128	0.00121
BNAE	0.00133	0.00210	0.00179	0.00177
CRAE	0.00115	0.00162	0.00132	0.00144
VAE	0.00136	0.00229	0.00185	0.00182
DIRESA _{MSE}	0.00163	0.00273	0.00204	0.00204
DIRESA _{Corr}	0.00164	0.00277	0.00205	0.00205

Table SI 10: Distance preservation standard error of mean for the Lorenz '63 test dataset. Columns as in Table SI 8.

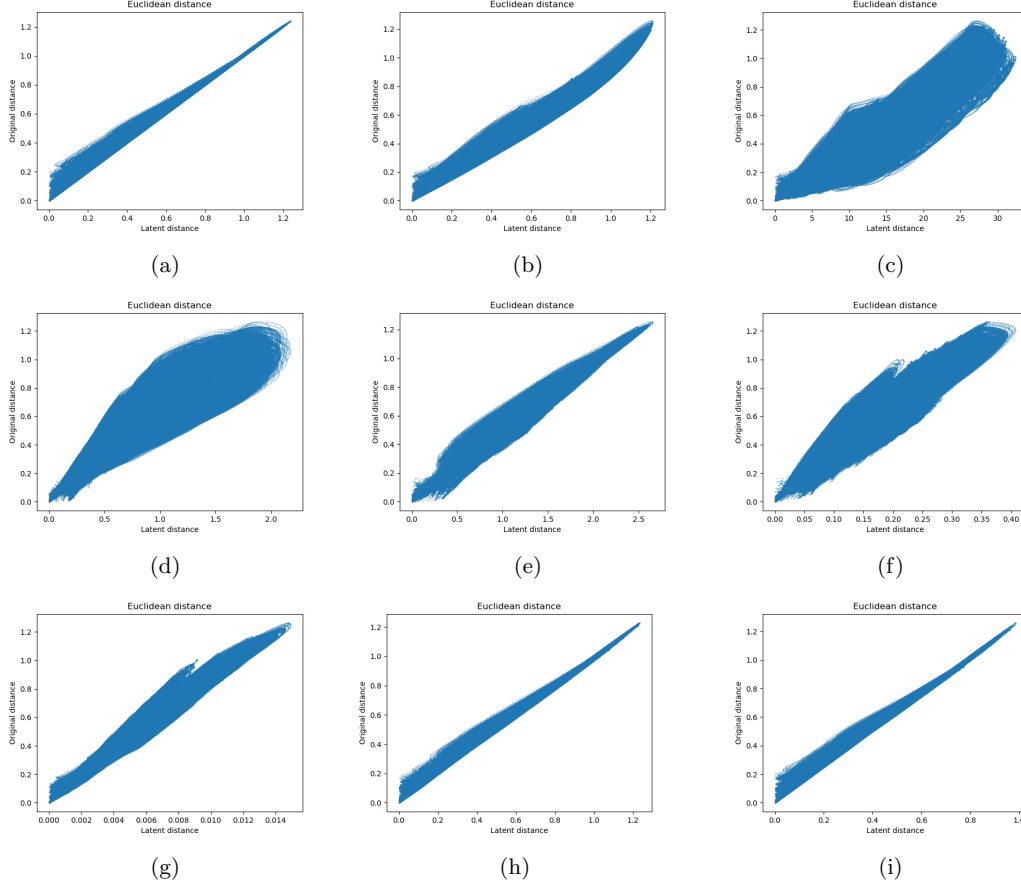


Figure SI 1: Scatter plots of distances for 200 random samples of the test dataset for PCA (a), KPCA (b), UMAP (c), AE (d), BNAE (e), CRAE (f), VAE (g), DIRESA_{MSE} (h) and DIRESA_{Corr} (i)

when a location parameter of 100 is used. For the mean scores, DIRESA_{MSE} scores best on 3 out of 4 indicators, while for the median, it scores best on all 4. Tables SI 10 show the standard error of the mean for the KPIs with a location parameter of 100. Figure SI 2 shows the scatter plots of the 100 closest distances (in latent space) for the different methods for 200 random samples of the test dataset.

3.2 MAOOAM distance preservation

Table SI 11 shows the standard error of the mean for the *Corr* and *LogCorr* distance KPIs and for the KPIs with a location parameter of 50: *Can50*, *Pear50*, *Spear50* and *Ken50*. Table SI 12 shows the 2 sample t-test p-value for the mean distance between DIRESA and PCA.

References

- [1] F. Pedregosa et al. “Scikit-learn: Machine Learning in Python”. In: *Journal of Machine Learning Research* 12 (2011), pp. 2825–2830.
- [2] Leland McInnes et al. “UMAP: Uniform Manifold Approximation and Projection”. In: *The Journal of Open Source Software* 3.29 (2018), p. 861.

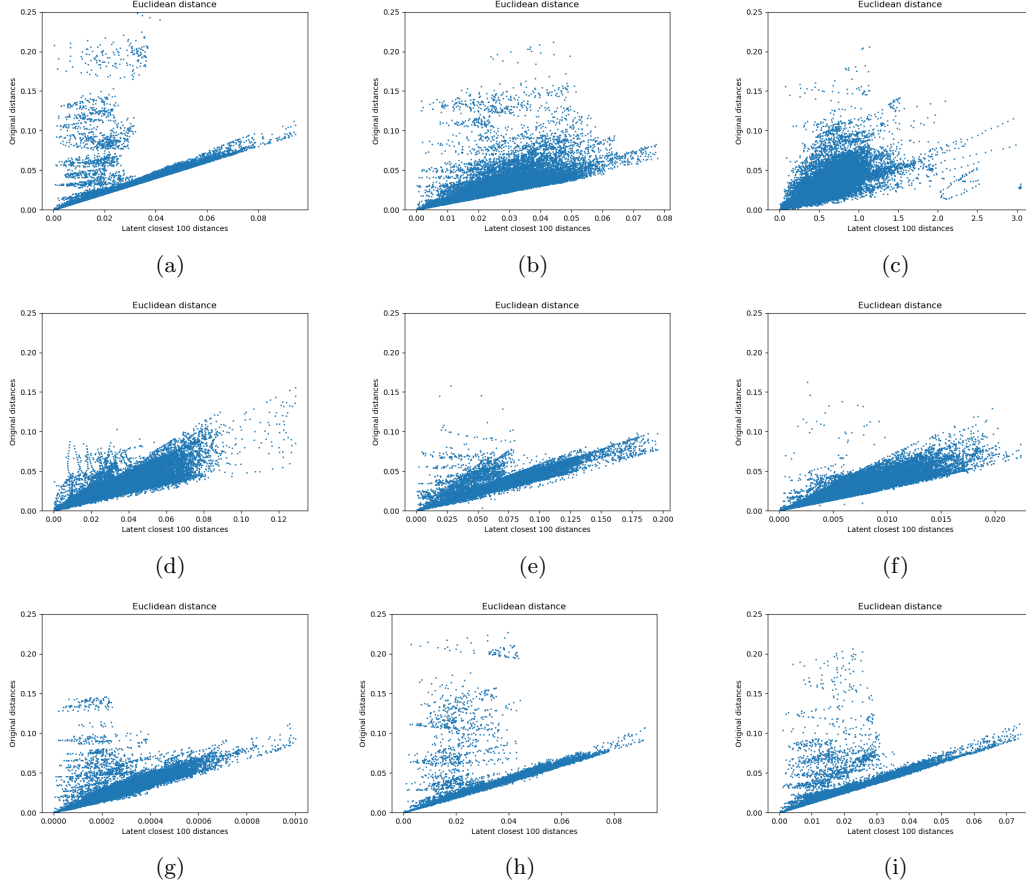


Figure SI 2: Scatter plots of 100 closest distances for 200 random samples of the test dataset for PCA (a), KPCA (b), UMAP (c), AE (d), BNAE (e), CRAE (f), VAE (g), DIRESA_{MSE} (h) and DIRESA_{Corr} (i)

Model	Corr	LogCorr	Can50	Pear50	Spear50	Ken50
PCA	0.000	0.000	0.009	0.013	0.013	0.010
DIRESA _{MSE}	0.000	0.000	0.003	0.014	0.014	0.011
DIRESA _{MSLE}	0.000	0.000	0.011	0.015	0.015	0.013
DIRESA _{Corr}	0.000	0.000	0.009	0.014	0.014	0.011
DIRESA _{LogCorr}	0.000	0.000	0.009	0.013	0.014	0.012

Table SI 11: Distance preservation standard error of mean for 200 random samples of the MAOOAM test dataset. Columns as in Table 2.

Models	Can50	Pear50	Spear50	Ken50
DIRESA _{MSLE} - PCA	0.0003	0.004	0.004	0.006
DIRESA _{LogCorr} - PCA	0.005	0.031	0.024	0.022

Table SI 12: 2 sample t-test p-values for the mean distance between DIRESA and PCA for the MAOOAM test dataset. Columns as in Table 2.