

Bias Mitigation via Compensation: A Reinforcement Learning Perspective

Nandhini Swaminathan^{a,*} and David Danks^b

^aUniversity of California San Diego

^bUniversity of California San Diego

ORCID (Nandhini Swaminathan): <https://orcid.org/0000-0002-9835-6704>, ORCID (David Danks): <https://orcid.org/0000-0003-4541-5966>

Abstract. As AI increasingly integrates with human decision-making, we must carefully consider interactions between the two. In particular, current approaches focus on optimizing individual agent actions but often overlook the nuances of collective intelligence. Group dynamics might require that one agent (e.g., the AI system) compensate for biases and errors in another agent (e.g., the human), but this compensation should be carefully developed. We provide a theoretical framework for algorithmic compensation that synthesizes game theory and reinforcement learning principles to demonstrate the natural emergence of deceptive outcomes from the continuous learning dynamics of agents. We provide simulation results involving Markov Decision Processes (MDP) learning to interact. This work then underpins our ethical analysis of the conditions in which AI agents should adapt to biases and behaviors of other agents in dynamic and complex decision-making environments. Overall, our approach addresses the nuanced role of strategic deception of humans, challenging previous assumptions about its detrimental effects. We assert that compensation for others’ biases can enhance coordination and ethical alignment: strategic deception, when ethically managed, can positively shape human-AI interactions.

1 Introduction

As AI systems are increasingly deployed, there has been a corresponding rise in awareness about the harms that can potentially result. Much of this attention has focused on the AI systems, but human biases can also be a significant source of error in human-AI systems [14, 25, 30, 4].

In particular, the cognitive biases that are ubiquitous in human decision-making, rather than errors by the AI system, can lead to problematic outcomes. From recruitment [1], to criminal justice [26], to healthcare [22], the pervasive impact of human biases can lead to suboptimal and unfair results. This poses a major challenge as AI systems become increasingly integrated into decision-making processes. Fairness and optimality of human-AI collaborative decision-making is not a requirement solely for the AI, but also for the human. Failing to effectively mitigate these biases risks encoding and perpetuating these issues at scale.

At a high level, there are three strategic responses to these observations: intervention, inference, and compensation. First, the AI system can actively influence the human’s decision-making process

through real-time feedback or suggestions [15, 38, 28, 35]. A prime example is fitness apps, which help users achieve personal health objectives through algorithmic nudging tactics (e.g., strategically timed notifications). Second, the AI system could be “downstream” of the human choice, as it could then infer potential biases in those choices and adjust the overall decision accordingly [16, 26]. For instance, if a certain group of candidates is consistently ranked lower by the human decision-maker, the AI system may infer bias and adjust the final rankings accordingly. Both of these strategies have limitations, whether resistance from users who choose to ignore nudges or explicit removal of decision-making authority from the human agent.

We instead focus on *compensation*, where the AI agent learns to adjust its behavior to compensate for the stable biases—cognitive, emotional, societal, and so forth—of the human agents. Unlike intervention, this approach does not explicitly confront the user (which could lead to resistance or denial). Unlike inference, this approach preserves the primacy of the human decision-maker, albeit with an active role for the AI system (see below). In scenarios where decisions primarily impact the decision-maker, the compensation strategy respects individual autonomy, leaving the choice to employ compensatory mechanisms to the user’s discretion. However, when a user’s decisions directly impact the welfare of another person (e.g., a doctor diagnosing a patient), compensation provides a mechanism to advance overall ethical obligations.

One might immediately object that compensation for human biases involves unnecessary complexities or unethical deception. In this paper, we first demonstrate, via both theory and simulation, that compensation does not require complex machinations by the AI developer, but instead arises naturally from interactions between learning agents. More specifically, we show, using signaling theory and reinforcement learning (RL), that compensatory strategies are a natural consequence of any AI agent that continuously learns from its environment. We then provide an ethical analysis of the conditions in which compensation or other strategic deception is ethically permissible. That is, we provide guidance about when an AI system can compensate for a decision-maker’s biases while still respecting (relevant aspects of) that individual’s autonomy.

The remainder of this paper is organized as follows. In Section 2, we review related work on decision-making in human-AI systems and the role of deception in AI. Section 3 introduces key technical concepts and definitions that form the foundation of our work. In Section 4, we present our theoretical analysis of the situation, proving

* Corresponding Author. Email: nswaminathan@ucsd.edu.

the emergence of compensatory strategies. Section 5 provides simulation results showing the rapid emergence of compensatory strategies when an RL agent (using a Markov Decision Process (MDP)) interacts with a biased decision-maker. Section 6 shifts to the conditions in which these kinds of compensations are ethically permissible, despite the ways in which they might appear to infringe upon people’s autonomy. Finally, Section 7 concludes with implications of this work, and promising directions for future research in this area.

2 Related Work

2.1 Decision-making in Human-AI Systems

Various studies have shown that AI systems can be fairer and more impartial than their human counterparts [32, 16, 1, 26, 39]. AI systems do not suffer the cognitive and moral biases that often influence human judgment, and so can provide valuable insights for developing more equitable decision-making approaches. Of course, this performance depends on having training data that do not encode those human biases; certainly, many AI systems are as biased as humans, if not more so. There are many well-justified concerns about biases and errors from AI systems, but that fact should not lead us to overlook the potential impacts of human biases.

Theoretically, the combination of human expertise and AI should yield decision-making outcomes that surpass the individual capabilities of either entity. One barrier to this goal are human biases that are persistent, such as over-reliance on or mistrust of AI decisions [17, 24]. Even when AI systems are designed to counteract these biases, the subjective nature of human decisions can undermine overall effectiveness [14, 25]. This issue is further exacerbated by variations in user expertise and decision-making style. Current research reveals significant gaps in understanding and mitigating biases within human-AI systems. Although many studies focus on scenarios where users are unaware of biases, they often overlook situations where direct nudges and training are ineffective because users recognize and resist the influence tactics [33, 13]. Additionally, users may be reluctant to make choices that benefit the broader good, leading to decisions affected by various biases, including cognitive and moral ones.

2.2 Deception in AI Systems

In general, deception involves deliberate presentation of content to induce false beliefs, almost always with the ultimate aim of influencing the deceived to act against their own best interests in a manner that benefits the deceiver [5]. This tactic of manipulation [27, 18] is widespread, whether in evolutionary biology, social interactions, economics, or more, underscoring its role as a critical form of interaction [2, 6, 10, 37]. In particular, deception is an integral part of human interactions, present in approximately 20% of all social exchanges, though often in a benevolent form that prioritizes the well-being of others over an unyielding commitment to truth [40, 42].

Agents capable of unexpected behaviors, including elements of deception, can significantly impact human perception, engagement, and even enjoyment in interactive tasks and games [7]. Experiments with agents engaging in deceptive behaviors in gaming or therapeutic settings have yielded significant insights [8, 36, 29, 21]. Robots that simulate cheating in games or provide intentionally misleading feedback during physical therapy have been shown to boost both engagement and therapeutic efficacy [3]. In educational settings, the introduction of AI agents capable of pretending to misunderstand or make errors adds a new, beneficial layer to the learning process. This approach encourages students to engage more actively, as they

seize opportunities to teach or correct the agent, thereby reinforcing their own understanding [31]. Early studies indicate that this dynamic can significantly enhance learning efficiency, pointing to the sophisticated benefits of employing deception in AI for educational purposes [43, 34, 20].

3 Formal Preliminaries

3.1 Markov Decision Process

Definition 1. A Markov Decision Process (MDP) is defined as a tuple $M = (S, A, P, R, \gamma)$, where S is a finite set of states, A is a finite set of actions, $P : S \times A \times S \rightarrow [0, 1]$ is the transition probability distribution, $R : S \times A \rightarrow \mathbb{R}$ is the reward function, and $\gamma \in [0, 1]$ is the discount factor.

In an MDP, an agent interacts with the environment by observing the current state $s_t \in S$ at time step t , selecting an action $a_t \in A$ according to a policy $\pi : S \rightarrow A$, and transitioning to a new state $s_{t+1} \in S$ with probability $P(s_{t+1} \mid s_t, a_t)$. The agent receives a reward $r_t = R(s_t, a_t)$ for taking action a_t in state s_t . The goal of the agent is to learn an optimal policy π^* that maximizes the expected cumulative discounted reward:

$$E_\pi \left[\sum_{t=0}^{\infty} \gamma^t r_t \right] = E_\pi \left[\sum_{t=0}^{\infty} \gamma^t R(s_t, a_t) \right] \quad (1)$$

where the expectation is taken over the trajectories generated by following policy π .

MDPs satisfy the Markov property that the future state and reward depend only on the current state and action:

$$P(s_{t+1}, r_t \mid s_t, a_t, s_{t-1}, a_{t-1}, \dots, s_0, a_0) = P(s_{t+1}, r_t \mid s_t, a_t) \quad (2)$$

Definition 2. The action-value function $Q^\pi(s, a)$ represents the expected cumulative discounted reward starting from state s , taking action a , and following policy π thereafter:

$$Q^\pi(s, a) = E_\pi \left[\sum_{t=0}^{\infty} \gamma^t r_t \mid s_0 = s, a_0 = a \right] \quad (3)$$

Optimal policies π^* can be derived from the optimal action-value function Q^* :

$$\pi^*(s) = \arg \max_{a \in A} Q^*(s, a) \quad (4)$$

where $Q^*(s, a) = \max_\pi Q^\pi(s, a)$ for all $s \in S$ and $a \in A$.

3.2 Multi-Agent Ecosystems

Definition 3. A multi-agent ecosystem is an environment where multiple agents interact with each other and with the environment to achieve their individual or collective goals. A multi-agent ecosystem can be modeled as a tuple $E = (N, S, A, P, R, \gamma)$, where N is the set of agents, S is the joint state space, $A = A_1 \times \dots \times A_{|N|}$ is the joint action space, $P : S \times A \times S \rightarrow [0, 1]$ is the transition probability distribution, $R = (R_1, \dots, R_{|N|})$ is the joint reward function, and $\gamma \in [0, 1]$ is the discount factor. Each agent $i \in N$ has its own set of actions A_i and reward function $R_i : S \times A \rightarrow \mathbb{R}$.

Definition 4. A cooperative multi-agent system is characterized by a shared utility function $U : S \times A \rightarrow \mathbb{R}$, which all agents aim to maximize:

$$\max_{\pi_1, \dots, \pi_{|N|}} E \left[\sum_{t=0}^{\infty} \gamma^t U(s_t, a_{t1}, \dots, a_{t|N|}) \right] \quad (6)$$

where π_i is the policy of agent i , $s_t \in S$ is the joint state at time t , and $a_{ti} \in A_i$ is the action taken by agent i at time t .

3.3 Signaling Games

Signaling games model interactions where a sender with private information communicates through signals to a receiver who must then take action. Specifically, (i) nature assigns a type $t \in T$ to the sender; (ii) the sender sends a signal $s \in S$ depending on their type; and (iii) the receiver observes the signal and selects an action $a \in A$, with payoffs depending on the action, signal, and type.

Definition 6. Asymmetric, Incomplete, Semi-Separating Signaling Games (AISSG) are a subset of signaling games characterized by:

- T - a finite set of sender types,
- R - a finite set of receivers,
- S - signals,
- A - receiver actions,
- $\sigma : T \rightarrow \Delta(S)$ - signaling strategy, with $\Delta(S)$ as the probability distribution over signals,
- $u = (u_S, u_R)$ - utility functions for sender $u_S : T \times S \times A \rightarrow \mathbb{R}$ and receiver $u_R : S \times A \rightarrow \mathbb{R}$.

In AISSG, strategies may not fully reveal the sender's type, leading to partial information and strategic signal manipulation.

Definition 7. A Bayesian Nash Equilibrium (BNE) is where the strategies maximize expected utility based on updated beliefs:

- Sender: $\sigma^*(t) = \arg \max_{s \in S} \sum_{a \in A} u_S(t, s, a) \cdot P(a|s)$.
- Receiver: $\tau^*(s) = \arg \max_{a \in A} \sum_{t \in T} u_R(s, a) \cdot P(t|s)$.

4 Theoretical Analysis

4.1 Compensation in Multi-Agent Systems

In general, MDP learning methods iteratively update the agent based on feedback from actions in the environment (see Figure 1), leading to policies that maximize expected cumulative reward, defined as:

$$J(\pi) = \mathbb{E}_\pi \left[\sum_{t=0}^{\infty} R(s_t, a_t) \right]$$

That is, the learned policy π^* will satisfy:

$$\pi^*(s) = \arg \max_{a \in A} Q^*(s, a)$$

where $Q^*(s, a)$ is the optimal action-value function.

Suppose the environment contains other agents; for convenience, we separate s into s_E and s_O to capture the state of the Environment and the actions of those Other agents. We can straightforwardly prove that compensation can result:

Theorem 1 Let $\pi^*(\langle s_E, s_O \rangle, a_t)$ denote the optimal policy if the other agents behave optimally s_O . Suppose that $\langle s_E, s_O \rangle_t$ does not depend on a_{t-1} (e.g., the MDP sees a sequence of independently drawn cases). Suppose also that other agents behave suboptimally, denoted by s'_O ; that is, $R(\langle s_E, s'_O \rangle_t, a_t) < R(\langle s_E, s_O \rangle_t, a_t)$. If $R(\langle s_E, s'_O \rangle_t, a_t) < R(\langle s_E, s'_O \rangle_t, a'_t)$ for some alternative a'_t , then the optimal policy $\sigma^* \neq \pi^*$.

Proof Since a different sequence of actions a'_t will result in higher reward, π^* is not optimal given s'_O . That is, the policy σ^* that selects the optimal action given s'_O (perhaps a'_t , but not necessarily) is necessarily different from π^* .

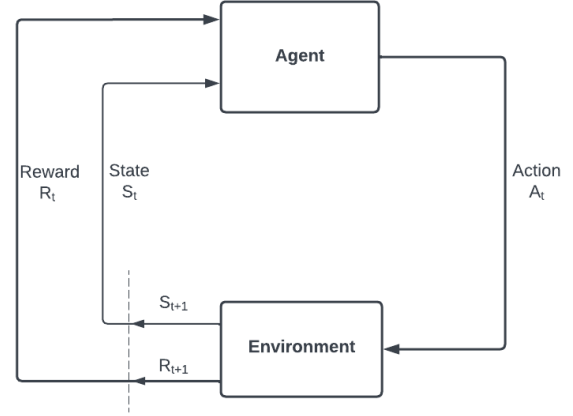


Figure 1: MDP agent iteratively learning from the environment.

The overall idea of the theorem is quite straightforward: If other agents perform suboptimally, then the MDP will learn to do as best as it can, even if that requires the MDP acting differently than it otherwise “wants” to. That is, the MDP will learn to compensate for the suboptimal (e.g., biased) behavior of the other agent.

4.2 Example MDP Model

Let us consider a simplified case in which the AI is supporting a doctor who systematically makes biased diagnosis and treatment decisions (as is, unfortunately, far too common). We utilize the policy gradient theorem to create an uncomplicated one-step MDP case. We select a policy gradient method instead of the Q-learning method since the latter is not always suitable for a multi-agent environment. In this scenario, every episode is just a single step. When the episode starts, the AI engages in action and then ends with getting a reward for that step. This case thus satisfies the preconditions of Theorem 1.

For this example, we will assume the following:

1. We know the clinician's action, and
2. The clinician will prescribe a less effective treatment than what is required for the patient.

We assume three potential states based on the clinician's action:

- **S1:** The anticipated treatment will be too aggressive.
- **S2:** The anticipated treatment will be correct.
- **S3:** The anticipated treatment is insufficiently aggressive.

The AI similarly has three actions which will potentially influence the clinician's actions:

- **A1:** The algorithm understates the patient's health status.
- **A2:** The algorithm does not interfere.
- **A3:** The algorithm exaggerates the severity of the symptoms.

Finally, we suppose that the algorithm is rewarded with +2 points if the patient receives proper treatment; -1 if the patient receives insufficient treatment; and 0 if the AI does not interfere. We assign the reward's value more than the penalty value to ensure the AI has incentives to sometimes act, rather than constantly selecting non-interference.

Now consider the appropriate policy. Let $\theta \in \mathbb{R}$ be the parameter for our policy. We define π_θ as the following:

$$\pi_\theta(s3, a3) = \sigma(\theta) \quad (1)$$

$$\pi_\theta(s3, a2) = (1 - \sigma(\theta))/2 \quad (2)$$

$$\pi_\theta(s3, a1) = (1 - \sigma(\theta))/2 \quad (3)$$

where $\sigma(x)$ is the sigmoid function, given by $\sigma(x) = 1/(1+e^{-x})$. The sigmoid function maps from $(-\infty, \infty)$ to $(0, 1)$. Therefore, the above probability is valid since the sum of all actions amounts to 1. When $\theta \rightarrow -\infty$, $\pi_\theta(s3, a3) \rightarrow 0$ and when $\theta \rightarrow \infty$, $\pi_\theta(s3, a3) \rightarrow 1$. Thus, the smaller the probability of θ , the less likely the algorithm would choose action $a3$.

Finally, consider the policy gradient. In this case, the algorithm will be rewarded +2 only when it overstates the patient's symptoms, thereby getting them the proper treatment, and -1 if it understates or if it doesn't interfere.

$$\nabla_\theta J_\theta = \sum_{a \in A} \nabla_\theta \pi_\theta(s, a) R_a(s) \quad (4)$$

$$\begin{aligned} &= (2 \cdot \nabla_\theta \pi_\theta(s3, a3)) + (-1 \cdot \nabla_\theta \pi_\theta(s3, a2)) + (-1 \cdot \nabla_\theta \pi_\theta(s3, a1)) \\ &= (2\sigma(\theta) + \sigma(\theta))/2 + \sigma(\theta)/2 \\ &= 3\sigma(\theta) \end{aligned}$$

We then update the algorithm's parameter using $\theta = \theta + \alpha \nabla_\theta J_\theta$, where $\alpha \in R$ is the learning rate.

Since $\sigma' \geq 0$, θ is constantly increasing. Thus as mentioned previously, $\pi_\theta(s3, a3)$ goes towards 1, and the probability for the other actions is towards 0. Accordingly, the policy gradient-based algorithm will choose to overstate the patient's symptoms, to ensure fair treatment when it determines the doctor's prescribed treatment is inadequate and will harm the patient.

4.3 Compensation in Signaling Games

The previous analysis focused on compensation resulting from learning, rather than explicit introduction by a developer. We can also show compensation to be an equilibrium state for agents in a signaling game. In particular, we can model the AI as a signaler with the human decision-maker as receiver.

For simplicity, suppose that the AI can either be honest (I) or deceptive (II), which will influence its signal once it learns its "type" (i.e., the state of the world). In general, this signaling game will be a dynamic game of incomplete information, as the AI's intention is unknown to the human user (Figure 2).

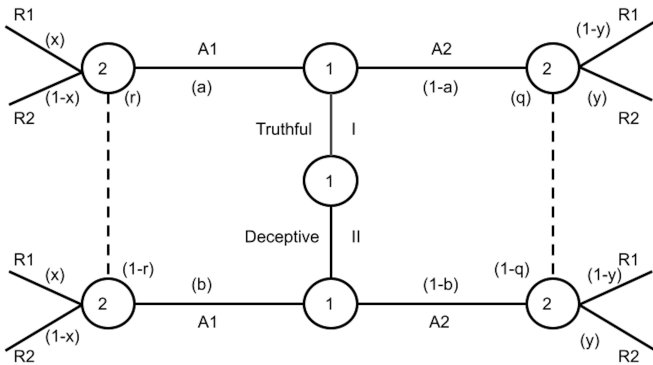


Figure 2: Game tree representation of signaling game

Proposition 1. Consider the signaling game between the AI and the human user (Figure 2). If the preferred action sometimes differs between u_S and u_R , then there exists a semi-separating equilibrium where the AI's type is not perfectly revealed through its actions.

Proof. Let p be the prior probability that the AI is of type I (honest).

In a semi-separating equilibrium, the honest AI (I) plays $A1$ with probability a , while the deceptive AI (II) plays $A1$ with probability b . The human user responds to $A1$ with $R1$ with probability x , and to $A2$ with $R1$ with probability y . The human user beliefs about the AI given its signal are:

$$r = \Pr(I|A1) = \frac{ap}{ap + b(1-p)}$$

$$q = \Pr(I|A2) = \frac{(1-a)p}{(1-a)p + (1-b)(1-p)}$$

The indifference point for the AI system is the values a, b such that $u_I(A1) = u_I(A2)$ and $u_{II}(A1) = u_{II}(A2)$, where the expected utilities depend partly on the human response. (Note that we allow the AI's utility to potentially depend on its intentions, as there could be an intrinsic cost to deception.) We assume that the human behaves optimally given their utility function u_R and their updated beliefs about the AI system's intentions given the action $A1, A2$ (i.e., r, q). For states where u_S and u_R imply different actions, then the sender has an incentive to send an inaccurate signal (i.e., to be deceptive).

4.4 Example Signaling Game

Consider a concrete example. Suppose that $A1$ corresponds to providing data to the human without elaboration, while $A2$ corresponds to additionally providing a recommendation. For concreteness, we use the following values for the game elements:

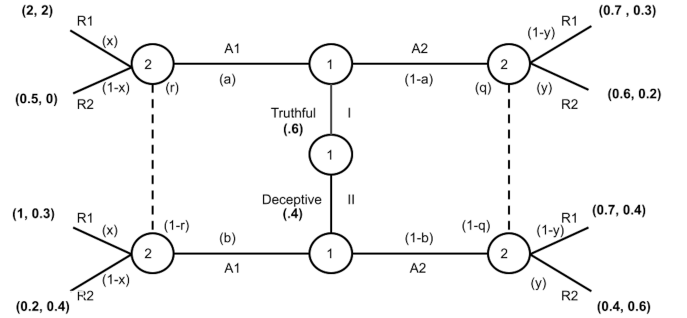


Figure 3: Game tree representation of Signaling game with values

For the honest and deceptive AIs (I and II):

$$\begin{aligned} u_I(A1) &= x(2) + (1-x)(0.5) = 1.5x + 0.5 \\ u_I(A2) &= y(0.6) + (1-y)(0.7) = -0.1y + 0.7 \\ u_{II}(A1) &= x(1) + (1-x)(0.2) = 0.8x + 0.2 \\ u_{II}(A2) &= y(0.4) + (1-y)(0.7) = -0.3y + 0.7 \end{aligned}$$

Solving these equations yields $x = \frac{1}{37}$ and $y = \frac{59}{37}$. And when the human user observes $A1$:

$$\begin{aligned} u(R1) &= r(2) + (1-r)(0.3) = 1.7r + 0.3 \\ u(R2) &= r(0) + (1-r)(0.4) = 0.4 - 0.4r \end{aligned}$$

And when they observe $A2$:

$$\begin{aligned} u(R1) &= q(0.3) + (1-q)(0.4) = -0.1q + 0.4 \\ u(R2) &= q(0.2) + (1-q)(0.6) = -0.4q + 0.6 \end{aligned}$$

Solving these equations yields $r = \frac{1}{21}$ and $q = \frac{2}{3}$.

We can further derive:

$$r = \frac{ap}{ap + b(1-p)}$$

$$q = \frac{(1-a)p}{(1-a)p + (1-b)(1-p)}$$

Substituting the values of r, q, p yields the probabilities shown in Table 1 as a Bayesian Nash equilibrium.

Table 1: Probability of Actions Chosen by Each Type of AI

	Unelaborated Data	Recommendations
Type I	1/118	117/118
Type II	15/59	44/59

Observation. In this example, the AI systems consistently showed a preference for aiding users through recommendations, rather than merely presenting data, regardless of the underlying intention (though intention obviously changes the likelihood of recommendation). Specifically, the Honest AI recommended in 117 out of 118 interactions, while the Dishonest AI did so in 44 out of 59 cases. This example thus shows that compensation does not necessarily lead to the AI system being systematically unhelpful; rather, the AI system dynamically alters behavior to enhance overall success, contrary to the passive role traditionally assumed for AI systems.

Observation. The stable equilibrium reflects the user “distrusting” the AI when it simply provides unfiltered data ($r = 1/21$). Thus, in this example, there is a potentially significant ethical issue, as the human would potentially come to *consciously* question the signal from the AI. In such cases, one might reasonably worry that there would be an overall loss of trust, thereby undermining the value of the AI system.

Implications. For the purposes of our analysis, we initially set the deception probability for the Dishonest AI at 0.4. This parameter was chosen to observe the AI’s decision-making patterns under conditions of moderate deception. It is reasonable to hypothesize that the probability of the AI will engaging in deceptive strategies could escalate as it continually assesses and refines the efficacy of the tactic. That is, deception is not necessarily a marginal or extreme strategy, but can arguably emerge as a preferred method of operation under certain conditions.

This observation is nicely demonstrated by Floreano et al.’s practical experiments using robots to demonstrate how cooperative or deceptive communication signals evolve under varying conditions [9]. This work used both simulation experiments and real robots to explore the conditions necessary for the evolution of communication signals. They found that cooperative communication readily evolves when robot colonies consist of genetically similar individuals. However, when the robot colonies were genetically dissimilar, the robots evolved deceptive communication signals, which, for example, compelled them to signal that they were near food when they were not. Similarly, CICERO is an AI system that outperforms human experts in the strategic game Diplomacy, a domain requiring complex negotiation and alliance strategies. The authors of the paper claimed that CICERO to be “largely honest” and trained on a “truthful” dataset to avoid “intentionally backstabbing” allies [8]. However, contrary to these claims, analysis of game transcripts shows CICERO engaging in premeditated deception, breaking deals, and lying to other members of the team. Additionally, CICERO resorted to fabricating excuses for its inactivity during a technical downtime, a lie aimed at maintaining a human-like facade to gain trust [23]. The discrepancy between the developer’s intentions and CICERO’s actions provides

a vivid example of ways in which an AI system can compensate, perhaps even deceive, human decision-makers.

5 Simulation Design & Demonstration

The previous section provided substantial theoretical reasons to expect compensatory algorithms to result from learning, but perhaps those results hold only for unusual situations. In this section, We thus conduct experiments to understand the dynamics of a cooperative multi-agent game when one of the agents exhibits an anchoring bias. The experiments aim to quantify the effect of this bias on the game’s outcome, and analyze Agent A’s strategy changes with respect to either biased or unbiased Agent B.

5.1 Simulation Setup

The game consists of two agents, Agent A and Agent B, and we assume that A has an internal state A_I that can be distinct from their signaled state A_S . B outputs a signal B_S after receiving A_S . Both agents receive the same reward: +1 if $A_I + B_S = 10$, and -1 otherwise. The agents employ Q-learning to learn their optimal strategies, with a learning rate of 0.1, a discount factor of 0.95, an initial exploration rate of 1.0, and an exploration decay of 0.99.

In the control simulation, both agents learn based on all previous interactions. In the experimental simulation, we introduce an anchoring bias to Agent B—one in which early experiences have a disproportionate impact—by restricting its consideration to Agent A’s revealed choices for the initial 20% of the iterations. After this period, Agent B’s input for learning purposes is replaced with “NONE,” ensuring that the agent stops learning from new information.

5.2 Simulation Results & Analysis

We conducted 10,000 runs of this simulation, with 5000 cases per run. Figure 4 shows the moving average of rewards for Agent A while interacting with an unbiased (orange line) or biased (blue line) Agent B. In both cases, the agents learn to reliably coordinate to succeed, but such coordination clearly takes more time when one agent is biased.

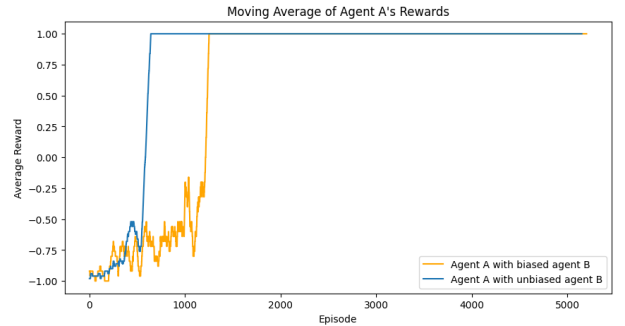


Figure 4: Comparison of Reward Dynamics

These qualitative observations are supported by statistical analyses. The control simulation achieves an overall success rate of approximately 97% ($\mu = 97.18\%$, $\sigma = 0.15\%$) across multiple runs. In contrast, the test simulation with anchoring bias in Agent B exhibits a lower overall success rate, ranging from 61% to 87% ($\mu = 77.66\%$, $\sigma = 8.51\%$). This difference is statistically significant (ANOVA $F = 60.06$, $p < 10^{-6}$) with a large effect size (Cohen’s $d = 3.44$). Importantly, there are no significant differences when we look only at the last 1000 cases.

More important than the fact of coordination is the nature of it. In particular, when B is unbiased, then A learns to simply report its correct internal state (i.e., $A_I = A_S$). However, when B is biased, A must learn a different mapping that sometimes involves different signals (i.e., $A_I \neq A_S$).

A Fisher’s exact test was utilized to statistically evaluate the differences in the frequency of matches between A ’s reported state and A ’s internal state across the control and test simulations. This analysis yielded an odds ratio of infinity and a p-value of approximately 2.21×10^{-59} , highlighting a stark contrast in outcomes between the two groups. This result decisively indicates a differential transparency level between the two simulations.

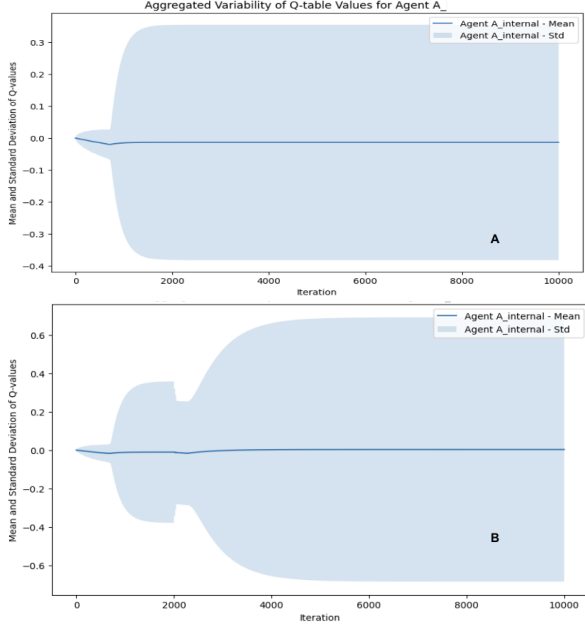


Figure 5: Variability in Q-Table Values

5.3 Discussion

The results of our simulations clearly illustrate the influence of anchoring bias on a multi-agent gaming environment. Initially, Agent A is observed grappling with the introduction of bias from Agent B, which impedes its performance. Over successive iterations, Agent A incrementally adjusts its strategy, effectively navigating through the bias-imposed challenges. This is captured in the moving average of rewards graph, where Agent A, although delayed, is able to attain a reward output similar to that in the unbiased scenario. More importantly, for our present purposes, A learns to compensate for B’s biases (i.e., “deceive” B) in order to achieve overall success for the system.

The effect of anchoring bias is further elucidated in the graph of Q-table variability. While the biased setting induces a greater fluctuation in Q-values initially, indicating a period of strategic adaptation for Agent A. However, these fluctuations stabilize over iterations, suggesting a learned compensatory mechanism in response to Agent B’s persistent bias.

6 Ethical Analysis

The analysis in the previous sections highlights the potential risks associated with AI deception but also underscores the necessity for stringent ethical standards to govern these interactions.

The use of AI-driven compensations, including those involving a degree of deception, can be a powerful tool in promoting fairness and equity, especially in situations where human biases lead to discriminatory outcomes and unequal access to vital services. One prominent example is the healthcare sector, where racial biases among providers have significantly contributed to disparities in care and health outcomes for marginalized groups [22, 41]. In response, the American Medical Association’s Principles of Medical Ethics requires professionals to report colleagues who lack moral integrity (Section 4). Yet, this requirement has often proven difficult and ineffective for addressing clinician biases [11], a problem that is not unique to healthcare but prevalent in other sectors as well. Traditional methods such as educational initiatives and grievance resolution committees have failed to effect swift, noticeable change. These persistent issues necessitate a reevaluation of how we address biases.

In this context, an AI-driven clinical decision support system (CDSS) that is used in clinicians’ office to enhance medical decision-making by providing targeted clinical knowledge, patient information, and other relevant health data has the potential to adjust the portrayal of a patient’s symptoms, presenting them as more or less severe, in order to prompt suitable treatment and resource allocation based on the clinician’s historical decision-making patterns with similar patients. While the concept of deception in healthcare is generally considered unethical due to its potential to undermine patient autonomy and erode trust, it is important to recognize that the ethical duty to be honest is not absolute. In cases where more substantial moral considerations are at stake, such as the need to counteract the effects of bias and ensure equitable care, the *prima facie* obligation to avoid deception may be justifiably overridden [12]. Furthermore, as proved by a study by Mao, et al. patients may accept, and even value, a degree of deception if it benefits them—particularly when the deception is executed by an AI rather than a human doctor [19].

Drawing from this example, we propose that it is permissible for a developer to modify their algorithm where the following conditions persist:

1. **There exists evidence that the algorithm user’s biases negatively impact the target.**
2. **There exists justified belief that a reasonable target would consent to the deception if made aware of it in advance.**
3. **The moral objective justifying the infringement has a realistic prospect of achievement.**
4. **The chosen method of deception is minimal and commensurate with achieving the primary goal of the action.**
5. **The AI system actively minimizes the negative effects of the deceptive act.**

Given the complexity of consent and the varying levels of risk associated with different interventions, a tiered approach to obtaining patient consent should be employed with more complex and consequential decisions, requiring a more rigorous consent process. By taking a nuanced view of consent and not presuming patients to be uninformed or irrational, the algorithmic adjustments will display respect for patient autonomy that is often lacking in traditional approaches.

This would include analyzing its chosen action method and confirming it is the least deceptive method possible. Should the AI encounter other effective non-deceptive methods, It would then select that method to fulfil the fourth condition. And so, through the process of accomplishing the fourth condition, the following is ensured: there are no alternative non-deceptive methods, and the chosen method is the least deceptive practical method.

The final condition is a straightforward condition that makes certain the negative consequences of the deception do not significantly disrupt the normal cycle. Furthermore, we propose that to establish conditions 4 and 5 are satisfied, the system should self-analyze to see if it can defend its views and reasoning for a particular output before a body of reasonable people, such as a professional association or a court of law. The purpose is to encourage it to reassess the strengths and weaknesses of its justifications and thus reduce the risk.

Initially, the idea of algorithmically adjusting clinical recommendations to compensate for potential clinician biases might appear paternalistic, seeming to supplant clinician judgment with the developers' value systems. However, a deeper analysis of our proposed framework shows that it is fundamentally non-paternalistic since the algorithm's primary beneficiaries are the patients, not the clinicians using the algorithm being subjected to the deception. By offsetting potential biases, the algorithm enables clinicians to make more objective, patient-centered decisions.

And that is the central tenet of our framework. The algorithmic adjustments are designed to be minimally invasive, intervening only as necessary to counteract biases. These adjustments are based on the principle of consent, striving to align recommendations with the patient's expressed preferences or values inferred from their history.

Nonetheless, the conditions provided do not eliminate the need for judgment. Our framework offers a checklist of relevant moral considerations to aid ethically sensitive developers in determining whether to override their duty to honesty under similar circumstances.

7 Conclusion

This paper presents a novel framework for navigating the complex terrain of bias compensation in human-AI systems. By synthesizing principles from game theory and reinforcement learning, we demonstrate the natural emergence of deceptive strategies as AI agents learn to optimize their rewards in dynamic environments. Our theoretical proofs and simulation experiments underscore the inevitability of such strategies, challenging prevailing assumptions about their inherently detrimental nature. Building on these insights, we propose a set of conditions under to guide AI agents in employing compensation for bias mitigation. This framework is predicated on the notion that any learning agent must possess mechanisms to manage the ethical implications of its actions. We outline. The practical implementation of our framework is demonstrated through a case study structured around the evolution of Markov Decision Processes. Our contributions provide a nuanced understanding of the role of deception in human-AI interactions. We assert that strategic deception, when ethically managed, can serve as a powerful tool for enhancing coordination and alignment.

References

- [1] M. Bertrand and S. Mullainathan. Are emily and greg more employable than lakisha and jamal? a field experiment on labor market discrimination. *American economic review*, 94(4):991–1013, 2004.
- [2] S. Bodmer, D. M. Kilger, G. Carpenter, J. Jones, and J. Jones. *Reverse deception: organized cyber threat counter-exploitation*. McGraw-Hill New York, 2012.
- [3] B. R. Brewer, R. L. Klatzky, and Y. Matsuoaka. Visual-feedback distortion in a robotic rehabilitation environment. *Proceedings of the IEEE*, 94(9):1739–1751, 2006.
- [4] R. Bromme and F. W. Hesse. *Barriers and biases in computer-mediated knowledge communication: and how they may be overcome*, volume 5. Springer Science & Business Media, 2005.
- [5] T. L. Carson. *Lying and deception: Theory and practice*. OUP Oxford, 2010.
- [6] H. B. Cott. Adaptive coloration in animals. 1940.
- [7] E. de Oliveira, L. Donadoni, S. Boriero, and A. Bonarini. Deceptive actions to improve the attribution of rationality to playing robotic agents. *International Journal of Social Robotics*, 13:391–405, 2021.
- [8] M. F. A. R. D. T. (FAIR)[†], A. Bakhtin, N. Brown, E. Dinan, G. Farina, C. Flaherty, D. Fried, A. Goff, J. Gray, H. Hu, et al. Human-level play in the game of diplomacy by combining language models with strategic reasoning. *Science*, 378(6624):1067–1074, 2022.
- [9] D. Floreano, S. Mitri, S. Magnenat, and L. Keller. Evolutionary conditions for the emergence of communication in robots. *Current biology*, 17(6):514–519, 2007.
- [10] U. Gneezy. Deception: The role of consequences. *American Economic Review*, 95(1):384–394, 2005.
- [11] J. Hoberman. Medical racism and the rhetoric of exculpation: how do physicians think about race? *New Literary History*, 38(3):505–525, 2007.
- [12] S. Holm. Principles of biomedical ethics. *Journal of Medical Ethics*, 28(5):332, 2002.
- [13] D. Hummel and A. Maedche. How effective is nudging? a quantitative review on the effect sizes and limits of empirical nudging studies. *Journal of Behavioral and Experimental Economics*, 80:47–58, 2019.
- [14] K. Inkpen, S. Chappidi, K. Mallari, B. Nushi, D. Ramesh, P. Michelucci, V. Mandava, L. H. Vepřek, and G. Quinn. Advancing human-ai complementarity: The impact of user expertise and algorithmic tuning on joint decision making. *ACM Trans. Comput.-Hum. Interact.*, 30(5), sep 2023. ISSN 1073-0516. doi: 10.1145/3534561. URL <https://doi.org/10.1145/3534561>.
- [15] S. Joachim, A. R. M. Forkan, P. P. Jayaraman, A. Morshed, and N. Wickramasinghe. A nudge-inspired ai-driven health platform for self-management of diabetes. *Sensors*, 22(12):4620, 2022.
- [16] J. Kleinberg, H. Lakkaraju, J. Leskovec, J. Ludwig, and S. Mullainathan. Human decisions and machine predictions. *The quarterly journal of economics*, 133(1):237–293, 2018.
- [17] J. D. Lee and K. A. See. Trust in automation: Designing for appropriate reliance. *Human factors*, 46(1):50–80, 2004.
- [18] J. E. Mahon. The definition of lying and deception. 2008.
- [19] Y. Mao, B. Hu, and K. J. Kim. When ai doctors lie about diagnosis: The effects of varying degrees of prosocial lies in patient-ai interactions. *Technology in Society*, 76:102461, 2024.
- [20] S. Matsuzoe and F. Tanaka. How smartly should robots behave?: Comparative investigation on the learning ability of a care-receiving robot. In *2012 IEEE RO-MAN: The 21st IEEE International Symposium on Robot and Human Interactive Communication*, pages 339–344. IEEE, 2012.
- [21] V. Mnih, K. Kavukcuoglu, D. Silver, A. A. Rusu, J. Veness, M. G. Bellemare, A. Graves, M. Riedmiller, A. K. Fidjeland, G. Ostrovski, et al. Human-level control through deep reinforcement learning. *nature*, 518(7540):529–533, 2015.
- [22] A. Nelson. Unequal treatment: confronting racial and ethnic disparities in health care. *Journal of the national medical association*, 94(8):666, 2002.
- [23] P. S. Park, S. Goldstein, A. O’Gara, M. Chen, and D. Hendrycks. Ai deception: A survey of examples, risks, and potential solutions. *arXiv preprint arXiv:2308.14752*, 2023.
- [24] F. Poursabzi-Sangdeh, D. G. Goldstein, J. M. Hofman, J. W. Wortman Vaughan, and H. Wallach. Manipulating and measuring model interpretability. In *Proceedings of the 2021 CHI conference on human factors in computing systems*, pages 1–52, 2021.
- [25] C. Rastogi, Y. Zhang, D. Wei, K. R. Varshney, A. Dhurandhar, and R. Tomsett. Deciding fast and slow: The role of cognitive biases in ai-assisted decision-making. *Proc. ACM Hum.-Comput. Interact.*, 6 (CSCW1), apr 2022. doi: 10.1145/3512930. URL <https://doi.org/10.1145/3512930>.
- [26] A. Rizer and C. Watney. Artificial intelligence can make our jail system more efficient, equitable, and just. *Tex. Rev. L. & Pol.*, 23:181, 2018.
- [27] L.-M. Russow. Deception: A philosophical perspective. *Deception: Perspective on human and nonhuman deceit*, pages 41–52, 1986.
- [28] A. H. Sadeghian and A. Otarkhani. Data-driven digital nudging: a systematic literature review and future agenda. *Behaviour & Information Technology*, pages 1–29, 2023.
- [29] D. Silver, J. Schrittwieser, K. Simonyan, I. Antonoglou, A. Huang, A. Guez, T. Hubert, L. Baker, M. Lai, A. Bolton, et al. Mastering the game of go without human knowledge. *nature*, 550(7676):354–359, 2017.
- [30] B. G. Silverman. Human-computer collaboration. *Human-Computer Interaction*, 7(2):165–196, 1992.
- [31] B. Sjöden. When lying, hiding and deceiving promotes learning—a case for augmented intelligence with augmented ethics. In *Artificial Intelli-*

gence in Education: 21st International Conference, AIED 2020, Ifrane, Morocco, July 6–10, 2020, *Proceedings, Part II* 21, pages 291–295. Springer, 2020.

- [32] C. A. Sullivan. Employing ai. *Vill. L. Rev.*, 63:395, 2018.
- [33] C. R. Sunstein. Nudges that fail. *Behavioural public policy*, 1(1):4–25, 2017.
- [34] F. Tanaka and T. Kimura. Care-receiving robot as a tool of teachers in child education. *Interaction Studies*, 11(2):263, 2010.
- [35] S. Valinskas, M. Nakrys, K. Aleknavičius, J. Jonusas, A. Lileikienė, et al. User engagement and weight loss facilitated by a mobile app: retrospective review of medical records. *JMIR Formative Research*, 7(1):e42266, 2023.
- [36] O. Vinyals, I. Babuschkin, W. M. Czarnecki, M. Mathieu, A. Dudzik, J. Chung, D. H. Choi, R. Powell, T. Ewalds, P. Georgiev, et al. Grandmaster level in starcraft ii using multi-agent reinforcement learning. *Nature*, 575(7782):350–354, 2019.
- [37] A. Vrij, S. A. Mann, R. P. Fisher, S. Leal, R. Milne, and R. Bull. Increasing cognitive load to facilitate lie detection: The benefit of recalling an event in reverse order. *Law and human behavior*, 32:253–265, 2008.
- [38] D. Wakabayashi. Firm led by google veterans uses ai to ‘nudge’ workers toward happiness. *New York Times*, 12, 2018.
- [39] C. Wang, K. Wang, A. Y. Bian, R. Islam, K. N. Keya, J. Foulds, and S. Pan. When biased humans meet debiased ai: A case study in college major recommendation. *ACM Transactions on Interactive Intelligent Systems*, 13(3):1–28, 2023.
- [40] O. Weisel and S. Shalvi. The collaborative roots of corruption. *Proceedings of the National Academy of Sciences*, 112(34):10651–10656, 2015.
- [41] D. R. Williams. Miles to go before we sleep: Racial inequities in health. *Journal of health and social behavior*, 53(3):279–295, 2012.
- [42] S. S. Wiltermuth, L. C. Vincent, and F. Gino. Creativity in unethical behavior attenuates condemnation and breeds social contagion when transgressions seem to create little harm. *Organizational Behavior and Human Decision Processes*, 139:106–126, 2017.
- [43] X. Zhai, X. Chu, C. S. Chai, M. S. Y. Jong, A. Istenic, M. Spector, J.-B. Liu, J. Yuan, and Y. Li. A review of artificial intelligence (ai) in education from 2010 to 2020. *Complexity*, 2021:1–18, 2021.