

VimTS: A Unified Video and Image Text Spotter for Enhancing the Cross-domain Generalization

Yuliang Liu, IEEE Member, Mingxin Huang, Hao Yan, Linger Deng, Weijia Wu, Hao Lu, Chunhua Shen, Lianwen Jin*, IEEE Member, Xiang Bai, IEEE Senior Member

Abstract—Text spotting, a task involving the extraction of textual information from image or video sequences, faces challenges in cross-domain adaption, such as image-to-image and image-to-video generalization. In this paper, we introduce a new method, termed VimTS, which enhances the generalization ability of the model by achieving better synergy among different tasks. Typically, we propose a Prompt Queries Generation Module and a Tasks-aware Adapter to effectively convert the original single-task model into a multi-task model suitable for both image and video scenarios with minimal additional parameters. The Prompt Queries Generation Module facilitates explicit interaction between different tasks, while the Tasks-aware Adapter helps the model dynamically learn suitable features for each task. Additionally, to further enable the model to learn temporal information at a lower cost, we propose a synthetic video text dataset (VTD-368k) by leveraging the Content Deformation Fields (CoDeF) algorithm. Notably, our method outperforms the state-of-the-art method by an average of 2.6% in six cross-domain benchmarks such as TT-to-IC15, CTW1500-to-TT, and TT-to-CTW1500. For video-level cross-domain adaption, our method even surpasses the previous end-to-end video spotting method in ICDAR2015 video and DSText v2 by an average of 5.5% on the MOTA metric, using only image-level data. We further demonstrate that existing Large Multimodal Models exhibit limitations in generating cross-domain scene text spotting, in contrast to our VimTS model which requires significantly fewer parameters and data. The code and datasets will be made available at the <https://VimTextSpotter.github.io>.

Index Terms—Unified; Synergy; Video Text Spotting; Text Detection; Text Recognition; Text Tracking

1 INTRODUCTION

TEXT spotting has garnered significant attention in recent years, driven by its potential applications such as automated subtitles in dynamic scenes, real-time reading of road signs for self-driving vehicles, and instant translation for international broadcasts. From two-stage methods [1], [2], [3] to Transformer-based method [4], [5], [6], the relationship between detection and recognition is getting closer and has achieved significant advancements.

While text spotting has shown promising progress, addressing cross-domain text spotting remains a significant challenge that requires further exploration [7]. In this paper, the cross-domain text spotting encompasses image-level and video-level scenarios, as shown in Fig. 1 (a) and (b). Image-level cross-domain text spotting involves the migration between images, while video-level cross-domain text spotting represents the generalization from images to video scenes.

1) In image-level cross-domain text spotting, the challenge lies in the varying styles, fonts, and backgrounds across different benchmarks, requiring models to generalize well beyond their training data. When the training set and the test set belong to different benchmarks, the model usually performs poorly, as demonstrated in [7]. Furthermore, the differences in annotation formats across

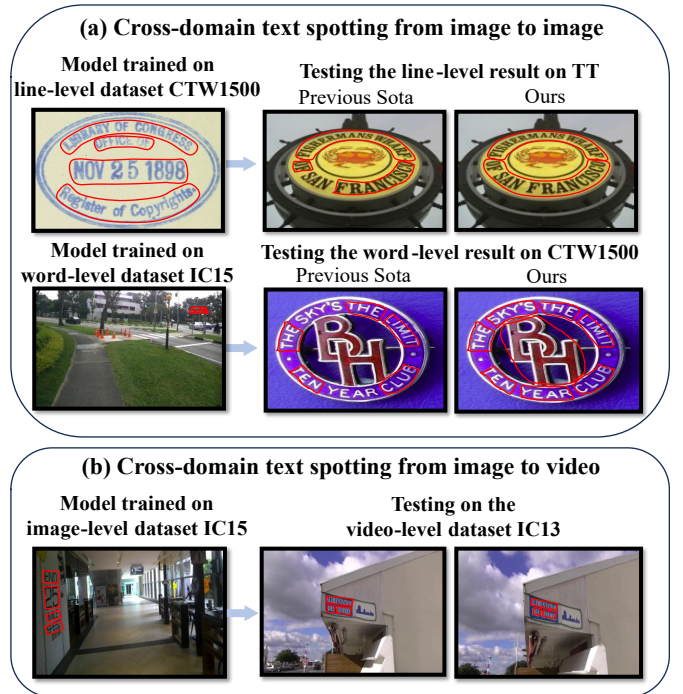


Fig. 1 – Fig. (a) and (b) are two types of cross-domain text spotting, including image-to-image and image-to-video. TT represents the TotalText. IC15 represents the ICDAR2015 [8]. IC13 represent the ICDAR2013 video [9]. TT represents the TotalText [10]

Y. Liu, H. Yan, L. Deng, H. Lu, and X. Bai are with School of Artificial Intelligence and Automation, Huazhong University of Science and Technology, Wuhan, 430074, China. M. Huang and L. Jin are with South China University of Technology, Guangzhou, 510000, China (email: eelwojin@scut.edu.cn). W. Wu and C. Shen are with Zhejiang University, Zhejiang, 310058, China.

Corresponding author: L. Jin.

various datasets bring further challenges. For instance, Total-Text [10] and ICDAR2015 [8] utilize word-level annotations, while CTW1500 [11] employs line-level annotations. Integrating datasets with distinct annotation formats simultaneously proves challenging. This disparity not only complicates the training process but also hampers model performance, as the model struggles to adapt to divergent annotation schemes.

2) For video-level cross-domain text spotting, intuitively, it might appear simple and efficient to train models on static images for text spotting and then apply these models frame-by-frame to videos. However, as illustrated in Fig. 2, we found that models tailored for static images frequently underperform in video contexts, resulting in a significant number of missed detections. Videos incorporating dynamic factors like occlusions, swift changes in scenes, and temporal relationships between frames, the involvement of additional video text tracking tasks diminishes the effectiveness and accuracy of text spotters designed for still images. Therefore, exploring methods to effectively adapt text spotters for video contexts is crucial. When we further explore the video text recognition, we find that the video text data is relatively lacking, due to the expensive annotation cost. Unlike text detection, text spotting normally requires significantly more training data to achieve acceptable text recognition performance. A solution is using the optical flow estimation for data synthesis [12]. However, this method presents several challenges, including distortion, labeling errors, and a bias towards static objects. Additionally, this method [12] does not provide open-source synthetic data for communal utilization. There is a need for open-sourced large-scale synthetic data in video text spotting, such as SynthText [13] for static images.

In this paper, we present VimTS, a unified framework capable of performing both word-level and line-level text spotting, as well as video-level text spotting. Through the unified framework, the model is allowed to leverage the synergy between different tasks. When data for one task is lacking in a certain scenario, we improve cross-domain performance by jointly optimizing tasks across different scenarios. Specifically, to achieve synergy between different tasks, we develop two forms of interaction. Firstly, inspired by [14], VimTS employs a unique decomposition of conventional queries into specific queries for text detection, recognition, and tracking, which allows queries for different tasks to conduct explicit interaction between each other. To achieve synergy among hierarchical text spotting tasks, we propose a Prompt Queries Generation Module, which performs the interaction between word-level, line-level, and video-level text spotting. To efficiently learn these interactive and discriminative features, we introduce a Task-aware Adapter to dynamically select suitable features for different tasks. The PQGM with the Task-aware Adapter can effectively transform the original model into a multi-task model for both image and video scenarios with minimal additional parameters. Furthermore, we utilize the CoDeF [15] to facilitate the achievement of realistic and stable text flow propagation for constructing a synthetic video text dataset (VTD-368k). This dataset augments VimTS’s learning of temporal information, while image-level data help VimTS learn detection and recognition capabilities in real-world

scenarios, thus efficiently adapting the model pre-trained on image to video.

The advantages of our method can be summarized as follows:

- We introduce a new framework, termed VimTS, designed to leverage the synergy between various tasks and scenarios, thereby enhancing the generalization ability in text spotting.
- We propose a Prompt Queries Generation Module and a Task-aware Adapter, which combines hierarchical text spotting tasks into a unified framework, requiring only minimal additional parameters. The training of task-aware adapter only requires 3.0% of parameters compared to fine-tuning the entire model.
- We propose VTD-368k, a large-scale synthetic video text dataset, derived from high-quality open-source videos, designed to improve text spotting models. By utilizing the CoDeF to facilitate the achievement of realistic and stable text flow propagation, the synthetic video data is more consistent with the text between frames.
- In image-level cross-domain text spotting, our method demonstrates superior performance compared to the state-of-the-art method across six benchmarks, with an average improvement of 2.6% in terms of Hmean. Furthermore, in video-level cross-domain text spotting, our method surpasses the previous end-to-end approach in both ICDAR2015 video and DStext v2 by an average of 5.5% on MOTA metric, achieved solely through the utilization of image-level data. Additionally, by using the video data, such as VTD-368k or ICDAR2015 video, our method can achieve further improvement.

2 RELATED WORK

2.1 Scene Text Spotting

Scene text spotting has seen a significant shift from conventional methodologies to more modern end-to-end learning techniques. Traditional approaches, as highlighted in research such as [16], often faced challenges related to inference inefficiencies and error accumulation. Pioneering a more unified perspective, Li *et al.* [17] integrated detection and recognition into a unified framework, creating a comprehensive framework, which predominantly focused on horizontal texts.

As the field progressed, solutions for handling texts in varied orientations emerged. Techniques such as Text-Align [18] and RoI-Rotate [1] became instrumental in transforming oriented text features into horizontal ones. An innovative approach Mask TextSpotter [19], leveraging character-level segmentation to recognize and process irregularly shaped texts. TextDragon [20] viewed text instances as a set of segments and introduced a RoISlide to curved texts. Qin *et al.* [21] proposed RoI Masking to suppress the background noise for the recognition features. Concurrently, Mask-TextSpotter v3 [2] proposes a Segmentation Proposal Network (SPN) to generate accurate proposals for arbitrarily-shaped text. PAN++ [22] presents a fast framework based



Fig. 2 – Applying static text spotting methods to videos, even those with minimal motion, results in inadequate performance regarding both bounding box recall and recognition accuracy. T_n represents the n_{th} frame of a video.

on a fast text detector [23]. ABCNet [24] used the parametric bezier curve to model the curved text and developed BezierAlign for rectifying curved text. ABINet++ [25] attempted to introduce an autonomous, bidirectional, and iterative language model [26] to the recognizer. To enhance long text recognition, ABINet++ integrates character order and content to attend to character features precisely. TESTR [4] adopted a dual-decoder structure for detection and recognition based on the Deformable DETR [27]. Other recent contributions like SwinTextSpotter [28] endeavored to fuse detection and recognition more closely. Similarly, SPTS series [6], [29] adopted an auto-regressive framework in which most parameters are shared between text detection and recognition. TTS [5] introduces a weakly-supervised multi-task transformer that achieves competitive performance with previous methods solely through training with text transcription. Ye *et al.* [30] further introduces a set of sequential queries for both detection and recognition within a single decoder.

2.2 Video Text Spotting

Compared to static text spotting, there have been few recent advancements in video text spotting due to its challenges. Yin *et al.* [31] surveyed text detection [32], tracking [33], and recognition in video. Wang *et al.* [34] developed an end-to-end system for video text spotting, utilizing hand-crafted post-processing for tracking. Subsequently, Cheng *et al.* [35] integrated a spatial-temporal video text detector with a text recommender to select high-quality text and perform recognition once. Its improved version, FREE [36], adopted an end-to-end trainable framework for faster and robust video text spotting. Nguyen *et al.* [37] performed multi-scale character detection and exploited temporal redundancy to remove false positives. Rong *et al.* [38] proposed a framework for scene text recognition across multiple frames using feature representation and a conditional random field model. Wu *et al.* [39] developed a dual decoder framework for detection and tracking, utilizing object features and IoU match. Inspired by the MOTR [40], Wu *et al.* [41] unified text detection and tracking into a single decoder, treating video text spotting as a long-range temporal variation problem. To further enhance the performance of the recognizer, VLSpotter [42] introduced a super-resolution module and language model for video text spotting.

2.3 Domain Adaptation

Domain adaptation, a burgeoning field of study, addresses the challenges posed by domain shift and dataset bias. It

has been studied extensively in many fields [43], [44], [45]. Researchers also proposed several cross-domain approaches in OCR. For instance, Chen *et al.* [46] propose a pixel-level domain adaptation block and an image-level domain adaptation block for text detection to reduce the domain shift by introducing adversarial training. Wu *et al.* [47] attempt to transfer knowledge from synthetic data to real data for scene text detection. They employ text instance alignment to facilitate learning domain-invariant features adversarially, and utilize text self-training to reduce the impact of inaccurate pseudo-labels, hence minimizing false positives (FPs) and false negatives (FNs). Additionally, Chen *et al.* [48] develop a self-training framework aimed at automatically extracting the pseudo-labels of challenging text instances from unannotated videos or images. In another work, Yu *et al.* [49] introduce a cross-modal interaction mechanism, integrating vision-language information from CLIP [50] to improve the cross-domain performance of scene text detectors. The above methods are designed for scene text detection.

For scene text recognition, Zhang *et al.* [51] introduced SSDAN, a sequence-to-sequence domain adaptation network. SSDAN utilizes a gated attention similarity unit to dynamically align the distribution of source and target sequence data within a character-level feature space. GADAN [52] develops a geometry-aware domain adaptation network for both text detection and recognition. It effectively handles cross-domain shifts by simultaneously modeling changes in both geometric and appearance spaces, enabling realistic image conversion between domains with diverse characteristics. In recent years, there have also been ways to start looking at cross-domain aspects of text spotting. Expanding upon their prior work [49], Yu *et al.* [7] propose FastTCM-CR50 as a new backbone for scene text detection and spotting, to improve the cross-domain capability of existing methods. FastTCM-CR50 incorporates an implicit image condition and bimodal similarity matching module, empowering the CLIP text encoder to conduct offline computations during inference. As a result, it achieves superior performance and reduces inference time.

3 METHODOLOGY

In this paper, we introduce VimTS, a unified framework designed to leverage the synergy between various tasks. Through this unified framework, this approach aims to improve the generalization ability of the text spotter. The overall architecture is illustrated in Fig. 3. Inspired by [14], we employ a set of task-aware queries to represent various

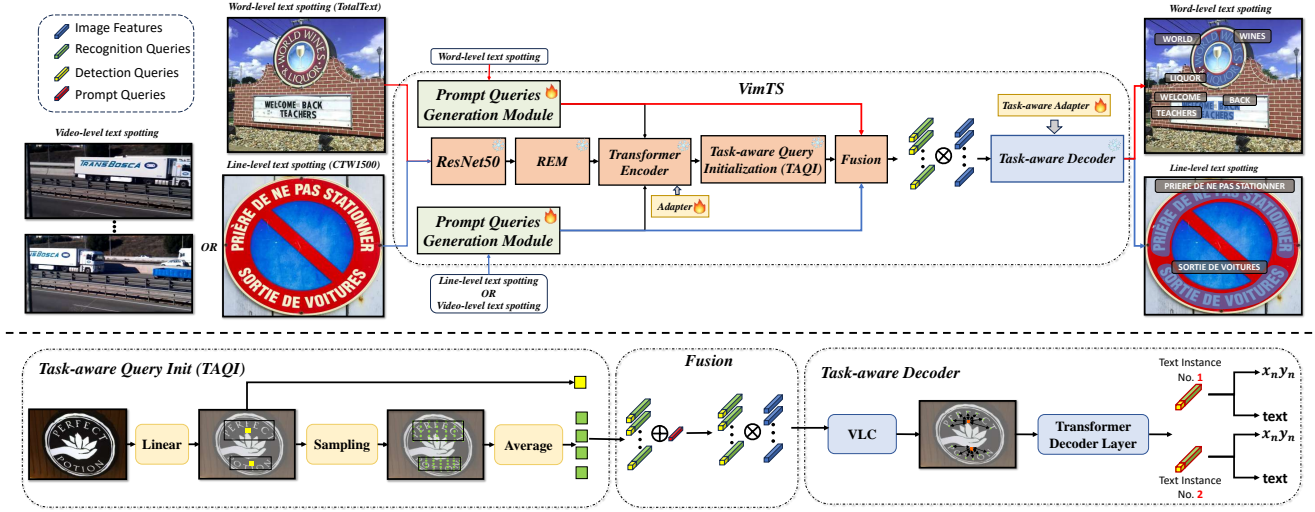


Fig. 3 – Overall framework of the VimTS. The image features are extracted in the feature extraction process. Then, the Query Initialization is used to generate the task-aware queries including detection and recognition queries. The task-aware queries are sent to the task-aware decoder to obtain the detection and recognition results simultaneously. The red arrow means performing word-level text spotting. The blue arrow means performing line-level text spotting. After the model is pre-trained, we freeze most of its parameters and train only the Task-ware Adapter and Prompt Queries Generation Module to convert the original single-task model into a multi-task model.

tasks. Initially, image features are obtained via a feature extraction process comprising ResNet50, the receptive enhancement module (REM), and the Transformer encoder. Similar to [14], these features are then used to generate task-aware queries through the Query Initialization module, which encompasses both detection and recognition queries. The Initialization of tracking queries is presented in Sec 3.6. Subsequently, these queries are fed into the task-aware decoder [14] to explicitly capture discriminative and interactive features for text detection, recognition, and tracking simultaneously. Then, a Prompt Queries Generation Module (PQGM) and a Task-aware Adapter to enable the interaction between the hierarchical tasks including word-level and line-level text spotting, as well as video-level text spotting. During this stage of training, most parameters are frozen. Then, multitasking features are learned by the Task-aware Adapter and PQGM. Firstly, we input the prompt into the PQGM for the task to be performed. Then, the PQGM will generate prompt queries and the prompt queries are sent to the Transformer encoder and Task-aware decoder to guide the model to complete the corresponding task. It is worth noting that our method can not only perform image-level cross-domain but also learn video-level cross-domain adaption. Detailed implementations will be provided in the following subsections.

3.1 Feature Extraction

For the feature extraction, we follow the [14]. We first use a ResNet50 [53] to extract the features. Then, to further enlarge the receptive field of the features from ResNet50, we use a receptive enhancement module (REM). To achieve this, REM uses a convolutional layer with a large kernel to downsample the feature map. The output of the REM and ResNet are sent into a Transformer encoder [27] to further enhance the long-range dependencies across various scales.

3.2 Query Initialization

For the query initialization, we follow [14] and adopt the different initialization methods for different queries. We first use a liner layer to output the coarse bounding box coordinates and probabilities. Then, the top N coarse bounding box coordinates are selected based on the probabilities. Then, the recognition queries are extracted within the coarse bounding box coordinates and the detection queries are generated by using a linear layer to transform the bounding box coordinates.

3.3 Decoder

For the decoder, we adopt the decoder in [14] to enhance the interaction between different tasks. The decoder consists of the vision-language communication module [14] and the Transformer decoder layer [27]. The task-aware queries, including detection queries, recognition queries, and tracking queries. The tracking queries are detailed in Sec. 3.6. The queries are first fed into a vision-language communication module to enable the detection and recognition queries to interact with each other. Then, we adopt intra-group self-attention and inter-group self-attention to further aggregate the features in the Transformer decoder layer. The inter-group self-attention module is utilized to perform the interaction between tracking queries. The inter-group self-attention is used to enable detection and recognition queries to interact with each other.

3.4 Prompt Queries Generation Module

To enhance the model's ability to handle multiple tasks effectively, we propose the Prompt Queries Generation Module (PQGM) for generating prompt queries to guide its operation. The structure of this module is illustrated in Fig. 4. For each task, we employ a learnable embedding as the prompt query, with its dimension matching that of the

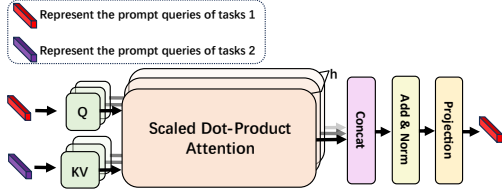


Fig. 4 – Illustration of the Prompt Queries Generation Module. Prompt queries for different tasks exchange information in the prompt queries generation module. h is the number of parallel attention heads.

hidden features from the Transformer. Before feeding these prompt queries into the model, we facilitate information exchange between prompt queries for different tasks using an attention mechanism. Subsequently, we input the prompt queries into the model to guide its learning of task-specific features. With the PQGM, VimTS can adeptly handle multiple tasks concurrently and encourage explicit interactions among them, thereby promoting synergies across different tasks. Specifically, following the interaction, we transmit the prompt queries to the Transformer encoder, enabling it to learn task-specific features. These task-specific features are then utilized to assist in Query Initialization and guide the decoder to output the results of corresponding tasks. To further enhance the learning of task-specific features, we further integrate the prompt queries with the task-aware queries. We achieve this fusion by adding the prompt queries to the task-aware queries. By the prompt of the prompt queries, the model is guided toward completing the corresponding tasks more effectively.

3.5 Task-aware Adapter

Taking inspiration from [54], we propose a Task-aware Adapter to dynamically select suitable features for different tasks. The Task-aware Adapter with the PQGM efficiently transforms the original single-task model into a multi-task model suitable for both image and video scenarios, with minimal additional parameters required. The task-aware adapter employs a cascade adapter structure, with one adapter encoding detection information and another encoding recognition information. To implement this, we begin by freezing most parameters of a pre-trained text spotter. Next, we integrate the adapter into the neural network, such as a deformable transformer layer. During multi-task training, the adapter learns the characteristics of different tasks. Notably, the task-aware adapter can not only be applied in image-level scenarios but also learn temporal information, thus aiding the transition of pre-trained models to tasks involving video text spotting. The overall structure is depicted in Fig. 5. Initially, we use two linear layers to reduce the dimension of group queries to $C/4$, thus reducing the parameters of the subsequent module. The task-aware queries then aggregate detection information through an attention mechanism. After aggregating the detection features, for image-level text spotting, an attention mechanism is employed to learn the relationships between different text instances, while for video-level text spotting, the attention mechanism is further used to model the temporal information. The second adapter follows a similar process but

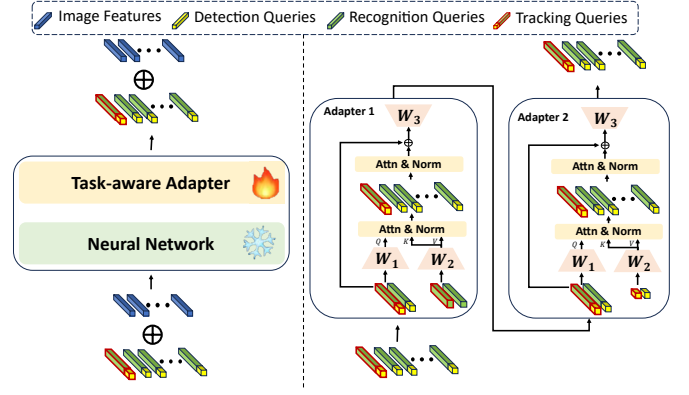


Fig. 5 – The overall structure of the task-aware adapter. The Adapter-1 is used to aggregate detection information and learn temporal information. The Adapter-2 is used to aggregate recognition information and learn temporal information.

focuses on aggregating recognition information. With the task-aware adapter, interactive and discriminative features are efficiently learned, requiring minimal additional parameters. The effectiveness of this module is demonstrated in the ablation study.

3.6 Tracking Queries

Inspired by MOTR [40] and ColTrack [55], we adopt tracking queries to make the model support tracing text. This approach enables VimTS to dynamically adapt to different inputs including image and video. When presented with the initial frame of a video, the detection queries and recognition queries are used to locate and recognize text instances. These queries are then fed into the decoder, facilitating the aggregation of features and simultaneous decoding of both detection and recognition results. Once the features are aggregated, the semantic and location information of the text instance is encoded into the queries. The same text instance between the front and back frames exhibits a strong correlation, and there is also a strong correlation between their features. Therefore, for subsequent input video frames, we utilize previous detection and recognition queries as input queries, termed tracking queries. These tracking queries are responses to locating, recognizer, and tracking the same text instances in the current frame text instances from the previous frame. In the case of newborn text instances, we continue to employ detection and recognition queries to locate and recognize them. The overall process is shown in Fig. 3. The different queries explicitly model the discriminative and interactive features for different tasks in a single decoder and output the detection, recognition, and tracking results simultaneously. The previous end-to-end method [41] employs a relatively separate recognition head after the tracking process. Therefore, the recognition information between the different frames is not fully utilized. By benefiting from a unified framework and incorporating group queries, our method allows for the effective utilization of recognition information across various frames during the tracking process. The recognition information of previous frames can be used to help recognize the text

instances in later frames, which can not be achieved by the previous end-to-end method.

3.7 Optimization

Loss. The training process of VimTS is a set prediction problem that uses a fixed number of outputs to match the ground truths. Inspired by the DETR-like methods [27], [63], [64], we utilize the Hungarian algorithm [65] to perform pairwise matching and minimize the prediction-ground truth matching cost \mathcal{C}_{match} as:

$$\hat{\sigma} = \arg \min_{\sigma} \sum_{i=1}^N \mathcal{C}_{match}(Y_i, \hat{Y}_{\sigma(i)}), \quad (1)$$

where Y_i is the ground truth and $\hat{Y}_{\sigma(i)}$ is the prediction. N is the number of the predictions indexed by $\sigma(i)$. The cost function \mathcal{C}_{match} is defined as:

$$\mathcal{C}_{match}(Y_i, \hat{Y}_{\sigma(i)}) = \lambda_c \mathcal{C}_c(\hat{p}_{\sigma(i)}(c_i)) + \mathbb{1}_{\{c_i \neq \emptyset\}} \lambda_b \mathcal{C}_b(b_i, \hat{b}_{\sigma(i)}), \quad (2)$$

where c_i and b_i are the ground truth class and bounding box, and $\hat{b}_{\sigma(i)}$ represents the prediction of bounding box. $\hat{p}_{\sigma(i)}(c_i)$ is the probability of prediction for class c_i . λ_c and λ_b are the weights for the classification and bounding box. After the Hungarian algorithm, the prediction and ground truth can be one-to-one matched. The training loss is as follows:

$$\begin{aligned} \mathcal{L}(Y_i, \hat{Y}_{\sigma(i)}) &= \alpha_c \mathcal{L}_c(\hat{p}_{\sigma(i)}(c_i)) + \mathbb{1}_{\{c_i \neq \emptyset\}} \mathcal{L}_b(b_i, \hat{b}_{\sigma(i)}) \\ &+ \mathbb{1}_{\{c_i \neq \emptyset\}} \alpha_r \mathcal{L}_r(r_i, \hat{r}_{\sigma(i)}) + \mathbb{1}_{\{c_i \neq \emptyset\}} \alpha_p \mathcal{L}_p(p_i, \hat{p}_{\sigma(i)}), \end{aligned} \quad (3)$$

where α_c , α_b , α_p , and α_r are the loss weights for the classification, bounding box, polygon, and recognition, respectively. The classification loss \mathcal{L}_c is the focal loss [66]. The bounding box loss \mathcal{L}_b consists of the ℓ_1 loss and the GIoU loss [67]. The polygon loss uses the ℓ_1 loss as well. The recognition loss is the standard cross entropy loss. Similar to [40], for video text spotting, the loss of newborn text instances is similar to that used in image text spotting and the text instances undergoing tracking are directly associated with the corresponding instances for loss computation.

3.8 Synthetic Data

Video text spotting data is highly costly. BOVText [39] reports that annotating 2,021 videos requires the dedicated efforts of 30 staff members over a period of three months. Furthermore, dataset copyright is also limited to the large-scale construction of video text spotting data. Therefore, employing low-cost synthetic data is an effective method for alleviating the data requirement of video text spotting models. A solution for data synthesis is using optical flow estimation, but it poses several challenges, including distortion, labeling errors, and a bias towards static objects [12]. To tackle these challenges, we introduce a new approach that utilizes the CoDeF [15] to facilitate the achievement of realistic and stable text flow propagation for constructing a synthetic video text dataset.

3.8.1 Data Source and Preprocessing

We manually collect and filter text-free, open-source and unrestricted videos from NExT-QA [56], Charades-Ego [59], Breakfast [62], A2D [57], MPI-Cooking [60], ActorShift [58] and Hollywood [61]. Subsequently, we arrange them in order of priority, which is determined by the stability of transitions, high resolution, and the prevalence of extensive planar areas in the videos. The statistics of each dataset are shown in Tab. 1. To achieve distributed processing and GPU memory reduction, we split the videos into segments that contain 368K frames for data synthesis. The synthetic data is termed VTD-368K.

3.8.2 Synthetic Method

Before describing the framework, we first give a brief introduction to CoDeF [15].

CoDeF (Content Deformation Fields). CoDeF is an efficient way to represent a video \mathbf{V} comprised of frames $\{I_1, I_2, \dots, I_N\}$ with a flattened canonical image \mathbf{C} , and a deformation field \mathbf{D} . The process can be described as:

$$\{\mathbf{C}, \mathbf{D}\} = \mathbb{F}([I_1, I_2, \dots, I_N]), \quad (4)$$

where \mathbb{F} denotes the fitting process of the implicit model. By employing specific tools such as ControlNet [68], SAM [69], or R-ESRGAN [70], to transform the canonical image \mathbf{C} into \mathbf{C}' , and concurrently integrating this transformation with the deformation field \mathbf{D} , we can achieve video style translations, video object tracking, and video super-resolution. The reconstruction process for video \mathbf{V}' can be formulated as follow:

$$\mathbf{V}' = \mathbb{C}(\mathbf{C}', \mathbf{D}), \quad (5)$$

where \mathbb{C} is the reconstructing process of the implicit model and \mathbf{V}' is the reconstructed video.

Our method. We propose a new synthetic method. Specifically, as shown in Fig. 6, we first use SAM-Track [71] and RAFT [72] to obtain the optical flow maps and segmentation maps of all frames, respectively. Then, the CoDeF is used to effectively reconstruct both rigid and non-rigid objects within videos, while meticulously restoring the subtle intricacies of motion details. Processed by the CoDeF, an input video is represented as a canonical image \mathbf{C} and deformation field \mathbf{D} . Where, \mathbf{C} serves as the substrate for text placement via Synthtext, while \mathbf{D} encapsulates the transformation from observation to canonical representation for each frame. Subsequently, the embedding text map \mathbf{T}_c can be generated as follows:

$$\{\mathbf{C}, \mathbf{T}_c\} = \underset{\text{Render}}{\mathbb{M}}(\mathbf{C})|_{\{S_c, D_c\}}, \quad (6)$$

where S_c and D_c denote segmentation map and depth map of canonical image \mathbf{C} . Then, \mathbf{T}_c is used as the input of Eq. 5 and combined with \mathbf{D} to reconstruct video text maps \mathbf{T}_t , using the following equation:

$$\mathbf{T}_t = \mathbb{C}(\mathbf{T}_c, \mathbf{D}). \quad (7)$$

The trained implicit deformable model generates text geometry, but it does not preserve its collinearity and stroke sequence. To address this issue, the projective transformation is introduced after the reconstruction of the implicit deformable model. Specifically, we collect a set of point pairs

TABLE 1 – Statistics of sourced video datasets of the VTD-368k. The Duration represents the average duration of the video. The Remaining indicates the proportion of the selected frames. Examples of the VTD-368k can be found in Tab. 7

Datasets	Videos	Frames	Duration	Theme	Priority	Remaining%
NEXT-QA [56]	2.1K	2.1M	50s	kid, concerts, pets, gatherings	high	14.1
A2D [57]	2.9K	402K	5s	human and animal activities	high	12.1
ActorShift [58]	146	33K	15s	animal activities	middle	18.4
Charades-Ego [59]	2.5K	2.0M	50s	daily indoors activities	middle	0.3
MPI-Cooking [60]	24	465K	600s	cooking activities	middle	0
Hollywood [61]	375	115K	30s	human actions in movie	middle	0
Breakfast [62]	1.0K	791K	120s	breakfast preparation	low	0

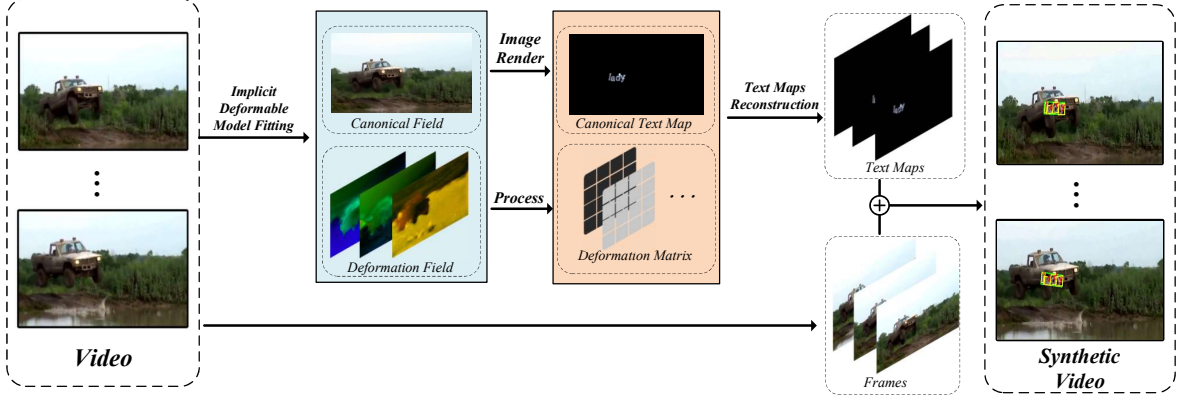


Fig. 6 – Overall framework of CoDeF-based synthetic method.

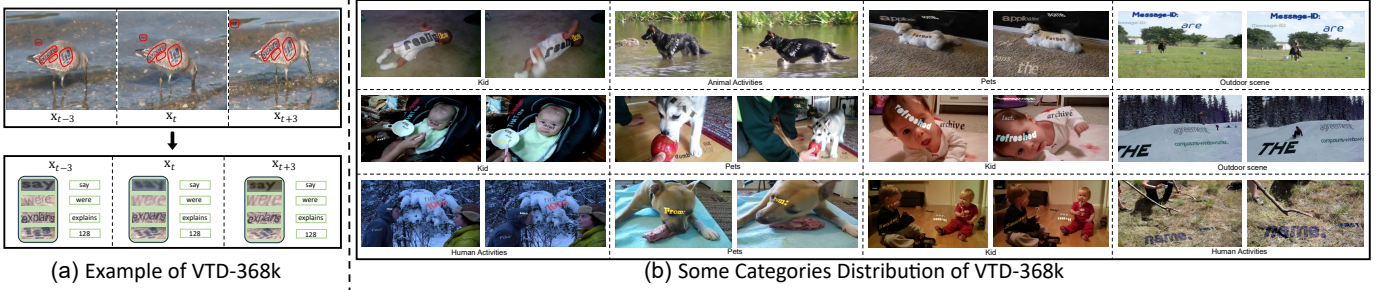


Fig. 7 – Distributions of VTD-368k. (a) Some annotations examples of VTD-368k. (b) Some categories distribution of VTD-368k. The synthetic dataset covers a wide scenes. Our synthetic data has a strong continuity between different frames by facilitating the achievement of realistic and stable text flow propagation.

(p_c, p_t) . Where p_c are the points in the canonical image that form a text geometry, and p_t are their corresponding points in the reconstructed frames. We then estimate the projective matrix $H_{c,t}$ by RANSAC [73] to fit those point pairs robustly. Finally, we apply $H_{c,t}$ to transform each text geometry in the text maps.

By utilizing the CoDeF, our method facilitates the achievement of realistic and stable text flow propagation, significantly reducing the occurrence of distortions. Furthermore, it imposes minimal constraints during the text flow propagation process, effectively mitigating the risk of ignoring dynamic objects.

Despite the numerous benefits that CoDeF offers, it does come with certain limitations. Specifically, the CoDeF-based synthesis method relies on an image rendering algorithm to process canonical image C generated by an implicit deformable model. However, it is difficult to use the deformation field D and the renderable canonical image C to represent those videos with dynamic camera movement. Therefore, inspired by [12], we propose a new method

to handle those videos via optical flow estimation. The original method in [12] produces distortion in the text flow propagation process due to the long-distance accumulation of optical flow, which causes abnormal sampling points and leads to erroneous computation of the homography matrix. To achieve more stable synthesis results, we apply Eq. 8 and Eq. 9 to implement the frame-by-frame forward and backward text flow propagation process of the text flow:

$$p_{k+1} = F_{k \leftrightarrow k+1}(p_k) + p_k, p_k \in T_k, k \in [t, N-1], \quad (8)$$

$$p_{t-k-1} = F_{t-k \leftrightarrow t-k-1}(p_k) + p_{t-k}, p_{t-k} \in T_{t-k}, k \in [0, t), \quad (9)$$

where t is the id of the rendered frame. Similarly, we also perform character-level text flow propagation and assign correct labels to the text maps in each frame. Some examples of VTD-368k are visualized in Fig. 7.

4 EXPERIMENTS ON IMAGE TEXT SPOTTING

For image-level cross-domain text spotting, following [7], we conduct experiments on common cross-domain settings

TABLE 2 – Real-to-real adaptation on scene text detection methods. Detection metric ‘F-measure’ (%) is reported. TT_W represents the word-level TotalText. TT_L represents the line-level TotalText. CTW_W represents the word-level CTW1500. CTW_L represents the line-level CTW1500. Bold indicates SOTA. The same conventions apply to the table below.

Method	Venue	$TT_W \rightarrow IC15$	$TT_W \rightarrow CTW_L$	$IC15 \rightarrow CTW_L$	$CTW_L \rightarrow IC15$	$CTW_L \rightarrow TT_L$	$TT_W \rightarrow CTW_W$	Average
ABCNet v2 [3]	TPAMI’2021	80.2	46.4	46.5	45.0	70.1	88.5	62.8
TESTR [4]	CVPR’2022	79.8	48.1	46.6	46.4	72.8	87.5	63.5
TPSNet [74]	ACMMM’2022	78.4	46.0	42.7	42.6	71.7	88.3	61.6
ABINet++ [25]	TPAMI’2022	79.8	47.7	49.0	41.8	71.6	88.1	63.0
DeepSolo [75]	CVPR’2023	79.7	46.9	47.2	50.0	72.5	89.6	64.3
ESTextSpotter [14]	ICCV’2023	83.4	48.0	46.3	55.6	76.8	90.4	66.8
FastTCM [7]	TPAMI’2024	81.1	47.8	46.9	53.7	75.9	87.6	65.5
VimTS	-	85.5	48.1	47.9	56.2	77.4	91.5	67.8

TABLE 3 – Real-to-real adaptation on scene text spotting methods. End-to-End spotting metric ‘None’ (%) is reported.

Method	Venue	$TT_W \rightarrow IC15$	$TT_W \rightarrow CTW_L$	$IC15 \rightarrow CTW_L$	$CTW_L \rightarrow IC15$	$CTW_L \rightarrow TT_L$	$TT_W \rightarrow CTW_W$	Average
ABCNet v2 [3]	TPAMI’2021	54.3	27.4	21.7	24.5	46.5	75.9	41.7
TESTR [4]	CVPR’2022	55.9	29.0	26.6	23.8	44.4	76.9	42.8
TPSNet [74]	ACMMM’2022	60.5	27.5	20.1	23.2	41.8	77.8	41.8
ABINet++ [25]	TPAMI’2022	62.0	29.7	30.4	20.3	43.5	78.8	44.1
DeepSolo [75]	CVPR’2023	63.6	29.6	26.7	25.0	50.5	81.7	46.2
SPTS v2 [29]	TPAMI’2023	58.7	28.5	28.5	33.2	52.7	79.5	46.9
ESTextSpotter [14]	ICCV’2023	65.0	29.5	27.3	31.6	50.5	80.9	47.5
FastTCM [7]	TPAMI’2024	56.7	28.6	26.1	25.7	45.3	77.2	43.2
VimTS	-	68.0	30.4	29.6	35.9	54.5	82.2	50.1

to evaluate VimTS, including arbitrarily shaped datasets TotalText [10] and CTW1500 [11], and multi-oriented dataset ICDAR2015 [8].

4.1 Implementation Details

We pre-train the model on a combination of Curved SynthText [24], ICDAR-MLT [76], and the corresponding datasets with 240K iterations. The base learning rate is 1×10^{-4} and reduced to 1×10^{-5} at the 180K-th iteration and 1×10^{-6} at 210K-th iteration. Then, the model is fine-tuned on the corresponding real datasets. We use $N = 100$ as the maximum number of predictions. The max length of recognition queries is 25. The weight for the classification loss α_c is 2.0. The weight of the ℓ_1 loss is 5.0 and the GIoU loss is 2.0. The polygon loss weight α_p and the recognition loss weight α_r are both set to 1.0. The focal loss parameters α and γ are 0.25 and 2.0, respectively. The number of both encoder and decoder layers is 6.

The data augmentation strategies used are also kept the same as previous works [3], [4], [24] as follows: 1) random resizing with the shorter size chosen from 640 to 896 pixels (with an interval of 32), and the longest size is constrained within 1600 pixels; 2) random cropping, which ensures that text is not being cut; 3) random rotation, which rotates the images with an angle in the range of $[-45^\circ, 45^\circ]$. For testing, we resize the shorter size of the image to 1000 pixels while keeping the longest size of the image within 1824 pixels. All experiments are conducted on 8 NVIDIA RTX3090 GPUs.

4.2 Comparison with State-of-the-arts Methods

Cross-Domain Text Spotting in Multi-Oriented Text. We evaluated the robustness of our method on the multi-oriented text by conducting experiments on the ICDAR2015 dataset. Following the approach [7], we considered two main settings: 1) training the model on the word-level dataset TotalText and testing it on ICDAR2015, and 2) training the model on the line-level dataset CTW1500 and

testing it on ICDAR2015. The detection results are presented in Tab. 2. Our method achieves the highest H-mean score of 85.5% on the ICDAR2015 dataset using TotalText’s model, outperforming EStextSpotter by 2.1%. The end-to-end recognition results on ICDAR2015 are shown in Tab. 3. Using the CTW1500’s model to evaluate ICDAR2015, our method outperforms DeepSolo by 10.9%, demonstrating the effectiveness of the proposed method. Additionally, our method surpasses the previous cross-domain method FastTCM by 4.4% using TotalText’s model to evaluate ICDAR2015.

Cross-Domain Text Spotting in Arbitrarily-Shaped Text. Following the previous method [7], we test our method on two arbitrarily-shaped text benchmarks (Total-Text and CTW1500) to verify the generalization ability of our method for arbitrarily-shaped cross-domain scene text spotting. For the text detection task, as shown in Tab. 2. VimTS outperforms the previous methods with 91.5% in terms of the H-mean metric on line-level Total-Text dataset, 1.9% higher than the DeepSolo. The result of cross-domain text spotting is presented in Tab. 3. Notably, even without line-level annotations from Total-Text for training, our method demonstrates promising performance in line-level Totaltext. Furthermore, our method outperforms the previous cross-domain method, FastTCM, by an average of 6.9% in six cross-domain benchmarks. For text detection, our method outperforms the state-of-the-art approach by an average of 1.0% across six cross-domain benchmarks. Similarly, in text spotting, our method demonstrates superiority over the state-of-the-art by an average of 2.6% across the same benchmarks. These results demonstrate the strong generalization ability of our method.

4.3 Ablation Study in Cross-Domain Text Spotting

We conduct ablation studies in cross-domain text spotting using Total-Text-line, ICDAR2015, and CTW1500-word to evaluate the effectiveness of the proposed method. We directly train the model using both TotalText and CTW1500.

TABLE 4 – Ablation study of unified multi-granularity fine-tuning methods. The results are tested on Real-to-real adaptation on scene text spotting methods. End-to-end spotting metric ‘None’ (%) is reported. The Full-Tuning represents tuning all the parameters of the model. PQGM represents the Prompt Queries Generation Module.

Method	Tuned Params	Full-Tuning	PQGM	Adapter TA	Adapter	$TT_W \rightarrow IC15$	$CTW_L \rightarrow TT_L$	$TT_W \rightarrow CTW_W$
Baseline	-	-	-	-	-	65.0	50.5	80.9
Baseline+ 56.6M (100%)	✓	-	-	-	-	62.5 (-2.5)	36.6 (-13.9)	71.1 (-9.8)
Baseline+ 56.9M (100%)	✓	✓	-	-	-	67.6 (+2.6)	54.0 (+3.5)	81.5 (+0.6)
Baseline+ 0.7M (1.2%)	-	-	✓	✓	-	67.2 (+2.2)	53.9 (+3.4)	81.3 (+0.4)
Baseline+ 1.7M (3.0%)	-	-	✓	-	✓	68.0 (+3.0)	54.5 (+4.0)	82.2 (+1.3)

Combining Datasets with Distinct Annotation Formats. We first attempt to directly unify the word-level and line-level text spotting into a single framework without the PQGM. However, as shown in the second line of Tab. 4, the result demonstrates that combining the hierarchical text spotting with annotations in different formats at the same time will disturb the training of the model, reducing the performance of the model.

Performing Task Interaction to Achieve Task Synergy. To effectively unify the word-level and line-level text spotting, we propose a Prompt Queries Generation Module (PQGM) to guide the model in completing the corresponding tasks. The result is presented in the third line of Tab. 4. With the PQGM, 5.1%, 17.4%, and 10.4% improvement are achieved in $TT_W \rightarrow IC15$, $CTW_L \rightarrow TT_L$, and $TT_W \rightarrow CTW_W$, respectively. These results demonstrate the effectiveness of the proposed PQGM in unifying the hierarchical text spotting. PQGM facilitates model adaptation to both word-level and line-level text spotting, enhancing the synergy between hierarchical text spotting rather than compromising performance.

Effectiveness of the Task-Aware Adapter. To verify the effectiveness of the task-aware Adapter, we conducted experiments to compare it with the original Adapter and the full-finetuning method. As indicated in the fourth line of Tab. 4, using the original Adapter for fine-tuning the pretrained model resulted in performance degradation compared to full fine-tuning. In contrast, our method outperforms full fine-tuning with minimal trainable parameters, demonstrating its effectiveness. We can observe that compared to the full-finetuning method, using the task-aware adapter improves $TT_W \rightarrow IC15$, $CTW_L \rightarrow TT_L$, and $TT_W \rightarrow CTW_W$ by 0.4%, 0.5%, and 0.7%, respectively. Furthermore, our method achieves these enhancements while only utilizing 3.0% of the parameters required for fine-tuning the entire model.

5 EXPERIMENTS ON VIDEO TEXT SPOTTING

5.1 Implementation Details

Following previous methods [39], [41], in our experiments, we develop a two-stage training manner. We first train our model using image-level datasets, which include ICDAR2013 [9], ICDAR2015 [8], Total-Text [10], and MLT2017 [76]. Consistent with prior works [39], [41], we incorporate random shift [91] to generate video clips with pseudo tracks in static images. For using the video data, we utilize the proposed synthetic video data. We jointly tune the PQGM and task-aware adapter on both image-level and video-level data building upon the pre-trained

TABLE 5 – Video text detection results in ICDAR2013 video dataset.

Method	Video Text Detection/%		
	Precision	Recall	F-measure
Epshtein <i>et al.</i> [77]	39.8	32.5	35.9
Zhao <i>et al.</i> [78]	47.0	46.3	46.7
Yin <i>et al.</i> [79]	48.6	54.7	51.6
Khare <i>et al.</i> [80]	57.9	55.9	51.7
Wang <i>et al.</i> [81]	58.3	51.7	54.5
Shivakumara <i>et al.</i> [82]	61.0	57.0	59.0
Wu <i>et al.</i> [83]	63.0	68.0	65.0
Yu <i>et al.</i> [84]	82.4	56.4	66.9
Wei <i>et al.</i> [85]	75.5	64.1	69.3
Free [36]	79.7	68.4	73.6
TransDETR [41]	80.6	70.2	75.0
VLSpotter [42]	82.3	71.8	76.0
VimTS (Zero-shot)	81.2	72.3	76.5
VimTS (with VTD-368k)	81.5	73.5	77.3
VimTS (with video data)	83.2	74.1	78.4

TABLE 6 – Video text detection results in DStext v2.

Method	Video Text Detection/%		
	Precision	Recall	F-measure
EAST [86]	72.1	37.8	49.6
PSENet [87]	76.1	38.5	51.1
DB [88]	76.5	40.3	52.8
DB++ [89]	77.8	41.6	54.2
TransVTSpotter [39]	77.2	45.3	57.1
TransDETR [41]	78.5	52.5	62.9
VimTS (Zero-shot)	78.7	53.5	63.7
VimTS (with VTD-368k)	79.1	54.4	64.2
VimTS (with Video data)	79.3	55.2	65.0

TABLE 7 – Zero-shot video text spotting on ICDAR2013 video. All methods use the same training set and evaluate on each frame of the video.

Method	Video Text Spotting/%		
	Precision	Recall	F-measure
ABCNet [24]	49.2	26.5	34.4
ABCNet v2 [3]	57.8	31.8	41.0
ABINet++ [25]	55.4	30.2	39.1
TESTR [4]	52.4	36.7	43.2
DeepSolo [30]	56.8	37.8	45.4
FastTCM [7]	53.6	34.3	41.8
VimTS	77.3	41.0	53.6

model on images. We utilize the AdamW [92] with a learning rate of 2×10^{-4} as the optimizer. Following previous work [41], we implement sequential data augmentation strategies, encompassing the following steps: 1) Random resizing of the image, with the shorter dimension chosen from a range of 608 to 992 pixels (in intervals of 32), while ensuring the longest dimension does not exceed 1536 pixels; 2) Random cropping, designed to preserve the entirety of the text without any truncation.

TABLE 8 – Video Text Spotting results. ‘M-Tracked’ and ‘M-Lost’ denote ‘Mostly Tracked’ and ‘Mostly Lost’, respectively.

Method	Venue	Backbone	End to End Video Text Spotting/%				
			$ID_{F1}\uparrow$	$MOTA\uparrow$	$MOTP\uparrow$	$M-Tracked\uparrow$	$M-Lost\downarrow$
ICDAR2015							
<i>Separate Framework</i>							
USTB_TexVideo(II-2) [8]	ICDAR'2015		21.3	13.2	66.6	6.6	67.7
USTB_TexVideo [8]	ICDAR'2015		28.2	15.6	68.5	9.5	60.7
StradVision-1 [8]	ICDAR'2015		32.0	9.0	70.2	8.9	59.5
Free [36]	TIP'2020	ResNet50	61.9	53.0	74.9	45.5	35.9
TransVTSpotter [39]	NuerIPS'2021	ResNet50	61.5	53.2	74.9	-	-
<i>End-to-End framework</i>							
TransDETR [41]	IJCV'2024	ResNet50	72.8	60.9	74.6	33.6	20.8
CoText [41]	-	ResNet18	72.0	59.0	74.5	48.6	26.4
VLSpotter [42]	IJCAI'2023	ResNet50	72.8	60.1	76.4	50.0	26.1
VimTS (Zero-shot)	-	ResNet50	73.2	61.0	77.1	52.2	25.7
VimTS (with VTD-368k)	-	ResNet50	74.1	61.8	77.3	52.7	25.6
VimTS (with Video data)	-	ResNet50	75.0	62.3	77.8	52.9	25.3
DSText v2							
<i>Separate Framework</i>							
EAST+VMFT+CRNN [90]	PR'2024	ResNet50	9.3	-31.2	77.3	553	11497
PSENet+VMFT+CRNN [90]	PR'2024	ResNet50	10.2	-31.0	77.3	536	11454
<i>End-to-End framework</i>							
TransDETR [41]	IJCV'2024	ResNet50	12.0	-11.9	78.8	446	11818
VimTS (Zero-shot)	-	ResNet50	12.5	-1.0	82.1	744	11362
VimTS (with VTD-368k)	-	ResNet50	13.2	-0.5	82.5	783	11031
VimTS (with video data)	-	ResNet50	20.0	3.2	83.5	812	10024

5.2 Zero-shot Transfer from Image to Video

To evaluate our method’s ability in video text spotting, we conduct a comparison with a previous image-level text spotting method using the ICDAR2013 video dataset [9] in a zero-shot manner. All methods are trained only using the image-level data and directly evaluated on evaluate on each frame of the ICDAR2013 video in a zero-shot manner. The results are shown in Tab. 7. VimTS achieves 53.6% in the F-measure metrics, outperforming the previous image-level text spotting method by 8.2% at least. These results demonstrate the superior generalization ability of our proposed method in the domain of video text spotting.

5.3 Comparison with State-of-the-arts Methods

We compare our method with state-of-the-art methods in terms of three tasks, containing video text detection, video text tracking, and video text spotting. The evaluation metrics of video text detection, spotting, and tracking following the previous method [41], including Precision, Recall, F-Measure, IDF1, MOTA, MOTP, M-Tracked, and M-Lost. We evaluate our method in three manners: 1) Training with only image-level datasets and directly evaluating the video datasets in a zero-shot manner. 2) Training with image-level data and VTD-368k, and evaluating the video datasets. 3) Training with image-level data, VTD-368k, and video data, and evaluating the video datasets.

Video text detection. For video text detection, similar to previous works [41], [42], we evaluate our method in the popular public dataset ICDAR2013 [9]. The results are presented in Tab. 5. For the ICDAR2013 dataset, VimTS outperforms previous methods in all metrics. The proposed VimTS surpasses the previous end-to-end method TransDETR [41] by 2.3% on the F-measure metric, leveraging solely image-level data and VTD-368k for training. Notably, VimTS outperforms previous methods even when trained solely on image-level data, highlighting the robust generalization and effectiveness of our method. Additionally, we


also evaluate our method on the challenge dataset DSText v2 [90]. As shown in Tab. 6, our method achieves 64.2% on the F-measure metric, which surpasses the previous state-of-the-art method by 2.1%. Additionally, our method achieves 63.7% on the F-measure metric in a zero-shot manner, demonstrating the effectiveness of the proposed method.

Video text Spotting. For tasks of video text spotting, we evaluate our method on ICDAR2015 and DSText. The results are presented in Tab. 8. In the scene text video benchmark ICDAR2015, VimTS surpasses the previous state-of-the-art method by 1.3% in terms of the ID_{F1} metrics, leveraging solely image-level data and VTD-368k for training. On the DSText v2 dataset, with a zero-shot manner, VimTS outperforms the previous end-to-end method TransDETR by 1.2%, 3.7% in ID_{F1} , MOTP, respectively. Additionally, as shown in Tab. 8, using real video data can further enhance the performance of our method. These results demonstrate the effectiveness of our method.


5.4 Visualization and Analysis

We compare our zero-shot method with two previous end-to-end approaches: TransDETR [41], a state-of-the-art video-based method, and TESTR [4], a state-of-the-art image-based method, as shown in Fig. 8. It can be found that even in cases of reflective and blurry text, our method consistently locates, recognizes, and tracks text instances, whereas TransDETR struggles with these scenarios. Unlike TransDETR, which relies solely on detection information between adjacent frames, our method leverages both detection and contextual information to enhance detection, recognition, and tracking capabilities, thereby achieving superior performance in video text spotting. Furthermore, compared to TESTR, which employs the same image-level data for training, our method can also locate and recognize text more accurately.


Furthermore, we also provide some qualitative results to verify why our method can achieve promising results on video text spotting by using only image-level data. To

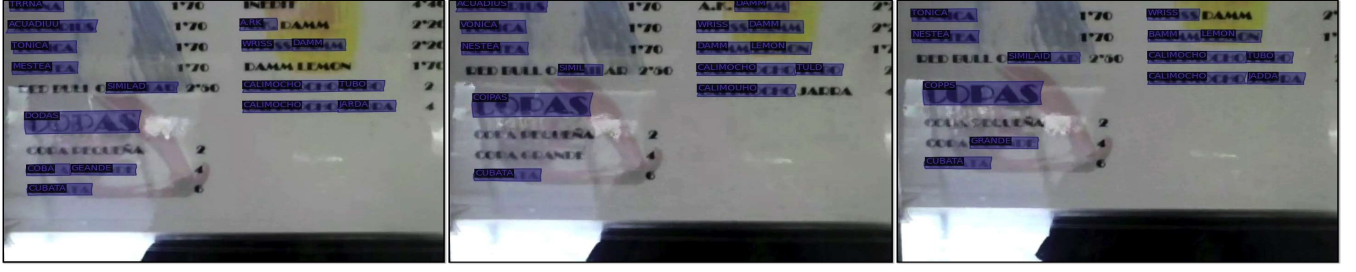

(a) TESTR [4] (zero-shot). It is trained on the image-level data.

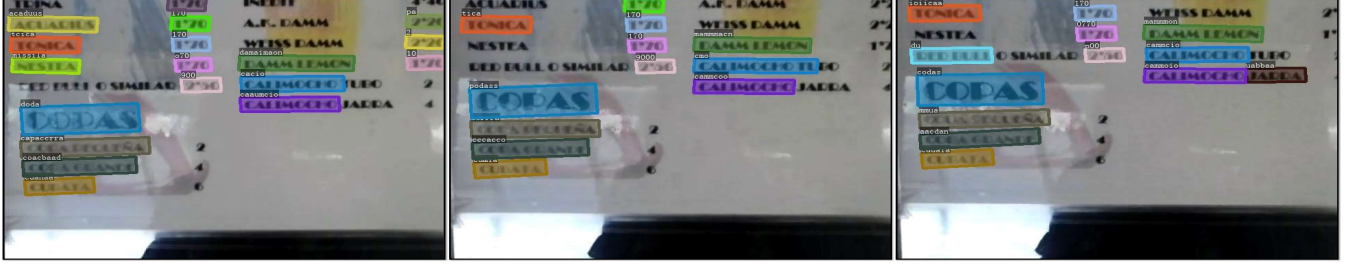


(b) TransDETR [41]. It is trained on the video-level data.

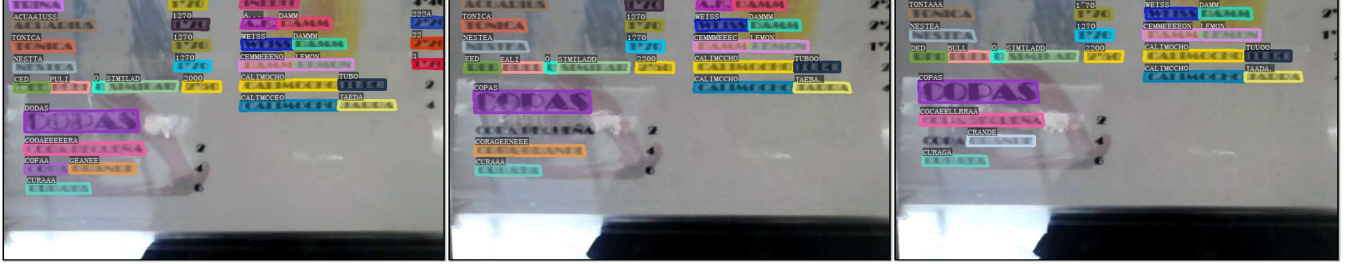

(c) Ours (zero-shot). It is trained on the image-level data.

Fig. 8 – Visualization results of VimTS (ours), TESTR, and TransDETR on ICDAR2015(video). The same color between different frames represents the same tracking ID. Best view on screen.

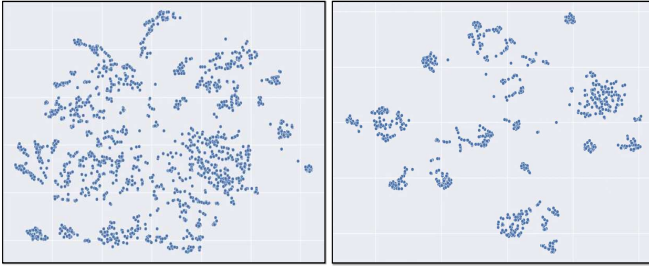

(a) Baseline

(b) Ours

Fig. 9 – Distribution of the text instances in different frames via t-SNE. Best view on screen.

illustrate, we input the adjacent 100 frames of video into the model and visualize the distribution of the features of the text instances via t-SNE, as shown in Fig. 9. It can be seen that, in the proposed method, the similarity of the features of the same text in different frames is higher. Therefore, in our method, employing features from the previous frame as input queries in the current frame is effective for locating, recognizing, and tracking identical text instances even using only image-level training data.

6 DISCUSSION AND LIMITATION

Scene text spotting has seen rapid development in recent years, yielding impressive results, particularly in uni-

domain text spotting. However, cross-domain text spotting continues to present challenges, indicating areas for improvement. Our observation reveals that various models exhibit distinct behaviors when applied to cross-domain text spotting compared to their performance in uni-domain scenarios.

Recently, large multi-modal models have raised much attention for their robust generalization capabilities. To further show the effectiveness of our method, we conduct a cross-domain experiment on ICDAR2015 to compare with the large multi-modal models. The evaluation process is following [93]. The results are presented in Tab. 9. The findings show the importance of developing scene text spotting methods for specific tasks. Such a specialized approach is not only more efficient in terms of requiring fewer parameters but also necessitates less training data compared to the broader application of Large Multimodal Models.

We also provide some failure cases in Fig. 10. We can find that even if the text instances in the previous frame have already been located and recognized. However, due to text instances moving quickly, leading to the text instances becoming significantly blurred, the model fails to locate and recognize them in the current frame. Therefore, the problem of blur of high-speed moving text is worth exploring in the future.



Fig. 10 – Failure cases. When the motion amplitude is too large, the text instances are blurred seriously. Even if the text instances are correctly located and recognized in the previous frame, the model fails to locate and recognize them in the current frame.

TABLE 9 – Cross-domain text spotting on ICDAR2015 compared with the MLLMS. All results are tested on the ‘None’ lexicon. OCR-related data represents the training data associated with OCR.

Method	OCR-related data	ICDAR2015/%		
		Precision	Recall	F-measure
QWEN-VL [94]	Synthetic, Natural, Doc (24.9M)	31.9	42.7	36.5
LLAVA-1.5 [95]	Natural (0.05M)	17.8	8.6	11.6
mPLUG-Owl2 [96]	Natural (0.1M)	17.6	25.6	20.9
Monkey [97]	Natural, Doc, Table (0.16M)	72.3	29.2	41.6
SPHINX [98]	Natural (0.23M)	14.0	13.5	13.8
TextMonkey [99]	Natural, Doc, Table (0.41M)	58.4	35.4	44.1
InternLM-XComposer2 [100]	Natural, Doc, Table (1M)	58.9	36.5	45.1
InternVL 1.5 [101]	Unknown	58.1	50.1	53.8
Gemini Pro [102]	Unknown	46.4	62.7	53.4
QWEN-VL MAX [94]	Unknown	50.1	60.4	54.8
GPT4V [93]	Unknown	57.4	64.6	60.8
VimTS (Ours)	Synthetic, Natural (0.15M)	74.3	62.8	68.0

7 CONCLUSION

In this paper, we introduce VimTS which enhances cross-domain text spotting performance by improving the synergy among hierarchical text spotting tasks, which include word-level, line-level, and video-level text spotting. VimTS enhances the generalization ability of the model by jointly optimizing different tasks across different scenarios. Extensive experiments on a wide range of cross-domain benchmarks, consistently demonstrate that our method outperforms previous state-of-the-art approaches by significant margins. It is worth mentioning that our method demonstrates it is viable that still text images can be learned to be well transferred to video text images. Since still images require significantly less annotation effort compared to video image, exploring methods to bridge the domain gaps will be highly valuable. Furthermore, we demonstrate that current Large Multimodal Models still face limitations in cross-domain text spotting. Using fewer parameters and less data to improve the generalization of Large Multimodal Models in text spotting is worth further exploration.

ACKNOWLEDGEMENT

This research was in part supported by National Key R&D Program of China (No. 2022ZD0118700), NSFC (No. 62225603, 62206104, 61936003), Zhuhai Industry Core and Key Technology Research Project (No. 2220004002350).

REFERENCES

- [1] X. Liu, D. Liang, S. Yan, D. Chen, Y. Qiao, and J. Yan, “FOTS: Fast oriented text spotting with a unified network,” in *Proc. IEEE Conf. Comp. Vis. Patt. Recogn.*, pp. 5676–5685, 2018.
- [2] M. Liao, G. Pang, J. Huang, T. Hassner, and X. Bai, “Mask TextSpotter v3: Segmentation proposal network for robust scene text spotting,” in *Proc. Eur. Conf. Comp. Vis.*, pp. 706–722, 2020.

- [3] Y. Liu, C. Shen, L. Jin, T. He, P. Chen, C. Liu, and H. Chen, “ABCNet v2: Adaptive bezier-curve network for real-time end-to-end text spotting,” *IEEE Trans. Pattern Anal. Mach. Intell.*, vol. 44, no. 11, pp. 8048–8064, 2022.
- [4] X. Zhang, Y. Su, S. Tripathi, and Z. Tu, “Text spotting transformers,” in *Proc. IEEE Conf. Comp. Vis. Patt. Recogn.*, pp. 9519–9528, 2022.
- [5] Y. Kittenplon, I. Lavi, S. Fogel, Y. Bar, R. Manmatha, and P. Perona, “Towards weakly-supervised text spotting using a multi-task transformer,” in *Proc. IEEE Conf. Comp. Vis. Patt. Recogn.*, pp. 4604–4613, 2022.
- [6] D. Peng, X. Wang, Y. Liu, J. Zhang, M. Huang, S. Lai, J. Li, S. Zhu, D. Lin, C. Shen, et al., “SPTS: Single-point text spotting,” in *Proc. ACM Int. Conf. Multimedia*, pp. 4272–4281, 2022.
- [7] W. Yu, Y. Liu, X. Zhu, H. Cao, X. Sun, and X. Bai, “Turning a clip model into a scene text spotter,” *IEEE Trans. Pattern Anal. Mach. Intell.*, pp. 1–12, 2024.
- [8] D. Karatzas, L. Gomez-Bigorda, et al., “ICDAR 2015 competition on robust reading,” in *Proc. IAPR Int. Conf. Document Analysis Recogn.*, pp. 1156–1160, 2015.
- [9] D. Karatzas, F. Shafait, S. Uchida, M. Iwamura, L. G. i Bigorda, S. R. Mestre, J. Mas, D. F. Mota, J. A. Almazan, and L. P. De Las Heras, “ICDAR 2013 robust reading competition,” in *Proc. IAPR Int. Conf. Document Analysis Recogn.*, pp. 1484–1493, 2013.
- [10] C.-K. Ch’ng, C. S. Chan, and C.-L. Liu, “Total-Text: toward orientation robustness in scene text detection,” *Int. J. Document Analysis Recogn.*, pp. 1–22, 2019.
- [11] Y. Liu, L. Jin, S. Zhang, C. Luo, and S. Zhang, “Curved scene text detection via transverse and longitudinal sequence connection,” *Pattern Recogn.*, vol. 90, pp. 337–345, 2019.
- [12] Y. Zhao, W. Wu, Z. Li, J. Li, and W. Wang, “Flowtext: Synthesizing realistic scene text video with optical flow estimation,” in *IEEE Int Conf. on Multimedia and Expo*, pp. 1517–1522, 2023.
- [13] A. Gupta, A. Vedaldi, and A. Zisserman, “Synthetic data for text localisation in natural images,” in *Proc. IEEE Conf. Comp. Vis. Patt. Recogn.*, pp. 2315–2324, 2016.
- [14] M. Huang, J. Zhang, D. Peng, H. Lu, C. Huang, Y. Liu, X. Bai, and L. Jin, “ESTextSpotter: Towards better scene text spotting with explicit synergy in transformer,” in *Proc. IEEE Int. Conf. Comp. Vis.*, pp. 19495–19505, 2023.
- [15] H. Ouyang, Q. Wang, Y. Xiao, Q. Bai, J. Zhang, K. Zheng, X. Zhou, Q. Chen, and Y. Shen, “Codef: Content deformation fields for temporally consistent video processing,” in *Proc. IEEE Conf. Comp. Vis. Patt. Recogn.*, 2024.
- [16] M. Jaderberg, K. Simonyan, A. Vedaldi, and A. Zisserman, “Reading text in the wild with convolutional neural networks,” *Int. J. Comput. Vision*, vol. 116, no. 6, pp. 1–20, 2016.
- [17] H. Li, P. Wang, and C. Shen, “Towards end-to-end text spotting with convolutional recurrent neural networks,” in *Proc. IEEE Int. Conf. Comp. Vis.*, pp. 5238–5246, 2017.
- [18] T. He, Z. Tian, W. Huang, C. Shen, Y. Qiao, and C. Sun, “An end-to-end textspotter with explicit alignment and attention,” in *Proc. IEEE Conf. Comp. Vis. Patt. Recogn.*, pp. 5020–5029, 2018.
- [19] M. Liao, P. Lyu, M. He, C. Yao, W. Wu, and X. Bai, “Mask TextSpotter: An end-to-end trainable neural network for spotting text with arbitrary shapes,” *IEEE Trans. Pattern Anal. Mach. Intell.*, vol. 43, pp. 532–548, 2019.
- [20] W. Feng, W. He, F. Yin, X.-Y. Zhang, and C.-L. Liu, “TextDragon: An end-to-end framework for arbitrary shaped text spotting,” in *Proc. IEEE Int. Conf. Comp. Vis.*, pp. 9076–9085, 2019.
- [21] S. Qin, A. Bissacco, M. Raptis, Y. Fujii, and Y. Xiao, “Towards unconstrained end-to-end text spotting,” *Proc. IEEE Int. Conf. Comp. Vis.*, pp. 4704–4714, 2019.
- [22] W. Wang, E. Xie, X. Li, X. Liu, D. Liang, Y. Zhibo, T. Lu, and C. Shen, “PAN++: Towards efficient and accurate end-to-end spotting of arbitrarily-shaped text,” *IEEE Trans. Pattern Anal. Mach. Intell.*, vol. 44, no. 9, pp. 5349–5367, 2022.
- [23] W. Wang, E. Xie, X. Song, Y. Zang, W. Wang, T. Lu, G. Yu, and C. Shen, “Efficient and accurate arbitrary-shaped text detection with pixel aggregation network,” *Proc. IEEE Int. Conf. Comp. Vis.*, pp. 8440–8449, 2019.
- [24] Y. Liu, H. Chen, C. Shen, T. He, L. Jin, and L. Wang, “ABC-Net: Real-time scene text spotting with adaptive bezier-curve network,” in *Proc. IEEE Conf. Comp. Vis. Patt. Recogn.*, pp. 9809–9818, 2020.
- [25] S. Fang, Z. Mao, H. Xie, Y. Wang, C. Yan, and Y. Zhang, “ABINet++: Autonomous, bidirectional and iterative language

- modeling for scene text spotting," *IEEE Trans. Pattern Anal. Mach. Intell.*, vol. 11, no. 6, pp. 7123–7141, 2023.
- [26] S. Fang, H. Xie, Y. Wang, Z. Mao, and Y. Zhang, "Read like humans: Autonomous, bidirectional and iterative language modeling for scene text recognition," in *Proc. IEEE Conf. Comp. Vis. Patt. Recogn.*, pp. 7098–7107, 2021.
- [27] X. Zhu, W. Su, L. Lu, B. Li, X. Wang, and J. Dai, "Deformable DETR: Deformable transformers for end-to-end object detection," *Proc. Int. Conf. Learn. Representations*, 2021.
- [28] M. Huang, Y. Liu, Z. Peng, C. Liu, D. Lin, S. Zhu, N. Yuan, K. Ding, and L. Jin, "SwinTextSpotter: Scene text spotting via better synergy between text detection and text recognition," in *Proc. IEEE Conf. Comp. Vis. Patt. Recogn.*, pp. 4593–4603, 2022.
- [29] Y. Liu, J. Zhang, D. Peng, M. Huang, X. Wang, J. Tang, C. Huang, D. Lin, C. Shen, X. Bai, et al., "SPTS v2: Single-point scene text spotting," *IEEE Trans. Pattern Anal. Mach. Intell.*, vol. 45, no. 12, pp. 15665–15679, 2023.
- [30] M. Ye, J. Zhang, S. Zhao, J. Liu, T. Liu, B. Du, and D. Tao, "DeepSolo: Let transformer decoder with explicit points solo for text spotting," in *Proc. IEEE Conf. Comp. Vis. Patt. Recogn.*, pp. 19348–19357, 2023.
- [31] X.-C. Yin, Z.-Y. Zuo, S. Tian, and C.-L. Liu, "Text detection, tracking and recognition in video: a comprehensive survey," *IEEE Trans. Image Process.*, vol. 25, no. 6, pp. 2752–2773, 2016.
- [32] S. Tian, W.-Y. Pei, Z.-Y. Zuo, and X.-C. Yin, "Scene text detection in video by learning locally and globally," in *Proc. Int. Joint Conf. Artificial Intell.*, pp. 2647–2653, 2016.
- [33] S. Tian, X.-C. Yin, Y. Su, and H.-W. Hao, "A unified framework for tracking based text detection and recognition from web videos," *IEEE transactions on pattern analysis and machine intelligence*, vol. 40, no. 3, pp. 542–554, 2017.
- [34] X. Wang, Y. Jiang, S. Yang, X. Zhu, W. Li, P. Fu, H. Wang, and Z. Luo, "End-to-end scene text recognition in videos based on multi frame tracking," in *Proc. IAPR Int. Conf. Document Analysis Recog.*, vol. 1, pp. 1255–1260, 2017.
- [35] Z. Cheng, J. Lu, Y. Niu, S. Pu, F. Wu, and S. Zhou, "You only recognize once: Towards fast video text spotting," in *Proc. ACM Int. Conf. Multimedia*, pp. 855–863, 2019.
- [36] Z. Cheng, J. Lu, B. Zou, L. Qiao, Y. Xu, S. Pu, Y. Niu, F. Wu, and S. Zhou, "Free: A fast and robust end-to-end video text spotter," *IEEE Trans. Image Process.*, vol. 30, pp. 822–837, 2020.
- [37] P. X. Nguyen, K. Wang, and S. Belongie, "Video text detection and recognition: Dataset and benchmark," in *Proc. Winter Conf. Appl. Comp. Vision*, pp. 776–783, 2014.
- [38] X. Rong, C. Yi, X. Yang, and Y. Tian, "Scene text recognition in multiple frames based on text tracking," in *IEEE Int Conf. on Multimedia and Expo*, pp. 1–6, 2014.
- [39] W. Wu, D. Zhang, Y. Cai, S. Wang, J. Li, Z. Li, Y. Tang, and H. Zhou, "A bilingual, openworld video text dataset and end-to-end video text spotter with transformer," in *Proc. Advances in Neural Inf. Process. Syst. Track on Datasets and Benchmarks*, pp. 1–10, 2021.
- [40] F. Zeng, B. Dong, Y. Zhang, T. Wang, X. Zhang, and Y. Wei, "MOTR: End-to-end multiple-object tracking with transformer," in *Proc. Eur. Conf. Comp. Vis.*, pp. 659–675, 2022.
- [41] W. Wu, D. Zhang, Y. Fu, C. Shen, H. Zhou, Y. Cai, and P. Luo, "End-to-end video text spotting with transformer," *Int. J. Comput. Vision*, pp. 1–11, 2024.
- [42] X. Zu, H. Yu, B. Li, and X. Xue, "Towards accurate video text spotting with text-wise semantic reasoning," in *Proc. Int. Joint Conf. Artificial Intell.*, pp. 1858–1866, 2023.
- [43] E. Tzeng, J. Hoffman, K. Saenko, and T. Darrell, "Adversarial discriminative domain adaptation," in *Proc. IEEE Conf. Comp. Vis. Patt. Recogn.*, pp. 7167–7176, 2017.
- [44] K. You, M. Long, Z. Cao, J. Wang, and M. I. Jordan, "Universal domain adaptation," in *Proc. IEEE Conf. Comp. Vis. Patt. Recogn.*, pp. 2720–2729, 2019.
- [45] C. Ge, R. Huang, M. Xie, Z. Lai, S. Song, S. Li, and G. Huang, "Domain adaptation via prompt learning," *IEEE Trans. Neural Netw. & Learn. Syst.*, pp. 1–11, 2023.
- [46] D. Chen, L. Lu, Y. Lu, R. Yu, S. Wang, L. Zhang, and T. Liu, "Cross-domain scene text detection via pixel and image-level adaptation," in *Int. Conf. Neural Inf. Process.*, pp. 135–143, 2019.
- [47] W. Wu, N. Lu, E. Xie, Y. Wang, W. Yu, C. Yang, and H. Zhou, "Synthetic-to-real unsupervised domain adaptation for scene text detection in the wild," in *Proc. Asian Conf. Comp. Vis.*, 2020.
- [48] Y. Chen, W. Wang, Y. Zhou, F. Yang, D. Yang, and W. Wang, "Self-training for domain adaptive scene text detection," in *Proc. IAPR Int. Conf. Document Analysis Recog.*, pp. 850–857, 2021.
- [49] W. Yu, Y. Liu, W. Hua, D. Jiang, B. Ren, and X. Bai, "Turning a clip model into a scene text detector," in *Proc. IEEE Conf. Comp. Vis. Patt. Recogn.*, pp. 6978–6988, 2023.
- [50] A. Radford, J. W. Kim, C. Hallacy, A. Ramesh, G. Goh, S. Agarwal, G. Sastry, A. Askell, P. Mishkin, J. Clark, et al., "Learning transferable visual models from natural language supervision," in *In Proc. Int. Conf. Mach. Learn.*, pp. 8748–8763, PMLR, 2021.
- [51] Y. Zhang, S. Nie, W. Liu, X. Xu, D. Zhang, and H. T. Shen, "Sequence-to-sequence domain adaptation network for robust text image recognition," in *Proc. IEEE Conf. Comp. Vis. Patt. Recogn.*, pp. 2740–2749, 2019.
- [52] F. Zhan, C. Xue, and S. Lu, "Ga-dan: Geometry-aware domain adaptation network for scene text detection and recognition," in *Proc. IEEE Int. Conf. Comp. Vis.*, pp. 9105–9115, 2019.
- [53] W. He, X.-Y. Zhang, F. Yin, and C.-L. Liu, "Deep direct regression for multi-oriented scene text detection," in *Proc. IEEE Conf. Comp. Vis. Patt. Recogn.*, pp. 745–753, 2017.
- [54] N. Houlsby, A. Giurgiu, S. Jastrzebski, B. Morrone, Q. De Larousilhe, A. Gesmundo, M. Attariyan, and S. Gelly, "Parameter-efficient transfer learning for nlp," in *Proc. Int. Conf. Mach. Learn.*, pp. 2790–2799, 2019.
- [55] Y. Liu, J. Wu, and Y. Fu, "Collaborative tracking learning for frame-rate-insensitive multi-object tracking," in *Proc. IEEE Int. Conf. Comp. Vis.*, pp. 9964–9973, 2023.
- [56] J. Xiao, X. Shang, A. Yao, and T.-S. Chua, "Next-qa: Next phase of question-answering to explaining temporal actions," in *Proc. IEEE Conf. Comp. Vis. Patt. Recogn.*, pp. 9777–9786, 2021.
- [57] C. Xu, S.-H. Hsieh, C. Xiong, and J. J. Corso, "Can humans fly? action understanding with multiple classes of actors," in *Proc. IEEE Conf. Comp. Vis. Patt. Recogn.*, pp. 2264–2273, 2015.
- [58] Y. Zhang, H. Doughty, L. Shao, and C. G. Snoek, "Audio-adaptive activity recognition across video domains," in *Proc. IEEE Conf. Comp. Vis. Patt. Recogn.*, pp. 13791–13800, 2022.
- [59] G. A. Sigurdsson, A. Gupta, C. Schmid, A. Farhadi, and K. Alahari, "Actor and observer: Joint modeling of first and third-person videos," in *Proc. IEEE Conf. Comp. Vis. Patt. Recogn.*, pp. 7396–7404, 2018.
- [60] M. Rohrbach, S. Amin, M. Andriluka, and B. Schiele, "A database for fine grained activity detection of cooking activities," in *Proc. IEEE Conf. Comp. Vis. Patt. Recogn.*, pp. 1194–1201, 2012.
- [61] M. Marszalek, I. Laptev, and C. Schmid, "Actions in context," in *Proc. IEEE Conf. Comp. Vis. Patt. Recogn.*, pp. 2929–2936, 2009.
- [62] H. Kuehne, A. Arslan, and T. Serre, "The language of actions: Recovering the syntax and semantics of goal-directed human activities," in *Proc. IEEE Conf. Comp. Vis. Patt. Recogn.*, pp. 780–787, 2014.
- [63] N. Carion, F. Massa, G. Synnaeve, N. Usunier, A. Kirillov, and S. Zagoruyko, "End-to-end object detection with transformers," in *Proc. Eur. Conf. Comp. Vis.*, pp. 213–229, 2020.
- [64] S. Liu, F. Li, H. Zhang, X. Yang, X. Qi, H. Su, J. Zhu, and L. Zhang, "DAB-DETR: Dynamic anchor boxes are better queries for DETR," in *Int. Conf. Learn. Representations*, 2022.
- [65] H. W. Kuhn, "The hungarian method for the assignment problem," *Naval research logistics quarterly*, vol. 2, no. 1-2, pp. 83–97, 1955.
- [66] T.-Y. Lin, P. Goyal, R. Girshick, K. He, and P. Dollár, "Focal loss for dense object detection," in *Proc. IEEE Int. Conf. Comp. Vis.*, pp. 2980–2988, 2017.
- [67] H. Rezatofighi, N. Tsoi, J. Gwak, A. Sadeghian, I. Reid, and S. Savarese, "Generalized intersection over union: A metric and a loss for bounding box regression," in *Proc. IEEE Conf. Comp. Vis. Patt. Recogn.*, pp. 658–666, 2019.
- [68] L. Zhang, A. Rao, and M. Agrawala, "Adding conditional control to text-to-image diffusion models," in *Proc. IEEE Int. Conf. Comp. Vis.*, pp. 3836–3847, 2023.
- [69] A. Kirillov, E. Mintun, N. Ravi, H. Mao, C. Rolland, L. Gustafson, T. Xiao, S. Whitehead, A. C. Berg, W.-Y. Lo, et al., "Segment anything," in *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pp. 4015–4026, 2023.
- [70] X. Wang, L. Xie, C. Dong, and Y. Shan, "Real-esrgan: Training real-world blind super-resolution with pure synthetic data," in *Proc. IEEE Int. Conf. Comp. Vis.*, pp. 1905–1914, 2021.

- [71] Y. Cheng, L. Li, Y. Xu, X. Li, Z. Yang, W. Wang, and Y. Yang, "Segment and track anything," *arXiv preprint arXiv:2305.06558*, 2023.
- [72] Z. Teed and J. Deng, "Raft: Recurrent all-pairs field transforms for optical flow," in *Proc. Eur. Conf. Comp. Vis.*, pp. 402–419, 2020.
- [73] M. A. Fischler and R. C. Bolles, "Random sample consensus: a paradigm for model fitting with applications to image analysis and automated cartography," *Communications of the ACM*, vol. 24, no. 6, pp. 381–395, 1981.
- [74] W. Wang, Y. Zhou, J. Lv, D. Wu, G. Zhao, N. Jiang, and W. Wang, "Tpsnet: Reverse thinking of thin plate splines for arbitrary shape scene text representation," in *Proc. ACM Int. Conf. Multimedia*, pp. 5014–5025, 2022.
- [75] M. Ye, J. Zhang, S. Zhao, J. Liu, B. Du, and D. Tao, "DPTText-DETR: Towards better scene text detection with dynamic points in transformer," in *Proc. AAAI Conf. Artificial Intell.*, pp. 3241–3249, 2023.
- [76] N. Nayef, F. Yin, I. Bizid, H. Choi, Y. Feng, D. Karatzas, Z. Luo, U. Pal, C. Rigaud, J. Chazalon, *et al.*, "ICDAR 2017 robust reading challenge on multi-lingual scene text detection and script identification-RRC-MLT," in *Proc. IAPR Int. Conf. Document Analysis Recog.*, vol. 1, pp. 1454–1459, 2017.
- [77] B. Epshtein, E. Ofek, and Y. Wexler, "Detecting text in natural scenes with stroke width transform," in *Proc. IEEE Conf. Comp. Vis. Patt. Recog.*, pp. 2963–2970, 2010.
- [78] X. Zhao, K.-H. Lin, Y. Fu, Y. Hu, Y. Liu, and T. S. Huang, "Text from corners: a novel approach to detect text and caption in videos," *IEEE Trans. Image Process.*, vol. 20, no. 3, pp. 790–799, 2010.
- [79] X.-C. Yin, X. Yin, K. Huang, and H.-W. Hao, "Robust text detection in natural scene images," *IEEE Trans. Pattern Anal. Mach. Intell.*, vol. 36, no. 5, pp. 970–983, 2013.
- [80] V. Khare, P. Shivakumara, R. Paramesran, and M. Blumenstein, "Arbitrarily-oriented multi-lingual text detection in video," *Multimedia Tools and Applications*, vol. 76, pp. 16625–16655, 2017.
- [81] L. Wang, Y. Wang, S. Shan, and F. Su, "Scene text detection and tracking in video with background cues," in *Proc. ACM on Int. Conf. on Multimedia Retrieval*, pp. 160–168, 2018.
- [82] P. Shivakumara, L. Wu, T. Lu, C. L. Tan, M. Blumenstein, and B. S. Anami, "Fractals based multi-oriented text detection system for recognition in mobile video images," *Pattern Recog.*, vol. 68, pp. 158–174, 2017.
- [83] L. Wu, P. Shivakumara, T. Lu, and C. L. Tan, "A new technique for multi-oriented scene text line detection and tracking in video," *IEEE Transactions on multimedia*, vol. 17, no. 8, pp. 1137–1152, 2015.
- [84] H. Yu, Y. Huang, L. Pi, C. Zhang, X. Li, and L. Wang, "End-to-end video text detection with online tracking," *Pattern Recog.*, vol. 113, p. 107791, 2021.
- [85] W. Feng, F. Yin, X.-Y. Zhang, and C.-L. Liu, "Semantic-aware video text detection," in *Proc. IEEE Conf. Comp. Vis. Patt. Recog.*, pp. 1695–1705, 2021.
- [86] X. Zhou, C. Yao, H. Wen, Y. Wang, S. Zhou, W. He, and J. Liang, "EAST: An efficient and accurate scene text detector," in *Proc. IEEE Conf. Comp. Vis. Patt. Recog.*, pp. 5551–5560, 2017.
- [87] X. Wang, Y. Jiang, Z. Luo, C.-L. Liu, H. Choi, and S. Kim, "Arbitrary Shape Scene Text Detection with Adaptive Text Region Representation," in *Proc. IEEE Conf. Comp. Vis. Patt. Recog.*, pp. 6449–6458, 2019.
- [88] M. Liao, Z. Wan, C. Yao, K. Chen, and X. Bai, "Real-time scene text detection with differentiable binarization," in *Proc. AAAI Conf. Artificial Intell.*, pp. 11474–11481, 2020.
- [89] M. Liao, Z. Zou, Z. Wan, C. Yao, and X. Bai, "Real-time scene text detection with differentiable binarization and adaptive scale fusion," *IEEE Trans. Pattern Anal. Mach. Intell.*, vol. 45, no. 1, pp. 919–931, 2022.
- [90] W. Wu, Y. Zhang, Y. He, L. Zhang, Z. Lou, H. Zhou, and X. Bai, "DSText V2: A comprehensive video text spotting dataset for dense and small text," *Pattern Recog.*, vol. 149, p. 110177, 2024.
- [91] X. Zhou, V. Koltun, and P. Krähenbühl, "Tracking objects as points," in *Proc. Eur. Conf. Comp. Vis.*, pp. 474–490, Springer, 2020.
- [92] I. Loshchilov and F. Hutter, "Decoupled weight decay regularization," *Proc. Int. Conf. Learn. Representations*, 2018.
- [93] Y. Shi, D. Peng, W. Liao, Z. Lin, X. Chen, C. Liu, Y. Zhang, and L. Jin, "Exploring ocr capabilities of gpt-4v (ision): A quantitative and in-depth evaluation," *arXiv preprint arXiv:2310.16809*, 2023.
- [94] J. Bai, S. Bai, S. Yang, S. Wang, S. Tan, P. Wang, J. Lin, C. Zhou, and J. Zhou, "Qwen-vl: A frontier large vision-language model with versatile abilities," *arXiv preprint arXiv:2308.12966*, 2023.
- [95] H. Liu, C. Li, Y. Li, and Y. J. Lee, "Improved baselines with visual instruction tuning," *arXiv preprint arXiv:2310.03744*, 2023.
- [96] Q. Ye, H. Xu, J. Ye, M. Yan, H. Liu, Q. Qian, J. Zhang, F. Huang, and J. Zhou, "mplug-owl2: Revolutionizing multi-modal large language model with modality collaboration," *arXiv preprint arXiv:2311.04257*, 2023.
- [97] Z. Li, B. Yang, Q. Liu, Z. Ma, S. Zhang, J. Yang, Y. Sun, Y. Liu, and X. Bai, "Monkey: Image resolution and text label are important things for large multi-modal models," *arXiv preprint arXiv:2311.06607*, 2023.
- [98] Z. Lin, C. Liu, R. Zhang, P. Gao, L. Qiu, H. Xiao, H. Qiu, C. Lin, W. Shao, K. Chen, *et al.*, "Sphinx: The joint mixing of weights, tasks, and visual embeddings for multi-modal large language models," *arXiv preprint arXiv:2311.07575*, 2023.
- [99] Y. Liu, B. Yang, Q. Liu, Z. Li, Z. Ma, S. Zhang, and X. Bai, "Textmonkey: An ocr-free large multimodal model for understanding document," *arXiv preprint arXiv:2403.04473*, 2024.
- [100] X. Dong, P. Zhang, Y. Zang, Y. Cao, B. Wang, L. Ouyang, X. Wei, S. Zhang, H. Duan, M. Cao, W. Zhang, Y. Li, H. Yan, Y. Gao, X. Zhang, W. Li, J. Li, K. Chen, C. He, X. Zhang, Y. Qiao, D. Lin, and J. Wang, "Internlm-xcomposer2: Mastering free-form text-image composition and comprehension in vision-language large model," *arXiv preprint arXiv:2401.16420*, 2024.
- [101] Z. Chen, W. Wang, H. Tian, S. Ye, Z. Gao, E. Cui, W. Tong, K. Hu, J. Luo, Z. Ma, *et al.*, "How far are we to gpt-4v? closing the gap to commercial multimodal models with open-source suites," *arXiv preprint arXiv:2404.16821*, 2024.
- [102] G. Team, R. Anil, S. Borgeaud, Y. Wu, J.-B. Alayrac, J. Yu, R. Soricut, J. Schalkwyk, A. M. Dai, A. Hauth, *et al.*, "Gemini: a family of highly capable multimodal models," *arXiv preprint arXiv:2312.11805*, 2023.