

# Discrete Aware Matrix Completion via Convexized $\ell_0$ -Norm Approximation

Niclas Führling, Kengo Ando, *Graduate Student Members, IEEE*,  
Giuseppe Thadeu Freitas de Abreu, David González G., *Senior Members, IEEE* and Osvaldo Gonsa

**Abstract**—We consider a novel algorithm, for the completion of partially observed low-rank matrices in a structured setting where each entry can be chosen from a finite discrete alphabet set, such as in common recommender systems. The proposed low-rank matrix completion (MC) method is an improved variation of state-of-the-art (SotA) discrete aware matrix completion method which we previously proposed, in which discreteness is enforced by an  $\ell_0$ -norm regularizer, not by replaced with the  $\ell_1$ -norm, but instead approximated by a continuous and differentiable function normalized via fractional programming (FP) under a proximal gradient (PG) framework. Simulation results demonstrate the superior performance of the new method compared to the SotA techniques as well as the earlier  $\ell_1$ -norm-based discrete-aware matrix completion approach.

**Index Terms**—Fractional Programming, Matrix Completion, Proximal Gradient

## I. INTRODUCTION

WITH the recent popularity of machine learning and big data, matrix completion has become a problem in many modern applications stemming from different areas, such as recommendation systems in computer science [1], localization algorithms in signal processing [2], and millimeter wave channel estimation in wireless communications [3].

The most common problems are often structured low-rank MC problems, where  $\mathbf{X} \in \mathbb{R}^{m \times n}$  is the desired low-rank matrix obtained from the partially observed, incomplete matrix  $\mathbf{O} \in \mathbb{R}^{m \times n}$  [4]–[6], and traditional MC solutions [7]–[9] mainly seek to improve performance and or lower complexity by replacing the non-convex rank objective with corresponding convex alternatives, *i.e.* the nuclear norm (NN).

To cite a few SotA examples, an MC approach employing the NN as a bound on the rank objective was proposed in [7], which was shown to be able to fill matrices even with a few noisy observations. Another approach proposed in [8] describes the relaxed minimization of the NN, solved via semidefinite programming (SDP). Since the complexity of the SDP solution is of order  $\mathcal{O}(\max(m, n)^4)$ , where  $m$  and  $n$  are the dimensions of the matrix, the method can only solve the problem up to a certain size before becoming unfeasible. In order to lower the complexity of the problem, the technique proposed in [10] relies on singular value thresholding (SVT) as a PG minimizer of the NN function.

N. Führling, Kengo Ando and G. T. F. Abreu are with the School of Computer Science and Engineering, Constructor University, Campus Ring 1, 28759, Bremen, Germany (emails: [nfuehrling, kando, gabreu]@constructor.university).

D. González G. and O. Gonsa are with the Wireless Communications Technologies Group, Continental AG, Wilhelm-Fay Strasse 30, 65936, Frankfurt am Main, Germany (e-mails: david.gonzalez.g@ieee.org, osvaldo.gonsa@continental-corporation.com).

Motivated by that idea, we recently proposed in [11] a similar PG-based low-complexity low-rank MC method to solve a harder variation of the problem faced when the matrix entries must belong to a finite discrete alphabet. The resulting discrete-aware MC technique is especially efficient to solve problems such as in recommendation and rating applications [1]. This discreteness in the previously proposed method is included by adding a discrete-space regularizer in the optimization problem, with the solution offered in closed-form under a relaxed variation in which the regularizer is convexized by using the  $\ell_1$ -norm.

In this article, we propose an improvement of the latter discrete-aware matrix completion algorithm [11] in which the discrete-space regularizer is the actual  $\ell_0$ -norm, relaxed by first replacing it with an arbitrarily-tight continuous and differentiable, but not convex, function, which is then convexized via FP. The method also makes use a PG algorithm designed specifically for the formulated problem.

The structure of the article is as follows. First, basics on the MC problem, as well as a review of the discrete-aware variation of the MC proposed in [11] is given in Section II. Then, the new method based on the  $\ell_0$ -norm approximation is described in Section III, followed by simulations results comparing our contribution with SotA methods and a few concluding remarks, in Sections IV and V, respectively.

## II. MATRIX COMPLETION

### A. Classical Formulation of the Matrix Completion Problem

Before looking into the proposed method, a few major MC techniques will be discussed, all of which aim to recover entries from a partially observed matrix. Typical SotA MC techniques are based on a low-rank constraint, such that the original optimization problem can be written as

$$\arg \min_{\mathbf{X} \in \mathbb{R}^{m \times n}} \text{rank}(\mathbf{X}), \quad (1a)$$

$$\text{s.t.} \quad P_{\Omega}(\mathbf{X}) = P_{\Omega}(\mathbf{O}), \quad (1b)$$

where  $\text{rank}(\cdot)$  indicates the rank of the input matrix, and  $P_{\Omega}(\cdot)$  indicates a mask operator, defined as

$$[P_{\Omega}(\mathbf{X})]_{i,j} = \begin{cases} [\mathbf{X}]_{i,j}, & \text{if } (i,j) \in \Omega, \\ 0, & \text{otherwise,} \end{cases} \quad (2)$$

where  $\Omega$  denotes the index set of observed elements, and  $[\cdot]_{i,j}$  denotes the  $(i,j)$ -th element of a given matrix.

We emphasize that although problem (1) is optimal, it is also non-deterministic polynomial-time (NP)-hard due to the non-convexity of the rank operator, such that its solution cannot be obtained efficiently.

It has also been shown [12], however, that the problem can be relaxed replacing the rank objective by the NN operator  $\|\mathbf{X}\|_*$ , which is given by the sum of the singular values of  $\mathbf{X}$ , since a matrix of rank  $r$  has exactly  $r$  nonzero singular values. The relaxed optimization problem can be written as

$$\arg \min_{\mathbf{X} \in \mathbb{R}^{m \times n}} \|\mathbf{X}\|_*, \quad (3a)$$

$$\text{s.t.} \quad P_\Omega(\mathbf{X}) = P_\Omega(\mathbf{O}), \quad (3b)$$

where the NN can be viewed as a tight lower bound of the rank operator [13], compared to the original problem in (1).

Taking into account realistic scenarios where observed matrices can contain noisy measurements, constraint (3b) can be relaxed to the target matrix being recovered only as an approximately low-rank solution. Various related works, *e.g.* [14]–[16], have therefore considered the following variation of problem (3)

$$\arg \min_{\mathbf{X} \in \mathbb{R}^{m \times n}} \|\mathbf{X}\|_*, \quad (4a)$$

$$\text{s.t.} \quad \underbrace{\frac{1}{2} \|P_\Omega(\mathbf{X} - \mathbf{O})\|_F^2}_{\triangleq f(\mathbf{X})} \leq \epsilon, \quad (4b)$$

where  $f(\mathbf{X})$  was implicitly defined for notational convenience.

Problem (4) can be rewritten in regularized form as

$$\arg \min_{\mathbf{X} \in \mathbb{R}^{m \times n}} f(\mathbf{X}) + \lambda \|\mathbf{X}\|_*, \quad (5)$$

or, including the rank constraint, as

$$\arg \min_{\mathbf{X} \in \mathbb{R}^{m \times n}} f(\mathbf{X}), \quad (6a)$$

$$\text{s.t.} \quad \text{rank}(\mathbf{X}) \leq \mu. \quad (6b)$$

While most SotA methods [17]–[19] seek to solve variations of the aforementioned convex problems, significant progress has been made recently on non-convex optimization methods [20]–[22], which typically lead to better performance over convex alternatives due to the tighter proximity to the original (typically non-convex) formulations. As an example, an excellent survey on non-convex optimization methods applied to low-rank MC can be found in [23].

### B. Soft-impute Approach

Soft-impute (SI) is a recently proposed method to solve large-scale MC problems [24]–[26] similar to those described by equations (4) and (5). The standard SI method consists of the recursion

$$\mathbf{X}_t = \text{SVT}_\lambda(\mathbf{X}_t + P_\Omega(\mathbf{O} - \mathbf{X}_t)), \quad (7)$$

where the SVT function is given as

$$\text{SVT}_\lambda(\mathbf{A}) = \mathbf{U}(\mathbf{\Sigma} - \lambda \mathbf{I})_+ \mathbf{V}^\top, \quad (8)$$

with  $\mathbf{A} \triangleq \mathbf{U}\mathbf{\Sigma}\mathbf{V}^\top$  and  $(\cdot)_+$  being the positive part of the input.

It has been shown in [26] that SI can be used as a PG method, enabling the use of SI-based Nesterov-type momentum acceleration [27], expressed by the updated recursion

$$\mathbf{X}_t = \text{SVT}_\lambda(\mathbf{Y}_t + P_\Omega(\mathbf{O} - \mathbf{Y}_t)), \quad (9)$$

with  $\mathbf{Y}_t = (1 + \gamma_t)\mathbf{X}_{t-1} + \gamma_t\mathbf{X}_{t-2}$ , where  $\gamma_t$  acts as the weight of the momentum.

### C. Discrete-Aware Matrix Completion

The discrete-aware matrix completion scheme first proposed in [11] assumes that the missing entries of the matrix that need be recovered belong to a finite discrete alphabet set  $\mathcal{A} \triangleq \{a_1, a_2, \dots\}$ . Thus, the standard regularized optimization problem discussed above can be extended to

$$\arg \min_{\mathbf{X} \in \mathbb{R}^{m \times n}} f(\mathbf{X}) + \lambda g(\mathbf{X}) + \zeta r(\mathbf{X}|p), \quad (10)$$

where  $g(\mathbf{X})$  denotes a low-rank regularizer, which is chosen to be the nuclear norm (NN), while the discrete-space regularizer  $r(\mathbf{X}|p)$  defined as

$$r(\mathbf{X}|p) \triangleq \sum_{k=1}^{|\mathcal{A}|} \|\text{vec}_{\bar{\Omega}}(\mathbf{X}) - a_k \mathbf{1}\|_p, \quad (11)$$

with  $0 \leq p$  and  $\text{vec}_{\bar{\Omega}}(\mathbf{X})$  represents a vectorization of the matrix  $\mathbf{X}$ , where the entries are chosen corresponding to the given index set  $\bar{\Omega}$ , being the complementary set to the previously presented set  $\Omega$ .

Following SotA methods, a PG method was used in [11] to solve the problem iteratively, containing the following steps:

$$\mathbf{Y}_t = (1 + \gamma_t)\mathbf{X}_{t-1} + \gamma_t\mathbf{X}_{t-2}, \quad (12)$$

$$\mathbf{Z}_t = \text{prox}_{\zeta_r}(\mathbf{Y}_t), \quad (13)$$

$$\mathbf{X}_t = \text{SVT}_\lambda(P_\Omega(\mathbf{Z}_t) + P_\Omega(\mathbf{O})), \quad (14)$$

where the first step integrates the momentum acceleration function, the second corresponds to the proximal operation on the discrete space regularizer, and the last amounts to the PG operation on the NN regularizer  $g(\mathbf{X})$ , since it is known [10] that SVT can be used as a proximal minimizer for the NN.

Following the approach described in [28], the operation on the discrete-space regularizer  $\text{prox}_{\zeta_r}(\mathbf{Y}_t)$  is given by

$$\text{prox}_{\zeta_r}(\mathbf{Y}_t) \triangleq \arg \min_{\mathbf{U}} r(\mathbf{U}|1) + \frac{1}{2\zeta} \|\text{vec}_{\bar{\Omega}}(\mathbf{U} - \mathbf{Y}_t)\|_2^2, \quad (15)$$

where it was shown in [11] that by an element-by-element reformulation, a closed-form solution can be found for the desired matrix  $\mathbf{U}$ , leading to

$$\bar{\mathbf{u}} = \text{sign}(\bar{\mathbf{y}}_t) \odot (|\bar{\mathbf{y}}_t| - \zeta \mathbf{1})_+, \quad (16)$$

as a preliminary solution, where  $\bar{\mathbf{u}}_l \triangleq [\mathbf{u}]_l - a_k$  and  $\bar{\mathbf{y}}_{t,l} \triangleq [\mathbf{y}_t]_l - a_k$  are used as auxiliary variables. Finally,  $\mathbf{u}$  can be recovered by

$$\mathbf{u} = \bar{\mathbf{u}} + a_k \mathbf{1}, \quad (17)$$

which is then the final solution for the first proximal operation.

## III. PROPOSED DISCRETE-AWARE MATRIX COMPLETION

### A. Discrete-Aware Regularizer with $\ell_0$ -Norm Approximation

Consider the following tight approximation of the  $\ell_0$ -norm proposed in [29]

$$\|\mathbf{x}\|_0 \approx \sum_{i=1}^L \frac{|x_i|^2}{|x_i|^2 + \alpha} = L - \sum_{i=1}^L \frac{\alpha}{|x_i|^2 + \alpha}, \quad (18)$$

where  $L$  and  $\alpha$  are the length of the vector  $\mathbf{x}$  and an arbitrary small constant respectively.

Notice in particular that under this approximation we have, for any value of  $x_i$ ,

$$\frac{|x_i|^2}{|x_i|^2 + \alpha} \rightarrow 0 \text{ for } |x_i|^2 = 0, \quad (19)$$

$$\frac{|x_i|^2}{|x_i|^2 + \alpha} \rightarrow 1 \text{ for } |x_i|^2 > 0. \quad (20)$$

In order to apply the approximation to the discrete-aware regularizer, we first rewrite it in an element-by-element format, using the approximation to each term. Proceeding as such, the regularizer can be written as

$$\begin{aligned} r(\mathbf{X}|0) &= \sum_{k=1}^{|\mathcal{A}|} \|\text{vec}_{\bar{\Omega}}(\mathbf{X}) - a_k \mathbf{1}\|_0 = \sum_{k=1}^{|\mathcal{A}|} \sum_{j=1}^{|\mathcal{X}|} \|\mathbf{x}_j - a_k\|_0 \\ &\approx \sum_{k=1}^{|\mathcal{A}|} \left( \underbrace{|\mathcal{X}|}_{\text{const.}} - \sum_{j=1}^{|\mathcal{X}|} \frac{\alpha}{|\mathbf{x}_j - a_k|^2 + \alpha} \right) \\ &= - \sum_{k=1}^{|\mathcal{A}|} \sum_{j=1}^{|\mathcal{X}|} \frac{\alpha}{|\mathbf{x}_j - a_k|^2 + \alpha}, \end{aligned} \quad (21)$$

where  $|\mathcal{X}|$  denotes the number of elements in the set obtained after applying  $\text{vec}_{\bar{\Omega}}(\cdot)$  to  $\mathbf{X}$ . Additionally, since  $|\mathcal{X}|$  is a constant term, it can be neglected in the following due to working on an optimization problem.

### B. Reformulation via Fractional Programming

Notice that the discrete-aware regularizer formulation of equation (21) is not convex due to the fraction of affine and convex functions. In order to mitigate this challenge, we introduce a fractional-programming variation of the  $\ell_0$ -norm approximation, enabled by the quadratic transform described in [30], [31].

A simple reformulation can be found by applying the quadratic transform to the original  $\ell_0$ -norm approximation, which yields

$$\begin{aligned} \|x\|_0 &\approx L - \sum_{i=1}^L \frac{\alpha}{|x_i|^2 + \alpha} \approx L - \left( \sum_{i=1}^L 2\beta_i \sqrt{\alpha} - \beta_i^2 (|x_i|^2 + \alpha) \right) \\ &= \sum_{i=1}^L \beta_i^2 |x_i|^2 + L - \underbrace{\left( \sum_{i=1}^L 2\beta_i \sqrt{\alpha} + \alpha \right)}_{\text{indep. of } x} \equiv \sum_{i=1}^L \beta_i^2 |x_i|^2, \end{aligned} \quad (22)$$

where  $\beta_i \triangleq \frac{\sqrt{\alpha}}{|x_i|^2 + \alpha}$  is an auxiliary variable resulting from the fractional programming step, and the terms independent of  $x$  can be neglected for the purpose of the minimization problem, leading to the last equivalent.

In the following, the quadratic transform can be applied to the problem statement of the discrete-space regularizer similar as shown in (22), leading to

$$- \sum_{k=1}^{|\mathcal{A}|} \sum_{j=1}^{|\mathcal{X}|} \frac{\alpha}{|\mathbf{x}_j - a_k|^2 + \alpha} = \sum_{k=1}^{|\mathcal{A}|} \sum_{j=1}^{|\mathcal{X}|} \beta_{k,j}^2 |\mathbf{x}_j - a_k|^2, \quad (23)$$

with  $\beta_{k,j} \triangleq \frac{\sqrt{\alpha}}{|\mathbf{x}_j - a_k|^2 + \alpha}$  being an auxiliary variable resulting from the quadratic transform as stated above.

In order to simplify and vectorize the regularizer to its final form, the following auxiliary vector and matrix are introduced

$$\mathbf{b} = \sum_{k=1}^{|\mathcal{A}|} a_k [\beta_{k,1}^2, \beta_{k,2}^2, \dots, \beta_{k,|\mathcal{X}|}^2]^\top, \quad (24a)$$

$$\mathbf{B} = \sum_{k=1}^{|\mathcal{A}|} \text{diag}(\beta_{k,1}^2, \beta_{k,2}^2, \dots, \beta_{k,|\mathcal{X}|}^2) \succ 0, \quad (24b)$$

such that after some algebra, the final regularizer can be reformulated as

$$r(\mathbf{X}|0) \approx h(\mathbf{X}) = \text{vec}_{\bar{\Omega}}(\mathbf{X})^\top \mathbf{B} \text{vec}_{\bar{\Omega}}(\mathbf{X}) - 2 \text{vec}_{\bar{\Omega}}(\mathbf{X})^\top \mathbf{b}. \quad (25)$$

Having obtained a closed-form and convex formulation of the approximate  $\ell_0$ -norm regularizer, the proposed optimization problem can be written as

$$\arg \min_{\mathbf{X} \in \mathbb{R}^{m \times n}} \underbrace{f(\mathbf{X})}_{\frac{1}{2} \|\mathbf{P}_{\Omega}(\mathbf{X} - \mathbf{O})\|_F^2} + \underbrace{\lambda g(\mathbf{X})}_{\|\mathbf{X}\|_*} + \underbrace{\zeta r(\mathbf{X}|0)}_{\text{eq. (25)}}, \quad (26)$$

or, using equation (25), as

$$\arg \min_{\mathbf{X} \in \mathbb{R}^{m \times n}} f(\mathbf{X}) + \zeta h(\mathbf{X}) + \lambda g(\mathbf{X}). \quad (27)$$

Now, the proximal gradient algorithm corresponding to this problem can be obtained by modifying the one originally derived in [11]. To that end, consider first the gradient of  $h(\mathbf{X})$  be expressed by

$$\nabla h(\mathbf{X}) = \text{vec}_{\bar{\Omega}}^{-1}(2\mathbf{B} \text{vec}_{\bar{\Omega}}(\mathbf{X}) - 2\mathbf{b}). \quad (28)$$

Then, let us compute the momentum acceleration function as in (12), namely

$$\mathbf{X}_t = (1 + \gamma_t) \mathbf{X}_{t-1} + \gamma_t \mathbf{X}_{t-2}, \quad (29)$$

where the momentum weights  $\gamma_t$  are obtained as in [27].

Next, we process the SVT step where, as shown in [28], the input corresponds to the matrix  $\mathbf{X}_t$  and the gradient  $\nabla h(\mathbf{X})$ , which yields

$$\begin{aligned} \mathbf{X}_{t+1} &= \text{SVT}_{\lambda}(\mathbf{X}_t - \nabla f(\mathbf{X}_t) - \mu \zeta \nabla h(\mathbf{X}_t)) \\ &= \text{SVT}_{\lambda}(\mathbf{P}_{\Omega}(\mathbf{O}) + \mathbf{P}_{\bar{\Omega}}(\mathbf{X}_t - \mu \zeta \nabla h(\mathbf{X}_t))), \end{aligned} \quad (30)$$

where  $\mu$  denotes the a stepsize optimized for convergence guarantees by employing the Lipschitz condition

$$0 \leq \mu \leq 1/L, \quad (31a)$$

with  $L$  denoting the Lipschitz constant, computed as

$$L = \max \text{eig}(\mathbf{B}^\top \mathbf{B}) = \max(\mathbf{B}_{i,i}^2, \forall i) \quad (31b)$$

where  $\max \text{eig}(\cdot)$  denotes the operator returning the maximum eigenvalue of the argument matrix, and (31b) offers a low complexity alternative.

The detailed procedure to solve problem (27) is summarized as a pseudo-code in Algorithm 1. The algorithm works in two loops until the convergence of  $\mathbf{B}$  in the outer loop and the convergence of the gradient algorithm in the inner loop. In the outer loop, the auxiliary variables  $\mathbf{B}$  and  $\mathbf{b}$ , as well as the stepsize  $\mu$  are calculated; while in the inner loop the first step is constructing  $\mathbf{X}_t$  from the Nesterov-type momentum acceleration method, followed by the gradient  $h(\mathbf{X})$ , and finally the soft-input.

---

**Algorithm 1** Discrete-Aware Matrix Completion with  $\ell_0$ -Norm Approximation

---

**Input:** Incomplete matrix  $\mathbf{O}$  and constants  $\alpha, \lambda$  and  $\zeta$ .

---

```

1: Initialization: Initialize random  $\mathbf{X}_{t-1} = \mathbf{X}_{t-2}$ 
2: for until convergence of  $\mathbf{B}$  do
3:   Compute  $\mathbf{B}, \mathbf{b}$  via (24)
4:   Find  $\mu$  via (31)
5:   for until convergence of Gradient algorithm do
6:     Compute  $\mathbf{X}_t$  via (29)
7:     Compute  $\nabla h(\mathbf{X}_t)$  via (28)
8:     Compute  $\mathbf{X}_{t+1}$  via (30)
9:   end for
10: end for
Output: Completed matrix  $\mathbf{X}$ .

```

---

#### IV. NUMERICAL RESULTS

In this section we compare the proposed method to the SotA techniques described in [32], the accelerated and inexact SI (AIS)-impute approach of [26], and our own earlier discrete-aware method described in [11]. For comparison such comparisons, the MovieLens-100k data set<sup>1</sup> is chosen, which is commonly used in the MC literature on recommendation methods, where each matrix entry has an integer rating varying from 1 to 5. The chosen performance metric for comparison is the normalized mean square error (NMSE), defined by

$$\text{NMSE} \triangleq \frac{\|P_{\Omega^c}(\mathbf{X} - \mathbf{O})\|_F^2}{\|P_{\Omega^c}(\mathbf{O})\|_F^2}. \quad (32)$$

In order to submit both SotA and proposed methods to the same conditions, identical simulation setups are chosen, where the ratio of observed values in the matrix  $\mathbf{O}$  varies from 20% to 60%. The NMSE results over varying observation ratios are shown in Figure 1, while the convergence behavior for a fixed observation ratio of 20% is shown in Figure 2.

It is found from Figure 1, that indeed the proposed method outperforms all other alternatives, offering a gain over the earlier method of [11] that is more significant at harsher conditions of where the observation ratios are lowest.

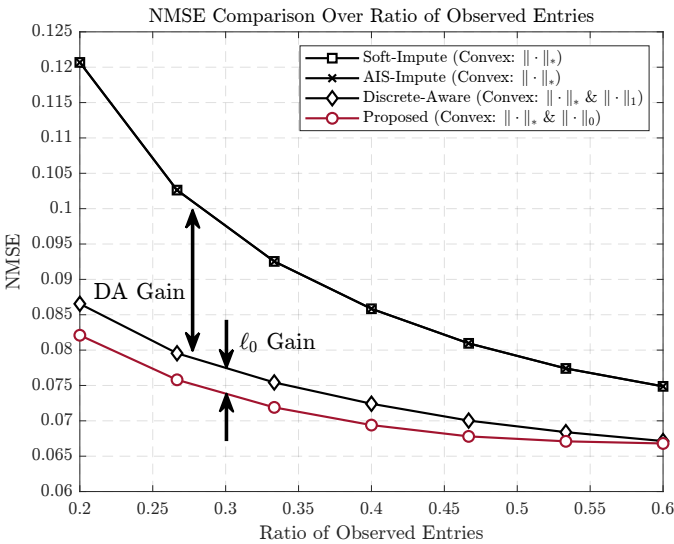


Fig. 1. NMSE comparison of the SotA and the proposed method, with a varying ratio of observed entries in  $\mathbf{O}$ , for  $\alpha = 0.1$ ,  $\lambda = 10$  and  $\zeta = 0.15$ .

<sup>1</sup>Dataset available at <https://grouplens.org/datasets/movielens/>

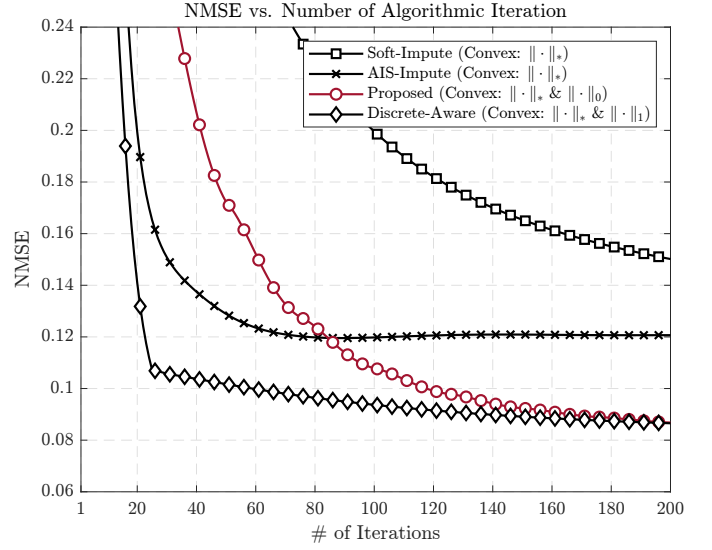


Fig. 2. NMSE convergence comparison of the SotA and the proposed method, with a 20% observation ratio of  $\mathbf{O}$ , for  $\alpha = 0.1$ ,  $\lambda = 10$  and  $\zeta = 0.15$ .

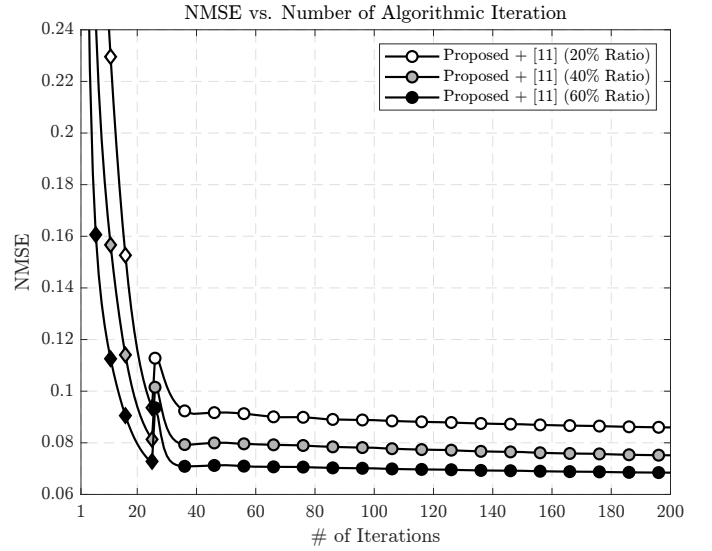


Fig. 3. NMSE convergence comparison of the proposed method initialized with [11], with a varying ratio of observed entries in  $\mathbf{O}$ .

In turn, our second set of results offered in Figure 2 shows that the penalty of the gain achieved by the proposed method with asymptotically tight  $\ell_0$ -norm approximation, convexized via FP, is a slower convergence compared to the earlier method based on the  $\ell_1$ -norm approximation of the  $\ell_0$ -norm, although the new method still converges as fast or faster than the techniques in [32] and [26]. Given that the proposed method relies on a convexized problem, the convergence results of Figure 2 suggests us to consider initializing the proposed method with the solution of our earlier technique from [11]. This results corresponding to this approach are shown in Figure 3, and demonstrate that indeed, the combination of the earlier method from [11] with the one here proposed yields the best combination of convergence and performance.

## V. CONCLUSION

We propose a new discrete-aware MC algorithm in which a discrete-space  $\ell_0$ -norm regularizer is introduced to the objective function, which is later approximated with asymptotically tight precision. The initially non-convex problem is then convexized via fractional programming and solved efficiently via a proximal gradient method. Simulation results demonstrate that the proposed scheme outperforms both SotA techniques, as well as our earlier discrete aware method using a regularizer relaxed by the  $\ell_1$ -norm. The contributed scheme can be applied to problems such as recommender systems for streaming or shopping services, as well as social network connections [1], [25], [33].

## REFERENCES

- [1] Z. Chen and S. Wang, "A review on matrix completion for recommender systems," *Knowledge and Information Systems*, vol. 64, no. 1, pp. 1–34, 2022. [Online]. Available: <https://doi.org/10.1007/s10115-021-01629-6>
- [2] L. T. Nguyen, J. Kim, S. Kim, and B. Shim, "Localization of iot networks via low-rank matrix completion," *IEEE Transactions on Communications*, vol. 67, no. 8, pp. 5833–5847, 2019.
- [3] E. Vlachos, G. C. Alexandropoulos, and J. Thompson, "Massive MIMO channel estimation for millimeter wave systems via matrix completion," *IEEE Signal Processing Letters*, vol. 25, no. 11, pp. 1675–1679, 2018.
- [4] L. T. Nguyen, J. Kim, and B. Shim, "Low-rank matrix completion: A contemporary survey," *IEEE Access*, vol. 7, pp. 94 215–94 237, 2019.
- [5] W. Dai, E. Kerman, and O. Milenkovic, "A geometric approach to low-rank matrix completion," *IEEE Transactions on Information Theory*, vol. 58, no. 1, pp. 237–247, 2012.
- [6] B. Vandereycken, "Low-rank matrix completion by riemannian optimization," *SIAM Journal on Optimization*, vol. 23, no. 2, pp. 1214–1236, 2013. [Online]. Available: <https://doi.org/10.1137/110845768>
- [7] E. J. Candès and Y. Plan, "Matrix completion with noise," *Proceedings of the IEEE*, vol. 98, no. 6, pp. 925–936, 2010.
- [8] E. J. Candès and B. Recht, "Exact matrix completion via convex optimization," *Foundations of Computational Mathematics*, vol. 9, no. 6, pp. 717–772, 2009. [Online]. Available: <https://doi.org/10.1007/s10208-009-9045-5>
- [9] E. J. Candès and T. Tao, "The power of convex relaxation: Near-optimal matrix completion," *IEEE Transactions on Information Theory*, vol. 56, no. 5, pp. 2053–2080, 2010.
- [10] J.-F. Cai, E. J. Candès, and Z. Shen, "A singular value thresholding algorithm for matrix completion," *SIAM Journal on Optimization*, vol. 20, no. 4, pp. 1956–1982, 2010.
- [11] H. Iimori, G. T. F. de Abreu, O. Taghizadeh, and K. Ishibashi, "Discrete-aware matrix completion via proximal gradient," in *2020 54th Asilomar Conference on Signals, Systems, and Computers*, 2020, pp. 1327–1332.
- [12] E. Candès and B. Recht, "Exact matrix completion via convex optimization," *Communications of the ACM*, vol. 55, no. 6, pp. 111–119, 2012.
- [13] B. Recht, M. Fazel, and P. A. Parrilo, "Guaranteed minimum-rank solutions of linear matrix equations via nuclear norm minimization," *SIAM Review*, vol. 52, no. 3, pp. 471–501, 2010.
- [14] R. H. Keshavan, A. Montanari, and S. Oh, "Matrix completion from a few entries," *IEEE Transactions on Information Theory*, vol. 56, no. 6, pp. 2980–2998, 2010.
- [15] W. Glunt, T. L. Hayden, S. Hong, and J. Wells, "An alternating projection algorithm for computing the nearest euclidean distance matrix," *SIAM Journal on Matrix Analysis and Applications*, vol. 11, no. 4, pp. 589–600, 1990. [Online]. Available: <https://doi.org/10.1137/0611042>
- [16] R. K. W. Wong and T. C. M. Lee, "Matrix completion with noisy entries and outliers," *Journal of Machine Learning Research*, vol. 18, no. 147, pp. 1–25, 2017. [Online]. Available: <http://jmlr.org/papers/v18/15-076.html>
- [17] R. Meka, P. Jain, and I. Dhillon, "Guaranteed rank minimization via singular value projection," *NIPS*, 09 2009.
- [18] Y. Hu, D. Zhang, J. Ye, X. Li, and X. He, "Fast and accurate matrix completion via truncated nuclear norm regularization," *IEEE Transactions on Pattern Analysis and Machine Intelligence*, vol. 35, no. 9, pp. 2117–2130, 2013.
- [19] J. Tanner and K. Wei, "Low rank matrix completion by alternating steepest descent methods," *Applied and Computational Harmonic Analysis*, vol. 40, 08 2015.
- [20] Y. Wang, Q. Yao, and J. Kwok, "A scalable, adaptive and sound nonconvex regularizer for low-rank matrix learning," 04 2021, pp. 1798–1808.
- [21] R. Sun and Z.-Q. Luo, "Guaranteed matrix completion via non-convex factorization," *IEEE Transactions on Information Theory*, vol. 62, no. 11, pp. 6535–6579, 2016.
- [22] Q. Li, Z. Zhu, and G. Tang, "The non-convex geometry of low-rank matrix optimization," *Information and Inference: A Journal of the IMA*, vol. 8, 01 2018.
- [23] Y. Chi, Y. M. Lu, and Y. Chen, "Nonconvex optimization meets low-rank matrix factorization: An overview," *IEEE Transactions on Signal Processing*, vol. 67, no. 20, pp. 5239–5269, 2019.
- [24] B. Recht and C. Ré, "Parallel stochastic gradient algorithms for large-scale matrix completion," *Mathematical Programming Computation*, vol. 5, no. 2, pp. 201–226, 2013. [Online]. Available: <https://doi.org/10.1007/s12532-013-0053-8>
- [25] H. Fang, Z. Zhang, Y. Shao, and C.-J. Hsieh, "Improved bounded matrix completion for large-scale recommender systems," in *IJCAI*, 2017, pp. 1654–1660.
- [26] Q. Yao and J. T. Kwok, "Accelerated and inexact soft-impute for large-scale matrix and tensor completion," *IEEE Transactions on Knowledge and Data Engineering*, vol. 31, no. 9, pp. 1665–1679, 2019.
- [27] Y. E. Nesterov, "A method for solving the convex programming problem with convergence rate  $O(1/k^2)$ ," *Dokl. Akad. Nauk SSSR*, vol. 269, pp. 543–547, 1983.
- [28] N. Antonello, L. Stella, P. Patrinos, and T. van Waterschoot, "Proximal gradient algorithms: Applications in signal processing," 2020.
- [29] H. Mohimani, M. Babaie-Zadeh, and C. Jutten, "A fast approach for overcomplete sparse decomposition based on smoothed  $\ell^0$  norm," *IEEE Transactions on Signal Processing*, vol. 57, no. 1, pp. 289–301, 2009.
- [30] K. Shen and W. Yu, "Fractional programming for communication systems—part I: Power control and beamforming," *IEEE Transactions on Signal Processing*, 2018.
- [31] —, "Fractional programming for communication systems—part II: Uplink scheduling via matching," *IEEE Transactions on Signal Processing*, vol. 66, no. 10, pp. 2631–2644, 2018.
- [32] R. Mazumder, T. Hastie, and R. Tibshirani, "Spectral regularization algorithms for learning large incomplete matrices," *Journal of Machine Learning Research*, vol. 11, no. 80, pp. 2287–2322, 2010. [Online]. Available: <http://jmlr.org/papers/v11/mazumder10a.html>
- [33] R. Pech, D. Hao, L. Pan, H. Cheng, and T. Zhou, "Link prediction via matrix completion," *EPL (Europhysics Letters)*, vol. 117, no. 3, p. 38002, Feb. 2017. [Online]. Available: <http://dx.doi.org/10.1209/0295-5075/117/38002>