Federated Learning Privacy: Attacks, Defenses, Applications, and Policy Landscape — A Survey

JOSHUA C. ZHAO*, Purdue University, United States of America

SAURABH BAGCHI*, Purdue University and KeyByte, United States of America

SALMAN AVESTIMEHR, University of Southern California and FedML, United States of America

KEVIN S. CHAN, DEVCOM Army Research Laboratory, United States of America

SOMALI CHATERJI, Purdue University and KeyByte, United States of America

DIMITRIS DIMITRIADIS, Amazon, United States of America

JIACHENG LI, Purdue University, United States of America

NINGHUI LI, Purdue University, United States of America

ARASH NOURIAN, Amazon, United States of America

HOLGER R. ROTH, NVIDIA, United States of America

Deep learning has shown incredible potential across a vast array of tasks and accompanying this growth has been an insatiable appetite for data. However, a large amount of data needed for enabling deep learning is stored on personal devices and recent concerns on privacy have further highlighted challenges for accessing such data. As a result, federated learning (FL) has emerged as an important privacy-preserving technology enabling collaborative training of machine learning models without the need to send the raw, potentially sensitive, data to a central server. However, the fundamental premise that sending model updates to a server is privacy-preserving only holds if the updates cannot be "reverse engineered" to infer information about the private training data. It has been shown under a wide variety of settings that this premise for privacy does *not* hold.

In this survey paper, we provide a comprehensive literature review of the different privacy attacks and defense methods in FL. We identify the current limitations of these attacks and highlight the settings in which FL client privacy can be broken. We dissect some of the successful industry applications of FL and draw lessons for future successful adoption. We survey the emerging landscape of privacy regulation for FL. We conclude with future directions for taking FL toward the cherished goal of generating accurate models while preserving the privacy of the data from its participants.

CCS Concepts: • Security and privacy \rightarrow Human and societal aspects of security and privacy, Systems security; • Computing methodologies \rightarrow Machine learning.

 $^*Other\ than\ the\ first\ two\ authors, all\ other\ authors\ are\ listed\ alphabetically.\ Corresponding\ author:\ Saurabh\ Bagchi.$

Authors' addresses: Joshua C. Zhao*, Purdue University, West Lafayette, IN, United States of America, zhao1207@purdue.edu; Saurabh Bagchi*, Purdue University and KeyByte, West Lafayette, IN, United States of America, sbagchi@purdue.edu; Salman Avestimehr, University of Southern California and FedML, Los Angeles, CA, United States of America, avestime@usc.edu; Kevin S. Chan, DEVCOM Army Research Laboratory, Adelphi, MD, United States of America, kevin.s.chan.civ@army.mil; Somali Chaterji, Purdue University and KeyByte, West Lafayette, IN, United States of America, schaterji@purdue.edu; Dimitris Dimitriadis, Amazon, Bellevue, WA, United States of America, dbdim@amazon.com; Jiacheng Li, Purdue University, West Lafayette, IN, United States of America, ninghui@purdue.edu; Arash Nourian, Amazon, Sunnyvale, CA, United States of America, nourian@gmail.com; Holger R. Roth, NVIDIA, Bethesda, MD, United States of America, hroth@nvidia.com.

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than ACM must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from permissions@acm.org.

© 2024 Association for Computing Machinery.

Additional Key Words and Phrases: Distributed machine learning, Federated learning, Privacy in federated learning, Application domains for federated learning, Privacy policies

ACM Reference Format:

1 Introduction

Federated Learning (FL) is a widely popular learning architecture that allows one to learn a Machine Learning (ML) model collaboratively. The classical structure of FL is that there are multiple clients each with their own local data, which they would possibly like to keep private, and there is a server that is responsible for learning a global ML model.

One of the two primary reasons for the popularity of FL is that clients can keep their data private and still benefit from the combined learning across all of their data. (The second reason is the "power of crowds", i.e., many weak devices can come together to learn complex models, which would be beyond the compute power of any one client to learn on its own.) However, by 2018, this hope of FL had been effectively dashed. It was shown in a set of seminal papers that if the central aggregator has access to gradients sent by the clients (which it does in most versions of FL), then the aggregator can learn various things from these clients, each of which would be taken to effectively break the privacy of client data. [91, 145, 150] The simplest to understand form of this attack is that the aggregator can reconstruct the data of the clients from the gradient updates, to different degrees of fidelity. The attacker, the central aggregator here, has the unique advantage that it can observe the individual updates from the clients over time and can control the view of the participants of the global parameters. Also worryingly, the attacker could be one of the clients who can observe the global parameter updates, and can control his parameter uploads.

In this article, we survey the constant back and forth that has been going on for the last 5 years or so in protecting the privacy of data through FL. We will have as one of the primary focus questions: what are the research challenges that need to be solved to achieve "good enough" protection for different application use cases. Our article takes a distinctive viewpoint of grounding the technical discussion of the attacks and the defenses in application use cases. For example, the kind of privacy expectation, and regulation, in the healthcare sector is very different from that in the finance or insurance sector, which again is distinct from that in Internet of Things (IoT).

We provide a categorization of the attacks against privacy in FL (Section 6) and also a categorization of the defenses (Section 7). A coupled dimension is the kind of FL that is happening — cross-device vs. cross-silo, horizontal FL vs. vertical FL, or derivatives of classical FL, such as, peer-to-peer learning or hierarchical FL. The discussion of attacks and defenses is meaningful only when we provide the context of what the threat model is, *i.e.*, what are the capabilities available to the adversaries and to the defenders, what aspect of the learning process is attacked (model, data, or something else), and what is the proportion of benign vs. adversarial entities. We provide this kind of foundation-setting discussion in Section 2.

Policy considerations. Our article goes beyond the technology landscape and also surveys the policy landscape (Section 5), which is nascent and developing. A central consideration of ML regulation, namely, regulation of the data, is central to FL since here we deal with data that is local, and possibly sensitive, to individual clients. Regulation of FL is therefore apt and a start needs to be made soon. We hope that this discussion of regulation, in the context of the technical achievements to date and the expected deliverables, will lead us to enlightened regulation in the space of privacy in FL.

Manuscript submitted to ACM CSUR

Privacy pushes-and-pulls. Given that being a privacy-preserving technology was a core reason for its introduction, it is vital that FL is indeed able to preserve the privacy of users. Despite this, the process of sending gradient or model updates to a server has been shown to be less than secure. Recent works in membership inference, property inference, and even data reconstruction have demonstrated that vanilla FL is vulnerable to a multitude of privacy attacks. On the other hand, defenses such as secure aggregation, differential privacy, or homomorphic encryption have also continued to be developed to prevent these attacks. Ultimately, the privacy expectation of FL is that an attacker, whether being the server, an outsider, or a participating client, is not able to infer any private information about the local training data of any of the clients. In this work, we discuss the current privacy attacks and pinpoint the vulnerabilities that make them possible. We then highlight the defenses that can prevent the attacks or make them more difficult along with the limitations and drawbacks of each.

2 Problem Context

2.1 Federated learning process

FL has emerged as a decentralized training framework that addresses the dual challenges of leveraging computational resources at the network's edge and preserving data privacy. Central to FL is its unique approach to collaborative model training, which aggregates model updates from participating clients rather than transmitting the raw data of the clients. This method not only leverages the vast computational power distributed across edge devices but also aligns with the increasing demands for data privacy amidst the exponential growth and insatiable appetite for data of modern AI systems. At the heart of FL's philosophy is the distributed training of machine learning models, where the crux is the exchange of model updates with a central server, sidestepping the need to share sensitive training data.

The vanilla FL training process typically involves the coordinated interplay of two principal actors: the central server and the participating clients. The central server orchestrates the workflow by selecting the clients, dispatching the global model to the participating clients for local refinement, and then aggregating the updates before finally updating the global model. Conversely, clients engage in a straightforward yet crucial role. They receive the global model from the server, apply training updates using their local datasets, and then transmit these training updates back to the server. For a single FL training cycle, the operations unfold as follows:

- (1) Client Selection and Model Dispatch: The central server selects a subset of k out of N available clients, dispatching the current global model parameters, G_t , to them. The selection count varies based on the FL scenario:
 - In cross-device FL, typically involving lightweight devices like smartphones or IoT devices, the selection ranges
 from 100 to 1000. This broad participation mitigates network unreliability and device dropouts, ensuring
 diverse data representation.
 - In *cross-silo FL*, involving entities like data centers or hospitals, a tighter group of 5–10 clients is chosen, reflecting the higher trust, collaboration levels, and substantial computational resources of these participants.
- (2) **Local Training and Update Generation**: Participating clients refine the global model G_t using their local data across one or more iterations. This process yields updates, either as computed gradients, $\nabla G_{t,i}$, or direct model parameter modifications, which are then sent back to the central server.
- (3) **Aggregation and Global Model Update**: The server aggregates these client updates using methods like mean or weighted mean to form the new global model parameters, $G_{t+1} = G_t + \sum_{i=1}^k (w_i \cdot \nabla G_{t,i})$. This prepares the model for the next distribution, refinement, and aggregation cycle.

This iterative process repeats until satisfactory model performance is reached, i.e., convergence is reached to a reasonable degree.

2.2 Enhancing Federated Learning: Key Considerations for Operational Integrity and Security.

Several additional considerations come into play, ensuring the smooth and secure operation of this collaborative model training process. Here are some of the important considerations.

Client eligibility and selection: One of the initial steps in the FL cycle involves the selection of participating clients. In scenarios categorized under cross-device FL, where the participants are typically mobile or IoT devices, certain prerequisites must be met before a device is deemed eligible. These prerequisites often include having sufficient battery life to complete the training tasks without interruption and a stable network connection to facilitate seamless communication with the central server. These criteria are essential to prevent dropout or delays in the training process. Security enhancement through encryption: Once selected and during the model refinement phase, enhancing security becomes paramount. To this end, clients may employ encryption techniques to the updates they generate. This encryption ensures that the gradients or model parameter modifications are securely transmitted to the central server, safeguarding the data against eavesdropping or tampering attempts. This layer of security is crucial in preserving the integrity of the data and the privacy of the clients' information.

Robust aggregation by the central server: On the receiving end of this process, the central server plays a critical role in aggregating the updates from all participating clients. Given the potential for compromised devices or malicious actors within the network, the server might implement robust aggregation techniques. These techniques are designed to identify and neutralize the influence of any anomalous updates that could skew the model's learning in an undesirable direction. By employing such strategies, the server ensures that the aggregated update accurately reflects the collective learning from all legitimate participants, thereby reinforcing the reliability and effectiveness of the FL process.

These considerations highlight the need for a multi-layered approach to address the practical challenges in deploying secure and private FL systems. There is often a tension between operational efficiency and the security/privacy achieved by the protocol.

2.3 Variants of Federated Learning

2.3.1 Cross-device and Cross-silo Federated Learning: FL can be broadly categorized into cross-device and cross-silo contexts, each presenting unique scalability and deployment challenges. In cross-device FL, we envisage a vast network of personal devices, such as smartphones, wearables, or IoT devices, each participating in the learning process. This variant is marked by its massive scale, involving potentially millions of devices, each contributing data for model training. The finance sector, for example, could leverage cross-device FL to enhance fraud detection systems by learning from transactions across countless mobile banking apps without centralizing sensitive financial data. However, this approach is fraught with challenges, primarily due to the limited computational power and intermittent connectivity of devices, not to mention the heightened concerns over data privacy and security. Conversely, cross-silo FL operates on a smaller scale with fewer, resource-ample entities like hospitals, featuring stable communications and higher computational resources. In healthcare, for instance, cross-silo FL enables hospitals to collaboratively improve diagnostic models by learning from diverse patient datasets while ensuring that sensitive medical records remain within hospital premises. Similarly, in finance, banks can utilize cross-silo FL to jointly develop more accurate credit scoring models without exposing their clients' financial details to competitors. This form of FL, while offering more control and resources, still Manuscript submitted to ACM CSUR

necessitates careful navigation of regulatory, privacy, and interoperability challenges. FL showcases its adaptability and value across sectors through its two main variants: cross-device and cross-silo. In finance, cross-device FL can harness personal devices like smartphones to enhance fraud detection without centralizing sensitive data, balancing privacy with regulatory adherence despite challenges like limited device power and connectivity. Meanwhile, healthcare can benefit from cross-silo FL, where institutions like hospitals collaborate to improve diagnostics without sharing patient data, aligning with strict privacy laws and ethical standards. These approaches demonstrate FL's capacity to meet sector-specific needs—offering scalable, privacy-preserving solutions in finance through cross-device models, and secure, collaborative advancements in healthcare via cross-silo frameworks. This duality not only underscores FL's versatility in tackling regulatory and privacy challenges but also emphasizes its potential to drive innovation and security in sensitive domains.

2.3.2 Federated transfer learning: Federated Transfer Learning (FTL) extends FL by facilitating knowledge sharing across different domains or tasks, aiming to enhance model performance where direct data sharing is infeasible. Unlike FL, which focuses on aggregating updates to refine a global model, FTL emphasizes transferring knowledge from a well-resourced source domain — rich in labeled data — to a target domain with limited labeled resources. This cross-domain learning is achieved by sharing model parameters or learned features instead of raw data, thus inherently supporting privacy by keeping the data localized while only model information traverses domains.

The crux of FTL's effectiveness lies in its domain adaptation strategies, where the challenge is to make a model trained in one domain perform well in another with distinct data distributions, feature spaces, and tasks. This process, inherently more complex than the simple update aggregation in FL, demands sophisticated communication for exchanging not just model updates but also domain-specific adaptations, leading to higher communication overhead. Moreover, FTL must navigate the delicate balance between privacy and utility. It leverages the privacy-preserving nature of FL by ensuring that sensitive data remains within its original domain, with additional measures like differential privacy further enhancing security. However, this focus on privacy necessitates careful handling to ensure that the transferred model knowledge does not inadvertently leak sensitive information.

FTL's requirement for domain adaptation introduces significant communication overhead and computational complexity. The iterative process of model adaptation and fine-tuning across domains entails multiple rounds of communication, each adding to the logistical and computational demands of deploying FTL at scale. Despite these challenges, the potential of FTL to leverage cross-domain knowledge without compromising data privacy stands as a compelling advancement in distributed machine learning.

FTL is particularly useful in scenarios where data cannot be pooled together due to privacy concerns but where tasks across domains are related. For example, in healthcare, models trained on data from one hospital can be adapted to improve predictions in another hospital, despite differences in patient demographics or data collection practices. Similarly, in finance, knowledge from credit scoring models in one region can be transferred to enhance models in another region.

2.3.3 Hierarchical Federated Learning Hierarchical Federated Learning (HFL) [19, 25, 48, 83, 84] introduces a multitiered aggregation framework, significantly enhancing the scalability and efficiency of collaborative learning models. This system incorporates several levels of servers, from edge parameter servers to a final cloud parameter server, facilitating a more structured and efficient communication and aggregation pathway. By leveraging edge servers for initial aggregation [83], HFL mitigates the communication bottlenecks often encountered in traditional FL, enabling faster, more energy-efficient training processes. In response to the limitations observed in both FL and P2PL — where

FL's centralized model can pose privacy risks, and P2PL's decentralized nature complicates integrity and consensus — HFL emerges as a powerful hybrid solution. It employs a hierarchical structure where clients, or "spokes," communicate updates to edge servers, or "hubs," which then aggregate these updates before further communication among themselves or with a higher-level server. This architecture not only reduces the privacy concerns associated with a single central server but also addresses the communication and consensus challenges inherent in a fully decentralized setup.

Horizontal and Vertical Federated Learning In FL, data can be partitioned in two primary ways: horizontally or vertically. This distinction significantly impacts the learning process and the approach to privacy and efficiency in collaborative learning environments. Horizontal Federated Learning involves clients that have data sharing the *same feature space* but differ in the *samples* or *IDs*. This is common in scenarios where different entities collect similar types of data across various subjects.

Example: Consider multiple hospitals collecting health data. Each hospital has its own set of patient data, with the feature space (types of health data) being consistent, but the actual data (patient records) varying. Mathematically, this can be represented as:

Let
$$D_i$$
 and D_j be datasets from hospitals i and j respectively, where (1)

$$D_i, D_j \subseteq X \times \mathcal{Y}, \quad \text{and} \quad X_i = X_j, \quad \text{but} \quad \mathcal{Y}_i \neq \mathcal{Y}_j$$
 (2)

Vertical Federated Learning involves clients that have data with the *same IDs* but inhabit different *feature spaces*. This setup is typical in collaborations between entities that collect different types of data about the same subjects.

Example: A bank and a hospital share data about the same individuals, with the bank holding financial information and the hospital holding medical records. They share IDs but have vastly different feature spaces.

Let
$$D_a$$
 from a bank and D_b from a hospital, where (3)

$$D_a, D_b \subseteq X \times \mathcal{Y}, \quad \text{and} \quad \mathcal{Y}_a = \mathcal{Y}_b, \quad \text{but} \quad X_a \neq X_b$$
 (4)

2.3.4 IID and non-IID Data Distributions IID Data Distributions: In scenarios where data is considered IID, each client's dataset is assumed to be drawn from the same probability distribution. This uniformity suggests that datasets across varied domains, such as those of a bank and a hospital, exhibit similar statistical properties and structures, despite their distinct contexts.

Non-IID Data Distributions: Contrastingly, non-IID data distributions reflect situations where data across clients originate from heterogeneous distributions. This diversity is rooted in demographic variances, regional characteristics, or the intrinsic nature of the collected data.

Implications on Privacy and Learning: *Privacy Concerns:* The heterogeneity of non-IID data amplifies privacy concerns, necessitating robust privacy-preserving mechanisms that can handle the diversity of data sources. The specificity of models to certain data characteristics could inadvertently lead to data leakage or facilitate inference attacks, underscoring the need for privacy techniques that are adaptable to varying data distributions.

2.3.5 FedSGD and FedAvg: Core FL algorithms The two standard FL algorithms are FedSGD and FedAvg [89], mainly differing in the number of local iterations. FedSGD, the federated adaptation of stochastic gradient descent, operates on the principle of minimalism. It mandates that clients engage in a singular iteration of training on a localized data batch before transmitting the resultant gradient to a central server. This server, in turn, aggregates the gradients from all Manuscript submitted to ACM CSUR

participating clients, adjusting the weights in proportion to each client's contribution to the total dataset. This process is especially pertinent in scenarios demanding rapid model updates.

Advancing beyond FedSGD, FedAvg introduces multiple local iterations or epochs at each client before communicating updates to the server. These updates can comprise either the computed gradients over all local iterations or the updated model parameters themselves. The algorithm's structure inherently minimizes the frequency of communication with the server, addressing privacy concerns by limiting the exposure of initial and final model states only. This characteristic is crucial in contexts where data sensitivity is paramount, as it effectively conceals the intermediate computational states from potential external eavesdropping. Moreover, FedAvg facilitates a deeper, more nuanced learning from the complex datasets typical of financial and medical sectors. By allowing for extended local training periods, the algorithm empowers the model to better capture and adapt to the intricate patterns present within such diverse data sources. This capability not only enhances the model's precision but also its applicability and relevance to the distinct challenges and requirements of these domains.

2.4 Threat model

For privacy attacks within the domain of FL, the threat landscape is complex and varies significantly based on the nature of the attack. The architecture of FL inherently poses unique challenges in safeguarding privacy due to the decentralized nature of data processing. Here, the central server and the clients play pivotal roles, each representing potential vectors for privacy breaches and attacks. Understanding the nuances of these threats is crucial for developing robust defense mechanisms. At the heart of FL, the central server embodies a critical point of vulnerability. It plays a dual role: distributing the learning model to clients and aggregating their updates. This centralized control positions the server as a potent target for attacks, making it the focal point for the strongest privacy threats in FL. The server's pivotal role in managing the flow of information — both disseminating and receiving — means that attacks can take on various forms, each tailored to exploit specific weaknesses in the server-client interaction. This is split into two broad types of threats as follows:

Central Server Threats: *Honest-but-Curious Server:* This scenario presupposes a server that adheres strictly to the prescribed FL protocol without any malicious alterations. However, it harbors intentions to infer private information from the updates received from clients. Despite its non-intrusive facade, this model represents a significant privacy threat as the server possesses the capability to analyze aggregated data and potentially extract sensitive client information without overtly compromising the integrity of the training process.

Malicious Server: A more daunting threat emerges with the malicious server, which actively seeks to undermine the privacy and integrity of the FL process. This adversary is not bound by the ethical constraints of the honest-but-curious model and may engage in manipulative tactics such as altering client model parameters, tweaking the model architecture, or distorting the training process. The objective is clear: to siphon off private data from clients or to inject biases into the model, thereby compromising both privacy and model fidelity.

Client-Side Threats: A parallel threat model arises due to the clients. Corresponding to the server case, here also the clients can be: *Honest-but-Curious Clients*: Parallel to the server-side threat, clients under this model operate within the bounds of the FL protocol but with ulterior motives. They aim to intercept and analyze communications between other clients and the server, with the ultimate goal of reconstructing the local data of their peers. This form of eavesdropping introduces a subtle yet potent risk to data confidentiality within the FL ecosystem.

Malicious Clients: Beyond mere curiosity, malicious clients actively engage in sabotaging the FL process. By submitting falsified updates, these adversaries attempt to derail the collective learning effort, leading to a degraded model utility.

Manuscript submitted to ACM CSUR

While this behavior does not directly infringe on privacy, it undermines the integrity and reliability of the FL system, posing a significant challenge to maintaining model quality.

Complexities of Misbehaving Clients: The threat landscape is further complicated by the variability in the behavior of misbehaving clients. Two critical factors need consideration: the proportion of clients engaged in malicious activities and the extent of their collaboration. Misbehaving clients may operate independently, presenting a scattered threat. However, the danger amplifies when they collude, orchestrating their attacks to maximize disruption or data extraction. This coordinated effort can significantly exacerbate the challenges in defending against privacy breaches and ensuring the integrity of the FL process.

2.5 Metrics measuring privacy

Membership inference attacks - accuracy. The goal of membership inference attacks is to infer whether a particular instance is used in the training of a target model. A balanced evaluation set, which consists of the same number of members and non-members, is used in the membership inference attack evaluations in most existing literature. For membership inference attacks, the attack accuracy measures the attack effectiveness over the whole data population [114]. Attack AUC can also be used to measure the privacy leakage in terms of membership inference over the whole population. The higher the attack accuracy is, the more privacy leakage the target model has on its training set for the whole set.

Membership inference attacks - TPR at a low FPR. Accuracy and AUC measures the average privacy vulnerability across all instances. In the context of privacy, one usually wants to ensure that every individual's privacy is protected. It is thus necessary to measure membership leakage threat for the most vulnerable instances. In [26], it was proposed to use true positive rate (TPR) at a low false positive rate (FPR) to measure effects of MI attacks. Consider, for example, TPR at FPR= 0.001. If *TPR* is also around 0.001, then that means the adversary cannot do better than random guessing even when they are very confident about MI inference. On the other hand, if If *TPR* is also around 0.01, then that means the adversary would be able to correctly identify (a small percentage of) members with a 10 : 1 odds ratio.

Data reconstruction attacks - reconstruction quality. One important metric for gauging the success of data reconstruction attacks is in the similarity of the reconstructions to the ground truth images. This measure can be visual and is typically quantified through image similarity metrics such as PSNR (peak signal-to-noise ratio), SSIM (structural similarity index measure), or L-PIPS (learned perceptual image patch similarity). Image identifiability precision (IIP) was also introduced as a potential metric for reconstruction quality [136]. Instead of per-image calculations, compared to all images in the ground truth batch, IIP finds the nearest neighbor of each reconstructed image. The metric is quantified as the fraction of reconstructions that have the ground truth image as their nearest neighbor. Additionally, [146] discusses the use of leaked data for training models in downstream prediction tasks related to the image similarity metrics. Even reconstructed images with some of the lowest metric scores (e.g., PSNR< 12, SSIM< 0.2) were still shown to improve the accuracy of the trained models [146].

Data reconstruction attacks - leakage rate. Another metric used to quantify success of data reconstruction attacks is leakage rate. While leakage rate can be simply defined as the number of leaked images, quantification can still vary. Some methods such as linear layer leakage can result in leaking a single image with multiple ground truth images overlapping. Here, leakage rate is typically defined as the number of reconstructions that only have a single image leaked. While methods such as gradient inversion typically rely on image similarity to measure the quality, leakage rate can also be used based on the number of images above a given threshold for any metric (e.g., PSNR> 16) [58].

Privacy Industry References Attacks Defenses Applications Policy Li et al [82] Ouadrhiri et al [44] X Chen et al [27] X Lyu et al [87] X Х Х Х Rigaki et al [107] X Х Our work Х

Table 1: Comparison table of federated learning privacy surveys

3 Relation to Prior Surveys

Federated learning was originally introduced as a method to collaboratively train machine learning models while allowing users to keep their data local and private. Despite this, many prior works have shown that the updates sent to a server still inherently include sensitive information that can be used to leak either properties of the data or reconstruct them directly. Following this, much work has also been done in the area of FL privacy defense. To motivate our work, we first compare the prior surveys in FL privacy and discuss the missing pieces. Table 1 shows a summary of prior surveys compared to this work.

Many surveys have looked at the privacy aspect of FL. [44, 71, 82] discuss privacy defense in FL with little discussion on privacy attacks. Other surveys [24, 30, 85, 93, 115, 138, 143] look at privacy attacks, but are missing discussion on more recent catastrophic attack methods such as linear layer leakage for data reconstruction or membership inference attacks that don't require training data. [27] discuss the trade-off between privacy and fairness in FL. While the methods of optimization and closed-form linear layer leakage attacks are discussed, the work still misses other key data reconstruction methods such as multi-round disaggregation or attacks targeted against secure aggregation. Similarly, [107] discusses privacy attacks in machine learning but also lacks many current privacy attacks specific to FL. [87] is the closest survey to ours, focusing on security and privacy attacks and defenses in FL. However, important discussion on the key limitations of attacks and defenses is missing. Similarly, discussion into recently introduced data reconstruction attacks such as [50, 70, 76, 133] are also missing.

With the rapid development of FL privacy attacks and defenses, prior surveys are missing discussion of many current key privacy attacks and defenses. Our work bridges this gap and provides a comprehensive discussion on the current privacy attack threats (data reconstruction, membership-inference, and property inference attacks) along with defenses (differential privacy, secure aggregation, homomorphic encryption, and trusted execution environments) while highlighting the limitations of these methods along with areas where improvement is needed. Additionally, to the best of our knowledge, we are the only work to discuss current industry applications utilizing FL in a variety of industry sectors including healthcare, finance, and IoT edge applications. Similarly, we are the only work to include crucial discussion on government data privacy policies and their relation to FL. We close our work by looking ahead and hypothesizing the key developments that would be necessary for FL to become a privacy-preserving technology that addresses user privacy concerns and policy mandates in real-world deployments.

4 Application Use Cases and Policy Drivers

As part of the research in FL, investigating when the participating parties are adequately incentivized to participate is crucial, especially for real-life scenarios. The incentive mechanism expects that not all clients have the same interests in Manuscript submitted to ACM CSUR

the global model as the server. The existing FL incentive mechanism is typically designed by sampling a fixed subset of clients based on their data quantity or resources [86]. On the far-end of this spectrum, on the non-federated setting, clients can train their own local model M_i using only the available local data D_i and send the local model parameters to the server. Analysis based on [88] shows that local training often outperforms federated models, depending on the local data D_i . Federated learning has multiple applications across various industries, including healthcare, finance, automotive, and personalized medicine. In healthcare, we can use federated learning to train models on patients' data without compromising their privacy, especially when using Differential Privacy. Similarly, in the financial industry, we can employ federated learning to train fraud detection models without exposing any sensitive financial data to potentially malicious entities. In the automotive industry, we can employ federated learning to train autonomous driving models on real-life data avoiding transferring huge volumes of data back to the servers.

Table 2: Characterization of federated learning application domains into cross-device and cross silo deployments

Application Domain	Cross-Device	Cross Silo
Healthcare	✓	✓
Finance		\checkmark
IoT / Edge	\checkmark	\checkmark
Autonomous Driving	✓	

4.1 Application of FL in Healthcare

In the past few years, we have experienced a flood of changes in automation in the healthcare industry, increasing the need and expectation for better ML models. Healthcare professionals have turned to technology to help them treat patients better, improve their understanding of the emerging global demand, etc. However, training healthcare-related models requires vast and diverse datasets. On the other hand, sharing information is becoming even more challenging due to the ever-stricter privacy regulations. Using FL, participating institutions can train a global model on their in-house data without exposing sensitive local data. This new paradigm leads to better models and more accurate training algorithms, allowing them to access and also work around various regulations. Thus, the potential benefits of FL in the healthcare industry are significant.

There have been several real-world efforts around FL in the healthcare sector, including proof-of-concept projects and establishing long-running consortia [105, 106]. For example, in the United Kingdom, FLIP enables AI researchers to develop clinical applications using NHS patient data without transferring the information outside the hospital network, addressing the challenge of confidentiality in healthcare [6]. In France, the HealthChain consortium [13] aims to address the bottleneck in accessing medical data for AI models that could lead to medical breakthroughs. In Germany, the Trustworthy Federated Data Analytics (TFDA) project [17] aims to address the challenges posed by centralized data structures in the context of growing data needs for machine learning. Recognizing the drawbacks and threats associated with data centralization, TFDA focuses on implementing decentralized, cooperative data analytics architectures, specifically within and beyond the Helmholtz research community. The MELLODDY project [60, 98], co-funded by the European Union and EFPIA companies, has successfully demonstrated the feasibility of large-scale collaborative artificial intelligence (AI) for drug discovery. By leveraging a large collection of small molecules, the project utilized federated and privacy-preserving machine learning to achieve more accurate predictive modeling, leading to potential efficiencies in drug discovery. The German Cancer Consortium's Joint Imaging Platform (JIP) [111] is a Manuscript submitted to ACM CSUR

strategic initiative within the German Cancer Consortium (DKTK) with the goal of establishing a technical infrastructure to facilitate modern and distributed imaging research. Emphasizing the use of contemporary machine learning methods in medical image processing, the project aims to enhance collaboration among clinical sites and support multicenter trials. Internationally, the Federated Tumor Segmentation (FeTS) initiative [8, 102] is developing one of the largest federations of healthcare institutions. This initiative aims to gain knowledge for tumor boundary detection from diverse patient populations without sharing patient data. In a collaborative effort involving seven clinical institutions worldwide, an early study explored using FL to construct robust medical imaging classification models for breast density based on BI-RADS [108]. Despite significant differences in datasets across sites, including mammography systems, class distribution, and data set size, the results demonstrated successful AI model training in a federated manner. The EXAM project [37] aimed to build a common predictive model to estimate the oxygen treatment requirements of patients arriving at the emergency department (ED) with symptoms of COVID-19 for the next 24h and 72h periods. A consortium of 20 hospital sites across the globe participated in this real-world application of FL. Furthermore, institutions such as The American College of Radiology (ACR) enable privacy-preserving AI utilizing federated learning technology [15].

These efforts show the trend within the healthcare industries to decentralize data for AI workflows while keeping regulatory challenges in mind for the benefit of patient privacy. FL technology might be the key to enabling trustworthy AI development, such as diversity [35].

4.2 Application of FL in Finance

The data privacy and protection laws are becoming ever more restrictive, especially in industries like the Financial sector. This allows consumers and businesses to trust each other to keep the data safe and secure. With traditional ML, businesses dependent on FinTech face several issues, such as getting clearance and lawful consent, the governance of the customers' data and the time and finally, the cost in collecting and of managing such data. FL provides an efficient way for managing this data by keeping it local, on the financial institutions servers. FL is an encrypted and distributed machine learning approach that allows joint training on decentralized data where participants do not share any of it.

One of the most promising application of federated learning in financial services is anti-money laundering (AML). In a typical money laundering scheme, criminals try to conceal the origin, identity, and destination of financial transactions to look normal as they are from a legitimate source. AML solutions allow financial institutions to prevent, detect, investigate and report any activity that is suspicious of money laundering and stop criminals from illegally obtained funds as legitimate income. The estimated amount of money laundered globally in one year is 2 - 5% of global GDP (\$800 billion - \$2 trillion)[18]. Failure to prevent money laundering can endanger the integrity and stability of global financial system. Financial institutions are required to put strict policies and measures to prevent, detect, and report laundered money and combat these crimes. However, each financial institution has typically access to its own transnational data and can not prevent and detect complex money laundry cases where the money routes through multiple financial institutions that could look legitimate to some of involved institutions in the chain. Cross-silo Federated AML can greatly help financial institutions to create better predictive models with broader context for identifying bad actors. Such models learn more global and deeper correlation identifiers for bad actors and money laundry specific actions based on contributed data provided by consortium of financial institutions.

Another application of federated learning is in insurance underwriting. The main use cases for federated learning in insurance include origination- predicting if a person contracts an insurance offer, insurer's risk assessment, fraud detection, and claim processing. Due to soiled data in different companies on different demographics or customers movement across insurance companies, Insurers can significantly improve their predictive models for these use cases by

Manuscript submitted to ACM CSUR

utilizing federated learning. Claim history processing is of the most challenging use cases that federated learning can lead to more accurate and efficient operations. Insurance companies often need to have access to previous claims history of an insurer in details to give a better pricing or benefits to new clients. However, having access to such historical data in a privacy preserving manner is challenging due to regulations governing the insurance industry. Insurance companies can leverage cross-silo federated learning to privately train their models without compromising customers privacy and satisfying the governing regulations. Such models lead to more accurate offers while helping customers get the benefits of having a long-term history of free claims across different categories.

4.3 Application of FL in IoT or at the Edge

The Internet of Things (IoT) is the current concept of ubiquitous internet connectivity of all devices (refrigerators, toasters, doorbells, street cameras, ..., the list is unending). As these devices suggest the availability of data from these devices from anywhere, the privacy and security of these devices and the data is paramount. However, there is strong interest from companies and individuals to exploit the available data for constructive applications to benefit more than just the immediate use-case and users. One prominent example is the Google keyboard (Gboard) prediction [57], where Google improves the performance of their mobile keyboard prediction by gaining information from user interaction. However, this example highlights information privacy in that improvements to this technology will benefit all users but users are willing to share only if their privacy is assured. Therefore, FL techniques that exploit data and maintain user and data privacy are attractive for IoT applications [144].

In such scenarios and related application domains, it is well understood that communication and computing resources are two of the bottlenecks for federated learning in real-life applications. The devices are often used for tasks other than FL, so the FL task usually competes with these other ones for computing resources, making scheduling and coordinating even more complicated. Asynchronous strategies like PAPAYA[63] appear to address such issues. Other scenarios include heterogeneity in the computing resources [38] or drift in local device clocks [74], leading to asynchrony caused by varying compute and resulting in delays in the aggregation step. Methods to account for or dynamically adapt to changing available resources will greatly enhance the utility of FL techniques in these scenarios. The increased need for bandwidth for FL iterations has led to significant research efforts in reducing it. Methods combining optimizers such as FedAvg with sparsification and/or quantization of model updates to a small number of bits have demonstrated significant reductions in communication overhead. However, it still remains an open research question how communication overheads can be further reduced, and whether any of these methods or their combinations can come close to providing optimal trade-offs between communication and accuracy in federated learning. For example, the Fed-ET approach is promising where smaller models are communicated [34]. Another class of approach to maximizing bandwidth usage in FL approaches include device selection [103]. While efforts in these situations are motivated by increasing communications efficiency, device selection methods can potentially provide device privacy in terms of revealing which nodes are contributing to FL process. Moreover, there has also been recent work that allows for the control information exchange to limit communications, but can similarly be used to provide some privacy to node utility to FL algorithms [128].

Additionally, IoT has been promoted as a use-case for edge networks where networks are bandwidth-limited and storage and compute is also limited. These systems operate in a variety of environments often characterized by having stringent operational requirements despite having to cope with sophisticated adversarial influences and constraints in both computational and network resources. These environments include resource-constraints inhibiting information exchange to other nodes, specifically a central node with which centralized computation and decisions can be conducted. Federated approaches have been proposed for use in sensor networks, swarms of unmanned aerial vehicle and on Manuscript submitted to ACM CSUR

coalition networks for shared situational awareness. They have also been proposed for FL at the edge by reducing the network overhead incurred by such learning processes [129]. The promise of IoT and edge computing will continue to be revealed, with FL techniques potentially as a main driver of the technologies.

5 Privacy-Related Policies

Most of the existing regulations on safeguarding consumers privacy, both nationally and internationally were conceived in a pre-AI/ML era and have not been able to keep up with the rapid evolution of AI/Ml and their privacy implications. The European Union's General Data Protection Regulation ("GDPR") [10] governs data protection and privacy for all citizens within the EU and imposes strict obligations on data controllers and processors. GDPR contains the *principle of data minimization* in article 5.1 (c) which requires that the data that are not necessary to achieve the intended purpose cannot be lawfully collected, stored or otherwise processed. Since federated learning restricts the transfer of raw data to a central location, it provides more compliance with the principle of data minimization than other approaches that do require the transfer of all raw date to a central location to train a model. Federated learning also protects the collected data from unwanted processing that are not compliant with the collection purpose satisfying the *principle of purpose limitation*, as described in article 5.1.(b).

In the United States, the state of Privacy and AI laws is tracked by the EPIC project which shows recent large number of states effective privacy laws [5]. Each of these privacy laws has specific requirements when accessing and processing personal data. Even FTC is enforcing the same privacy rights for companies using AI [9]. At the federal level, sector-specific privacy polices in the US such as Graham-Leach-Bliley Act (GLBA) [11] for financial data or Health Insurance Portability and Accountability Act (HIPAA) [12] for medical date provide consumers with limited protection scope when it comes to using AI and ML. Recently, US introduced H.R. 8152-The American Data Privacy and Protection Act [14]-to catch up with various amendments proposed in EU on AI/ML workloads by extending the covered algorithm to AI/ML space. Some states also patched their existing policies such as California Privacy Rights Act (CPRA) [4] amendments to the CCPA [3] or Texas Data Privacy and Security Act (TDPSA) [16].

GenAI's remarkable capacity to analyze data and make complex analyses further amplifies privacy concerns. There is clear a privacy gaps in existing privacy policies as it relates to AI systems. Most of these policies and regulations were proposed pre-AI and even newer ones per Gen AI where there has been less information on privacy implications of these systems. Such gap may pose significant challenges to privacy laws and they will need further amendments to address emerging privacy concerns from Gen AI.

The recent AI Foundation Model Transparency Act [1] mandates FTC and NIST to establish standards for data sharing by foundation model deployers. This legislation goal is to empower consumers to make well informed decisions when they interact with AI. The Algorithmic Accountability Act of 2023 [2] also requires companies to assess the impacts of the AI systems on consumer privacy and give users choices when they interact with AI systems.

These regulations mostly require keeping the data in its location and restrict its processing based on the intended collection purposes. Federated learning is a potential solution to facilitate compliance with these privacy laws.

6 Privacy Attacks

In this section, we first discuss the leading categories of privacy attacks against FL. We summarize this, with the most significant attributes of each attack type, in Table 3.

6.1 Data Reconstruction Attacks

(a) Ground truth

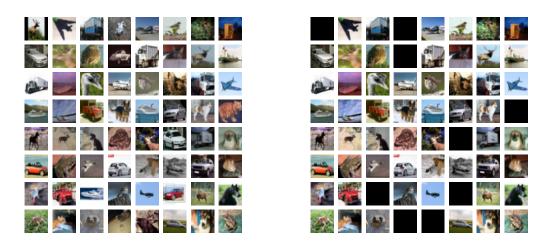


Fig. 1: Images reconstructed using LOKI [148], a linear layer leakage attack, on a batch of 64 CIFAR-10 images. FedAvg with 8 local iterations of mini-batch size 8 used. Out of 64 images, 55 are reconstructed successfully with high visual recognizability.



Fig. 2: Images reconstructed using Inverting Gradients [54], an optimization attack, on a batch of 8 CIFAR-10 images in FedSGD. Images have high visual recognizability.

6.1.1 Optimization-based. Optimization (a.k.a. gradient inversion) approaches have shown great success in leaking data from individual updates, especially with smaller batch sizes. These attacks typically operate under the threat model of an honest-but-curious server or an external attacker that has access to the model and individual gradients from each client. With only this information, the attacker initializes some dummy data and computes the gradient of that data on the model.

$$x^* = \arg\min_{x} ||\nabla L(x, y, \theta) - \nabla W||_2$$
 (5)

(b) Reconstruction

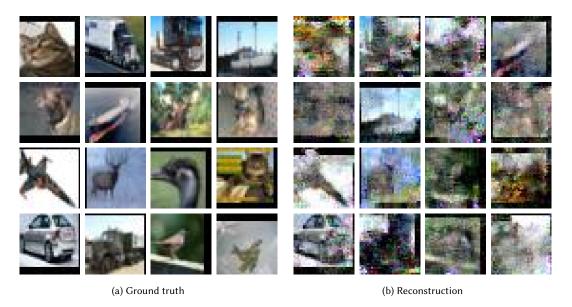


Fig. 3: Images reconstructed using Inverting Gradients [54], an optimization attack, on a batch of 16 CIFAR-10 images in FedSGD. Images are much less visually recognizability, with a few containing some recognizable parts.

An optimizer minimizes the difference between the generated gradient $\nabla L(x, y, \theta)$ and the ground truth gradient ∇W (benign client update). Here x is the dummy data, x^* is the reconstructed data, L is the loss function, y is the label, and θ is the model parameters.

More recent optimization approaches [54, 136] work under the assumption that user labels are known prior to optimization. Typically, these labels are directly retrieved through a zero-shot solution without using optimization approaches [136, 145]. Furthermore, regularizers and strong image priors specific to image data are often used to guide optimization results [54, 58, 126, 136]. These can also result in image artifacts typical of an image class, but not in the actual training image. These approaches have shown surprising success with image data on smaller batch sizes. However, as batch sizes increase, the fraction of images recovered decreases along with the reconstruction quality and the number of iterations required for the optimization also increases. One reason stated by [150] was that regardless of the order of images in the batch, the gradient will remain the same. Having multiple possible permutations then makes the optimization more difficult. Another fundamental reason is that a larger batch size means more images and more variables for optimization.

Both secure aggregation and FedAvg also pose a particularly difficult challenge for optimization attacks. For secure aggregation, the aggregated updated can be thought of as large-batch consisting of the batch images from all clients. This directly exacerbates the difficulty of reconstructing larger batch sizes. FedAvg, on the other hand, adds another layer of unknowns for the optimization since the intermediate model updates are unknown to the attacker. While [54] discuss attacking FedAvg, the attack is only shown with a very small local dataset size of up to 8 images on CIFAR-10. Furthermore, it needs to be investigated how different model architectures, such as transformers [59], impact the success of gradient inversion attacks.

Table 3: Summary of privacy attacks in federated learning

Attack class	Summary	Sub-category	Citation	Requirements
Data reconstruction	Attacker aims to directly reconstruct the client private data or a representation of the private data.	Gradient inversion	[54, 136, 145, 150]	Access to model and individual updates.
		Linear layer leakage	[22, 50, 148]	Modification to the network parameters and/or architecture.
		GAN-based	[62, 131]	Clients target a specific class by sending malicious updates.
		Other	[76, 101, 133]	Varies based on attack. Attacker may need to modify the model parameters, know additional training information, or send clients different updates.
Membership inference	Attacker infers if a sample was used in the training of the model.		[79, 91, 97, 121, 140]	Most require access to training data from the overall distribution. Some attacks require white- box access to model or the ability to send malicious updates.
Property inference	Attacker learns about sensitive properties within the training set (e.g., race, gender, age, etc.)		[39, 51, 53, 90]	Attacker has black- box access to the model and can access the output. They have access to other attributes besides the targeted one.
Model extraction	Attacker wants to steal functionality of a model. This can be the parameters, hyperparameters, etc		[100, 125, 127]	Attacker needs black- box access to the model in order to query the model and observe the outputs.

6.1.2 Linear layer leakage. Linear layer leakage attacks are a sub-class of analytic attacks that modify FC layers to leak inputs. Using the weight and bias gradients of an FC layer to leak inputs was discussed in [46, 104]. When only a single image activates a neuron in a fully connected layer, the input to that layer can be directly computed using the resulting gradients as

$$x^{i} = \frac{\delta L}{\delta W^{i}} / \frac{\delta L}{\delta B^{i}} \tag{6}$$




Fig. 4: Using the weight gradient $\frac{\delta L}{\delta W}$ and bias gradient $\frac{\delta L}{\delta B}$ of a fully connected layer to reconstruct the inputs. Neuron i is only activated by a single image, while j is activated by two. As a result, the reconstruction of neuron i is correct while j is a combination of images.

where *i* is the activated neuron, x^i is the input that activates neuron *i*, and $\frac{\delta L}{\delta W^i}$, $\frac{\delta L}{\delta B^i}$ are the weight gradient and bias gradient of the neuron respectively. This idea forms the basis for several reconstruction attacks [22, 50]. Figure 4 shows the basic process of leaking images through an FC layer.

When the fully-connected layer is placed at the start of a network, the data reconstructed from the the layer would be the input data. This reconstruction is exact, as opposed to the optimization approaches which function as estimations. However, inputs are only reconstructed exactly when a single data sample activates that neuron. If more than one input activates the neuron, the weight and bias gradients of these inputs will contribute to the batch gradient. When the gradient division of Equation 6 is done to retrieve the input, the resulting reconstruction would be a combination of all contributing images, a case of failed attack.

To alleviate this problem, [22, 50] use malicious modification of the parameters in the FC layer. For [22], trap weights were introduced, initializing the weights randomly to be half positive, half negative. In order to ensure that neuron activation is less common, the negative weights come from a larger negative magnitude range than the positive weights. They also discuss the use of convolutional layers to push the input image forward, allowing the attack to function on models starting with convolutional layers followed by fully-connected layers. However, one of the main problems of the method lies with scalability. Even if the size of the FC layer increases proportionately with an increasing total number of images, the leakage rate decreases. On the other hand, Robbing the Fed (RtF) [50] introduced another approach with higher leakage rate called "binning", where the weights of the FC layer would measure some known continuous CDF of the input data such as image brightness. The bias for each neuron then serves as a different cutoff, allowing only inputs with a high enough value to activate it. The goal of this method would be that only one input activates each "bin", where the bin is defined as the activated neuron with the largest cutoff (for ReLU, the largest negative bias)¹. For any case where only one input activates a bin, it can then be reconstructed as

$$x^{i} = \left(\frac{\delta L}{\delta W^{i}} - \frac{\delta L}{\delta W^{i+1}}\right) / \left(\frac{\delta L}{\delta B^{i}} - \frac{\delta L}{\delta B^{i+1}}\right) \tag{7}$$

where i is the activated bin and i+1 is the bin with the next higher cutoff bias. For Equation 7 to hold true, the attack requires the use of two consecutive FC layers. The first layer is used to leak the inputs using Equation 7 and the second FC layer maintains the requirement that $\frac{\delta L}{\delta B^i}$ and $\frac{\delta L}{\delta W^i}$ are the same for any neuron that the same input activates. This is achieved by having the same weight parameters connecting each neuron of the first FC layer to the second FC layer. For example, if the first FC layer has 1024 units and the second has 256, the weights connecting them would

 $^{^{1}}$ The bin biases are set as negative. The weights are positive and so the negative bins are used to prevent ReLU activation.

have a dimension of 1024×256 . The above property indicates that every row of the weight matrix is equivalent, e.g. $[0,:] = [1,:] = \cdots = [1023,:]$.

FedAvg. While the previous method works for FedSGD, for FedAvg, the model changes during local iterations and this prevents the reconstruction attack. As a result, [50] proposed the sparse variant of the attack which uses an activation function with a double-sided threshold (e.g., Hardtanh) such as:

$$f(x) = \begin{cases} 0 & x \le 0 \\ x & 0 \le x \le 1 \\ 1 & 1 \le x \end{cases}$$
 (8)

With this activation function, only when the input is between 0 and 1 will there be a non-zero gradient.

Using this activation function, neuron activation will be sparse (i.e., images will only activate a single neuron). However, this range between 0 and 1 for the non-zero gradient is fixed for all neurons. Since RtF's approach sets up neuron biases following a distribution of the images, the weights and biases of the FC layer will need to be adjusted to follow the new non-zero gradient range. This requires scaling the magnitude of these parameters based on the distance between the subsequent neuron biases. Consider that the weights originally measure average pixel brightness. In this case, all the weights would originally be set to $\frac{1}{N}$, where N is the total number of pixels. Then, the weights and biases are rescaled as:

$$W_i^* = \frac{W_i}{b_{i+1} - b_i} , \ b_i^* = \frac{b_i}{b_{i+1} - b_i}$$
 (9)

where W_i^* and b_i^* are the scaled weights and biases of neuron i respectively and $b_{i+1} - b_i$ is the distance between adjacent biases in the original distribution. This process uses the same distribution as the FedSGD case to setup the initial biases, while incorporating the fixed range of the new activation function by scaling the parameters. In FedAvg, after the clients send the updated model parameters, the server computes a "gradient" as:

$$\nabla W_{FedAva} = \Theta_{t+1} - \Theta_t \tag{10}$$

where Θ is the model parameters for the securely aggregated model and ∇W_{FedAvg} the computed gradient.

This FedAvg attack [50] works well in the context of single client attacks. However, attacking secure aggregated gradients becomes a problem as the total images in the gradient increases multiplicative to the number of clients. Particularly, [148] finds that numerical precision poses a problem for the FedAvg linear layer leakage attack when a large number of clients is attacked. Through the use of convolutional layers and a convolutional scaling factor (CSF), [148] is able to scale to an arbitrary number of clients while maintaining a high leakage rate. Furthermore, the CSF improves on the multiple-image reconstruction problem, only allowing images within the same local mini-batch to activate the same units. Notably, this allows the leakage rate on FedAvg attacks to be *higher* than in FedSGD (where FedAvg is typically harder to attack than FedSGD).

Linear layer leakage reconstruction quality is typically higher quality than optimization-based attacks and does not rely on the number of clients. However, it also requires malicious modification of the model parameters and/or architecture, resulting in more detectable attacks. Furthermore, the attack also adds a resource overhead to the model size. This problem is exacerbated by the number of clients as the attack layer sizes need to scale to keep the attack effective. This problem and the use of sparse tensors to alleviate the problem are discussed by [147].

6.1.3 GAN-based. Generative networks were introduced to attack collaborative learning in [62, 131]. However, contrary to optimization-based attacks and linear layer leakage, the attack does not aim to directly reconstruct exact training images, but instead reconstructs representations of a targeted class which the attacker does not hold any images of. In the attack, an adversary (a client in collaborative or federated learning training) trains a generative network in conjunction with the benign collaborative model. For a single training round, the attack process goes as follows:

- (1) The adversary downloads the model (or a portion of parameters in certain forms of collaborative training).
- (2) Images for the targeted class are generated by the generator and the generator is updated based on the discriminator (the global model).
- (3) Images for the targeted class are generated by the updated generator and mislabeled.
- (4) The adversary trains on the set of mislabeled images and any actual training images.
- (5) The adversary uploads the update to the parameter server.

Both training the generator and training on mislabeled images are critically important to the attack process. Firstly, training the generator is crucial since the ultimate goal is to be able to generate representations of a targeted class. Secondly, the process of including mislabeled generated images in order to influence the training process is also very important. Without this additional influence on training, the authors note that the generated image quality does not converge to a visible reconstruction.

One main strength of the mention is also in the ability to work through differential privacy. Specifically, the attack relies on the fact that the client model is able to learn and improve the accuracy. As long as the model is learning, the generator is also able to learn to reconstruct better images. This makes the GAN attack remarkably resilient to (at least record-level) differential privacy. As long as the privacy budget ϵ allows the model to continue learning, the attack works. When too restrictive of an ϵ is used, the attack fails but the model is also unable to learn.

Another strength of the GAN attack is that it can be employed through any malicious client as opposed to a parameter server. Optimization-based attacks require the observation of individual gradient updates along with the initial model. While clients receive the initial model state, the observation of individual gradient updates from other clients would not happen in the vanilla protocol. Linear layer leakage on the other hand can only be enacted by the server. Modification of the model parameters is required, and this can only be done by the parameter server. Compared to both these methods, only the GAN attack can be easily employed by a client. This larger attack surface also points to potentially greater privacy risks in collaborative training compared to even centralized training. It should also be noted that the attack only generates representations instead of actual reconstructions. However, this can still pose a great privacy risk depending the content of the private client training data.

6.1.4 Other attacks. While we have previously discussed the major categories of optimization, linear layer leakage, and GAN-based attacks for data reconstruction, other attacks have also been proposed that leak data differently or assist existing methods in attacking more challenging scenarios such as secure aggregation.

In order to tackle secure aggregation, a gradient suppression attack [101] was proposed whereby a malicious server sends customized model parameters to different clients such that only a single client would return a non-zero gradient update. This attack used a dead ReLU trick where the ReLU activation functions of a layer using were set to 0.

$$ReLU(x) = \begin{cases} 0 & x \le 0 \\ x & x > 0 \end{cases} \tag{11}$$

For a ReLU activation, any input below 0 returns a value of 0. Given the constant function when $x \le 0$, this ultimately results in the gradients $\frac{\delta L}{\delta W} = 0$ and $\frac{\delta L}{\delta b} = 0$. Therefore, ensuring the input to the ReLU function is negative (which can be as simple as having weights w as 0 and the bias b as negative for a fully-connected layer) is a sufficient condition for achieving zeroed gradients. Using this method, a malicious server will then send a malicious model with dead-ReLUs to all clients except for a single targeted client. After secure aggregation, the aggregated update would only comprise of a single non-zero update from the targeted client allow for a single-update attack. Another work [76] aims to disaggregate the updates with the same goal of breaking aggregation. This method utilizes the additional training summary information, in particular the client participation rate, to allow the server to reconstruct the user participation matrix through observation of the aggregated updates over multiple training rounds. The attack works particularly well with a malicious server when the a fixed model is sent during each round and the clients send the same updates. When the server does not modify the training process (honest-but-curious), user participation reconstruction becomes more difficult. With a smaller batch size and a larger number of local epochs or local dataset size, reconstruction begins to fail.

In [133], attackers attack a target image in an arbitrarily large batch by manipulating the model parameters to magnify the update of only the single image. Magnification is done in two steps: the magnification of the target class followed by a specific feature for a target image. In order to estimate a boundary for the features, the server uses several rounds of additional FL training for setup. This requires for the batch data to be the same across training rounds. In [70], the attacker formulates the problem of data reconstruction as a blind source separation problem. Given the observation that inputs to a linear layer can be directly reconstructed through the gradients, solving for the inputs is similar to solving for a unknown variables given a set of linear equations.

These attacks are all able to break some levels of aggregation. [76, 101] break aggregation itself to allow for other data reconstruction attacks to work with an aggregate setting. [70, 133] both function on both individual and aggregate updates. Each of these methods have their own strengths and weaknesses. [101] requires sending different models to different clients but allows an attacker to single out a single update. [76] requires multiple training rounds and additional knowledge on top of the client update. However, it can essentially completely disaggregate aggregate updates over time. [70] can attack batch sizes up to 1024, but also requires malicious modification of the network parameters. [133] targets a single image in an arbitary update size, but requires malicious modification of network parameters along with a few rounds of setup.

6.2 Membership Inference Attacks

The goal of membership inference attacks is to infer whether any particular data instance has been used in the training of a specific model. If a particular data instance has been used in the training, this instance is called a **member**, otherwise it is a **non-member**. Knowing the membership of one particular data point could result in revealing private information, for example if someone's data is known to be in a cancer dataset (used to train a cancer prediction model), then it is highly likely that this particular person has cancer.

6.2.1 With access to some training data. Nasr et al. [97] presented the very first analysis on membership inference attack against neural networks under FL with access to some training members and white-box access to the trained neural networks. The adversary can be either the central server or one of the participants in the FL framework. Besides, they presented the definition of passive attacker and active attacker, where the passive attacker does the training normally and the active attacker breaks the FL protocols to improve the effectiveness of MI attacks.

For passive attackers, they showed that the attackers can take advantage of the gradients, activation maps, prediction vectors, loss and true label of one instance using local model of each user at different epochs during the training process and perform MI attacks. An attack model is trained using some known members.

On the other hand, two active attacker strategies were proposed. The first one is called **gradient ascent attacker**, which means that the attacker will do gradient ascent on targeted samples. By taking the action of gradient ascent, the loss of the targeted samples will be increased. For member instances, their loss will be abruptly decreased by one client, thus can be distinguished from non-members. Both central server adversary and client adversary can utilize this strategy. The second active attack method is called **isolating attacker**. The attacker can isolate one special target participant by creating a separated copy of the aggregated model. This is equivalent to training a model on a single machine using the data from the targeted client. To use this isolation attack, the adversary needs to be the central server.

Zari et al. [140] proposed a computationally more efficient passive membership inference attack under FL which also requires some known members. Their attack uses as the feature vector the probabilities of the correct label under local models at different epochs, namely $\langle F_{\theta_{C_i}^{(1)}}(x)_y, F_{\theta_{C_i}^{(2)}}(x)_y, \cdots, F_{\theta_{C_i}^{(T)}}(x)_y \rangle$, where T is the number of communication rounds. An attack model is trained to predict membership using known members and known non-members (which come from validation). Since the feature vector contains only one number from one epoch, this attack requires significantly less computational resources than the Nasr's attack which uses information such as gradient and activation maps. The authors showed that using this probability feature vector can achieve higher membership inference attack accuracy than Nasr's attack on CIFAR-100 dataset with AlexNet and DenseNet, but lower accuracy than Nasr's attack on Purchase dataset.

Melis et al. [91] identified membership leakage when using FL for training a word embedding function, which is a deterministic function that maps each word to a high-dimensional vector. Given a training batch (composed of sentences), the gradients are all 0's for the words that do not appear in this batch, and thus the set of words used in the training sentences can be inferred. The attack assumes that the participants update the central server after each mini-batch, as opposed to updating after each training epoch.

6.2.2 Without access to any training data. Li et al. [79] proposed a novel membership inference attack specifically against FL without requiring access to private training data. The key insight is that large overparameterized neural network models usually generalize well and the gradients of large overparameterized neural network models statistically behave like high-dimensional independent isotropic random vectors (shown in Figure 6). Thus, they reformulated the task of membership inference attacks under FL as the following question: given a set of (largely unknown) orthogonal vectors, which is the parameter update coming from a particular client, does this set contain the gradients of a specific target instance?

One straightforward solution to this question is to test the cosine similarity between the gradients of the target instance and the parameter update from one particular client. If the cosine similarity is significantly higher than 0, then the attacker can claim with high confidence that this target instance is used in the training of this particular client, hence successful membership inference.

From another perspective, if S = a + b + c is a sum of orthogonal vectors, then $||S||_2^2 - ||S - a||_2^2 = ||a||_2^2$, otherwise for another vector f orthogonal to a, b, c we have $||S||_2^2 - ||S - f||_2^2 = -||f||_2^2$. These equations are easy to understand if we rotate the (orthogonal) vectors to form a canonical orthogonal basis $(a', 0, 0, \ldots), (0, b', 0, \ldots), (0, 0, c', \ldots)$, with $a', b', c' \in \mathbb{R} \setminus \{0\}$. Each gradient vector in the sum S is now associated with a unique canonical orthogonal basis. Since the L_2 norm is invariant under basis rotations (for the same reason the length of a vector is invariant under rotation), it

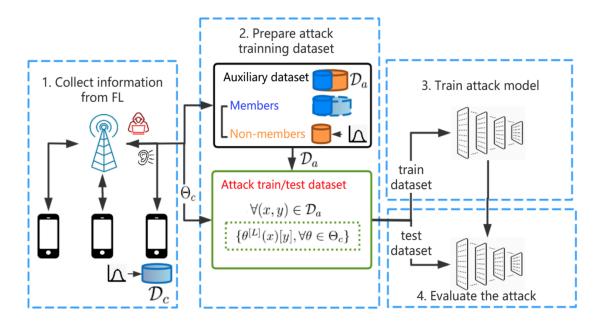


Fig. 5: Membership inference attack workflow from [140]. The attacker first collects information (e.g. parameter updates) from clients. Then, the attacker uses auxiliary dataset to train shadow models which can mimic the whole federated learning procedure, so that one attack model can be trained using the information collected from shadow models. Lastly, the attacker feeds the information collected from real clients into the attack model to perform membership inference attacks.

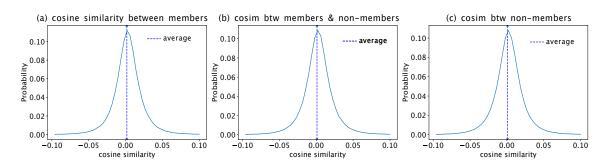


Fig. 6: Representative example of orthogonality of gradients of distinct instances (at epoch 250, AlexNet, CIFAR-100 dataset) from [79]: (a) Distribution of cosine similarity (cosim) between gradients of two distinct member instances. (b) Distribution of cosine similarity between gradients of one member instance and one non-member instance. (c) Distribution of cosine similarity between gradients of two distinct non-member instances.

now becomes clear why subtracting a vector v of the orthogonal basis from S reduces the L_2 norm of S (if v is in the sum) or increases the sum's L_2 (if v is not in the sum). If the L_2 norm is reduced, the attacker could claim that the target instance is a member, otherwise it is a non-member.

6.2.3 Membership inference attacks from centralized setting. It is worth noting that all the membership inference attacks that do not require **shadow models** can be applied to FL setting as well. **Shadow model** is a commonly used technique Manuscript submitted to ACM CSUR

in membership inferences and by this technique, the attacker is able to train models similar to the target model using data drawn from the same distribution of the training data of the target model. Thus, shadow models enable attackers to collect any information necessary for membership inference, for example, what the loss would be for one instance if this instance is not included in training.

Yeom et al. [135] presented a theoretical analysis on privacy leakage based on prediction loss. They showed that the generalization gap between training accuracy and testing accuracy could serve as a lower bound for MI attack accuracy, as the attacker predicts member if and only if the model's prediction is correct. Besides, they proposed a threshold attack based on prediction loss, and the attacker predicts member if and only if the prediction loss is lower than the threshold, since the loss of members is generally lower than the loss of non-members.

Inspired by Yeom et al. [135], Song et al. [121] proposed to adjust the prediction loss by a class-dependent value by noticing that some classes are harder to correctly classify than other classes. In addition, Song et al. [121] proposed to use a modified prediction entropy to predict membership. The modified prediction entropy is calculated using this formula: $Mentr(F_{\theta}(x), y) = -(1 - F_{\theta}(x)_y) \log(F_{\theta}(x)_y) - \sum_{i \neq y} F_{\theta}(x)_i \log(1 - F_{\theta}(x)_i)$.

Jayaraman et al. [66] suggested one MI attack based on Gaussian noise. The intuition is that for a member instance, the prediction loss should increase after adding random noise. This MI attack adds multiple different random noise to the given instance and count how many times the prediction loss of the noisy instance is higher than the prediction loss of the original instance. The given instance is predicted to be a member if the count is beyond a threshold set by the attacker

Hui et al. [64] exploits the model's prediction in a special "set" fashion. The adversary is aware of a set M of members, and N of non-members, and compute $d_1 = D(M \cup \{x\}, N)$ and $d_2 = D(M, N \cup \{x\})$, where D denotes the *Maximum Mean Discrepancy (MMD)* [49] of two distributions of features extracted from the prediction vectors. The intuition is that if x is a member, then we tend to have $d_1 > d_2$, and if x is non-member, we tend to have $d_1 < d_2$. This attack only provides predicted membership, which means it is infeasible to evaluate its effectiveness at a low false positive rate.

6.3 Property Inference Attacks

Fredrikson et al. [51] proposed the very first black-box property inference attack where the goal is to infer sensitive attributes of a given target record which is used in the training of a target model. This black box property inference attack assumes that the adversary can obtain the model's predicted label, has knowledge of all the attributes of a targeted record (including the true label) except the sensitive attribute, has access to the marginal priors of all the attributes, and also to the confusion matrix of the target model (which is usually not known by the attacker). The adversary queries the target model by varying the sensitive attribute and obtains the predicted labels. Assuming that there is k different values for the single sensitive attribute that the attacker wants to know, after querying the model multiple times with k different possible values while keeping the other known attributes unchanged, the adversary computes $C(y, y') * p_i$ for each possible sensitive attribute value, where C(y, y') = Pr[F(x) = y'|y] (which comes from the confusion matrix) and p_i , which is the marginal prior of i-th possible sensitive attribute value. Finally, the attack predicts the sensitive attribute value for which the $C(y, y') * p_i$ value is the maximum.

Mehnaz et al. [90] proposed two new attacks: a confidence score based model inversion attribute inference attack and a label-only model inversion attack. The key intuition of the confidence score based attack is that the target model's returned prediction is more likely to be correct and the confidence score is more likely to be higher when it is queried with a record containing the original sensitive attribute value. Thus, the value that can get correct prediction and yield lowest loss is predicted to be the correct value of the sensitive attribute. For the label-only model inversion attack, the

attacker can collect a subset of target samples which satisfy the following conditions: there is only a single value of the sensitive attribute to make the prediction correct. Once this subset is successfully collected, the attacker can train an attack model to predict the value of the sensitive attribute, assuming the collected set is always correct. They also extend our attacks to the scenario where some of the other (non-sensitive) attributes of a target record are unknown to the adversary. Moreover, they empirically demonstrate the disparate vulnerability of model inversion attacks, i.e., specific groups in the training dataset (grouped by gender, race, etc.) could be more vulnerable to model inversion attacks. In [39], Dibbo et al. refined the method above by proposing a new strategy to collect training data for the attack model. Instead of using real world data, they proposed to use generated random instances and change the value of the sensitive attribute to query the target model. Moreover, for each random instance, it is only accepted when each different sensitive attribute results in a different predicted label. Once this random instance set is gathered, an attack model is trained to predict the sensitive attribute for instances that the attacker is interested in.

6.4 Model Extraction Attacks

In model extraction attacks [55, 99], an attacker can establish a substitute model with almost the same functionalities as the target victim model via simply querying the victim model. While these attacks are not a direct threat to client data privacy in FL, they pose a threat against the server, stealing either the parameters, hyper parameters, architecture, or functionality of the model [100, 125, 127]. As such, model extraction attacks serve as a privacy threat for the intellectual property (i.e., the trained model) of a company. This is a practical impediment to the widespread deployment of FL as the trained model at the server is considered a precious asset. Hence, threats that allow an adversary to steal that asset have to be defended with a high degree of certainty.

Further, model extraction attacks can serve as a springboard to attacks that violate client data privacy. For example, the adversary can use the proxy model created using model extraction to launch attacks that translate well to the original model. Due to the transferability property of such attacks (the attacks against the proxy model are accurate against the original model) [130], the adversary can do a membership inference attack to determine which client data items were used in creating the model. This is worrisome as it has been shown recently that the best previous defense of perturbing the results of the query by the adversary as it is trying to construct the proxy model is still vulnerable to model extraction [29]. The basic idea is that this attack module, which can be integrated with any model extraction attack, can determine the difference in distribution between the unperturbed and perturbed query results and "reset" that difference.

7 Privacy Defenses

7.1 Differential Privacy

Differential Privacy (DP) [42, 43] is a widely used privacy-preserving technique. DP based defense techniques, such as DP-SGD [20], add noise to the training process. Each iteration of DP-SGD satisfies a particular (ϵ, δ) -DP guarantee through the sub-sampled Gaussian Mechanism - a composition of data sub-sampling and Gaussian noise addition. Since DP is immune to post-processing, we can compose this guarantee over multiple updates to reach a final (ϵ, δ) -DP guarantee. However, a naive composition—by summing the ϵ 's from each iteration would give a huge ϵ for accurate neural networks. This usually yields a trivial but not meaningful privacy guarantee. As a result, many works have proposed more sophisticated methods for analyzing the composition of DP-SGD iterations, which can prove much tighter values of $\epsilon \leq 10$ for the same algorithm [41, 75, 92]. In addition, another line of work for differential privacy Manuscript submitted to ACM CSUR

Table 4: Summary of defenses against privacy attacks in federated learning

Defense class	Summary	Citations	Effective against	Resources
Differential privacy	Prevents privacy leakage of any individual training samples.	[20, 41, 42, 75, 122]	Data reconstruction, membership inference Cross-silo and Cross-device	Clipping and noise added to updates based on a privacy budget. Noise injection can be done at each client or at the level of updates aggregated from all clients.
Secure aggregation	Individual updates are encrypted to ensure that a server or any attacker only has access to an unencrypted aggregate update.	[21, 23, 69, 120, 149]	Data reconstruction Cross-device	Additional communication between clients required to create encryption masks.
Homomorphic encryption	Clients send encrypted updates to a server. Certain arithmetic operations can be performed without requiring decryption. Server sends encrypted updated model back to clients. Similar to SA, but the server does not access unencrypted aggregate update.	[33, 47, 141]	Data reconstruction, membership inference, property inference Cross-silo	Requires large communication and computation overhead for clients to encrypt updates and send them to a server. More practical for cross-silo FL.

based privacy auditing is also crucial to validate that the privacy guarantee is correctly deployed. The most naive method to check if privacy guarantee is enforced requires significant computational resource because even for a single instance the training needs to be reproduced multiple times in order to get enough observation to verify the privacy guarantee. Nasr et al. [95] proposed an auditing method which requires only two runs of model training and the most recent work from Steinke et al. [122] proposed one method which only requires a single run. Existing libraries such as Tensorflow privacy and Tensorflow federated [7] already provide implementations of many differential privacy based algorithms. However, practitioners should still be cautious about existing implementations and perform privacy auditing when necessary.

DP based methods can provide a theoretical upper-bound on the effectiveness of any MI attack against any instance. Unfortunately, achieving a meaningful theoretical guarantee (e.g., with a resulting $\epsilon <$ 5) requires the usage of very large noises and thus resulting a huge utility loss. However, model trainer could use much smaller noises in DP-SGD. While doing this fails to provide a meaningful theoretical guarantee (the ϵ value would be too large), this can nonetheless provide empirical defense against MI attacks to protect privacy.

7.2 Secure Aggregation

Secure aggregation (SA) [23] enables the server to aggregate local model updates from a number of users, without observing any of their model updates in the clear. Specifically, SA protocols ensure that (1) the server and any set of users do not learn any information about the local dataset of any user from the encrypted model updates in the information theoretic sense; (2) the server only learns the aggregated model; (3) correct decoding of the aggregated model in the presence of users dropout.

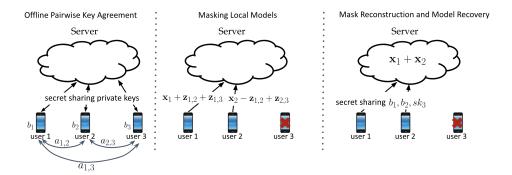


Fig. 7: An illustration of SecAgg in the example of 3 users.

The state-of-the-art for secure aggregation protocols in FL is to use additive masking to protect the privacy of individual models [21, 23, 69, 117, 118, 120, 149]. SecAgg [23] is the first practical protocol proposed by Google for FL that is resilient for both user failures or dropouts and collusion between users as well as the server. Particularly, SecAgg as depicted in Figure 7 leverages pairwise random seed $a_{i,j}$, for $i,j \in [N]$, to be generated between each pair of users for masking the model updates. Each pair of users generate the pairwise random seed by using key agreement protocol (e.g., Diffie-Hellman [40]), such that the random seed $a_{i,j}$ is a function of the public key pk_i of user i and the private key sk_i of user j. In addition, user i creates a private random seed b_i to prevent the privacy breaches that may occur if user i is only delayed rather than dropped, in which case the pairwise masks alone are not sufficient for privacy protection. For handling users failures or dropouts, the private key and the private random seed of each user are secret shared among all other users, and can be reconstructed by the server if any user drops during the protocol, which allows for a more resilient recovery protocol against user dropouts. User $i \in [N]$ then masks its model \mathbf{x}_i as $\tilde{\mathbf{x}}_i = \mathbf{x}_i + \text{PRG}(b_i) + \sum_{i:i < j} \text{PRG}(a_{i,j}) - \sum_{i:i > j} \text{PRG}(a_{j,i})$, where PRG is a pseudo random generator, and sends it to the server. Finally, to remove the masks that involves the dropped users, the server asks the set of survived users for the shares of the private keys of the dropped users and the shares of the private seeds of the survived users. Figure 7 gives an example for applying SA in the FL setting of three users. The cost of constructing and sharing the masks in SecAgg, however, scales with respect to $O(N^2)$ with N corresponding to the number of users, which takes the majority of execution time.

One active research direction for secure aggregation in FL has been to reduce the complexity of SecAgg. In particular, SecAgg+ [21] and TruboAggregate [119] managed to reduce the quadratic complexity of SecAgg to $O(N \log N)$. TruboAggregate leverages both sequential training over groups of rings and lagrange coded computing [139], while SecAgg+ leverages a sparse random graph where each user jointly encodes its model update with only a subset of user. However, the cost of mask reconstructions in SecAgg+ still increases as more users drop, while TruboAggregate results Manuscript submitted to ACM CSUR

in increasing the round/communication complexity. There have been other secure aggregation protocols proposed to reduce the computation/communication complexity of SecAgg [65, 69, 149].

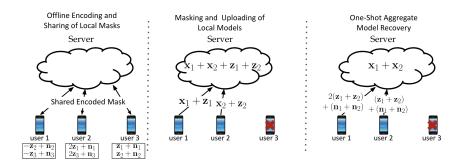


Fig. 8: An illustration of LightSecAgg in the example of 3 users.

Recently, [120] reduced the overhead of model aggregation in SecAgg by proposing LightSecAgg that relies on using private Maximum Distance Separable (MDS) codes [110, 123, 139]. The reduction in complexity achieved by LightSecAgg is based on using one-shot aggregate-mask reconstruction of the surviving users instead of pairwise random-seed reconstruction of the dropped users that reduces the reconstruction complexity to $O(\log N)$ compared to $O(N\log N)$ and $O(N^2)$ for SecAgg+ and SecAgg, respectively. LightSecAgg is composed of three main phases as shown in Figure 8. First, each user $i \in [N]$ partitions its local random mask \mathbf{z}_i to pieces and creates encoded masks via private MDS code to provide robustness against dropped users and privacy against colluding users. Each user sends one of the encoded masks to one of the other users for the purpose of one-shot recovery. Second, each user uploads its masked local model to the server. Third, the server reconstructs the aggregated masks of the surviving users to recover their aggregate of models. Each surviving user sends the aggregated encoded masks to the server. After receiving enough aggregated encoded masks from the surviving users, the server recovers the aggregate-mask and the desired aggregate-model.

Another interesting research direction of SA in FL has been to further analyze its formal privacy guarantees either over multi-rounds [116] or from the aggregated model [45]. In particular, while secure aggregation protocols have provable privacy guarantees at any single round, in the sense that no information is leaked beyond the aggregate model at each round, the privacy guarantees do not extend to attacks that span multiple training rounds. The authors in [116] have shown that the individual model may be reconstructed by leveraging the participation information and the aggregate models across multiple rounds. Assuming a scenario where the local updates do not change significantly over time (e.g., models start to converge), i.e., $\mathbf{x}_i = \mathbf{x}_i^{(t)}$ for all $i \in [3]$ and $t \in [2]$. Then the server can single out a model, say $\mathbf{x}_3^{(t)}$, even if a secure aggregation protocol is employed at each round. Instead of random users participation, the authors managed to resolve this limitation of secure aggregation by developing a structured user selection strategy that guarantees long-term privacy while taking into account the fairness in user selection and average number of participating users, and showed that provides a trade-off between long-term privacy and the convergence rate.

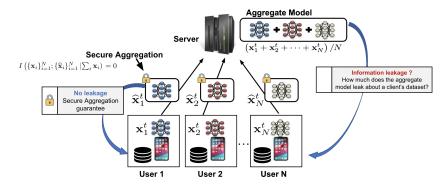


Fig. 9: Privacy leakage from the aggregated model in SA.

SA design ensures that the server only learns the aggregated model on each round, Figure 9. However, even with these SA guarantees on individual updates, it is not yet fully understood how much privacy is guaranteed in FL using SA, since the aggregated model update from all users may still leak information about an individual user's local dataset [101, 148]. The work in [45] measures the amount information the aggregated model leak about the local dataset of an individual user. They provide theoretical bounds on the mutual information (MI) privacy leakage in theory and demonstrate through an empirical study that these bounds hold in practice. Their key observations indicate that when employing FL in conjunction with SA, several significant trends emerge. First, they found that the MI privacy leakage decreases at a rate of $O(\frac{1}{N})$, where N is the number of users participating in FL with SA. Second, they noted that increasing model size does not lead to a linear increase of MI privacy leakage, and the MI privacy leakage only linearly increases with the rank of the covariance matrix of the individual model update. Lastly, using larger batch size during local training can help to reduce the MI privacy leakage. As highlighted, the privacy metric used in that work (mutual information) measures the on-average privacy leakage, without providing any privacy guarantees for worse-case scenarios. Measuring how much differential privacy SA can achieve might be an interesting direction to be explored.

7.3 Homomorphic Encryption

Homomorphic encryption (HE) can be considered an extension to SecAgg within FL. While SecAgg can still expose the aggregate model to the server, HE completely shields the model information from non-data owners. HE is a cryptographic technique that enables computations to be executed on encrypted data without requiring prior decryption. In essence, HE facilitates computation while preserving data in its encrypted state. This feature is essential for upholding privacy and security in contexts necessitating processing or analyzing sensitive information. Popular schemes such as CKKS allow encrypted arithmetic on approximate numbers [33] and are therefore interesting as a solution for encrypted machine learning. With HE, computations can be conducted on encrypted data, and subsequently, the results remain interpretable upon decryption without compromising the confidentiality of the underlying data.

Clients can employ HE to encrypt their model updates within the FL paradigm before transmission. Consequently, the server exclusively receives encrypted updates and is precluded from accessing any raw model updates. Utilizing an HE protocol, the server aggregates only encrypted weights, thereby preserving privacy. Following aggregation, the updated global model is sent back to the clients while still being encrypted. Subsequently, clients decrypt the model using their keys for further local training. HE serves to conceal each client's contributions, thereby removing the Manuscript submitted to ACM CSUR

server's access to sensitive information. Despite the computational overhead associated with HE, its implementation can markedly enhance patient data security within collaborative learning environments.

While HE mitigates risks such as model inversion or data leakage attributable to compromised servers, it is important to consider that the final models themselves may still retain privacy-sensitive information (see model inversion [137] and membership inference [114]). Consequently, integrating additional privacy safeguards, such as differential privacy or partial model sharing, warrants consideration to prevent the potential for memorization of individual training data.

Several FL frameworks implement HE-based solutions for secure federated aggregation [36, 68, 109], thereby significantly addressing privacy concerns in FL. These frameworks focus on typical applications of horizontal FL and deep learning models. Other approaches include HE in vertical FL applications, such as SecureBoost [32] aimed for financial applications of XGBoost [28] and encrypted Kaplan-Meier for survival analysis in oncology and genome-wide association studies in FL settings [52].

Although HE holds great promise for enhancing the security of FL applications, its scalability is constrained due to larger ciphertext messages, which could be impractical in scenarios with limited bandwidth and computing resources. Consequently, HE has been predominantly investigated in the context of cross-silo or enterprise FL applications with fewer clients, which is particularly prevalent in industries such as healthcare and finance. Furthermore, HE offers additional potential for securing client training operations through its capability for training on encrypted data [77].

7.4 Additional defenses against membership inference attacks

Adversarial Regularization (Adv-reg). Nasr et al. [96] proposed a defense that uses similar ideas as GAN. The classifier is trained in conjunction with an MI attacker model. The optimization objective of the target classifier is to reduce the prediction loss while minimizing the MI attack accuracy.

Mixup+MMD. Li et al. [78] proposed a defense that combines mixup data augmentation and MMD (Maximum Mean Discrepancy [49, 56]) based regularization. Instead of training with original instances, mixup data augmentation uses linear combinations of two original instances to train the model. It was shown in [142] that this can improve target model's generalization. Li et al. [78] found that they also help to defend against MI attacks. They also proposed to add a regularizer that is the MMD between the loss distribution of members and the loss distribution of a validation set not used in training. This helps make the loss distribution of members to be more similar to the loss distribution on non-members.

Distillation for membership privacy (DMP). Distillation uses labels generated by a teacher model to train a student model. It was proposed in [61] for the purpose of model compression. Shejwalkar et al. [113] proposed to use distillation to defend against MI attacks. One first trains a teacher model using the private training set, and then trains a student model using another unlabeled dataset from the same distribution as the private set. The intuition is that since the student model is not directly optimized over the private set, their membership may be protected, the authors also suggested to train a GAN using the private training set and draw samples from the trained GAN to train the student model, when no auxiliary unlabeled data is available.

SELENA. Tang et al. [124] proposed a framework named SELENA. One first generates multiple (overlapping) subsets from the training data, then trains one model from each subset. One then generates a new label for each training instance, using the average of predictions generated by models trained without using that instance. Finally, one trains a model using the training dataset using these new labels.

HAMP. Chen et al. [31] proposed a defense combining several ideas. First, labels for training instances are made smoother, by changing 1 to λ and each 0 to $\frac{1-\lambda}{k-1}$, where λ is a hyperparameter and k is the number of classes. Second, Manuscript submitted to ACM CSUR

an entropy based regularizer is added in the optimization objective. This step is somewhat redundant give that the first step already increases the entropy of the labels. Third, the model does not directly return its output on a queried instance x. Instead, one randomly generates another instance, reshuffle the prediction vector of the randomly generated instance based on the order of the probabilities of x and returns the reshuffled prediction vector. In essence, this last defense means returning only the order the classes in the prediction vector but not the actual values.

Mem-guard. Jia et al. [67] proposed the **Mem-guard** defense. In this defense, one trains an MI attack model in addition to the target classifier. When the target classifier is queried with an instance, the resulting prediction vector is not directly returned. Instead, one tries to find a perturbed version of the vector such that the perturbation is minimal and does not change the predicted label, and the MI attack model output (0.5,0.5) as its prediction vector.

MIST. Li et al. [80] proposed the Membership-Invariant Subspace Training (MIST) defense. In this work, the authors showed that subspace learning methods can help defend against membership inference attacks and make the trained model more generalizable. In a typical subspace learning scenario, the whole training set is divided into disjoint subsets and the original model is copied multiple times to generate a submodel set. For each submodel, it is trained using an unique disjoint subset for several optimization steps and then all the submodels are aggregated together to get a new central model. This diversify-aggregate step is repeated until convergence. Based on the subspace learning methods, a new loss called **cross-difference loss** is proposed. The cross difference loss is defined to be the difference between prediction from the submodel trained with one particular instance and the average predictions from all other submodels trained without this particular instance, since each instance can only be in one subset and thus be used in the training for one submodel. The experiments showed that MIST defense can achieve the state-of-the-art privacy-utility tradeoff. In [31, 78, 80, 124], extensive experiments have shown that several other defenses can provide better empirical privacy-utility tradeoff than DP-SGD.

8 Looking Ahead: Important Open Questions and Solution Directions

The topic of Federated Learning privacy is seeing a lot of interest in research, development, and deployment. We expect that for the foreseeable future, there will be robust activity on this topic with the balance between research, development, and deployment shifting over time. Here are five high-level directions that will need to be pursued and answered for FL to become truly useful in practice.

- (1) Tradeoff between utility and privacy. Most privacy-preserving techniques in FL fall in the tradeoff space between utility of the model (how accurate is the model under benign circumstances) and the privacy afforded to the data. A prototypical example is perturbation of the gradients being reported by the clients. This can be done for example through Differential Privacy (DP). Existing solutions show that the loss in utility is sharp for reasonable levels of privacy protection [72, 94, 132]. There is work to be done in making this tradeoff more gradual. Broadly, compelling solutions in this space should be able to provide an adjustable tradeoff between these two dimensions.
- (2) From centralization to decentralization. The question is will privacy be helped by a move toward greater decentralization, away from the coordination of a central federated server. The direction of decentralized learning has seen some initial results that indicate the answer to the above question is a yes [73, 81, 112]. However, such decentralization also brings in the vulnerability of the learning process to malicious clients. The question of how to ensure security to malicious clients in such learning remains open. The challenge is how to make such a solution, which has some inherent privacy benefits, also secure to misbehaving participants.

- (3) Cerification of privacy. We need to be able to certify that the privacy achieved by a given solution meets any given regulation, which holds within a jurisdiction. Such certification is difficult enough in traditional deterministic programs and more so for the stochastic programs that are at the basis of the FL systems. In line with the policy and regulation discussion in Section 5, for FL to become widely adopted in some critical application domains, it would be essential to provide privacy proofs so that the systems can be certified.
- (4) Verification of privacy. In one major line of work [22, 50, 101, 148], we have seen that privacy can be violated by the server by sending maliciously crafted models to the clients. This triggers the question what types of malicious models can be examined and detected by the faulty clients. The comparison can be quite a daunting task because of the relative weak computing power of clients, especially mobile and embedded clients, relative to the sizes of the models. The broad question is what does stealthiness of local data exfiltration mean with respect to the capability to verify by the clients.
- (5) Regulatory compliance As FL systems become more prevalent, it is imperative to address ethical concerns and ensure transparency in the process towards regulatory compliance of AI systems. This involves understanding the implications of FL on various stakeholders, including data providers, model owners, and end-users. Transparency measures should be implemented to provide visibility into how FL operates, including data usage, model training, and decision-making processes. Additionally, ethical guidelines should be established to govern the responsible development and deployment of FL systems, considering factors such as fairness, bias mitigation, and accountability. Incorporating ethical considerations and transparency measures will enhance trust in FL systems and promote their responsible use in various applications. They are a step towards compliance with emerging AI regulations, such as the EU AI act [134].

Each of these directions presents unique challenges that must be addressed to realize the full potential of FL while safeguarding data privacy.

Acknowledgments

To all our funding agencies.

References

- [1] [n.d.]. AI Foundation Model Transparency Act. ([n.d.]). https://beyer.house.gov/uploadedfiles/ai_foundation_model_transparency_act_text_118.p df
- $[2] \ [n.d.]. \ Algorithmic \ Accountability \ Act. \ ([n.d.]). \ \ https://www.congress.gov/bill/116th-congress/house-bill/2231$
- [3] [n.d.]. California Consumer Privacy Act. ([n.d.]). https://oag.ca.gov/privacy/ccpa
- [4] [n. d.]. California Privacy Rights Act. ([n. d.]). https://leginfo.legislature.ca.gov/faces/codes_displayText.xhtml?division=3.&part=4.&lawCode=C IV&ttitle=1.81.5
- [5] [n.d.]. EPIC Project. ([n.d.]). https://epic.org/the-state-of-state-ai-laws-2023/#:~:text=Of%20the%20AI%2Drelated%20laws,profiling%20and%20re quiring%20impact%20assessments
- [6] [n. d.]. Federated learning may provide a solution for future digital health challenges, howpublished = https://www.kcl.ac.uk/news/federated-learning-may-provide-a-solution-for-future-digital-health-challenges, note = Accessed: May 7, 2024.
- [7] [n.d.]. Federated Learning with Formal Differential Privacy Guarantees. https://blog.research.google/2022/02/federated-learning-with-formal.html. Accessed: 2023-12-18.
- [8] [n.d.]. The federated tumor segmentation (fets) initiative. https://www.med.upenn.edu/cbica/fets. Accessed: May 7, 2024.
- [9] [n. d.]. FTC: AI Companies: Uphold Your Privacy and Confidentiality Commitments. ([n. d.]). https://www.ftc.gov/policy/advocacy-research/tech-at-ftc/2024/01/ai-companies-uphold-your-privacy-confidentiality-commitments
- $[10] \ \ [n.\,d.]. \ \ GDPR-General\ Data\ Protection\ Regulation.\ ([n.\,d.]).\ \ https://gdpr-info.eu/$
- $[11] \ [n.d.]. \ Gramm-Leach-Bliley \ Act. \ ([n.d.]). \ https://www.ftc.gov/business-guidance/privacy-security/gramm-leach-bliley-act. \ [n.d.]). \ https://www.ftc.gov/business-guidance/privacy-security/gramm-leach-bliley-act. \ https://www.ftc.gov/business-guidance/privacy-security/gramm-leach-bliley-act. \ https://www.ftc.gov/business-guidance/privacy-security/gramm-leach-bliley-act$
- [12] [n. d.]. Health Insurance Portability and Accountability Act. ([n. d.]). https://www.hhs.gov/hipaa/index.html
- [13] [n. d.]. HealthChain consortium, howpublished = https://www.labelia.org/en/healthchain-project, note = Accessed: May 7, 2024.

- [14] [n. d.]. H.R.8152 American Data Privacy and Protection Act. ([n. d.]). https://www.congress.gov/bill/117th-congress/house-bill/8152/text
- [15] [n. d.]. Rhino Health and the American College of Radiology Enable Privacy-Preserving Artificial Intelligence. https://www.accesswire.com/72807 1/rhino-health-and-the-american-college-of-radiology-enable-privacy-preserving-artificial-intelligence. Accessed: May 7, 2024.
- [16] [n. d.]. Texas Data Privacy and Security Act. ([n. d.]). https://capitol.texas.gov/BillLookup/Text.aspx?LegSess=88R&Bill=HB4
- [17] [n. d.]. Trustworthy Federated Data Analytics (TFDA). https://tfda.hmsp.center/. Accessed: May 7, 2024.
- [18] [n. d.]. United Nations Money Laundering Overview. ([n. d.]). https://www.unodc.org/unodc/en/money-laundering/overview.html
- [19] Mehdi Salehi Heydar Abad, Emre Ozfatura, Deniz Gunduz, and Ozgur Ercetin. 2020. Hierarchical federated learning across heterogeneous cellular networks. In ICASSP 2020-2020 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP). IEEE, 8866–8870.
- [20] Martín Abadi, Andy Chu, Ian Goodfellow, H Brendan McMahan, Ilya Mironov, Kunal Talwar, and Li Zhang. 2016. Deep learning with differential privacy. In Proceedings of the 2016 ACM SIGSAC Conference on Computer and Communications Security. ACM, 308–318.
- [21] James Henry Bell, Kallista A Bonawitz, Adrià Gascón, Tancrède Lepoint, and Mariana Raykova. 2020. Secure single-server aggregation with (poly) logarithmic overhead. In Proceedings of the 2020 ACM SIGSAC Conference on Computer and Communications Security. 1253–1269.
- [22] Franziska Boenisch, Adam Dziedzic, Roei Schuster, Ali Shahin Shamsabadi, Ilia Shumailov, and Nicolas Papernot. 2023. When the curious abandon honesty: Federated learning is not private. 8th IEEE European Symposium on Security and Privacy (IEEE Euro S&P) (2023).
- [23] Keith Bonawitz, Vladimir Ivanov, Ben Kreuter, Antonio Marcedone, H Brendan McMahan, Sarvar Patel, Daniel Ramage, Aaron Segal, and Karn Seth. 2017. Practical secure aggregation for privacy-preserving machine learning. In proceedings of the 2017 ACM SIGSAC Conference on Computer and Communications Security. 1175–1191.
- [24] Nader Bouacida and Prasant Mohapatra. 2021. Vulnerabilities in federated learning. IEEE Access 9 (2021), 63229-63249.
- [25] Christopher Briggs, Zhong Fan, and Peter Andras. 2020. Federated learning with hierarchical clustering of local updates to improve training on non-IID data. In 2020 International Joint Conference on Neural Networks (IJCNN). IEEE, 1–9.
- [26] Nicholas Carlini, Steve Chien, Milad Nasr, Shuang Song, Andreas Terzis, and Florian Tramer. 2022. Membership inference attacks from first principles. In 2022 IEEE Symposium on Security and Privacy (SP). IEEE, 1897–1914.
- [27] Huiqiang Chen, Tianqing Zhu, Tao Zhang, Wanlei Zhou, and Philip S Yu. 2023. Privacy and Fairness in Federated Learning: on the Perspective of Trade-off. Comput. Surveys (2023).
- [28] Tianqi Chen and Carlos Guestrin. 2016. XGBoost: A Scalable Tree Boosting System. In Proceedings of the 22nd ACM SIGKDD International Conference on Knowledge Discovery and Data Mining (San Francisco, California, USA) (KDD '16). ACM, New York, NY, USA, 785–794. https://doi.org/10.1145/2939672.2939785
- [29] Yanjiao Chen, Rui Guan, Xueluan Gong, Jianshuo Dong, and Meng Xue. 2023. D-dae: Defense-penetrating model extraction attacks. In *IEEE Symposium on Security and Privacy (SP)*. IEEE, 382–399.
- [30] Yao Chen, Yijie Gui, Hong Lin, Wensheng Gan, and Yongdong Wu. 2022. Federated learning attacks and defenses: A survey. In 2022 IEEE International Conference on Big Data (Big Data). IEEE. 4256–4265.
- [31] Zitao Chen and Karthik Pattabiraman. 2023. Overconfidence is a Dangerous Thing: Mitigating Membership Inference Attacks by Enforcing Less Confident Prediction. arXiv preprint arXiv:2307.01610 (2023).
- [32] Kewei Cheng, Tao Fan, Yilun Jin, Yang Liu, Tianjian Chen, Dimitrios Papadopoulos, and Qiang Yang. 2021. SecureBoost: A lossless federated learning framework. IEEE Intelligent Systems 36, 6 (2021), 87–98.
- [33] Jung Hee Cheon, Andrey Kim, Miran Kim, and Yongsoo Song. 2017. Homomorphic encryption for arithmetic of approximate numbers. In Advances in Cryptology—ASIACRYPT 2017: 23rd International Conference on the Theory and Applications of Cryptology and Information Security, Hong Kong, China, December 3-7, 2017, Proceedings, Part I 23. Springer, 409–437.
- [34] Yae Jee Cho, Andre Manoel, Gauri Joshi, Robert Sim, and Dimitrios Dimitriadis. 2022. Heterogeneous Ensemble Knowledge Transfer for Training Large Models in Federated Learning. In *Proceedings of the Thirty-First International Joint Conference on Artificial Intelligence, IJCAI-22.* International Joint Conferences on Artificial Intelligence Organization, 2881–2887.
- [35] European Commission, Content Directorate-General for Communications Networks, and Technology. 2019. Ethics guidelines for trustworthy AI. Publications Office. https://doi.org/doi/10.2759/346720
- [36] Francesco Cremonesi, Marc Vesin, Sergen Cansiz, Yannick Bouillard, Irene Balelli, Lucia Innocenti, Santiago Silva, Samy-Safwan Ayed, Riccardo Taiello, Laetita Kameni, et al. 2023. Fed-BioMed: Open, Transparent and Trusted Federated Learning for Real-world Healthcare Applications. arXiv preprint arXiv:2304.12012 (2023).
- [37] Ittai Dayan, Holger R Roth, Aoxiao Zhong, Ahmed Harouni, Amilcare Gentili, Anas Z Abidin, Andrew Liu, Anthony Beardsworth Costa, Bradford J Wood, Chien-Sung Tsai, et al. 2021. Federated learning for predicting clinical outcomes in patients with COVID-19. Nature medicine 27, 10 (2021), 1735–1743.
- [38] Enmao Diao, Jie Ding, and Vahid Tarokh. 2021. Hetero{FL}: Computation and Communication Efficient Federated Learning for Heterogeneous Clients. In *International Conference on Learning Representations*.
- [39] Sayanton V Dibbo, Dae Lim Chung, and Shagufta Mehnaz. 2023. Model inversion attack with least information and an in-depth analysis of its disparate vulnerability. In 2023 IEEE Conference on Secure and Trustworthy Machine Learning (SaTML). IEEE, 119–135.
- [40] Whitfield Diffie and Martin Hellman. 1976. New directions in cryptography. IEEE transactions on Information Theory 22, 6 (1976), 644-654.
- [41] Jinshuo Dong, Aaron Roth, and Weijie J Su. 2019. Gaussian differential privacy. arXiv preprint arXiv:1905.02383 (2019).

- [42] Cynthia Dwork. 2008. Differential privacy: A survey of results. In International Conference on Theory and Applications of Models of Computation. Springer, 1–19.
- [43] Cynthia Dwork, Frank McSherry, Kobbi Nissim, and Adam Smith. 2006. Calibrating noise to sensitivity in private data analysis. In Theory of cryptography conference. Springer. 265–284.
- [44] Ahmed El Ouadrhiri and Ahmed Abdelhadi. 2022. Differential privacy for deep and federated learning: A survey. IEEE access 10 (2022), 22359–22380.
- [45] Ahmed Roushdy Elkordy, Jiang Zhang, Yahya H Ezzeldin, Konstantinos Psounis, and Salman Avestimehr. 2022. How much privacy does federated learning with secure aggregation guarantee? arXiv preprint arXiv:2208.02304 (2022).
- [46] Lixin Fan, Kam Woh Ng, Ce Ju, Tianyu Zhang, Chang Liu, Chee Seng Chan, and Qiang Yang. 2020. Rethinking privacy preserving deep learning: How to evaluate and thwart privacy attacks. In Federated Learning. Springer, 32–50.
- [47] Haokun Fang and Quan Qian. 2021. Privacy preserving machine learning with homomorphic encryption and federated learning. Future Internet 13, 4 (2021), 94.
- [48] Jie Feng, Lei Liu, Qingqi Pei, and Keqin Li. 2021. Min-max cost optimization for efficient hierarchical federated learning in wireless edge networks. IEEE Transactions on Parallel and Distributed Systems 33, 11 (2021), 2687–2700.
- [49] Robert Fortet and Edith Mourier. 1953. Convergence de la répartition empirique vers la répartition théorique. Annales scientifiques de l'École Normale Supérieure 70, 3 (1953), 267–285.
- [50] Liam H Fowl, Jonas Geiping, Wojciech Czaja, Micah Goldblum, and Tom Goldstein. 2022. Robbing the Fed: Directly Obtaining Private Data in Federated Learning with Modified Models. In International Conference on Learning Representations.
- [51] Matt Fredrikson, Somesh Jha, and Thomas Ristenpart. 2015. Model inversion attacks that exploit confidence information and basic countermeasures. In Proceedings of the 22nd ACM SIGSAC Conference on Computer and Communications Security. 1322–1333.
- [52] David Froelicher, Juan R Troncoso-Pastoriza, Jean Louis Raisaro, Michel A Cuendet, Joao Sa Sousa, Hyunghoon Cho, Bonnie Berger, Jacques Fellay, and Jean-Pierre Hubaux. 2021. Truly privacy-preserving federated analytics for precision medicine with multiparty homomorphic encryption. Nature communications 12, 1 (2021), 5910.
- [53] Karan Ganju, Qi Wang, Wei Yang, Carl A Gunter, and Nikita Borisov. 2018. Property inference attacks on fully connected neural networks using permutation invariant representations. In *Proceedings of the 2018 ACM SIGSAC conference on computer and communications security*. 619–633.
- [54] Jonas Geiping, Hartmut Bauermeister, Hannah Dröge, and Michael Moeller. 2020. Inverting gradients-how easy is it to break privacy in federated learning? Advances in Neural Information Processing Systems 33 (2020), 16937–16947.
- [55] Xueluan Gong, Qian Wang, Yanjiao Chen, Wang Yang, and Xinchang Jiang. 2020. Model extraction attacks and defenses on cloud-based machine learning models. *IEEE Communications Magazine* 58, 12 (2020), 83–89.
- [56] Arthur Gretton, Karsten M Borgwardt, Malte J Rasch, Bernhard Schölkopf, and Alexander Smola. 2012. A kernel two-sample test. Journal of Machine Learning Research 13, Mar (2012), 723–773.
- [57] Andrew Hard, Chloé M Kiddon, Daniel Ramage, Francoise Beaufays, Hubert Eichner, Kanishka Rao, Rajiv Mathews, and Sean Augenstein. 2018.
 Federated Learning for Mobile Keyboard Prediction. https://arxiv.org/abs/1811.03604
- [58] Ali Hatamizadeh, Hongxu Yin, Pavlo Molchanov, Andriy Myronenko, Wenqi Li, Prerna Dogra, Andrew Feng, Mona G Flores, Jan Kautz, Daguang Xu, et al. 2023. Do gradient inversion attacks make federated learning unsafe? *IEEE Transactions on Medical Imaging* (2023).
- [59] Ali Hatamizadeh, Hongxu Yin, Holger R Roth, Wenqi Li, Jan Kautz, Daguang Xu, and Pavlo Molchanov. 2022. Gradvit: Gradient inversion of vision transformers. In Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition. 10021–10030.
- [60] Wouter Heyndrickx, Lewis Mervin, Tobias Morawietz, Noé Sturm, Lukas Friedrich, Adam Zalewski, Anastasia Pentina, Lina Humbeck, Martijn Oldenhof, Ritsuya Niwayama, et al. 2023. Melloddy: Cross-pharma federated learning at unprecedented scale unlocks benefits in qsar without compromising proprietary information. Journal of chemical information and modeling (2023).
- [61] Geoffrey Hinton, Oriol Vinyals, and Jeff Dean. 2015. Distilling the knowledge in a neural network. arXiv preprint arXiv:1503.02531 (2015).
- [62] Briland Hitaj, Giuseppe Ateniese, and Fernando Perez-Cruz. 2017. Deep models under the GAN: information leakage from collaborative deep learning. In Proceedings of the 2017 ACM SIGSAC conference on computer and communications security. 603–618.
- [63] Dzmitry Huba, John Nguyen, Kshitiz Malik, Ruiyu Zhu, Mike Rabbat, Ashkan Yousefpour, Carole-Jean Wu, Hongyuan Zhan, Pavel Ustinov, Harish Srinivas, et al. 2022. Papaya: Practical, private, and scalable federated learning. Proceedings of Machine Learning and Systems 4 (2022), 814–832.
- [64] Bo Hui, Yuchen Yang, Haolin Yuan, Philippe Burlina, Neil Zhenqiang Gong, and Yinzhi Cao. 2021. Practical Blind Membership Inference Attack via Differential Comparisons. In ISOC Network and Distributed System Security Symposium (NDSS).
- [65] Tayyebeh Jahani-Nezhad, Mohammad Ali Maddah-Ali, Songze Li, and Giuseppe Caire. 2022. Swiftagg: Communication-efficient and dropout-resistant secure aggregation for federated learning with worst-case security guarantees. arXiv preprint arXiv:2202.04169 (2022).
- [66] Bargav Jayaraman, Lingxiao Wang, Katherine Knipmeyer, Quanquan Gu, and David Evans. 2021. Revisiting Membership Inference Under Realistic Assumptions. Proceedings on Privacy Enhancing Technologies 2021, 2 (2021).
- [67] Jinyuan Jia, Ahmed Salem, Michael Backes, Yang Zhang, and Neil Zhenqiang Gong. 2019. MemGuard: Defending against Black-Box Membership Inference Attacks via Adversarial Examples. In Proceedings of the 2019 ACM SIGSAC Conference on Computer and Communications Security. 259–274.
- [68] Weizhao Jin, Yuhang Yao, Shanshan Han, Carlee Joe-Wong, Srivatsan Ravi, Salman Avestimehr, and Chaoyang He. 2023. FedML-HE: An Efficient Homomorphic-Encryption-Based Privacy-Preserving Federated Learning System. arXiv preprint arXiv:2303.10837 (2023).
- [69] Swanand Kadhe, Nived Rajaraman, O Ozan Koyluoglu, and Kannan Ramchandran. 2020. Fastsecagg: Scalable secure aggregation for privacy-preserving federated learning. arXiv preprint arXiv:2009.11248 (2020).

[70] Sanjay Kariyappa, Chuan Guo, Kiwan Maeng, Wenjie Xiong, G Edward Suh, Moinuddin K Qureshi, and Hsien-Hsin S Lee. 2023. Cocktail party attack: Breaking aggregation-based privacy in federated learning using independent component analysis. In *International Conference on Machine Learning*. PMLR, 15884–15899.

- [71] Mashal Khan, Frank G Glavin, and Matthias Nickles. 2023. Federated learning as a privacy solution-an overview. Procedia Computer Science 217 (2023), 316–325.
- [72] Muah Kim, Onur Günlü, and Rafael F Schaefer. 2021. Federated learning with local differential privacy: Trade-offs between privacy, utility, and communication. In ICASSP 2021-2021 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP). IEEE, 2650–2654.
- [73] Anastasia Koloskova, Nicolas Loizou, Sadra Boreiri, Martin Jaggi, and Sebastian Stich. 2020. A unified theory of decentralized sgd with changing topology and local updates. In *International Conference on Machine Learning*. PMLR, 5381–5393.
- [74] Jinkyu Koo, Rajesh K Panta, Saurabh Bagchi, and Luis Montestruque. 2009. A tale of two synchronizing clocks. In Proceedings of the 7th ACM Conference on Embedded Networked Sensor Systems (Sensys). 239–252.
- [75] Antti Koskela, Joonas Jälkö, and Antti Honkela. 2020. Computing tight differential privacy guarantees using fft. In International Conference on Artificial Intelligence and Statistics. PMLR, 2560–2569.
- [76] Maximilian Lam, Gu-Yeon Wei, David Brooks, Vijay Janapa Reddi, and Michael Mitzenmacher. 2021. Gradient disaggregation: Breaking privacy in federated learning by reconstructing the user participant matrix. In *International Conference on Machine Learning*. PMLR, 5959–5968.
- [77] Joon-Woo Lee, HyungChul Kang, Yongwoo Lee, Woosuk Choi, Jieun Eom, Maxim Deryabin, Eunsang Lee, Junghyun Lee, Donghoon Yoo, Young-Sik Kim, et al. 2022. Privacy-preserving machine learning with fully homomorphic encryption for deep neural network. IEEE Access 10 (2022), 30039–30054.
- [78] Jiacheng Li, Ninghui Li, and Bruno Ribeiro. 2021. Membership inference attacks and defenses in classification models. In *Proceedings of the Eleventh ACM Conference on Data and Application Security and Privacy.* 5–16.
- [79] Jiacheng Li, Ninghui Li, and Bruno Ribeiro. 2022. Effective passive membership inference attacks in federated learning against overparameterized models. In The Eleventh International Conference on Learning Representations.
- [80] Jiacheng Li, Ninghui Li, and Bruno Ribeiro. 2023. MIST: Defending Against Membership Inference Attacks Through Membership-Invariant Subspace Training. arXiv preprint arXiv:2311.00919 (2023).
- [81] Shuangtong Li, Tianyi Zhou, Xinmei Tian, and Dacheng Tao. 2022. Learning to collaborate in decentralized learning of personalized models. In Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition. 9766–9775.
- [82] Tian Li, Anit Kumar Sahu, Ameet Talwalkar, and Virginia Smith. 2020. Federated learning: Challenges, methods, and future directions. IEEE signal processing magazine 37, 3 (2020), 50–60.
- [83] Lumin Liu, Jun Zhang, SH Song, and Khaled B Letaief. 2020. Client-edge-cloud hierarchical federated learning. In ICC 2020-2020 IEEE International Conference on Communications (ICC). IEEE, 1–6.
- [84] Lumin Liu, Jun Zhang, Shenghui Song, and Khaled B Letaief. 2022. Hierarchical federated learning with quantization: Convergence analysis and system design. IEEE Transactions on Wireless Communications 22, 1 (2022), 2–18.
- [85] Pengrui Liu, Xiangrui Xu, and Wei Wang. 2022. Threats, attacks and defenses to federated learning: issues, taxonomy and perspectives. *Cybersecurity* 5, 1 (2022), 1–19.
- [86] B. Luo, Y. Feng, S. Wang, J. Huang, and L. Tassiulas. 2023. Incentive Mechanism Design for Unbiased Federated Learning with Randomized Client Participation. In 2023 IEEE 43rd International Conference on Distributed Computing Systems (ICDCS). IEEE Computer Society, Los Alamitos, CA, USA, 545–555.
- [87] Lingjuan Lyu, Han Yu, Xingjun Ma, Chen Chen, Lichao Sun, Jun Zhao, Qiang Yang, and S Yu Philip. 2022. Privacy and robustness in federated learning: Attacks and defenses. IEEE transactions on neural networks and learning systems (2022).
- [88] Y. Mansour, Mehryar Mohri, Jae Ro, and Ananda Theertha Suresh. 2020. Three Approaches for Personalization with Applications to Federated Learning. ArXiv abs/2002.10619 (2020). https://api.semanticscholar.org/CorpusID:211296702
- [89] Brendan McMahan, Eider Moore, Daniel Ramage, Seth Hampson, and Blaise Aguera y Arcas. 2017. Communication-efficient learning of deep networks from decentralized data. In Artificial intelligence and statistics. PMLR. 1273–1282.
- [90] Shagufta Mehnaz, Sayanton V Dibbo, Roberta De Viti, Ehsanul Kabir, Björn B Brandenburg, Stefan Mangard, Ninghui Li, Elisa Bertino, Michael Backes, Emiliano De Cristofaro, et al. 2022. Are your sensitive attributes private? Novel model inversion attribute inference attacks on classification models. In 31st USENIX Security Symposium (USENIX Security 22). 4579–4596.
- [91] Luca Melis, Congzheng Song, Emiliano De Cristofaro, and Vitaly Shmatikov. 2019. Exploiting unintended feature leakage in collaborative learning. In 2019 IEEE symposium on security and privacy (SP). IEEE, 691–706.
- [92] Ilya Mironov. 2017. Rényi differential privacy. In 2017 IEEE 30th computer security foundations symposium (CSF). IEEE, 263–275.
- [93] Viraaji Mothukuri, Reza M Parizi, Seyedamin Pouriyeh, Yan Huang, Ali Dehghantanha, and Gautam Srivastava. 2021. A survey on security and privacy of federated learning. Future Generation Computer Systems 115 (2021), 619–640.
- [94] Mohammad Naseri, Jamie Hayes, and Emiliano De Cristofaro. 2020. Local and central differential privacy for robustness and privacy in federated learning. arXiv preprint arXiv:2009.03561 (2020).
- [95] Milad Nasr, Jamie Hayes, Thomas Steinke, Borja Balle, Florian Tramèr, Matthew Jagielski, Nicholas Carlini, and Andreas Terzis. 2023. Tight Auditing of Differentially Private Machine Learning. arXiv preprint arXiv:2302.07956 (2023).

- [96] Milad Nasr, Reza Shokri, and Amir Houmansadr. 2018. Machine learning with membership privacy using adversarial regularization. In Proceedings of the 2018 ACM SIGSAC Conference on Computer and Communications Security. ACM, 634–646.
- [97] Milad Nasr, Reza Shokri, and Amir Houmansadr. 2019. Comprehensive privacy analysis of deep learning: Passive and active white-box inference attacks against centralized and federated learning. In 2019 IEEE symposium on security and privacy (SP). IEEE, 739–753.
- [98] Martijn Oldenhof, Gergely Ács, Balázs Pejó, Ansgar Schuffenhauer, Nicholas Holway, Noé Sturm, Arne Dieckmann, Oliver Fortmeier, Eric Boniface, Clément Mayer, et al. 2023. Industry-scale orchestrated federated learning for drug discovery. In Proceedings of the AAAI Conference on Artificial Intelligence, Vol. 37. 15576–15584.
- [99] Daryna Oliynyk, Rudolf Mayer, and Andreas Rauber. 2023. I know what you trained last summer: A survey on stealing machine learning models and defences. Comput. Surveys 55, 14s (2023), 1–41.
- [100] Tribhuvanesh Orekondy, Bernt Schiele, and Mario Fritz. 2019. Knockoff nets: Stealing functionality of black-box models. In Proceedings of the IEEE/CVF conference on computer vision and pattern recognition. 4954–4963.
- [101] Dario Pasquini, Danilo Francati, and Giuseppe Ateniese. 2022. Eluding secure aggregation in federated learning via model inconsistency. In Proceedings of the 2022 ACM SIGSAC Conference on Computer and Communications Security. 2429–2443.
- [102] Sarthak Pati, Ujjwal Baid, Maximilian Zenk, Brandon Edwards, Micah Sheller, G Anthony Reina, Patrick Foley, Alexey Gruzdev, Jason Martin, Shadi Albarqouni, et al. 2021. The federated tumor segmentation (fets) challenge. arXiv preprint arXiv:2105.05874 (2021).
- [103] Jake Perazzone, Shiqiang Wang, Mingyue Ji, and Kevin S. Chan. 2022. Communication-Efficient Device Scheduling for Federated Learning Using Stochastic Optimization. In IEEE INFOCOM 2022 - IEEE Conference on Computer Communications. 1449–1458. https://doi.org/10.1109/INFOCOM4 8880.2022.9796818
- [104] Le Trieu Phong, Yoshinori Aono, Takuya Hayashi, Lihua Wang, and Shiho Moriai. 2017. Privacy-preserving deep learning: Revisited and enhanced. In International Conference on Applications and Techniques in Information Security. Springer, 100–110.
- [105] Muhammad Habib ur Rehman, Walter Hugo Lopez Pinaya, Parashkev Nachev, James T Teo, Sebastin Ourselin, and M Jorge Cardoso. 2023. Federated learning for medical imaging radiology. The British Journal of Radiology 96, 1150 (2023), 20220890.
- [106] Nicola Rieke, Jonny Hancox, Wenqi Li, Fausto Milletari, Holger R Roth, Shadi Albarqouni, Spyridon Bakas, Mathieu N Galtier, Bennett A Landman, Klaus Maier-Hein, et al. 2020. The future of digital health with federated learning. NPJ digital medicine 3, 1 (2020), 119.
- [107] Maria Rigaki and Sebastian Garcia. 2023. A survey of privacy attacks in machine learning. Comput. Surveys 56, 4 (2023), 1–34.
- [108] Holger R Roth, Ken Chang, Praveer Singh, Nir Neumark, Wenqi Li, Vikash Gupta, Sharut Gupta, Liangqiong Qu, Alvin Ihsani, Bernardo C Bizzo, et al. 2020. Federated learning for breast density classification: A real-world implementation. In Domain Adaptation and Representation Transfer, and Distributed and Collaborative Learning: Second MICCAI Workshop, DART 2020, and First MICCAI Workshop, DCL 2020, Held in Conjunction with MICCAI 2020, Lima, Peru, October 4–8, 2020, Proceedings 2. Springer, 181–191.
- [109] Holger R Roth, Yan Cheng, Yuhong Wen, Isaac Yang, Ziyue Xu, Yuan-Ting Hsieh, Kristopher Kersten, Ahmed Harouni, Can Zhao, Kevin Lu, et al. 2022. NVIDIA FLARE: Federated learning from simulation to real-world. arXiv preprint arXiv:2210.13291 (2022).
- [110] Ron M Roth and Abraham Lempel. 1989. On MDS codes via Cauchy matrices. IEEE transactions on information theory 35, 6 (1989), 1314-1319.
- [111] Jonas Scherer, Marco Nolden, Jens Kleesiek, Jasmin Metzger, Klaus Kades, Verena Schneider, Michael Bach, Oliver Sedlaczek, Andreas M Bucher, Thomas J Vogl, et al. 2020. Joint imaging platform for federated clinical data analytics. JCO clinical cancer informatics 4 (2020), 1027–1038.
- [112] Atul Sharma, Joshua C Zhao, Wei Chen, Qiang Qiu, Saurabh Bagchi, and Somali Chaterji. 2023. How to Learn Collaboratively-Federated Learning to Peer-to-Peer Learning and What's at Stake. In 2023 53rd Annual IEEE/IFIP International Conference on Dependable Systems and Networks-Supplemental Volume (DSN-S). IEEE, 122–126.
- [113] Virat Shejwalkar and Amir Houmansadr. 2021. Membership privacy for machine learning models through knowledge transfer. In *Proceedings of the AAAI Conference on Artificial Intelligence*.
- [114] Reza Shokri, Marco Stronati, Congzheng Song, and Vitaly Shmatikov. 2017. Membership inference attacks against machine learning models. In 2017 IEEE symposium on security and privacy (SP). IEEE, 3–18.
- [115] Hira Shahzadi Sikandar, Huda Waheed, Sibgha Tahir, Saif UR Malik, and Waqas Rafique. 2023. A Detailed Survey on Federated Learning Attacks and Defenses. Electronics 12, 2 (2023), 260.
- [116] Jinhyun So, Ramy E Ali, Başak Güler, Jiantao Jiao, and A Salman Avestimehr. 2023. Securing secure aggregation: Mitigating multi-round privacy leakage in federated learning. In Proceedings of the AAAI Conference on Artificial Intelligence, Vol. 37. 9864–9873.
- [117] Jinhyun So, Ramy E Ali, Basak Guler, Jiantao Jiao, and Salman Avestimehr. 2021. Securing secure aggregation: Mitigating multi-round privacy leakage in federated learning. arXiv preprint arXiv:2106.03328 (2021).
- [118] Jinhyun So, Başak Güler, and A Salman Avestimehr. 2021. Turbo-aggregate: Breaking the quadratic aggregation barrier in secure federated learning. IEEE Journal on Selected Areas in Information Theory 2, 1 (2021), 479–489.
- [119] Jinhyun So, Basak Guler, and A Salman Avestimehr. 2021. Turbo-Aggregate: Breaking the Quadratic Aggregation Barrier in Secure Federated Learning. IEEE Journal on Selected Areas in Information Theory (2021).
- [120] Jinhyun So, Corey J Nolet, Chien-Sheng Yang, Songze Li, Qian Yu, Ramy E Ali, Basak Guler, and Salman Avestimehr. 2022. Lightsecagg: a lightweight and versatile design for secure aggregation in federated learning. Proceedings of Machine Learning and Systems 4 (2022), 694–720.
- [121] Liwei Song, Reza Shokri, and Prateek Mittal. 2019. Membership inference attacks against adversarially robust deep learning models. In 2019 IEEE Security and Privacy Workshops (SPW). IEEE, 50–56.
- [122] Thomas Steinke, Milad Nasr, and Matthew Jagielski. 2023. Privacy Auditing with One (1) Training Run. arXiv preprint arXiv:2305.08846 (2023).

[123] Tingting Tang, Ramy E Ali, Hanieh Hashemi, Tynan Gangwani, Salman Avestimehr, and Murali Annavaram. 2021. Verifiable coded computing: Towards fast, secure and private distributed machine learning. arXiv preprint arXiv:2107.12958 (2021).

- [124] Xinyu Tang, Saeed Mahloujifar, Liwei Song, Virat Shejwalkar, Milad Nasr, Amir Houmansadr, and Prateek Mittal. 2022. Mitigating membership inference attacks by {Self-Distillation} through a novel ensemble architecture. In 31st USENIX Security Symposium (USENIX Security 22), 1433–1450.
- [125] Florian Tramèr, Fan Zhang, Ari Juels, Michael K Reiter, and Thomas Ristenpart. 2016. Stealing machine learning models via prediction {APIs}. In 25th USENIX security symposium (USENIX Security 16). 601–618.
- [126] Dmitrii Usynin, Daniel Rueckert, and Georgios Kaissis. 2023. Beyond gradients: Exploiting adversarial priors in model inversion attacks. ACM Transactions on Privacy and Security 26, 3 (2023), 1–30.
- [127] Binghui Wang and Neil Zhenqiang Gong. 2018. Stealing hyperparameters in machine learning. In 2018 IEEE symposium on security and privacy (SP). IEEE, 36–52.
- [128] Shiqiang Wang, Jake Perazzone, Mingyue Ji, and Kevin S. Chan. 2023. Federated Learning with Flexible Control. In *IEEE INFOCOM 2023 IEEE Conference on Computer Communications*. 1–10. https://doi.org/10.1109/INFOCOM53939.2023.10229070
- [129] Shiqiang Wang, Tiffany Tuor, Theodoros Salonidis, Kin K. Leung, Christian Makaya, Ting He, and Kevin Chan. 2019. Adaptive Federated Learning in Resource Constrained Edge Computing Systems. IEEE Journal on Selected Areas in Communications 37, 6 (2019), 1205–1221. https://doi.org/10.1109/JSAC.2019.2904348
- [130] Xiaosen Wang and Kun He. 2021. Enhancing the transferability of adversarial attacks through variance tuning. In Proceedings of the IEEE/CVF conference on computer vision and pattern recognition. 1924–1933.
- [131] Zhibo Wang, Mengkai Song, Zhifei Zhang, Yang Song, Qian Wang, and Hairong Qi. 2019. Beyond inferring class representatives: User-level privacy leakage from federated learning. In IEEE INFOCOM 2019-IEEE Conference on Computer Communications. IEEE, 2512–2520.
- [132] Kang Wei, Jun Li, Ming Ding, Chuan Ma, Howard H Yang, Farhad Farokhi, Shi Jin, Tony QS Quek, and H Vincent Poor. 2020. Federated learning with differential privacy: Algorithms and performance analysis. IEEE Transactions on Information Forensics and Security 15 (2020), 3454–3469.
- [133] Yuxin Wen, Jonas Geiping, Liam Fowl, Micah Goldblum, and Tom Goldstein. 2022. Fishing for user data in large-batch federated learning via gradient magnification. International Conference on Machine Learning (2022).
- [134] Herbert Woisetschläger, Alexander Erben, Bill Marino, Shiqiang Wang, Nicholas D Lane, Ruben Mayer, and Hans-Arno Jacobsen. 2024. Federated Learning Priorities Under the European Union Artificial Intelligence Act. arXiv preprint arXiv:2402.05968 (2024).
- [135] Samuel Yeom, Irene Giacomelli, Matt Fredrikson, and Somesh Jha. 2018. Privacy risk in machine learning: Analyzing the connection to overfitting. In 2018 IEEE 31st Computer Security Foundations Symposium (CSF). IEEE, 268–282.
- [136] Hongxu Yin, Arun Mallya, Arash Vahdat, Jose M Alvarez, Jan Kautz, and Pavlo Molchanov. 2021. See through gradients: Image batch recovery via gradinversion. In Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition. 16337–16346.
- [137] Hongxu Yin, Pavlo Molchanov, Jose M Alvarez, Zhizhong Li, Arun Mallya, Derek Hoiem, Niraj K Jha, and Jan Kautz. 2020. Dreaming to distill: Data-free knowledge transfer via deepinversion. In Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition. 8715–8724.
- [138] Xuefei Yin, Yanming Zhu, and Jiankun Hu. 2021. A comprehensive survey of privacy-preserving federated learning: A taxonomy, review, and future directions. ACM Computing Surveys (CSUR) 54, 6 (2021), 1–36.
- [139] Qian Yu, Songze Li, Netanel Raviv, Seyed Mohammadreza Mousavi Kalan, Mahdi Soltanolkotabi, and Salman A Avestimehr. 2019. Lagrange coded computing: Optimal design for resiliency, security, and privacy. In The 22nd International Conference on Artificial Intelligence and Statistics. PMLR, 1215, 1225.
- [140] Oualid Zari, Chuan Xu, and Giovanni Neglia. 2021. Efficient passive membership inference attack in federated learning. In NeurIPS PriML 2021-workshop Privacy in Machine Learning.
- [141] Chengliang Zhang, Suyi Li, Junzhe Xia, Wei Wang, Feng Yan, and Yang Liu. 2020. {BatchCrypt}: Efficient homomorphic encryption for {Cross-Silo} federated learning. In 2020 USENIX annual technical conference (USENIX ATC 20). 493–506.
- [142] Hongyi Zhang, Moustapha Cisse, Yann N Dauphin, and David Lopez-Paz. 2017. mixup: Beyond empirical risk minimization. arXiv preprint arXiv:1710.09412 (2017).
- [143] Kaiyue Zhang, Xuan Song, Chenhan Zhang, and Shui Yu. 2022. Challenges and future directions of secure federated learning: a survey. Frontiers of computer science 16 (2022), 1–8.
- [144] Tuo Zhang, Chaoyang He, Tianhao Ma, Lei Gao, Mark Ma, and Salman Avestimehr. 2021. Federated Learning for Internet of Things. In Proceedings of the 19th ACM Conference on Embedded Networked Sensor Systems (Coimbra, Portugal) (SenSys '21). Association for Computing Machinery, New York, NY, USA, 413–419. https://doi.org/10.1145/3485730.3493444
- [145] Bo Zhao, Konda Reddy Mopuri, and Hakan Bilen. 2020. idlg: Improved deep leakage from gradients. arXiv preprint arXiv:2001.02610 (2020).
- [146] Joshua Christian Zhao, Ahaan Dabholkar, Atul Sharma, and Saurabh Bagchi. 2024. Leak and Learn: An Attacker's Cookbook to Train Using Leaked Data from Federated Learning. In Conference on Computer Vision and Pattern Recognition (CVPR). IEEE Computer Society, 1–10.
- [147] Joshua C Zhao, Ahmed Roushdy Elkordy, Atul Sharma, Yahya H Ezzeldin, Salman Avestimehr, and Saurabh Bagchi. 2023. The Resource Problem of Using Linear Layer Leakage Attack in Federated Learning. In Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition. 3974–3983.
- [148] Joshua Christian Zhao, Atul Sharma, Ahmed Roushdy Elkordy, Yahya H Ezzeldin, Salman Avestimehr, and Saurabh Bagchi. 2023. LOKI: Large-scale Data Reconstruction Attack against Federated Learning through Model Manipulation. In 2024 IEEE Symposium on Security and Privacy (SP). IEEE Computer Society, 30–30.

- [149] Yizhou Zhao and Hua Sun. 2022. Information theoretic secure aggregation with user dropouts. *IEEE Transactions on Information Theory* 68, 11 (2022), 7471–7484.
- [150] Ligeng Zhu, Zhijian Liu, and Song Han. 2019. Deep leakage from gradients. Advances in neural information processing systems 32 (2019).

Received XXX; revised XXX; accepted XXX