

Who Wrote This? The Key to Zero-Shot LLM-Generated Text Detection Is GECScore

Junchao Wu[♣] Runzhe Zhan[♣] Derek F. Wong[♣]✉ Shu Yang[♣]
Xuebo Liu[♣] Lidia S. Chao[♣] Min Zhang[♣]

[♣]NLP²CT Lab, Department of Computer and Information Science, University of Macau
nlp2ct.{junchao,runzhe,shuyang}@gmail.com, {derekfw,lidiasc}@um.edu.mo

[♣]Institute of Computing and Intelligence, Harbin Institute of Technology, Shenzhen, China
{liuxuebo, zhangmin2021}@hit.edu.cn

Abstract

The efficacy of an large language model (LLM) generated text detector depends substantially on the availability of sizable training data. White-box zero-shot detectors, which require no such data, are nonetheless limited by the accessibility of the source model of the LLM-generated text. In this paper, we propose an simple but effective black-box zero-shot detection approach, predicated on the observation that human-written texts typically contain more grammatical errors than LLM-generated texts. This approach entails computing the **Grammar Error Correction Score** (GECScore) for the given text to distinguish between human-written and LLM-generated text. Extensive experimental results show that our method outperforms current state-of-the-art (SOTA) zero-shot and supervised methods, achieving an average AUROC of 98.7% and showing strong robustness against paraphrase and adversarial perturbation attacks.

1 Introduction

Recent advancements in the LLM-generated text detection have been remarkable, encompassing approaches such as watermarking, zero-shot, and supervised methods (Jawahar et al., 2020; Wu et al., 2023; Tang et al., 2023; Ghosal et al., 2023a). Zero-shot detection methods do not require training a dedicated classifier, collecting a sizable corpus of human-written and LLM-generated texts, or embedding explicit watermarks within the generated text. Instead, they rely solely on access to LLMs, and the statistical analysis of text features, making zero-shot detection a cost-effective and efficient solution for the LLM-generated text detection task.

The history of zero-shot detection methods for LLM-generated text can be traced back to machine

translation detection research, which uses linguistics features to detect whether a text is generated by a machine translation model (Corston-Oliver et al., 2001; Arase and Zhou, 2013). Progress in the field has led to a suite of zero-shot methods being developed for LLM-generated text detection. These methods are calculated based on the logits from the source model and include Log-Likelihood (Solaiman et al., 2019), Perplexity (Beresneva, 2016; Vasilatos et al., 2023), Entropy (Lavergne et al., 2008), Log-Rank (Gehrmann et al., 2019), and the Log-Likelihood Log-Rank Ratio (LRR) (Su et al., 2023). Perturbation-based zero-shot detection methods, such as DetectGPT (Mitchell et al., 2023) and NPR (Su et al., 2023), calculate Log-Likelihood and Log-Rank on perturbed texts to distinguish between human-written and LLM-generated text. Fast-DetectGPT (Bao et al., 2023) replaces the perturbation step of DetectGPT with a more efficient sampling step, and achieve better performance and speed.

However, current zero-shot detectors are not reliable enough with cleverly revised text, such as paraphrased text (Sadasivan et al., 2023; Krishna et al., 2023) and they also struggle to detect text from powerful LLMs or unknown source LLMs (Bao et al., 2023). While supervised approaches based on fine-tuning LMs demonstrate enhanced performance, they falter in out-of-distribution settings (Li et al., 2023) and are vulnerable to attacked through targeted training of an LLM (Nicks et al., 2023). In light of these challenges, we focus on a more challenging but valuable direction. We explore a black-box zero-shot approach that is independent of access to the generative model and does not depend on extensive training datasets or fine-tuned LMs as classifiers.

In this study, we propose a simple but effective zero-shot detection method that leverages an external grammar error correction model. By computing the Grammar Error Correction Score for the given

✉ Corresponding author.

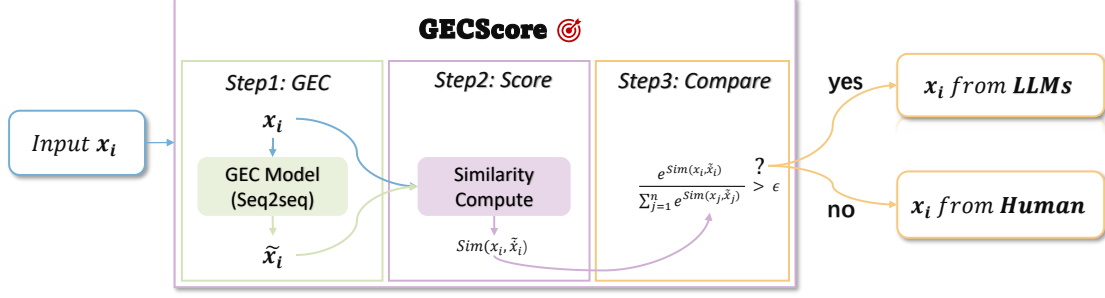


Figure 1: GECScore Framework Overview. First, a grammar correction model generates a grammatically corrected version $\tilde{x}_i$ of the input text x_i . Next, the similarity score $\hat{s}_{x_i}$ between $\tilde{x}_i$ and x_i is calculated using a similarity metric Sim , and then amplified through softmax. Finally, if the softmax-scaled score $\tilde{\sigma}_{x_i}$ meets or exceeds the threshold ϵ , the text is classified as LLM-generated.

text, our approach distinguishes between human-written and LLM-generated text. Extensive experimental results show that our method not only outperforms current SOTA zero-shot and supervised techniques, but also show remarkable robustness against paraphrase and adversarial attacks.

2 Methodology: GECScore

2.1 Hypothesis and Motivation

The GECScore is proposed based on the assumption that humans are more susceptible to committing grammatical errors than LLMs when writing. In other words, when we apply a text error correction algorithm to an initial text x_i , resulting in a revised text $\tilde{x}_i$, the similarity between $\tilde{x}_i$ and x_i from LLM-generated text should be greater compared to the human-written text. This hypothesis was inspired by the *Working Memory Theory* (Baddeley, 1992; Olive, 2004): Writing is a complex, high-level task that requires the use of working memory to organize ideas, craft sentences, and access linguistic regulations. The constraints of working memory often lead to errors in writing.

The inherent complexity of the human brain, compounded by psychological and environmental variables, intrinsically predisposes human-written texts to a higher error rate compared to outputs from LLMs. Neuroscientific and cognitive psychological research, particularly *Word Priming* (Meyer and Schvaneveldt, 1971; Neely, 1977) and *Memory Formation* (Hebb, 2005), sheds light on the cognitive mechanisms underpinning language errors. These lapses often stem from the brain’s inclination to prioritize semantic coherence and narrative flow over the rigors of character-level accuracy and syntactic exactitude. This tendency remains evident even among skilled writers and contributes to

a discrepancy in error frequency between human-written and LLM-generated texts.

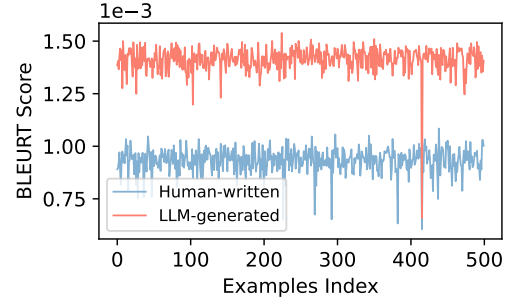


Figure 2: Similarity Score Distribution for Grammatically Corrected versus Original Texts. This figure illustrates the distribution of similarity scores using the BLEURT metric for 500 human-written and GPT-3.5 generated samples from the Writing Prompts dataset. Post-softmax scaling, a marked divergence in the similarity distributions of the two text categories is evident.

Furthermore, theories like *Language Interference* (Odlin, 2003), which points out that multilingual individuals might confuse different linguistic systems and increase the chance of errors, *Attention Bias* (Fernandes et al., 2019; Limpo et al., 2017), which suggests that distractions can split a writer’s focus and raise the possibility of mistakes, and *Cognitive Load* (Sweller, 1988; Kellogg, 1987), which emphasizes the intense mental effort required for writing tasks (e.g. organizing information) can lead to more errors, all offer further empirical support for the observed differential in error propensity between human-written and LLM-generated texts.

2.2 LLM-Generated Text Detection Using GECScore

In response to our hypothesis, we formulate our approach step by step.

Algorithm 1 GECScore-based Detection

Require: Sample x_n , preliminary sample set X , grammar error correction model g , similarity function Sim .

```
1: Expand sample set  $X \leftarrow X \cup \{x_n\}$ .  $\triangleright$  Step 1
2: Prepare corrected sample set  $\tilde{X} \leftarrow \emptyset$ .  $\triangleright$  Step 2
3: for each  $x_j$  in  $X$  do
4:    $\tilde{x}_j \leftarrow g(x_j)$ 
5:    $\tilde{X} \leftarrow \tilde{X} \cup \{\tilde{x}_j\}$ 
6: end
7: Initialize similarity scores set  $S \leftarrow \emptyset$ .  $\triangleright$  Step 3
   for each pair  $(x_j, \tilde{x}_j)$  in  $\langle X, \tilde{X} \rangle$  do
8:    $s_j \leftarrow \text{Sim}(x_j, \tilde{x}_j)$ 
9:    $S \leftarrow S \cup \{s_j\}$ 
10: end
11: Calculate GECScores using softmax.  $\triangleright$  Step 4
12:  $\tilde{S} \leftarrow \left\{ \frac{e^{s_1}}{\sum_{j=1}^n e^{s_j}}, \frac{e^{s_2}}{\sum_{j=1}^n e^{s_j}}, \dots, \frac{e^{s_n}}{\sum_{j=1}^n e^{s_j}} \right\}$ 
13: Compare with threshold  $\epsilon$ .  $\triangleright$  Step 5
14:  $\epsilon = \arg \max_{\epsilon'} (\text{TPR}(\epsilon') + (1 - \text{FPR}(\epsilon')))$ 
15: if  $\tilde{s}_n > \epsilon$  then
16:   return True
17: else
18:   return False
```

(1) Similar to previous zero-shot methods, GECScore requires a preliminary sample set $X = \{x_1, x_2, \dots, x_{n-1}\}$ to help calculate the threshold. Given the sample x_n to be detected, the whole sample would be expanded to $X = \{x_1, x_2, \dots, x_{n-1}, x_n\}$, n represents the number of samples used to construct the threshold.

(2) We first employ a grammar error correction function g , typically instantiated through a GEC model with seq2seq architecture, which will generate grammatical corrected results $\tilde{X} = \{\tilde{x}_1, \tilde{x}_2, \dots, \tilde{x}_{n-1}, \tilde{x}_n\}$.

(3) We employ a similarity metric Sim to calculate the similarity scores $S = \{s_1, s_2, \dots, s_{n-1}, s_n\}$ between the grammatical corrected texts $\tilde{X}$ and the original texts X . These similarity scores are then accentuated via a softmax function to amplify their disparities. We choose BLEURT (Sellam et al., 2020), which achieves the best average performance (see Table 7) as an example to calculate text similarity scores in our study and discuss other similarity metrics in the Appendix F.2. We define Grammar Error Correction Score as:

$$\text{GECScore}(x_i) = \frac{e^{\text{Sim}(x_i, g(x_i))}}{\sum_{j=1}^n e^{\text{Sim}(x_j, g(x_j))}}$$

(4) Based on the calculation of the GECScore for each sample, we obtained the GECScore for the entire sample set, $\tilde{S} = \{\tilde{s}_1, \tilde{s}_2, \dots, \tilde{s}_{n-1}, \tilde{s}_n\}$, and determined the optimal threshold ϵ for the detector, which achieving the best balance between true positive rate (TPR) and false positive rate (FPR). When comparing the input sample x_n with the threshold ϵ , if score of x_n is greater than ϵ , the sample x_n is more likely generated by LLMs, otherwise it is probably written by humans.

It should be noted that the threshold ϵ will be dynamically adjusted based on the input sample and the preliminary sample set. The richer the sample types in the preliminary sample set, the better and more stable performance GECScore can demonstrate.

2.3 Hypothesis Validation via GECScore

Building on the hypothesis discussed in Section 2.1, the GECScore is posited to yield a significantly higher value for samples x_n generated by LLMs as opposed to those written by humans. This assertion was empirically tested using the Writing Prompts datasets (Fan et al., 2018), with BLEURT (Sellam et al., 2020) serving as the evaluation metric, and GPT-3.5-Turbo¹ as the testbed. Figure 2 presents the outcomes of our investigation, which conspicuously illustrates the divergence in distributions of textual similarity scores subsequent to grammatical error correction between human-written texts and LLM-generated texts. Notably, the LLM-generated samples manifested relatively marginal textual variances. These findings enable us to propose that by establishing a threshold for the similarity score after grammatical error correction, one can efficaciously discern between human-written and LLM-generated texts. This threshold essentially functions as a binary classifier, leveraging distinctive patterns in grammatical precision and coherence that distinguish LLM-generated texts from human-written texts.

3 Experiment

3.1 Setup

Dataset Following the methodology of DetectGPT (Mitchell et al., 2023), we curated a dataset of human-written texts from various daily domains and typical LLMs use cases, excluding SQuAD (Rajpurkar et al., 2016) for the brevity of its text samples. Specifically, XSum (Narayan et al., 2018)

¹<https://openai.com/>

Datasets → Method ↓	XSum								Writing Prompts							
	GPT-2	OPT-2.7	Neo-2.7	GPT-J	NeoX	GPT-3.5	PaLM2	Avg.	GPT-2	OPT-2.7	Neo-2.7	GPT-J	NeoX	GPT-3.5	PaLM2	Avg.
<i>Zero-shot Methods</i>																
Likelihood	17.63	78.47	97.57	94.65	88.69	91.39	93.05	80.20	70.80	90.54	97.57	94.65	75.47	97.18	97.01	89.03
Rank	84.51	85.91	98.02	97.09	91.87	76.49	72.95	86.69	96.04	97.08	98.02	97.09	83.79	94.04	91.01	93.86
Log-Rank	25.25	83.81	98.68	96.36	93.07	90.34	92.00	82.78	77.27	93.01	98.68	96.36	80.18	96.51	96.35	91.19
LRR	61.28	90.60	99.64	98.37	86.95	81.04	80.90	85.54	89.32	97.00	99.64	98.37	86.95	89.68	90.27	93.03
NPR	85.28	81.31	87.60	82.36	79.92	69.07	55.38	67.50	95.22	94.82	96.35	95.53	20.87	89.82	87.74	82.90
DetectGPT	11.28	40.72	54.01	43.58	46.10	40.17	43.08	39.84	15.11	57.08	69.17	62.11	27.35	83.35	78.01	56.02
Fast-DetectGPT	13.29	70.14	59.53	88.59	74.58	75.85	80.81	66.11	41.19	89.47	80.01	98.19	12.17	99.58	99.42	74.29
BARTScore-CNN	36.84	63.15	64.78	62.28	48.79	94.98	79.78	64.37	65.06	84.25	78.76	77.43	74.29	98.97	92.69	81.63
<i>Supervised Methods</i>																
RoB-base	98.23	95.23	98.12	95.01	91.23	61.86	68.12	86.82	99.98	98.62	99.21	97.44	91.23	59.08	70.30	87.98
RoB-large	99.95	98.62	99.79	98.48	96.00	57.21	65.01	87.84	99.99	99.15	99.82	98.75	96.00	41.54	65.67	85.83
<i>Our Zero-shot Method: GECScore</i>																
GECScore (Ours)	98.08	98.88	97.72	98.02	98.20	100.0	99.84	98.67	98.56	98.07	98.50	98.66	98.33	99.80	100.0	98.84

Table 1: Baseline Comparisons across Datasets and Generative Models. Evaluates 10 baselines using AUROC (%) on 2 datasets and 7 generative models with 500 LLM-generated and 500 human-written samples per dataset.

was selected to exemplify news writing, while Writing Prompts (Fan et al., 2018) served to illustrate creative writing. We extracted a balanced corpus comprising 500 samples from each domain, maintaining a minimum threshold of 300 words per sample to ensure substantial content for analysis. The baseline models employed in our study align with those utilized in DetectGPT (Mitchell et al., 2023), and we have extended our evaluation to include the SOTA PaLM2 (Anil et al., 2023), thereby reinforcing the robustness of our proposed method. Comprehensive details of our dataset are delineated in Appendix B.2.

Baselines We evaluated our method against a comprehensive suite of zero-shot detectors, including Log-Likelihood (Solaiman et al., 2019), Rank (Gehrmann et al., 2019), Log-Rank (Gehrmann et al., 2019), LRR (Su et al., 2023), NPR (Su et al., 2023), DetectGPT (Mitchell et al., 2023), Fast-DetectGPT (Bao et al., 2023) and BARTScore-CNN (Zhu et al., 2023). For supervised detection baselines, we utilized the OpenAI suite², of detectors which were trained on RoBERTa-base and RoBERTa-large pre-trained models (Liu et al., 2019).

GEC Model We employed the COEDIT-L³ as the GEC model for our experiment. This model, fine-tuned on the CoEdIT (Raheja et al., 2023) dataset and built upon the google/flan-t5-large (Chung et al., 2022) architecture, has demonstrated SOTA results across a variety of text editing benchmarks, addressing requirements in syntax,

semantics, and stylistic modifications.

Metrics In line with the approach described by Mitchell et al. (2023), we adopted the AUROC to assess detector performance. All experiments were balanced with an equal number of samples from both LLM-generated and human-written texts.

3.2 Results

Our experiments were conducted in a black-box setting where the source model of the text is unknown. Following the approach of Bao et al. (2023), we utilized a surrogate model, GPT-Neo-2.7B (Kashyap et al., 2022), for scoring purposes.

Black-box LLM-Generated Text Detection Table 1 presents a comparative analysis of various detection methods in black-box settings. Experimental results indicate that GECScore consistently delivers the highest average AUROC across both the XSum and Writing Prompts datasets. Specifically, GECScore surpasses DetectGPT by substantial margins of 58.8% and 42.8%, and outforms Fast-DetectGPT by 32.5% and 24.5%, in the XSum and Writing Prompts datasets respectively. Moreover, GECScore exhibits superiority over supervised detectors, with an average increase of 10.8% and 13.1% in AUROC. Notably, GECScore shows impressive performance with advanced models like GPT-3.5-Turbo and PaLM2, surpassing 99% AUROC on both datasets, indicating its strong ability to distinguish texts from sophisticated LLMs.

Robust Performance of the Detectors In practical applications, LLM-generated text detectors may face potential attacks designed to simulate the human post-editing and refinement of LLM-generated text (Wu et al., 2023). To assess the

²<https://github.com/openai/gpt-2-output-dataset/tree/master/detector>

³<https://huggingface.co/grammarly/coedit-large>

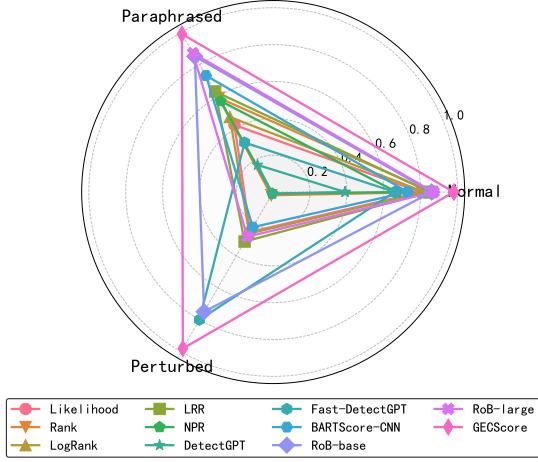


Figure 3: Robustness comparison of GECScore and other baselines on normal, paraphrased and perturbed data settings. GECScore outperforms all other methods in all settings. The evaluation metric is AUROC (%).

effectiveness and robustness of our method, we applied paraphrase and adversarial perturbation attacks. Following the methodologies of [Sadasi-van et al. \(2023\)](#) and [Stiff and Johansson \(2022\)](#), we initiated paraphrasing using the T5 paraphraser model⁴ and employed DeepWordBug ([Gao et al., 2018](#)) to simulate character and word perturbations in the text. The results, illustrated in [Figure 3](#) reveal a significant performance decline for all baseline methods when confronted with paraphrased and perturbed texts. In contrast, GECScore retains the most robust detection capabilities across all scenarios, exhibiting negligible performance degradation.

Factors Influencing GECScore Performance

We investigated factors influencing the efficacy of GECScore, with a focus on similarity metrics and text length, the settings are detailed in [Appendix F](#). [Figure 4](#) presents the results of our empirical analysis. The choice of similarity metrics is identified as a critical factor affecting GECScore’s effectiveness.

Semantic-based metrics, consistently deliver robust performance within our method. Notably, BLEURT ([Sellam et al., 2020](#)) outperforms all other similarity metrics, and showing remarkable robustness to variations in text length, with an average 99.51% of AUROC. In addition, METEOR ([Banerjee and Lavie, 2005](#)), GLEU ([Wang et al., 2018](#)) and ROUGE ([Lin, 2004](#)) also demonstrate commendable performance within our method, maintaining scores above 90% AUROC in all text

length settings, although performance slightly decreases at lower text lengths.

However, metrics relying on simple textual alignment methods including BLEU ([Papineni et al., 2002](#)), TER ([Snover et al., 2006](#)), chrF ([Popovic, 2015](#)) and Edit Distance ([Navarro, 2001](#)) are very sensitive to the length of text. These metrics mainly rely on edit distance and simple n -gram matching, demonstrating a positive correlation with text length. Particularly, BLEU ([Papineni et al., 2002](#)) achieves over 90% AUROC when the text length extends beyond 300 words.

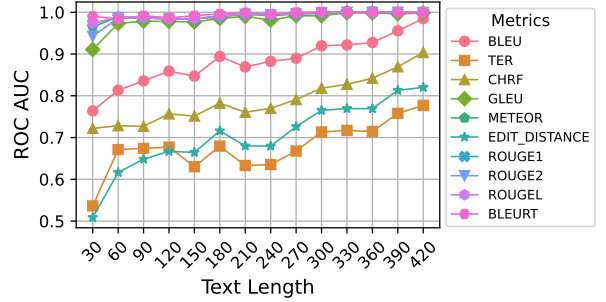


Figure 4: Results of different similarity metrics performance on different extent of text length. Semantic-based metrics exhibit commendable robustness. In contrast, metrics that are relied on edit distance and simple n -gram matching are very sensitive to the text length variations, culminating in a compromise robustness.

Statistics of BLEURT we record the mean and variance similarity scores of our method. As demonstrated in [Table 4](#), the mean similarity scores for texts generated by LLMs significantly exceed those of human-written texts, often by a factor of approximately **1.3 to 1.5**, and this observation is consistently maintained across various domains and generative models. Moreover, the variance observed within the similarity scores for LLM-generated texts is lower than that for human-written texts, implying that the disparity amongst human-written texts is relatively more substantial in comparison to that amongst LLM-generated texts.

4 Conclusion

In this paper, we introduced GECScore, a novel zero-shot detection method that operates as a black-box tool to effectively identify LLM-generated text without requiring access to source models or extensive training data. Our experimental results demonstrate that GECScore surpasses current SOTA detectors and remains highly robust against paraphrase and adversarial attacks.

⁴https://huggingface.co/Vamsi/T5_Paraphrase_Paws

Limitations

The real-world practice of GECScore relies on an effective and lightweight GEC model, which requires the GEC model used to have excellent across-domain and across-language performance, while concurrently sustaining a diminutive footprint to mitigate memory consumption and computational expenses. In addition, a pivotal requirement for the effective functioning of GECScore is the textual integrity of the text to be detected, as fragmented sentences could potentially confound its evaluative mechanism.

Future Directions

We hope to further discuss the use of LLMs as GEC models (Fang et al., 2023a,b; Fan et al., 2023; Zhang et al., 2023) in our approach in future work, considering the broader adaptability brought about by their powerful multilingual capabilities, and further leverage the power of the LLMs themselves (Lin et al., 2024; Zhan et al., 2024; Zhang et al., 2023) to detect the LLM-generated text.

Acknowledgements

This work was supported in part by the Science and Technology Development Fund, Macau SAR (Grant Nos. FDCT/060/2022/AFJ, FDCT/0070/2022/AMJ), National Natural Science Foundation of China (Grant No. 62261160648), Ministry of Science and Technology of China (Grant No. 2022YFE0204900), the Multi-year Research Grant from the University of Macau (Grant No. MYRG-GRG2023-00006-FST-UMDF), and Tencent AI Lab Rhino-Bird Gift Fund (Grant No. EF2023-00151-FST). This work was performed in part at SICC which is supported by SKL-IOTSC, and HPCC supported by ICTO of the University of Macau.

References

- Rohan Anil, Andrew M. Dai, Orhan Firat, Melvin Johnson, Dmitry Lepikhin, Alexandre Passos, Siamak Shakeri, Emanuel Taropa, Paige Bailey, Zhifeng Chen, Eric Chu, Jonathan H. Clark, Laurent El Shafey, Yanping Huang, Kathy Meier-Hellstern, Gaurav Mishra, Erica Moreira, Mark Omernick, Kevin Robinson, Sebastian Ruder, Yi Tay, Kefan Xiao, Yuanzhong Xu, Yujing Zhang, Gustavo Hernández Ábrego, Junwhan Ahn, Jacob Austin, Paul Barham, Jan A. Botha, James Bradbury, Siddhartha Brahma, Kevin Brooks, Michele Catasta, Yong Cheng, Colin Cherry, Christopher A. Choquette-Choo, Aakanksha Chowdhery, Clément Crepy, Shachi Dave, Mostafa Dehghani, Sunipa Dev, Jacob Devlin, Mark Díaz, Nan Du, Ethan Dyer, Vladimir Feinberg, Fangxi aoyu Feng, Vlad Fienber, Markus Freitag, Xavier Garcia, Sebastian Gehrmann, Lucas Gonzalez, and et al. 2023. [Palm 2 technical report](#). *CoRR*, abs/2305.10403.
- Yuki Arase and Ming Zhou. 2013. [Machine translation detection from monolingual web-text](#). In *Proceedings of the 51st Annual Meeting of the Association for Computational Linguistics, ACL 2013, 4-9 August 2013, Sofia, Bulgaria, Volume 1: Long Papers*, pages 1597–1607. The Association for Computer Linguistics.
- Alan Baddeley. 1992. Working memory. *Science*, 255(5044):556–559.
- Satanjeev Banerjee and Alon Lavie. 2005. [METEOR: an automatic metric for MT evaluation with improved correlation with human judgments](#). In *Proceedings of the Workshop on Intrinsic and Extrinsic Evaluation Measures for Machine Translation and/or Summarization@ACL 2005, Ann Arbor, Michigan, USA, June 29, 2005*, pages 65–72. Association for Computational Linguistics.
- Guangsheng Bao, Yanbin Zhao, Zhiyang Teng, Linyi Yang, and Yue Zhang. 2023. [Fast-detectgpt: Efficient zero-shot detection of machine-generated text via conditional probability curvature](#). *CoRR*, abs/2310.05130.
- Daria Beresneva. 2016. [Computer-generated text detection using machine learning: A systematic review](#). In *Natural Language Processing and Information Systems - 21st International Conference on Applications of Natural Language to Information Systems, NLDB 2016, Salford, UK, June 22-24, 2016, Proceedings*, volume 9612 of *Lecture Notes in Computer Science*, pages 421–426. Springer.
- Sid Black, Stella Biderman, Eric Hallahan, Quentin Anthony, Leo Gao, Laurence Golding, Horace He, Connor Leahy, Kyle McDonell, Jason Phang, Michael Pieler, USVSN Sai Prashanth, Shivanshu Purohit, Laria Reynolds, Jonathan Tow, Ben Wang, and Samuel Weinbach. 2022. [Gpt-neox-20b: An open-source autoregressive language model](#). *CoRR*, abs/2204.06745.
- Yutian Chen, Hao Kang, Vivian Zhai, Liangze Li, Rita Singh, and Bhiksha Raj. 2023. [Gpt-sentinel: Distinguishing human and chatgpt generated content](#). *CoRR*, abs/2305.07969.
- Hyung Won Chung, Le Hou, Shayne Longpre, Barret Zoph, Yi Tay, William Fedus, Eric Li, Xuezhi Wang, Mostafa Dehghani, Siddhartha Brahma, Albert Webson, Shixiang Shane Gu, Zhuyun Dai, Mirac Suzgun, Xinyun Chen, Aakanksha Chowdhery, Sharan Narang, Gaurav Mishra, Adams Yu, Vincent Y. Zhao, Yanping Huang, Andrew M. Dai, Hongkun Yu, Slav Petrov, Ed H. Chi, Jeff Dean, Jacob Devlin, Adam

- Roberts, Denny Zhou, Quoc V. Le, and Jason Wei. 2022. [Scaling instruction-finetuned language models](#). *CoRR*, abs/2210.11416.
- Simon Corston-Oliver, Michael Gamon, and Chris Brockett. 2001. [A machine learning approach to the automatic evaluation of machine translation](#). In *Association for Computational Linguistic, 39th Annual Meeting and 10th Conference of the European Chapter, Proceedings of the Conference, July 9-11, 2001, Toulouse, France*, pages 140–147. Morgan Kaufmann Publishers.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2019. [BERT: pre-training of deep bidirectional transformers for language understanding](#). In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, NAACL-HLT 2019, Minneapolis, MN, USA, June 2-7, 2019, Volume 1 (Long and Short Papers)*, pages 4171–4186. Association for Computational Linguistics.
- Angela Fan, Mike Lewis, and Yann N. Dauphin. 2018. [Hierarchical neural story generation](#). In *Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics, ACL 2018, Melbourne, Australia, July 15-20, 2018, Volume 1: Long Papers*, pages 889–898. Association for Computational Linguistics.
- Yaxin Fan, Feng Jiang, Peifeng Li, and Haizhou Li. 2023. [Grammargpt: Exploring open-source llms for native chinese grammatical error correction with supervised fine-tuning](#). In *Natural Language Processing and Chinese Computing - 12th National CCF Conference, NLPCC 2023, Foshan, China, October 12-15, 2023, Proceedings, Part III*, pages 69–80.
- Tao Fang, Xuebo Liu, Derek F. Wong, Runzhe Zhan, Liang Ding, Lidia S. Chao, Dacheng Tao, and Min Zhang. 2023a. [Transgec: Improving grammatical error correction with translationese](#). In *Findings of the Association for Computational Linguistics: ACL 2023, Toronto, Canada, July 9-14, 2023*, pages 3614–3633.
- Tao Fang, Shu Yang, Kaixin Lan, Derek F. Wong, Jinpeng Hu, Lidia S. Chao, and Yue Zhang. 2023b. [Is chatgpt a highly fluent grammatical error correction system? A comprehensive evaluation](#). *CoRR*, abs/2304.01746.
- Renata Adams Fernandes, Deisi Cristina Gollo Marques Vidor, and Alcyr Alves de Oliveira. 2019. The effect of noise on attention and performance in reading and writing tasks. In *CoDAS*, volume 31, page e20170241. SciELO Brasil.
- Ji Gao, Jack Lanchantin, Mary Lou Soffa, and Yanjun Qi. 2018. [Black-box generation of adversarial text sequences to evade deep learning classifiers](#). In *2018 IEEE Security and Privacy Workshops, SP Workshops 2018, San Francisco, CA, USA, May 24, 2018*, pages 50–56. IEEE Computer Society.
- Sebastian Gehrmann, Hendrik Strobelt, and Alexander M. Rush. 2019. [GLTR: statistical detection and visualization of generated text](#). In *Proceedings of the 57th Conference of the Association for Computational Linguistics, ACL 2019, Florence, Italy, July 28 - August 2, 2019, Volume 3: System Demonstrations*, pages 111–116. Association for Computational Linguistics.
- Soumya Suvra Ghosal, Souradip Chakraborty, Jonas Geiping, Furong Huang, Dinesh Manocha, and Amrit Bedi. 2023a. A survey on the possibilities & impossibilities of ai-generated text detection. *Transactions on Machine Learning Research*.
- Soumya Suvra Ghosal, Souradip Chakraborty, Jonas Geiping, Furong Huang, Dinesh Manocha, and Amrit Singh Bedi. 2023b. [Towards possibilities & impossibilities of ai-generated text detection: A survey](#). *CoRR*, abs/2310.15264.
- Biyang Guo, Xin Zhang, Ziyuan Wang, Minqi Jiang, Jinran Nie, Yuxuan Ding, Jianwei Yue, and Yupeng Wu. 2023. [How close is chatgpt to human experts? comparison corpus, evaluation, and detection](#). *CoRR*, abs/2301.07597.
- Sakib Haque, Zachary Eberhart, Aakash Bansal, and Collin McMillan. 2022. Semantic similarity metrics for evaluating source code summarization. In *Proceedings of the 30th IEEE/ACM International Conference on Program Comprehension*, pages 36–47.
- Donald Olding Hebb. 2005. *The organization of behavior: A neuropsychological theory*. Psychology press.
- Ganesh Jawahar, Muhammad Abdul-Mageed, and Laks V. S. Lakshmanan. 2020. [Automatic detection of machine generated text: A critical survey](#). In *Proceedings of the 28th International Conference on Computational Linguistics, COLING 2020, Barcelona, Spain (Online), December 8-13, 2020*, pages 2296–2309. International Committee on Computational Linguistics.
- Rohan Kashyap, Vivek Kashyap, and Narendra C. P. 2022. [Gpt-neo for commonsense reasoning-a theoretical and practical lens](#). *CoRR*, abs/2211.15593.
- Ronald T Kellogg. 1987. Writing performance: Effects of cognitive strategies. *Written communication*, 4(3):269–298.
- John Kirchenbauer, Jonas Geiping, Yuxin Wen, Jonathan Katz, Ian Miers, and Tom Goldstein. 2023. [A watermark for large language models](#). In *International Conference on Machine Learning, ICML 2023, 23-29 July 2023, Honolulu, Hawaii, USA*, volume 202 of *Proceedings of Machine Learning Research*, pages 17061–17084. PMLR.
- Kalpesh Krishna, Yixiao Song, Marzena Karpinska, John Wieting, and Mohit Iyyer. 2023. [Paraphrasing evades detectors of ai-generated text, but retrieval is an effective defense](#). *CoRR*, abs/2303.13408.

- Thomas Lavergne, Tanguy Urvoy, and François Yvon. 2008. [Detecting fake content with relative entropy scoring](#). In *Proceedings of the ECAI’08 Workshop on Uncovering Plagiarism, Authorship and Social Software Misuse, Patras, Greece, July 22, 2008*, volume 377 of *CEUR Workshop Proceedings*. CEUR-WS.org.
- Yafu Li, Qintong Li, Leyang Cui, Wei Bi, Longyue Wang, Linyi Yang, Shuming Shi, and Yue Zhang. 2023. [Deepfake text detection in the wild](#). *CoRR*, abs/2305.13242.
- Teresa Limpo, Rui A Alves, and Vincent Connelly. 2017. Examining the transcription-writing link: Effects of handwriting fluency and spelling accuracy on writing performance via planning and translating in middle grades. *Learning and individual differences*, 53:26–36.
- Bill Yuchen Lin, Abhilasha Ravichander, Ximing Lu, Nouha Dziri, Melanie Sclar, Khyathi Chandu, Chandra Bhagavatula, and Yejin Choi. 2024. [The unlocking spell on base llms: Rethinking alignment via in-context learning](#). In *International Conference on Learning Representations*.
- Chin-Yew Lin. 2004. [ROUGE: A package for automatic evaluation of summaries](#). In *Text Summarization Branches Out*, pages 74–81, Barcelona, Spain. Association for Computational Linguistics.
- Yikang Liu, Ziyin Zhang, Wanyang Zhang, Shisen Yue, Xiaojing Zhao, Xinyuan Cheng, Yiwen Zhang, and Hai Hu. 2023a. [Argugpt: evaluating, understanding and identifying argumentative essays generated by GPT models](#). *CoRR*, abs/2304.07666.
- Yinhan Liu, Myle Ott, Naman Goyal, Jingfei Du, Mandar Joshi, Danqi Chen, Omer Levy, Mike Lewis, Luke Zettlemoyer, and Veselin Stoyanov. 2019. [Roberta: A robustly optimized BERT pretraining approach](#). *CoRR*, abs/1907.11692.
- Zeyan Liu, Zijun Yao, Fengjun Li, and Bo Luo. 2023b. [Check me if you can: Detecting chatgpt-generated academic writing using checkgpt](#). *CoRR*, abs/2306.05524.
- Christopher Manning and Hinrich Schutze. 1999. *Foundations of statistical natural language processing*. MIT press.
- David E Meyer and Roger W Schvaneveldt. 1971. Facilitation in recognizing pairs of words: evidence of a dependence between retrieval operations. *Journal of experimental psychology*, 90(2):227.
- Eric Mitchell, Yoonho Lee, Alexander Khazatsky, Christopher D. Manning, and Chelsea Finn. 2023. [Detectgpt: Zero-shot machine-generated text detection using probability curvature](#). In *International Conference on Machine Learning, ICML 2023, 23-29 July 2023, Honolulu, Hawaii, USA*, volume 202 of *Proceedings of Machine Learning Research*, pages 24950–24962. PMLR.
- Shashi Narayan, Shay B. Cohen, and Mirella Lapata. 2018. [Don’t give me the details, just the summary! topic-aware convolutional neural networks for extreme summarization](#). In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing, Brussels, Belgium, October 31 - November 4, 2018*, pages 1797–1807. Association for Computational Linguistics.
- Gonzalo Navarro. 2001. [A guided tour to approximate string matching](#). *ACM Comput. Surv.*, 33(1):31–88.
- James H Neely. 1977. Semantic priming and retrieval from lexical memory: Roles of inhibitionless spreading activation and limited-capacity attention. *Journal of experimental psychology: general*, 106(3):226.
- Charlotte Nicks, Eric Mitchell, Rafael Rafailov, Archit Sharma, Christopher Manning, Chelsea Finn, and Stefano Ermon. 2023. Language model detectors are easily optimized against. In *Socially Responsible Language Modelling Research*.
- Terence Odlin. 2003. Cross-linguistic influence. *The handbook of second language acquisition*, pages 436–486.
- Thierry Olive. 2004. Working memory in writing: Empirical evidence from the dual-task technique. *European Psychologist*, 9(1):32–42.
- Kishore Papineni, Salim Roukos, Todd Ward, and Wei-Jing Zhu. 2002. Bleu: a method for automatic evaluation of machine translation. In *Proceedings of the 40th annual meeting of the Association for Computational Linguistics*, pages 311–318.
- Maja Popovic. 2015. [chrF: character n-gram f-score for automatic MT evaluation](#). In *Proceedings of the Tenth Workshop on Statistical Machine Translation, WMT@EMNLP 2015, 17-18 September 2015, Lisbon, Portugal*, pages 392–395. The Association for Computer Linguistics.
- Xipeng Qiu, Tianxiang Sun, Yige Xu, Yunfan Shao, Ning Dai, and Xuanjing Huang. 2020. [Pre-trained models for natural language processing: A survey](#). *CoRR*, abs/2003.08271.
- Alec Radford, Jeffrey Wu, Rewon Child, David Luan, Dario Amodei, Ilya Sutskever, et al. 2019. Language models are unsupervised multitask learners. *OpenAI blog*, 1(8):9.
- Colin Raffel, Noam Shazeer, Adam Roberts, Katherine Lee, Sharan Narang, Michael Matena, Yanqi Zhou, Wei Li, and Peter J. Liu. 2020. [Exploring the limits of transfer learning with a unified text-to-text transformer](#). *J. Mach. Learn. Res.*, 21:140:1–140:67.
- Vipul Raheja, Dhruv Kumar, Ryan Koo, and Dongyeop Kang. 2023. [Coedit: Text editing by task-specific instruction tuning](#). In *Findings of the Association for Computational Linguistics: EMNLP 2023, Singapore, December 6-10, 2023*, pages 5274–5291.

- Pranav Rajpurkar, Jian Zhang, Konstantin Lopyrev, and Percy Liang. 2016. [Squad: 100, 000+ questions for machine comprehension of text](#). In *Proceedings of the 2016 Conference on Empirical Methods in Natural Language Processing, EMNLP 2016, Austin, Texas, USA, November 1-4, 2016*, pages 2383–2392. The Association for Computational Linguistics.
- Vinu Sankar Sadasivan, Aounon Kumar, Sriram Balasubramanian, Wenxiao Wang, and Soheil Feizi. 2023. [Can ai-generated text be reliably detected?](#) *CoRR*, abs/2303.11156.
- Thibault Sellam, Dipanjan Das, and Ankur P. Parikh. 2020. [BLEURT: learning robust metrics for text generation](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics, ACL 2020, Online, July 5-10, 2020*, pages 7881–7892. Association for Computational Linguistics.
- Matthew G. Snover, Bonnie J. Dorr, Richard M. Schwartz, Linnea Micciulla, and John Makhoul. 2006. [A study of translation edit rate with targeted human annotation](#). In *Proceedings of the 7th Conference of the Association for Machine Translation in the Americas: Technical Papers, AMTA 2006, Cambridge, Massachusetts, USA, August 8-12, 2006*, pages 223–231. Association for Machine Translation in the Americas.
- Irene Solaiman, Miles Brundage, Jack Clark, Amanda Askeil, Ariel Herbert-Voss, Jeff Wu, Alec Radford, and Jasmine Wang. 2019. [Release strategies and the social impacts of language models](#). *CoRR*, abs/1908.09203.
- Harald Stiff and Fredrik Johansson. 2022. [Detecting computer-generated disinformation](#). *Int. J. Data Sci. Anal.*, 13(4):363–383.
- Jinyan Su, Terry Yue Zhuo, Di Wang, and Preslav Nakov. 2023. [Detectllm: Leveraging log rank information for zero-shot detection of machine-generated text](#). In *Findings of the Association for Computational Linguistics: EMNLP 2023, Singapore, December 6-10, 2023*, pages 12395–12412. Association for Computational Linguistics.
- John Sweller. 1988. Cognitive load during problem solving: Effects on learning. *Cognitive science*, 12(2):257–285.
- Ruixiang Tang, Yu-Neng Chuang, and Xia Hu. 2023. [The science of detecting llm-generated texts](#). *CoRR*, abs/2303.07205.
- Christoforos Vasilatos, Manaar Alam, Talal Rahwan, Yasir Zaki, and Michail Maniatakis. 2023. [Howkgpt: Investigating the detection of chatgpt-generated university student homework through context-aware perplexity analysis](#). *CoRR*, abs/2305.18226.
- Alex Wang, Amanpreet Singh, Julian Michael, Felix Hill, Omer Levy, and Samuel R. Bowman. 2018. [GLUE: A multi-task benchmark and analysis platform for natural language understanding](#). In *Proceedings of the Workshop: Analyzing and Interpreting Neural Networks for NLP, BlackboxNLP@EMNLP 2018, Brussels, Belgium, November 1, 2018*, pages 353–355. Association for Computational Linguistics.
- Ben Wang and Aran Komatsuzaki. 2021. GPT-J-6B: A 6 Billion Parameter Autoregressive Language Model. <https://github.com/kingoflolz/mesh-transformer-jax>.
- Junchao Wu, Shu Yang, Runzhe Zhan, Yulin Yuan, Derek F. Wong, and Lidia S. Chao. 2023. [A survey on llm-generated text detection: Necessity, methods, and future directions](#). *CoRR*, abs/2310.14724.
- Zhilin Yang, Zihang Dai, Yiming Yang, Jaime G. Carbonell, Ruslan Salakhutdinov, and Quoc V. Le. 2019. [Xlnet: Generalized autoregressive pretraining for language understanding](#). In *Advances in Neural Information Processing Systems 32: Annual Conference on Neural Information Processing Systems 2019, NeurIPS 2019, December 8-14, 2019, Vancouver, BC, Canada*, pages 5754–5764.
- Weizhe Yuan, Graham Neubig, and Pengfei Liu. 2021. [Bartscore: Evaluating generated text as text generation](#). In *Advances in Neural Information Processing Systems 34: Annual Conference on Neural Information Processing Systems 2021, NeurIPS 2021, December 6-14, 2021, virtual*, pages 27263–27277.
- Runzhe Zhan, Xinyi Yang, Derek F Wong, Lidia S Chao, and Yue Zhang. 2024. Prefix text as a yarn: Eliciting non-english alignment in foundation language model. *arXiv preprint arXiv:2404.16766*.
- Susan Zhang, Stephen Roller, Naman Goyal, Mikel Artetxe, Moya Chen, Shuohui Chen, Christopher Dewan, Mona T. Diab, Xian Li, Xi Victoria Lin, Todor Mihaylov, Myle Ott, Sam Shleifer, Kurt Shuster, Daniel Simig, Punit Singh Koura, Anjali Sridhar, Tianlu Wang, and Luke Zettlemoyer. 2022. [OPT: open pre-trained transformer language models](#). *CoRR*, abs/2205.01068.
- Yue Zhang, Leyang Cui, Enbo Zhao, Wei Bi, and Shuming Shi. 2023. [Robustgec: Robust grammatical error correction against subtle context perturbation](#). In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing, EMNLP 2023, Singapore, December 6-10, 2023*, pages 16780–16793.
- Biru Zhu, Lifan Yuan, Ganqu Cui, Yangyi Chen, Chong Fu, Bingxiang He, Yangdong Deng, Zhiyuan Liu, Maosong Sun, and Ming Gu. 2023. [Beat llms at their own game: Zero-shot llm-generated text detection via querying chatgpt](#). In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing, EMNLP 2023, Singapore, December 6-10, 2023*, pages 7470–7483. Association for Computational Linguistics.

A Related Work

A.1 White-box LLM-generated Text Detection

The white-box LLM-generated text detection method needs to be implemented by accessing the model. The current white-box approaches employ zero-shot techniques, wherein specific metrics are calculated by extracting the logits from the LLM output. These calculated values are subsequently compared against a statistically derived threshold, which serves as a criterion for the identification of LLM-generated text. The most widely used metric is Log-Likelihood (Solaiman et al., 2019), which appraises whether a given text was generated by LLM by accessing source LLM to measure the average token-wise log probability of each token. Similarly, Rank (Gehrmann et al., 2019) calculates the average of the absolute rank and entropy values for each token, while Log-Rank (Gehrmann et al., 2019) applies the log function to further calculate the rank value of each token based on Rank. A notable innovation in this domain is the Log-Likelihood and Log-Rank Ratio (LRR) introduced by Su et al. (2023), which combines Log-Likelihood and Log-Rank, and comprehensively considers two metrics by taking the divided value.

Certain white-box methods perform LLM-generated text detection by quantifying metric variations following perturbations. DetectGPT (Mitchell et al., 2023) distinguishes LLM-generated text by introducing perturbations to the original text via a T5 model (Raffel et al., 2020) and measuring the resultant alterations in the source LLM’s log probability. This method capitalizes on the observation that the average decrease in log probability for text output from perturbed LLMs consistently exceeds that of perturbed human-written text. Another similar and contemporaneous work initiative by Su et al. (2023) while performs the detection task by measuring log-rank. Although perturbation-based curve statistical methods exhibit superior capabilities to conventional zero-shot methods, the time overhead of perturbation greatly reduces the usability of this method. In response to this limitation, Fast-DetectGPT (Bao et al., 2023) replaced the perturbation step of DetectGPT with a more efficient sampling step to achieve superior efficacy and velocity in text detection performance.

A.2 Black-box LLM-generated Text Detection

Black-box LLM-generated text detection mainly identifies LLM-generated text by training neural models. The method of fine-tuning language model classifiers is the most widely used black-box method, which usually requires a large number of human-written and LLM-generated samples. Pre-trained language models such as BERT (Devlin et al., 2019), RoBERTa (Liu et al., 2019), and XLNet (Yang et al., 2019) show excellent semantic comprehension and effectively improve the performance of NLP tasks (Qiu et al., 2020), especially text classification. Previous research has shown that the fine-tuned classifier based on RoBERTa shows strong capabilities for the detection of LLM-generated text (Guo et al., 2023; Liu et al., 2023a,b; Chen et al., 2023). Notably, these fine-tuned classifiers have been shown to outperform other methodologies, such as zero-shot statistics and watermark approaches, while also exhibiting a commendable level of adversarial robustness.

Recently, we noticed that Zhu et al. (2023) demonstrated a novel black-box zero-shot method for detecting LLM-generated text. This method employs BARTScore (Yuan et al., 2021), a metric that calculates the semantic similarity between a piece of text that has been revised by ChatGPT and the original text, with the foundational hypothesis that ChatGPT is more inclined to introduce minimal modifications to LLM-generated text as compared to text written by humans.

B Experimental Settings

B.1 Black-box Zero-shot Detection Task Settings

Our research focuses on black-box zero-shot LLM generated text detection, under the stipulation that our proposed model has not been trained on any human-written and LLM-generated text pairs or has access to the source model of generated text. This research focus is particularly consistent with the real-world scenarios, where the specific identity of the generative model employed for text generation may often remain obscured. This means that the task of identifying LLM-generated text from unknown model is more important, and we call this task the “Black-box Detection Task”.

The setting of the “Black-box Detection Task” significantly distinguishes our approach from both the traditional zero-shot detection methods and supervised fine-tuning classifiers. The traditional

zero-shot detection methods require to access the language model to identify text token irregularities, which means that in the “Black-box Detection Task”, the traditional zero-shot method needs to rely on a surrogate model instead of the source model to perform the detection task. In contrast, supervised classifiers that are fine-tuned typically harness language models to distill vectorized representations of textual features, a process contingent on a substantial corpus of annotated samples for training purposes.

Our zero-shot methodology diverges from these traditional strategies by incorporating an auxiliary grammatical error correction model, which serves to accentuate and leverage the grammatical discrepancies between human-written text and that generated by LLMs. Within the scope of this study, we engage predominantly with experiments conducted under the “Black-box Detection Task” settings. We follow the experiments of Fast-DetectGPT (Bao et al., 2023) and use GPT-Neo-2.7B⁵ as the surrogate model of the traditional zero-shot method.

B.2 Datasets Settings

Human Datasets We follow DetectGPT (Mitchell et al., 2023) and select human-written texts covering various everyday domains and practical LLMs applications to build an LLM-generated text dataset. Specifically, XSum (Narayan et al., 2018) is used to represent news writing, and Writing Prompts (Fan et al., 2018) is used to represent creative writing. We did not use SQuAD (Rajpurkar et al., 2016) because the text samples of this dataset are too short. For the purpose of our experiments, we extracted a balanced set of 500 human-written samples and 500 LLM-generated samples for the detection task. This was done with the express intent of ensuring a robust and rigorous analysis. Furthermore, we imposed a stringent criterion with respect to the length of the text samples: each sample included in our study was required to comprise a minimum of 300 words, so as to facilitate a more accurate assessment of the reliability of our approach.

Generative Models and Settings The generative model we use is consistent with the generative model used in DetectGPT’s experiments, as shown in Table 2. These models are organized according to parameter size, including GPT-2 (Radford et al.,

2019), OPT-2.7b (Zhang et al., 2022), GPT-Neo-2.7b (Kashyap et al., 2022), GPT-J-6b (Wang and Komatsuzaki, 2021), GPT-NeoX-20b (Black et al., 2022) and GPT-3.5-turbo. Additionally, we also add the powerful PaLM2 (Anil et al., 2023) as a generative model to verify the effectiveness of our method.

For the generative tasks involving open-source models, we operationalized the text generation processes on a single Tesla A100 GPU (80GB) with full precision. For models with a larger parameter scale, up to 20 billion parameters (e.g. GPT-NeoX-20b), half precision (float16) was employed. The temperature setting for text generation was maintained at the default value of 1 to foster the generation of creative content. Furthermore, the parameters “top_p” and “top_k” were configured to 40 and 0.96, respectively. We provide the first sentence of the text as a prefix to guide the model to perform the generation task. In order to ensure the length consistency of the LLM-generated text and human-written text, we set “min_length” to 800 and “max_length” to 1024. This ensured the production of sufficiently lengthy texts, which were subsequently truncated to lengths closely mirroring those of human-written samples, all the while maintaining sentence integrity.

For closed-source models, we use OpenAI API⁷ and Google API⁸ to perform text generation tasks in the form of conversations. Referring to the experimental prompt of Fast-DetectGPT (Bao et al., 2023), we instructed the models to assume the personas of news and fiction writers to generate news articles and narrative stories respectively. The temperature of text generation also uses the default parameter 1. We provide the “word length” and “first sentence text” of the human-written sample in the prompt as <word count> and <prefix> to provide additional information to guide the LLMs generate a text that aligns with the specified requirements. The specific API Messages are as follows:

Listing 1: Message for XSum

```
[
  {'role': 'system', 'content': 'You_are_a_News
  ↪ _writer.'},
  {'role': 'user', 'content': 'Please_write_an_
  ↪ article_with_about_<word_count>_words_
  ↪ starting_exactly_with:_<prefix>'},
]
```

⁵<https://huggingface.co/EleutherAI/gpt-neo-2.7B>

⁷<https://openai.com/blog/openai-api>

⁸<https://ai.google.dev/models/palm>

Generative Model	Model Path / Service	Parameters
<i>Open Source Model</i>		
GPT-2 (Radford et al., 2019)	openai-community/gpt2	124M
OPT-2.7b (Zhang et al., 2022)	facebook/opt-2.7b	2.7B
Neo-2.7b (Kashyap et al., 2022)	EleutherAI/gpt-neo-2.7B	2.7B
GPT-J (Wang and Komatsuzaki, 2021)	EleutherAI/gpt-j-6b	6B
NeoX-20b (Black et al., 2022)	EleutherAI/gpt-neox-20b	20B
<i>Closed Source Model</i>		
ChatGPT ⁶	OpenAI/gpt-3.5-turbo	N/A
PaLM2 (Anil et al., 2023)	Google/chat-bison@002	N/A

Table 2: Details of the source models that is used to generate LLM-generated text.

Listing 2: Message for Writing Prompts

```
[
  {'role': 'system', 'content': 'You_are_a_
  ↳ Fiction_writer.'},
  {'role': 'user', 'content': 'Please_write_an_
  ↳ article_with_about_<word_count>_words_
  ↳ starting_exactly_with:_<prefix>'},
]
```

B.3 Details of the Compared Detection Methods

The details of the baseline methods we compared in our experiments are as follows:

Log-Likelihood This method employs a language model to calculate the log probability for each token within a text (Gehrmann et al., 2019; Kirchenbauer et al., 2023). Specifically, we involve averaging the log probabilities of all tokens, thereby producing a score that reflects the text’s Log-Likelihood. Higher scores suggest a greater probability of the text being LLM-generated.

Rank In this approach, the absolute rank of each word within a text is determined based on its preceding context (Gehrmann et al., 2019). Subsequently, a text’s overall score is calculated by averaging these rank values across all words. Similarly with Log-Likelihood, a critical observation is that lower scores indicate a higher Log-Likelihood of the text being LLM-generated.

Log-Rank This methodology leverages a language model to assess the contextual prominence of each word within a text by applying the Log-Rank metric (Gehrmann et al., 2019). Unlike the conventional Rank metric, which relies on the absolute rank of words, the Log-Rank approach modifies this by initially applying a logarithmic transformation to each word’s rank value. Specifically, this process entails computing the logarithm of the rank

positions of all words, followed by the aggregation of these log-transformed ranks to formulate a composite score.

LRR Su et al. (2023) proposed an improved zero-sample method of Log-Likelihood Log-Rank Ratio (LRR), which comprehensively considers Log-Likelihood and Log-Rank to obtain better performance by providing supplementary information for the given text. Texts with higher LRR are more likely to be generated by the target LLM.

NPR The Normalized Perturbed Log-Rank (NPR) (Su et al., 2023), applies perturbations to text, aiming to exploit the differential sensitivity of LLM-generated text and human-written text to such disturbances. LLM-generated text typically show a more substantial increase in the Log-Rank score following perturbations, suggesting a higher NPR score for LLM-generated text than human-written text.

DetectGPT Mitchell et al. (2023) introduced DetectGPT, a method that evaluates changes in a model’s log probability function in response to slight modifications to the text. The underlying theory suggests that LLM-generated texts are often situated at the local optima of the model’s log probability function, leading to a decrease in log probability for perturbed machine-generated texts compared to their original versions. In contrast, similar perturbations applied to human-written texts can result in either an increase or decrease in log probability.

Fast-DetectGPT While DetectGPT has been at the forefront of zero-shot detection, its substantial computational requirements have hampered its widespread application. Bao et al. (2023) have introduced Fast-DetectGPT, which employs the concept of conditional probability curvature to under-

score the disparities in word choice between LLMs and humans. By substituting DetectGPT’s perturbation technique with a more efficient sampling method, Fast-DetectGPT significantly enhances the performance and efficiency of its predecessor across a variety of test scenarios, achieving a remarkable 340-fold increase in detection speed.

BARTScore-CNN BARTScore-CNN (Zhu et al., 2023) proposes a zero-shot, black-box methodology to discern texts produced by LLMs. The core principle involves modifying the target text with the ChatGPT model, predicated on the hypothesis that ChatGPT will enact fewer alterations to LLM-generated content compared to human-authored texts. This is because LLM-generated texts align more closely with the generative patterns and statistical models that LLMs, including ChatGPT, are trained on. Therefore, a higher similarity between the original text and its ChatGPT-modified counterpart suggests a greater possibility of the text being LLM-generated.

OpenAI Detector Solaiman et al. (2019) released a dataset encompassing GPT-2 outputs and WebText samples, serving as a foundation for distinguishing between human-authored texts and those generated by AI (Solaiman et al., 2019). In addition to fine-tuning a RoBERTa model with the 1.5B-parameter GPT-2 outputs⁹, they introduced a simple yet effective classifier. This classifier is based on logistic regression and trained on TF-IDF unigram and bigram features, specifically designed to detect GPT-2 generated texts.

C Additional Experimental Results

C.1 Additional Metrics for Main Experiment

We have reported additional metrics from the main experiment to help better understand the effectiveness of our approach, as a single AUROC score may not capture the multifaceted nature of the problem comprehensively. We have included the F1 score in our report to provide a more holistic evaluation of our approach, as it strikes a balance between Precision and Recall metrics, and can also assist in identifying whether the detector is overfitting. We also focused on Recall, which focuses more on the detector’s ability to recognize text generated by LLM.

⁹<https://github.com/openai/gpt-2-output-dataset>

The results presented in Table 3 show that our method exhibits commendable comprehensive performance. It achieves performance nearly identical to supervised Roberta-Large fine-tuning on smaller generative models, and outperform all other zero-shot and supervised methods on larger and more powerful generative models, reaching reliable application level. The Recall scores underscore the robust capability of our method in recognizing LLM-generated text, with an average performance exceeding 97%. We note that the infrequent errors in our detection results are caused by unusual irregularities in individual LLM-generated samples (evidence for which is provided in Figure 2), as the majority of the Recall scores are marginally lower than the F1 Scores. In other words, our method exhibits an almost negligible misclassification rate on human-written text. This is confirmed by manual inspection of the confusion matrix resulting from our experiments. Indeed, we posit that this characteristic is a critical requirement for a more real-world detector: it should maintain a potent detection capability for LLM-generated text while ensuring an exceedingly low false positive rate for human-written text. This is because humans are more tolerant of false negatives with respect to LLM-generated text as opposed to false positives for human-written text. Misclassifying human-written text as LLM-generated can lead to more severe issues of fairness (for instance, a student’s diligently composed essay being erroneously flagged as plagiarized.) and erode trust in such detectors.

C.2 Detailed Statistical Results of BLEURT

The zero-shot detection methods performs the detection task by computing the evaluation score for each samples and comparing it with a statistical threshold. In our study, we record the mean and variance scores of the evaluation scores of our method, which describe the difference-amplified similarity between the grammar corrected texts and the original texts. Texts exhibiting a higher degree of similarity are indicative of a higher likelihood of being generated by LLMs. As demonstrated in Table 4, the mean evaluation scores for texts generated by LLMs significantly exceed those of human-written texts, often by a factor of approximately 1.3 to 1.5, and this observation is consistently maintained across various domains and generative models. Intriguingly, models of larger sizes and superior performance exhibit a more pronounced dispar-

Dataset	Method	GPT-2		OPT-2.7		Neo-2.7		GPT-J		NeoX		GPT-3.5		PaLM2		Avg.	
		Rec	F1	Rec	F1	Rec	F1	Rec	F1	Rec	F1	Rec	F1	Rec	F1	Rec	F1
XSum	Likelihood	00.00	00.00	66.40	70.86	86.80	83.62	63.80	67.65	81.20	73.15	93.00	86.99	87.40	88.73	68.37	67.29
	Rank	67.80	76.17	68.20	76.97	78.60	85.15	74.00	79.14	67.00	75.62	61.80	67.24	58.40	64.81	67.97	75.01
	Log-Rank	00.00	00.00	79.40	77.91	89.40	88.25	75.80	75.19	76.40	75.56	88.00	85.35	87.00	87.61	70.86	69.98
	LRR	63.00	60.69	85.60	83.75	95.00	94.15	85.60	83.75	81.40	80.43	69.40	72.82	75.00	76.45	79.29	78.86
	NPR	72.84	78.37	62.35	72.23	69.06	80.13	74.35	76.09	60.98	70.45	47.46	55.98	32.90	42.30	59.99	67.94
	DetectGPT	00.52	01.04	98.83	63.11	21.71	31.76	100.0	63.69	98.83	63.02	01.19	02.34	11.53	18.00	47.52	34.71
	Fast-DetectGPT	00.00	00.00	72.00	67.92	68.80	62.65	81.20	82.94	74.40	71.33	81.60	73.64	66.40	76.40	63.49	62.13
	BARTScore-CNN	00.00	00.00	54.00	57.50	69.20	65.03	63.40	61.85	26.20	35.64	91.20	91.47	68.40	74.91	53.20	55.20
	RoB-base	98.40	98.10	93.40	92.65	99.00	96.30	90.60	91.79	85.80	87.28	46.20	53.41	37.60	50.81	78.71	81.48
	RoB-large	99.00	99.49	93.40	94.53	98.20	98.00	97.80	94.49	89.80	90.61	33.60	43.63	38.60	50.99	78.63	81.68
	GECScore (Ours)	96.60	98.27	96.80	98.37	94.80	97.23	96.40	98.16	96.20	98.06	100.0	100.0	99.80	99.89	97.22	98.56
WP	Likelihood	88.00	73.82	84.60	83.92	96.00	94.02	94.40	89.81	91.60	88.07	97.00	93.62	91.60	92.15	91.89	87.92
	Rank	87.80	91.55	90.40	92.52	92.00	94.06	90.80	93.22	86.00	89.21	83.80	86.65	83.20	83.28	87.71	90.07
	Log-Rank	82.60	76.26	92.6	87.27	94.40	96.01	91.80	91.34	92.80	89.40	97.20	91.61	87.60	90.03	91.29	88.85
	LRR	90.40	84.01	95.00	91.61	98.80	98.21	93.00	94.41	89.80	91.53	81.40	81.80	85.40	82.27	90.54	89.12
	NPR	85.94	90.88	86.81	88.96	87.95	91.54	89.04	92.19	78.68	62.33	78.68	62.33	85.18	73.89	84.61	80.30
	DetectGPT	00.00	00.00	80.00	61.46	54.46	61.70	67.03	62.00	00.00	00.00	75.00	62.06	68.98	70.11	49.35	45.33
	Fast-DetectGPT	98.80	66.48	82.20	82.53	71.80	73.64	92.60	93.72	00.00	00.00	96.60	97.57	96.80	97.58	76.97	73.07
	BARTScore-CNN	68.00	63.84	73.74	76.34	74.00	73.41	80.40	74.23	60.20	66.44	95.60	96.46	89.20	90.65	77.31	77.34
	RoB-base	99.00	99.39	94.40	95.83	95.40	96.36	93.20	94.90	84.80	90.21	35.40	45.55	45.40	57.32	78.23	82.79
	RoB-large	99.80	99.70	95.00	95.57	99.00	98.31	94.00	94.75	94.60	90.96	97.80	67.68	64.20	62.94	92.06	87.13
	GECScore (Ours)	97.40	98.58	95.80	97.16	97.40	98.48	97.80	98.78	97.20	98.48	99.80	99.89	99.80	99.89	97.88	98.75

Table 3: Recall and F1 score (%) for detecting LLM-generated text from the 7 generative models on the 2 given dataset for GECScore and other 10 baselines. We evaluate using 500 LLM-generated samples and 500 human-written samples per dataset.

Models →	GPT-2		OPT-2.7		Neo-2.7		GPT-J		NeoX		GPT-3.5		PaLM2	
	Avg	Var	Avg	Var	Avg	Var	Avg	Var	Avg	Var	Avg	Var	Avg	Var
XSum														
Human-written	1.012e-03	4e-09	1.009e-03	4e-09	1.016e-03	4.1e-09	1.013e-03	4e-09	1.011e-03	4e-09	0.968e-03	3.7e-09	0.971e-03	3.7e-09
LLM-generated	1.374e-03	1.05e-08	1.376e-03	1.14e-08	1.370e-03	1.52e-08	1.373e-03	1.43e-08	1.374e-03	1.37e-08	1.410e-03	2.5e-09	1.408e-03	4.2e-09
Threshold	1.139e-03		1.124e-03		1.127e-03		1.134e-03		1.135e-03		1.112e-03		1.197e-03	
Writing Prompts														
Human-written	0.998e-03	3.999e-09	1.002e-03	3.538e-09	0.992e-03	3.472e-09	0.991e-03	3.463e-09	0.993e-03	3.477e-09	0.932e-03	3.490e-09	0.931e-03	3.481e-09
LLM-generated	1.356e-03	9.654e-09	1.354e-03	1.224e-08	1.363e-03	8.997e-09	1.364e-03	1.029e-08	1.362e-03	9.692e-09	1.412e-03	3.518e-09	1.413e-03	3.251e-09
Threshold	1.139e-03		1.124e-03		1.127e-03		1.134e-03		1.135e-03		1.112e-03		1.197e-03	

Table 4: Statistics of BLEURT

ity in this distribution, which further corroborates the efficacy of our method in the text generated by powerful and unknown LLMs.

Moreover, the variance observed within the evaluation scores for LLM-generated texts is lower than that for human-written texts, implying that the disparity amongst human-written texts is relatively more substantial in comparison to that amongst LLM-generated texts.

D Details of Robust Performance

D.1 Robustness Against Paraphrase and Perturb Attacks

The robustness of the detection method to adversarial challenges is of paramount importance, particularly in the context of practical applications where LLM-generated text detectors may confront potential attacks, such as human post-editing of the LLM-generated text. Related detection defense and attack works have been fully summarized in recent work (Ghosal et al., 2023b; Wu et al., 2023). To rigorously evaluate the efficacy of our proposed

method, we introduce relevant attack methods including paraphrase and perturbations attacks to test the robustness of the detector. Paraphrase attacks were executed utilizing a T5 paraphrasing model¹⁰, which is designed to reformulate text so as to preserve its original semantic content. We employed DeepWordBug (Gao et al., 2018), a black-box attack mechanism that implements character-level transformations on strategically selected key tokens within the input text. This method seeks to minimize the edit distance between the original input and the adversarially generated samples, thereby challenging the detector’s ability to maintain accurate performance.

The results in Table 5 and Table 6 reported that the performance of all methods drops significantly when faced with paraphrased and adversarially perturbed text. Specifically, all zero-shot methods manifested an average performance reduction of 16.22% AUROC when encountering paraphrase

¹⁰https://huggingface.co/Vamsi/T5_Paraphrase_Paws

Datasets → Method ↓	XSum								WritingPrompts							
	GPT-2	OPT-2.7	Neo-2.7	GPT-J	NeoX	GPT-3.5	PaLM2	Avg.	GPT-2	OPT-2.7	Neo-2.7	GPT-J	NeoX	GPT-3.5	PaLM2	Avg.
<i>Zero-shot Methods</i>																
Likelihood	06.65	35.46	41.73	32.27	31.07	76.94	79.84	42.47	53.36	69.20	84.95	77.64	74.90	85.55	85.63	75.89
Rank	60.46	58.40	66.71	58.81	52.53	61.69	57.61	59.45	89.50	88.52	91.69	88.95	84.52	80.59	79.26	86.14
Log-Rank	10.75	41.99	51.34	39.68	36.48	76.56	78.82	47.94	61.81	74.92	89.09	82.36	79.28	84.05	84.15	79.38
LRR	40.69	62.11	74.53	62.65	55.32	72.32	74.07	63.09	80.71	86.68	95.34	91.28	88.14	77.50	77.32	85.28
NPR	64.61	57.28	65.59	59.66	53.71	55.32	45.60	57.39	88.64	86.31	89.57	86.57	81.79	72.65	76.14	83.09
DetectGPT	05.18	12.30	18.04	12.68	13.96	27.17	30.55	17.12	06.77	24.86	40.38	36.15	37.65	58.62	67.40	38.83
Fast-DetectGPT	04.75	23.74	16.30	38.54	26.32	47.90	65.70	31.89	25.16	50.27	43.31	71.11	54.34	92.52	93.82	61.50
BARTScore-CNN	53.15	58.49	61.90	59.14	46.60	91.23	79.43	64.27	73.44	75.29	83.35	81.74	66.53	96.72	94.29	81.62
<i>Supervised Methods</i>																
RoB-base	98.37	95.45	97.52	94.93	92.19	60.08	61.84	85.76	99.96	98.82	99.55	98.17	96.12	52.98	60.30	86.55
RoB-large	99.97	99.08	99.81	98.91	98.42	57.47	60.13	87.68	99.99	99.56	99.83	99.42	98.58	35.82	51.97	83.59
<i>Our Zero-shot Method: GECScore</i>																
GECScore	99.63	99.61	99.91	99.60	99.62	99.40	100.0	99.68	99.74	99.77	99.68	99.40	99.46	99.80	99.80	99.66

Table 5: Comparison with 10 other baselines on 2 given datasets and 7 given generative models in paraphrased data settings. The evaluation metric is AUROC(%). We evaluate using 500 LLM-generated samples and 500 human-written samples per dataset.

attacks, and an average decrement of 51.09% AUROC when encountering perturbation attacks. Although the supervised method demonstrated commendable detection accuracy in paraphrase attacks, it nonetheless experienced a performance diminution of around 21% AUROC under the perturbation attack paradigm. In contrast, our method achieves competitive detection performance across all attack scenarios, exhibits the strongest detection capability, and demonstrates the most robust detection capability without any performance degradation.

D.2 Robustness Across Domains and Generative Models

Our detector is expected to achieve a high degree of generalizability across various domains and generative models for higher usability. We have conducted a comparative analysis of our method’s performance against a spectrum of extant detection techniques, utilizing datasets derived from disparate domains and generative models. We compare the performance of our method with other detection technique on datasets derived from different domains and generative models. The results in Table 1 show that our method has a consistently high level of efficacy when applied to XSum and Writing Prompts datasets. In contrast, the zero-shot methods are more struggle to detect on XSum than Writing Prompts dataset, potentially due to the influence of the specific stylistic characteristics inherent to the domain’s text.

Our method distinguishes itself by maintaining a commendable level of performance on texts generated by a diverse array of generative models, achieving an average AUROC score of 96%. Notably, the detection efficacy on all evaluated

generative models basically exceeds 90% AUROC. Our analysis reveals that traditional zero-shot methods are susceptible to the type of generative model in use. For example, Fast-DetectGPT (Bao et al., 2023) performs more than 80% AUROC on both GPT-J and PaLM2, but only performs 13.29% AUROC on GPT2. Furthermore, we observed that the black-box zero-shot detection method, BARTScore-CNN (Zhu et al., 2023), showcases competitive performance on texts generated by GPT-3.5-turbo. However, its performance on PaLM2-generated texts is markedly less consistent, achieving a 79% AUROC score on the XSum samples and demonstrating notably unreliable detection capabilities for lower-performing open-source models (averaging around 65% AUROC). In contrast, our method maintains consistently reliable performance both across domains and generative models, which emphasizes the possibility of our method to remain competitive in other unknown domains and when facing unknown models.

E Samples Distribution Ablation Analysis

The use of zero-shot detectors in practical scenarios requires the collection of more diverse samples to enhance their robustness. We assess the impact of the sample set size n on our method. The evaluation will be conducted from two perspectives: firstly, the influence of the sample set size n under balanced conditions; secondly, the effect of the imbalance ratio between LLM-generated text and human-written text on our method.

Datasets → Method ↓	XSum								WritingPrompts							
	GPT-2	OPT-2.7	Neo-2.7	GPT-J	NeoX	GPT-3.5	PaLM2	Avg.	GPT-2	OPT-2.7	Neo-2.7	GPT-J	NeoX	GPT-3.5	PaLM2	Avg.
Zero-shot Methods																
Likelihood	00.57	04.27	05.59	03.43	03.49	07.48	25.15	07.14	09.10	25.12	29.32	24.08	19.91	44.25	47.33	28.44
Rank	01.06	01.17	01.83	01.48	00.94	01.32	02.07	14.10	24.89	29.52	28.36	25.14	21.74	13.35	13.14	22.30
Log-Rank	00.54	04.11	06.47	03.64	03.51	08.33	26.16	07.53	11.72	28.48	33.60	26.93	22.60	43.28	46.15	30.39
LRR	02.09	07.13	15.28	07.90	06.55	17.34	31.44	12.53	26.39	41.92	48.80	38.42	33.83	41.10	42.79	39.03
NPR	01.85	01.75	01.97	02.06	01.00	01.37	01.24	01.60	27.90	25.64	26.77	25.87	22.88	10.24	11.62	21.56
DetectGPT	04.19	06.75	07.35	06.50	07.25	09.66	12.07	07.68	04.71	12.76	19.56	14.87	16.64	49.19	49.29	23.86
Fast-DetectGPT	38.50	66.33	63.22	79.91	69.19	72.14	80.22	67.07	67.18	87.04	84.33	95.01	89.47	98.68	98.25	88.56
BARTScore-CNN	02.20	05.76	05.22	03.96	06.93	31.92	23.69	11.38	17.02	23.56	20.17	19.16	21.80	72.08	65.83	34.23
Supervised Methods																
RoB-base	84.27	53.98	58.78	52.91	51.79	78.61	75.22	65.08	90.62	60.36	56.59	54.89	51.71	79.28	79.18	67.51
RoB-large	99.82	68.65	88.51	72.18	59.07	22.43	28.87	62.79	99.92	80.24	90.36	78.63	69.61	19.25	21.61	65.66
Our Zero-shot Method: GECScore																
GECScore	97.71	97.59	95.53	96.02	97.07	99.80	99.68	97.62	96.59	97.98	98.48	98.44	99.80	99.79	98.52	98.51

Table 6: Comparison with 10 other baselines on 2 given datasets and 7 given generative models in perturbed data settings. The evaluation metric is AUROC (%). We evaluate using 500 LLM-generated samples and 500 human-written samples per dataset.

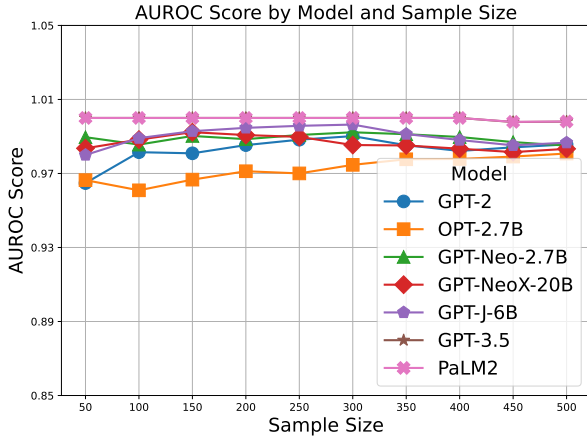


Figure 5: Effect of the Balanced Sample Set Size n .

E.1 Effect of the Balanced Sample Set Size n

We discuss the impact of using different sample sizes n for calculating thresholds on our method. Specifically, we further validate the robustness of our method under various settings where the balance between LLM-generated and human-written samples is adjusted. Our experimental results on the Writing Prompts dataset, as shown in Figure 5, indicate that our method achieves relatively stable performance across these settings with randomly sampled sets of n samples. With just 50 samples, our method is capable of consistently exceeding a performance metric of 95% within the domain.

E.2 Effect of the Imbalance Sample Set Size n

We discuss the impact of the different distributions of human-written and LLM-generated samples on our method. Specifically, we evaluate the performance of our method using various ratios of human-written to LLM-generated samples on the Writing

Prompts dataset. The results are shown in Figure 6: the left line chart displays the results for different ratios of human-written samples, each combined with 500 LLM-generated samples; the right line chart shows the results for different ratios of LLM-generated samples, each combined with 500 human-written samples. The experiments indicate that our method requires a relatively more diverse set of human-written samples compared to LLM-generated text and is less dependent on LLM-generated text. When the ratio of human-written to LLM-generated text is strictly set at 0.1, the average performance of GECScore drops to about 75%. However, as this ratio increases, the performance of our method continuously improves, stabilizing above 95% when it exceeds 0.5. This performance level is consistently maintained, demonstrating great usability. This reflects the advantages of our method in real-world applications: we have a large existing corpus of human-written text, but lack LLM-generated samples in specific domains. Moreover, with more advanced and commonly used models, such as GPT-3.5-Turbo and PaLM2, our method consistently demonstrates superior performance, emphasizing its adaptability and effectiveness across a broad range of generative models.

F Settings of Similarity Metrics and Text Length Ablation Study

F.1 Ablation Settings

We verified the impact of different similarity metrics on our proposed approach. In order to achieve this purpose, we initially employed an N-sentences sliding window technique to augment our dataset,

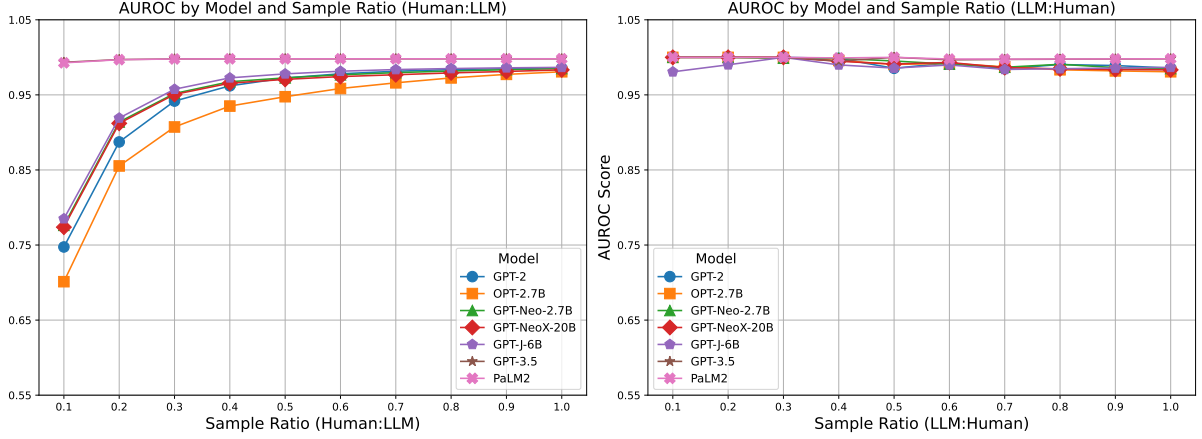


Figure 6: Effect of the Imbalance Sample Set Size n .

Metrics →	TER	Edit Distance	chrF	BLEU	GLEU	ROUGE2	METEOR	ROUGEL	ROUGE1	BLEURT
Avg. AUROC	67.74	70.31	78.92	88.31	98.20	98.96	99.11	99.26	99.26	99.51

Table 7: Average AUROC(%) of performance of difference similarity metrics on different text length. BLEURT achieves the best performance among all similarity metrics, and we use it in this paper as an example.

systematically segmenting each text sample into all conceivable complete text fragments. This segmentation was performed using the sliding window mechanism predicated on N sentences, thereby facilitating an enhancement in the diversity of text lengths within our corpus. We conducted a comprehensive analysis of the length distribution of the data-enhanced samples. The corpus was then stratified based on text length, with each category demarcated by intervals of 30 words. Finally, we sampled 500 human-written samples and 500 LLM-generated samples from each length interval and used different similarity metrics for testing.

F.2 Details of Similarity Metrics

The similarity metrics we used in our study are as follows:

BLEU The Bilingual Evaluation Understudy (BLEU) score (Papineni et al., 2002) is a widely utilized method for assessing the quality of machine translation, also employed to evaluate the similarity between generated text and reference text in text generation tasks (Haque et al., 2022). The foundation of the BLEU score calculation is the precision of n -grams (Manning and Schutze, 1999), which examines the frequency with which n -gram sequences in the generated text appear in the reference text. In our setting, the “reference” denotes the text under detection, whereas the “hypothesis” refers to its revised counterpart. The BLEU score ranges from

0 to 1, with 1 indicating a perfect match. A higher BLEU score signifies greater similarity between the original text and its revised version.

TER The Translation Edit Rate (TER) score (Snover et al., 2006) is a metric used primarily in machine translation evaluation to assess the amount of editing that a translated text requires to match a reference translation. Unlike BLEU, which focuses on the precision of matching n -grams between the translation and reference texts, TER calculates the number of edits (insertions, deletions, substitutions, and shifts) needed to change the hypothesis into one of the references. It ranges from 0 to infinity. A lower TER score is preferable, TER score of 0 indicates a perfect match between the hypothesis text and the reference text.

ChrF The Character n -gram F-score (chrF) is a metric for machine translation evaluation that calculates the similarity between generated text and a reference text using character n -grams, not word n -grams (Popovic, 2015). This method provides a detailed measure of textual similarity at the character level, capturing finer linguistic nuances that word-level metrics may overlook. Similar to the BLEU score, chrF scores range from 0 to 1, higher chrF scores indicate greater similarity between the generated and reference texts.

Edit Distance Edit Distance (Navarro, 2001) is a metric used to quantify the dissimilarity between two text strings by calculating the minimum number of operations required to transform one string into the other. These operations typically include insertions, deletions, or substitutions of characters. Unlike metrics that assess similarity or quality of text generation based on semantic or syntactic matches, Edit Distance provides a straightforward, operation-based measure of difference. The score, which can range from 0 upwards, directly correlates to the number of edit operations needed; a score of 0 indicates identical strings, while higher scores signify greater disparity.

ROUGE The Recall-Oriented Understudy for Gisting Evaluation (ROUGE) score is a set of metrics designed to evaluate the quality of summaries by comparing them to a set of reference summaries (Lin, 2004). It is particularly valuable in tasks such as text summarization and text generation, where the goal is to capture the essence of the original text. Similar to the BLEU score, ROUGE scores range from 0 to 1, where 1 denotes a perfect overlap and thus, a higher ROUGE score indicates a greater similarity between the generated text and the reference.

GLEU The General Language Understanding Evaluation (GLUE) benchmark (Wang et al., 2018) represents a comprehensive suite of resources aimed at the advancement, assessment, and in-depth analysis of natural language understanding (NLU) systems. Among these, the STS-B (Semantic Textual Similarity Benchmark) is a task designed to evaluate the ability of natural language understanding systems to determine the semantic similarity between pairs of sentences. In this task, systems are required to assign a similarity score ranging from 1 to 5 to each sentence pair, where 1 indicates minimal semantic similarity and 5 denotes a very high degree of semantic similarity.

METEOR The Metric for Evaluation of Translation with Explicit ORDERing (METEOR) score (Banerjee and Lavie, 2005) is an advanced metric designed to overcome some of the limitations of earlier evaluation methods such as BLEU, by incorporating a more sophisticated analysis of word-to-word matches between the translated text and the reference translations. It is especially useful in translation evaluation and other natural language processing tasks that require

an accurate measure of semantic and syntactic congruence. Unlike the BLEU score, METEOR not only accounts for exact word matches but also includes synonymy and stemming matches, and it introduces a penalty for word order differences. METEOR scores also range from 0 to 1, with 1 indicating an exact match between the generated text and the reference.

BLEURT BLEURT (Sellam et al., 2020) is a learning-based evaluation metric based on BERT, specifically designed for the assessment of English text generation. Traditional evaluation methods, such as BLEU and ROUGE, may not correlate well with human judgment. BLEURT offers a solution by being able to model human judgment with a few thousand potentially biased training examples. Similarly, a higher BLEURT score signifies greater similarity between the original text and its revised version.