

IMAGE CLASSIFICATION FOR CSSVD DETECTION IN CACAO PLANTS

Atuhurra Jesse, N'guessan Yves-Roland Douha, Pabitra Lenka

{atuhurra.jesse.ag2; douha.nguessan_yves-roland.dn6; lenka.pabitra.lm3} @is.naist.jp
Nara Institute of Science and Technology

ABSTRACT

The detection of diseases within plants has attracted a lot of attention from computer vision enthusiasts. Despite the progress made to detect diseases in many plants, there remains a research gap to train image classifiers to detect the cacao swollen shoot virus disease or CSSVD for short, pertinent to cacao plants. This gap has mainly been due to the unavailability of high quality labeled training data. Moreover, institutions have been hesitant to share their data related to CSSVD. To fill these gaps, we propose the development of image classifiers to detect CSSVD-infected cacao plants. Our proposed solution is based on VGG16, ResNet50 and Vision Transformer (ViT). We evaluate the classifiers on a recently released and publicly accessible KaraAgroAI Cocoa dataset. Our best image classifier, based on ResNet50, achieves 95.39% precision, 93.75% recall, 94.34% F1-score and 94% accuracy on only 20 epochs. There is a +9.75% improvement in recall when compared to previous works. Our results indicate that the image classifiers learn to identify cacao plants infected with CSSVD.

Index Terms— CSSVD, Image Classification, ResNet50, Vision Transformer, KaraAgroAI Cocoa Dataset

1. INTRODUCTION

The ability to recognize patterns in images and solve real-world problems is one of the main goals of computer vision researchers. Contemporary image classification includes training a neural network to learn the patterns within an image. From such patterns, the neural network distinguishes images that belong to different classes. Image classification has been dominated by CNN-based methods. The detection and classification of diseases within plants has attracted a lot of attention from computer vision enthusiasts, not only because they can train already available image classifiers to detect infected plants, but they can also contribute to a greater good, say, by enriching the lives of farmers. This work tackles the CSSVD disease which affects many farmers around the world. Figure 2a depicts countries where CSSVD is a major problem. Next we review recent studies that leverage image classifiers to identify diseases in plants.

A recent study by [1] presents the methods, datasets and

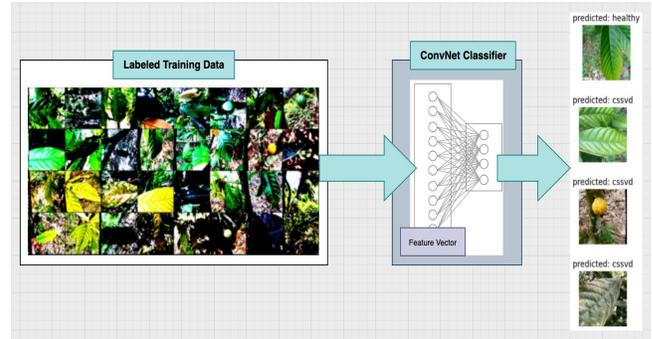


Fig. 1: ConvNet classifiers for CSSVD detection. Two ConvNets are used in this experiment. That is, VGG16 and ResNet50. In both cases, feature vectors are extracted from images of cacao leaves, stems and fruits. The classifier is then trained to extract distinguishing features to categorize an image into one of three classes, namely: Anthracnose, CSSVD, Healthy.

applications of image classification to plants. In this study, it is eminent that despite CSSVD being a major problem, it has not received a lot of researchers' attention. Specifically, this study presents no works at all about the detection of diseases in cacao plants. This research gap is in part due to lack of high quality labeled data necessary to train image classifiers to distinguish between infected and non-infected cacao plants.

To fill this gap, we propose the development of image classifiers to detect cacao plants infected with CSSVD. Our proposed solution is based on VGG16, ResNet50 and a Vision Transformer (ViT).

In this work, we conducted rigorous experiments by fine-tuning the pretrained VGG16, ResNet50 and ViT models to classify images from the KaraAgroAI Cocoa Dataset. The images from this dataset are labelled according to three classes, namely: Healthy, Cocoa Swollen Shoot Virus Disease (CSSVD), and Anthracnose. Results indicate that our image classifiers outperform previous attempts to detect CSSVD-infected cacao plants. Below, we summarize the main contributions of this work:

1. We are the first to study the CSSVD problem based on a high quality, well curated image dataset, that is, KaraA-

groAI Cocoa Dataset.

2. We fine-tuned pretrained image classification models to distinguish between cacao plants infected with CSSVD and non-infected cacao plants.

2. RELATED WORK

To describe accurately the contents within a natural scene, texture within the image plays an important role as the descriptor. Neural networks have been very successful at learning the unique features within an image that can be used to distinguish between two images. Since the advent of convolutional neural networks, CNN for short, several image classifiers based on CNN have been proposed. Among them; CNN [2], VGG [2], DCNN [3], ResNet [3], AlexNet [4], Inception [5], GoogleNet [5], EfficientNet [6], LeNet [7] and MobileNet [8], have been trained to classify images which belong to plants. The main goal is to distinguish between infected and non-infected plants.

[1, 9, 10, 11] are major works attempting to detect plant diseases using contemporary image classifiers.

Next, we describe the other works that train image classifiers to detect CSSVD in cacao plants. [12] proposed the extraction of characteristic vectors with HoG (Histograms of Oriented Gradient), LBP (Local Binary Pattern), and the SVM (Support Vector Machine) algorithms and then trained SVM, Random Forest, and artificial neural networks to distinguish between infected and non-infected cacao plants.

To make image classification more accessible to farmers [13] developed a smartphone application. Their implementation includes CNN based models trained to detect both Swollen Shoot and Black Pod diseases. Moreover, [14] proposed a feature extraction method for a low-computational device to classify cacao beans. Furthermore, [15] studied the identification of infected cacao beans. However, the closest to our work is [16] who trained a CNN for binary classification into healthy and infected cacao. Our work includes 3-class classification of cacao plants into; *Anthracnose*, *CSSVD*, and *Healthy*.

In all of the above works, the use of high-quality image data remains absent. Moreover, the works mentioned above do not release their data. To the best of our knowledge, this is the first attempt to train image classifiers to detect CSSVD infected cacao plants using high-resolution and well-curated labeled image training data.

3. METHODS

In this section, we describe all the methods used to preprocess the images before they're fed to the classifiers; and the classifiers used to learn image patterns within cacao plant leaves. The main goal is to learn patterns within the images that make it possible to determine to which of the three classes

an image belongs. Our work includes two image classifiers based on CNNs, namely: VGG16 [2], and ResNet50 [3] shown in Figure 1; and one classifier based on the vision transformer [17], shown in Figure 2b.

Formally, given an input image X , our three-label image classifier aims to estimate the function necessary to determine the presence of labels (and categorize image X into any of the labels) in the set $\mathcal{Y} = \{Anthracnose, CSSVD, Healthy\}$. This can be written as follows,

$$f : \mathbb{R}^{w \times h} \rightarrow [0, 1]^N$$
$$X \mapsto \mathbf{y} = (y_i)_{i \in \mathcal{Y}},$$

in which w and h are the pixel-wise width and height of the image, respectively. Note that $y_i = 1$ if the label i is present in X , else $y_i = 0$. The set of images is $\mathcal{X} = (x_1 \dots x_n)$; and there are 17,703 images in the KaraAgroAI Cocoa dataset.


3.1. VGG16

We follow the same steps as reported in [18]. **First**, the input consists of fixed-size 224×224 RGB images. Preprocessing of the input includes subtracting, from each pixel, the mean RGB value computed on the training set. **Next**, all images are passed through a stack of convolutional (conv.) layers, where we use filters with a 3×3 receptive field. The convolution stride is fixed to 1 pixel; the spatial padding of conv. layer input is such that the spatial resolution is preserved after convolution, i.e. the padding is 1 pixel for 3×3 conv. layers. Spatial pooling is carried out by five max-pooling layers, which follow some of the conv. layers, and not all the conv. layers are followed by max-pooling). Max-pooling is performed over a 2×2 pixel window, with stride 2. We adopt rectification non-linearity for each hidden layer. **Last**, a stack of convolutional layers is followed by three Fully-Connected (FC) layers: the first two have 4096 channels each. We modify the third FC layer to have 3 channels (one for each class). The final layer is the soft-max layer.


3.2. ResNet50

For the CSSVD image classifier based on ResNet50, we adopt the configuration as described in the works of [19]. **First**, we preprocess all input images in the same way as in the VGG16 model above, that is, the mean RGB value computed on the training set is subtracted from each pixel. **Next**, the image goes through a stack of convolutional layers most of which have 3×3 filters and follow these two design rules: (i) for the same output feature map size, the layers have the same number of filters; and (ii) if the feature map size is halved, the number of filters is doubled so as to preserve the time complexity per layer. Then, we perform downsampling directly by convolutional layers that have a stride of 2.

The implementation of ResNet50 is described as follows. The image is resized with its shorter side randomly sampled

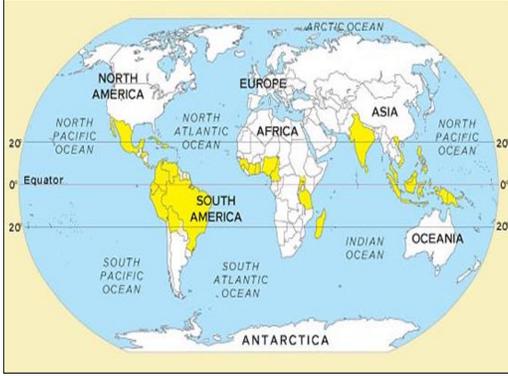

(a) Countries where CSSVD is prevalent are shown on the map in yellow.

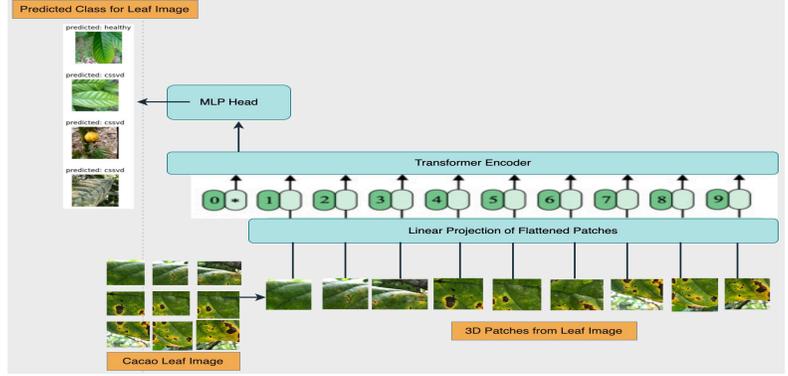

(b) An image classifier based on the Vision Transformer (ViT) for CSSVD detection.

Fig. 2: *Left:* CSSVD prevalence. *Right:* CSSVD detection with a Vision Transformer.

in [256, 480] for scale augmentation and a 224×224 crop is randomly sampled from an image or its horizontal flip. The standard color augmentation is used. We adopt batch normalization (BN) just after each convolution and before activation. We used Adam optimizer with a batch size of 64. The learning rate starts from 0.001 and is divided by 10 when the error plateaus, and the models are trained for up to 20 epochs. We use a weight decay of 0.0001 and a momentum of 0.9. We do not use dropout.

3.3. Vision Transformer (ViT)

We adopt the vision transformer developed by [17] for CSSVD classification. This vision transformer model is depicted in Figure 2b. The standard Transformer receives as input a 1D sequence of token embeddings. To handle 2D images, we reshape the image $\mathbf{x} \in \mathbb{R}^{H \times W \times C}$ into a sequence of flattened 2D patches $\mathbf{x}_p \in \mathbb{R}^{N \times (P^2 \cdot C)}$, where (H, W) is the resolution of the original image, C is the number of channels, (P, P) is the resolution of each image patch, and $N = HW/P^2$ is the resulting number of patches, which also serves as the effective input sequence length for the Transformer. The Transformer uses constant latent vector size D through all of its layers, so we flatten the patches and map to D dimensions with a trainable linear projection (Eq. 1). The output of this projection is referred to as the patch embeddings.

We prepended a learnable embedding to the sequence of embedded patches ($\mathbf{z}_0^0 = \mathbf{x}_{\text{class}}$), whose state at the output of the Transformer encoder (\mathbf{z}_L^0) serves as the image representation \mathbf{y} . Both during pre-training and fine-tuning, a classification head is attached to \mathbf{z}_L^0 . The classification head is implemented by a MLP with one hidden layer at pre-training time and by a single linear layer at fine-tuning time.

Position embeddings are added to the patch embeddings to retain positional information. We use standard learnable

1D position embeddings. The resulting sequence of embedding vectors serves as input to the encoder.

The Transformer encoder consists of alternating layers of multi-headed self-attention (MSA) and MLP blocks. Layer-norm (LN) is applied before every block, and residual connections after every block.

4. EXPERIMENTS

In this section, we report the results obtained on KaraAgroAI Cocoa Dataset [20].

4.1. KaraAgroAI Dataset

KaraAgroAI Cocoa Dataset is a multi-label image dataset that provides images across three classes, namely; Healthy, Cocoa Swollen Shoot Virus Disease (CSSVD), and Anthracnose. We gathered all the data and the per-class statistics are shown in the Table 2. To train the image classifiers, we split the dataset into train, validation and test sets (we used the 80/10/10 split resp.). The number of samples per class; in the train, validation and test sets; is shown in Table 3.

4.2. Experiment Settings

We selected three image classification methods, namely: VGG16, ResNet50 and ViT.

Hyper-parameter tuning: Our proposed classifiers are optimized with Adam optimizer, and the optimizer learning rate starts from 1e-3, decaying two times smaller every epoch. The total number of epochs is 20 with proper early stopping. The batch size is 64. The input of each dataset is zero-mean normalized. All hyper-parameters are shown in Table 4.

Computation server: All the models were trained and tested on a single Intel® Xeon® Platinum 8160 96-core CPU

Table 1: Summary of per-class classifier performance (%) on KaraAgroAI Dataset. The number of epochs is 20. For all experiments, the Image_size is 224X224. In addition, we report the overall precision, recall and F1-score resp. for all classes.

Model	VGG16				ResNet50				Vision Transformer			
	Precision	Recall	F1	Acc	Precision	Recall	F1	Acc	Precision	Recall	F1	Acc
Anthracnose	98.21	85.08	91.17	–	98.66	85.66	91.70	–	90.76	62.79	74.22	–
CSSVD	87.39	99.17	92.91	–	90.64	100	95.09	–	74.0	99.31	84.81	–
Healthy	96.54	90.996	93.69	–	96.89	95.59	96.24	–	86.05	71.01	77.81	–
Overall	96.54	90.996	93.69	92	95.39	93.75	94.34	94	86.05	71.01	77.81	80

Table 2: Number of images per class in KaraAgroAI Dataset.

	Anthracnose	CSSVD	Healthy	Total
#Images	5,162	7,292	5,249	17,703

Table 3: KaraAgroAI data split for experiments.

	Train	Validation	Test	Total
Anthracnose	4,131	515	516	5,162
CSSVD	5,838	727	727	7,292
Healthy	4,207	521	521	5,249
#Images	14,176	1,763	1,764	17,703

with 1.53TB RAM; running Ubuntu 20.04.5.

Table 4: Model Hyperparameters.

Hyperparameter	VGG16	ResNet50	Vision Transformer
Input image_size	224x224	224x224	224x224
Adam β_1	0.0	0.9	0.9
Adam β_2	0.999	0.999	0.999
Batch Size	64	64	64
Dropout, Attention	N/A	N/A	0.5
Dropout, Feedforward	0.5	N/A	0.2
Encoder Layer Used	CNN	CNN	CNN
Hid Dim Class Head	N/A	N/A	256
Number of heads	N/A	N/A	8
Embed_size	256	256	256
LR Scheduler	Linear	Linear	Linear
Learning Rate	1e-2	1e-3	1e-3
Momentum	0.9	0.9	0.9
Weight Decay	0.0005	0.0001	0.03
Total Epochs	20	20	20

4.3. Results and Analysis

We report the precision, recall, and F1-score per class; for all the image classifiers. Moreover, we report the number of model parameters on KaraAgroAI Cocoa dataset, shown in Table 5. We compare the best-performing model on CSSVD

Table 5: Summary of models used, parameter size and the size of each model on KaraAgroAI dataset.

Method	#Parameters	Model size (MBs)
VGG16	138.3M	14,469.3
ResNet50	23.5M	11,513.3
ViT	6.8M	4,797.2

Table 6: Summary of Classification Accuracy on KaraAgroAI dataset.

Model	VGG16	ResNet50	ViT
Overall Accuracy(%)	92	94	80

image classification with the recent work of [16]. A comparison of their best-performing model (as reported in their paper) and ours is shown in Table 7.

Table 7: Comparison for overall scores between our work, and related work on CSSVD classification.

Method	Base Model	Precision	Recall	F1	Accuracy
[16]	CNN	74	84	98	88
Ours	ViT	86.05	71.01	77.81	80
Ours	VGG16	93.86	91.41	92.67	92
Ours (best)	ResNet50	95.39	93.75	94.34	94

5. CONCLUSION

In this work, we investigated the ability for pre-trained image classification models to detect the rampant *cacao swollen shoot virus disease* (that is, *CSSVD*) in cacao plants. We leveraged the image-pattern recognition ability of *ResNet50*, *VGG16*, and *Vision Transformer* to identify infected cacao plants when trained with images of cacao leaves, stems and fruits.

We evaluated the classifiers on a recently released and publicly accessible KaraAgroAI Cocoa dataset comprising 17,703 images.

Experiment results indicate that ResNet50 and VGG16 are sufficient to classify cacao images among the three classes, that is, *Anthracnose*, *CSSVD* and *Healthy*; when trained for only 20 epochs.

Our best image classifier (that is, ResNet50) achieves 95.39% precision, 93.75% recall, 94.34%F1 and 94% accuracy on only 20 epochs. There is a +9.75% improvement in recall when compared to previous works.

Our results indicate that the image-classifiers learn to identify cacao plants infected with CSSVD when trained with images of cacao leaves, stems and fruits.

References

- [1] Bulent Tugrul, Elhoucine Elfatimi, and Recep Eryigit, "Convolutional neural networks in detection of plant leaf diseases: A review," *Agriculture*, vol. 12, no. 8, 2022.
- [2] Y. Le Cun, L. D. Jackel, B. Boser, J. S. Denker, H. P. Graf, I. Guyon, D. Henderson, R. E. Howard, and W. Hubbard, "Handwritten digit recognition: Applications of neural network chips and automatic learning," *Comm. Mag.*, vol. 27, no. 11, pp. 41–46, nov 1989.
- [3] James Atwood and Don Towsley, "Diffusion-convolutional neural networks," 2015.
- [4] Alex Krizhevsky, Ilya Sutskever, and Geoffrey E Hinton, "Imagenet classification with deep convolutional neural networks," in *Advances in Neural Information Processing Systems*, F. Pereira, C.J. Burges, L. Bottou, and K.Q. Weinberger, Eds. 2012, vol. 25, Curran Associates, Inc.
- [5] Christian Szegedy, Wei Liu, Yangqing Jia, Pierre Sermanet, Scott Reed, Dragomir Anguelov, Dumitru Erhan, Vincent Vanhoucke, and Andrew Rabinovich, "Going deeper with convolutions," 2014.
- [6] Mingxing Tan and Quoc V. Le, "Efficientnet: Rethinking model scaling for convolutional neural networks," 2019.
- [7] Y. Lecun, L. Bottou, Y. Bengio, and P. Haffner, "Gradient-based learning applied to document recognition," *Proceedings of the IEEE*, vol. 86, no. 11, pp. 2278–2324, 1998.
- [8] Andrew G. Howard, Menglong Zhu, Bo Chen, Dmitry Kalenichenko, Weijun Wang, Tobias Weyand, Marco Andreetto, and Hartwig Adam, "Mobilenets: Efficient convolutional neural networks for mobile vision applications," 2017.
- [9] Ebrahim Hirani, Varun Magotra, Jainam Jain, and Pramod Bide, "Plant disease detection using deep learning," in *2021 6th International Conference for Convergence in Technology (I2CT)*, 2021, pp. 1–4.
- [10] Banushruti Haveri and K Shashi Raj, "Review on plant disease detection using deep learning," in *2022 Second International Conference on Artificial Intelligence and Smart Energy (ICAIS)*, 2022, pp. 359–365.
- [11] J. Arun Pandian, V. Dhilip Kumar, Oana Geman, Michaela Hnatiuc, Muhammad Arif, and K. Kanchanadevi, "Plant disease detection using deep convolutional neural network," *Applied Sciences*, vol. 12, no. 14, 2022.
- [12] Ciro Rodriguez Rodriguez, Oswaldo Alfaro, Pervis Paredes, Doris Esenarro, and Francisco Hilario, "Machine learning techniques in the detection of cocoa (theobroma cacao l.) diseases," *Annals of the Romanian Society for Cell Biology*, vol. 25, no. 3, pp. 7732–7741, 2021, Publisher Copyright: © 2021, Universitatea de Vest Vasile Goldis din Arad. All rights reserved.
- [13] Sandra Kumi, Dylan Kelly, Jonathan Woodstuff, Richard K. Lomotey, Rita Orji, and Ralph Deters, "Cocoa companion: Deep learning-based smartphone application for cocoa disease detection," *Procedia Comput. Sci.*, vol. 203, no. C, pp. 87–94, jan 2022.
- [14] Yudhi Adhitya, Setya Widyawan Prakosa, Mario Köppen, and Jenq-Shiou Leu, "Feature extraction for cocoa bean digital image classification prediction for smart farming application," *Agronomy*, vol. 10, no. 11, 2020.
- [15] Jessica Fernandes, Victor Turrisi da Costa, Douglas Barbin, J.P. Cruz-Tirado, V. Baeten, and Sylvio Barbon Junior, "Deep computer vision system for cocoa classification," *Multimedia Tools and Applications*, vol. 1, pp. 1, 05 2022.
- [16] Mamadou Coulibaly, Konan Kouassi, Silue Kolo, and Olivier Asseu, "Detection of "swollen shoot" disease in ivorian cocoa trees via convolutional neural networks," *Engineering*, vol. 12, pp. 166–176, 01 2020.
- [17] Alexey Dosovitskiy, Lucas Beyer, Alexander Kolesnikov, Dirk Weissenborn, Xiaohua Zhai, Thomas Unterthiner, Mostafa Dehghani, Matthias Minderer, Georg Heigold, Sylvain Gelly, Jakob Uszkoreit, and Neil Houlsby, "An image is worth 16x16 words: Transformers for image recognition at scale," 2020.
- [18] Karen Simonyan and Andrew Zisserman, "Very deep convolutional networks for large-scale image recognition," 2014.
- [19] Kaiming He, Xiangyu Zhang, Shaoqing Ren, and Jian Sun, "Deep residual learning for image recognition," 2015.
- [20] Darlington Akogo, Christabel Acquaye, Emmanuel Amoako, Jerry Buaba, Issah Samori, Okani Honger Joseph, Stephen Torkpo, Grace Markin, Hodasi Bright, and Lawrence Gyami Sarfoa, "The KaraAgroAI Cocoa Dataset," 2022.