

Emperical Study on the Effect of Multi-Sampling in the Prediction Step of the Particle Filter

Genshiro Kitagawa

The Institute of Statistical Mathematics
and
Graduate University for Advanced Study

May 16, 2024

Abstract:

Particle filters are applicable to a wide range of nonlinear, non-Gaussian state-space models and have already been applied to a variety of problems. However, there is a problem in the calculation of smoothed distributions, where particles gradually degenerate and accuracy is reduced. The purpose of this paper is to consider the possibility of generating multiple particles in the prediction step of the particle filter and to empirically verify the effect using real data.

Key words: Nonlinear non-Gaussian state-space model; particle filter; smoother; multi-particle prediction; stratified sampling.

1 Introduction

In time series analysis, the prior knowledge of the dynamics of the phenomena and the mechanism of the observation process can usually be combined into state-space model form. And many important problems in time series analysis can be solved using state-space models (Harrison and Stevens 1976, West and Harison 1989, Kitagawa and Gersch 1996, Doucet et al. 2001, Prado and West 2010, Kitagawa and Gersch 1984). In the 1990's, various sequential Monte Carlo methods, referred to as bootstrap filters, Monte Carlo filters, and particle filters, were developed (Gordon et al. 1993, Kitagawa 1993, 1996, Doucet et al. 2000, 2001). In these methods, arbitrary distributions of the state and the system noise are expressed by many particles. Then, it is possible to develop a recursive filter and smoother for general nonlinear non-Gaussian state-space models. These methods have been successfully applied to a number of complex real-world problems (Doucet et al. 2001).

In state-space modeling, it is important to compute smoothed distributions that make good use of all the data already obtained. However, the usual method used in the calculation of smoothed distributions preserves particles that represent past filter distributions and resamples them using weight coefficients obtained from new observations, but if this is repeated, the weights are concentrated on specific particles, the distribution becomes degenerate, and the accuracy of the distribution approximation may deteriorate rapidly. The accuracy of the approximation of the distribution can deteriorate eventually. Therefore, it is important to develop a method that is less likely to cause degeneracy of the distribution. In this paper, we perform an emperical study using a specific trend estimation as an example to see how much improvement can be achieved by performing multiple sampling in the prediction step of the particle filter.

In Section 2, we briefly summarize Kalman filter, non-Gaussian filter and particle filters as filtering and smoothing algorithms for state-space models, and present some known results on the approximation accuracy of particle smoothing. In Section 3, we present a method for multiple sampling in the prediction step of the particle filter and show the improvement in accuracy and increase in computational complexity with increasing multiplicity L for the same example problem as in Section 2. Section 4 discusses the impact of stratified sampling, and Section 5 summarizes the findings of this paper.

2 A Brief Review of the Filtering and Smoothing Algorithms

2.1 The state-space model and the state estimation problems

Assume that a time series y_n is expressed by a linear state-space model

$$\begin{aligned} x_n &= F_n x_{n-1} + G_n v_n \\ y_n &= H_n x_n + w_n, \end{aligned} \quad (1)$$

where x_n is an k -dimensional state vector, v_n and w_n are ℓ -dimensional and 1-dimensional white noise sequences having density functions $q_n(v)$ and $r_n(w)$, respectively. The initial state vector x_0 is assumed to be distributed according to the density $p(x_0)$.

The information from the observations up to time j is denoted by Y_j , namely, $Y_j \equiv \{y_1, \dots, y_j\}$. The problem of state estimation is to evaluate $p(x_n|Y_j)$, the conditional density of x_n given the observations Y_j and the initial density $p(x_0|Y_0) \equiv p(x_0)$. For $n > j$, $n = j$ and $n < j$, it is called the problem of prediction, filtering and smoothing, respectively.

This linear state-space model can be generalized to a nonlinear non-Gaussian state-space model,

$$\begin{aligned} x_n &= F_n(x_{n-1}, v_n) \\ y_n &= H_n(x_n) + w_n, \end{aligned} \quad (2)$$

where $F_n(x, v)$ and $H_n(x)$ are possibly nonlinear functions of the state and the noise inputs. Diverse problems in time series analysis can be treated by using this nonlinear state-space model (Kitagawa and Gersch 1996, Doucet et al. 2001). Note that this nonlinear non-Gaussian state-space model can be further generalized to general state-space model which is defined by using conditional distributions.

2.2 The Kalman filter and the smoother

It is well-known that if all of the noise densities $q_n(v)$ and $r_n(w)$ and the initial state density $p(x_0)$ are Gaussian, then the conditional density of linear state-space model (1), $p(x_n|Y_m)$, is also Gaussian and that the mean and the variance covariance matrix can be obtained by the Kalman filter and the fixed interval smoothing algorithms (Anderson and Moore 1979).

To be specific, if we assume $q_n(v) \sim N(0, Q_n)$, $r_n(w) \sim N(0, R_n)$, $p(x_0|Y_0) \sim N(x_{0|0}, V_{0|0})$ and $p(x_n|Y_m) \sim N(x_{n|m}, V_{n|m})$, then the Kalman filter is given as follows:

One-step ahead prediction:

$$\begin{aligned} x_{n|n-1} &= F_n x_{n-1|n-1} \\ V_{n|n-1} &= F_n V_{n-1|n-1} F_n^T + G_n Q_n G_n^T. \end{aligned} \quad (3)$$

Filter

$$\begin{aligned} K_n &= V_{n|n-1} H_n^T (H_n V_{n|n-1} H_n^T + R_n)^{-1} \\ x_{n|n} &= x_{n|n-1} + K_n (y_n - H_n x_{n|n-1}) \\ V_{n|n} &= (I - K_n H_n) V_{n|n-1}. \end{aligned} \quad (4)$$

Using these estimates, the smoothed density is obtained by the following,

Fixed interval smoothing algorithm:

$$\begin{aligned} A_n &= V_{n|n} F_n^T V_{n+1|n}^{-1} \\ x_{n|N} &= x_{n|n} + A_n (x_{n+1|N} - x_{n+1|n}) \\ V_{n|N} &= V_{n|n} + A_n (V_{n+1|N} - V_{n+1|n}) A_n^T. \end{aligned} \quad (5)$$

2.3 The non-Gaussian filter and the smoother

It is well-known that for the nonlinear non-Gaussian state-space model (2), the recursive formulas for obtaining the densities of the one step ahead predictor, the filter and the smoother are as follows:

One step ahead prediction:

$$p(x_n|Y_{n-1}) = \int_{-\infty}^{\infty} p(x_n|x_{n-1})p(x_{n-1}|Y_{n-1})dx_{n-1}. \quad (6)$$

Filtering:

$$p(x_n|Y_n) = \frac{p(y_n|x_n)p(x_n|Y_{n-1})}{\int p(y_n|x_n)p(x_n|Y_{n-1})dx_n}. \quad (7)$$

Smoothing:

$$p(x_n|Y_N) = p(x_n|Y_n) \int_{-\infty}^{\infty} \frac{p(x_{n+1}|Y_N)p(x_{n+1}|x_n)}{p(x_{n+1}|Y_n)}dx_{n+1}. \quad (8)$$

In Kitagawa (1987, 1988), an algorithm for implementing the non-Gaussian filter and smoother was developed by approximating each density function using a step-function or a continuous piecewise linear function and by performing numerical computations. This method was successfully applied to various problems such as estimation of trend or volatility, spectrum smoothing, smoothing discrete process and tracking problem (Kitagawa and Gersch 1996, Kitagawa 2020).

2.4 Sequential Monte Carlo filter and smoother for non-Gaussian nonlinear state-space models

The non-Gaussian filter and smoother based on numerical integration mentioned in the previous subsection has a limitation that it can be applied to only lower dimensional, such as the third or the fourth order, state-space model. Sequential Monte Carlo filter and smoother, hereinafter referred to as particle filter, were developed to mitigate this problem. In this method, each distribution appeared in recursive filter and smoother is approximated by many “particles” that can be considered as realizations from that distribution (Gordon et al. 1993, Kitagawa 1993, 1996).

In this paper, we use the following notations, $\{p_n^{(1)}, \dots, p_n^{(m)}\} \sim p(x_n|Y_{n-1})$, $\{f_n^{(1)}, \dots, f_n^{(m)}\} \sim p(x_n|Y_n)$, $\{s_{n|N}^{(1)}, \dots, s_{n|N}^{(m)}\} \sim p(x_n|Y_N)$. In practice, we approximate the cumulative distributions by the empirical distributions determined by the set of “particles”.

Then a recursive filtering algorithm is realized as follows:

1. Generate a k -dimensional random number $f_0^{(j)} \sim p_0(x)$, for $j = 1, \dots, m$.
2. Repeat the following steps for $n = 1, \dots, N$.
 - (a) Generate an ℓ -dimensional random number $v_n^{(j)} \sim q(v)$, for $j = 1, \dots, m$.
 - (b) Generate a new particle by $p_n^{(j)} = F(f_{n-1}^{(j)}, v_n^{(j)})$, for $j = 1, \dots, m$.
 - (c) Compute the importance weight $\alpha_n^{(j)} = r(y_n - H(p_n^{(j)}))$, of the particle $p_n^{(j)}$ for $j = 1, \dots, m$.
 - (d) Generate $f_n^{(j)} \sim (\sum_{i=1}^m \alpha_n^{(i)})^{-1} \sum_{i=1}^m \alpha_n^{(i)} I(x, p_n^{(i)})$, for $j = 1, \dots, m$ by the resampling of $p_n^{(1)}, \dots, p_n^{(m)}$ with the sampling rate proportional to $\alpha_n^{(n)}$.

In Kitagawa (1993, 1996), it is shown that the particles approximating the smoothing distribution are obtained by a simple modification of the particle filter. Assume that $(s_{1|i}^{(j)}, \dots, s_{n|i}^{(j)})^T$

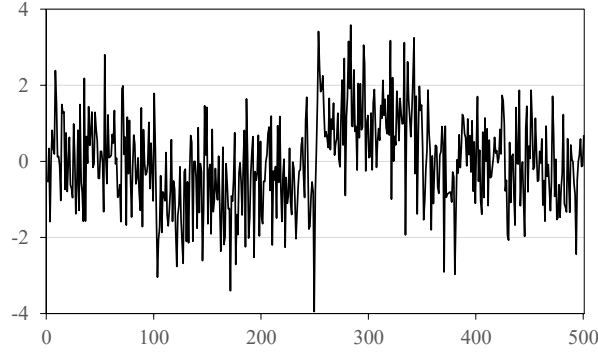


Figure 1: Test data used for the Monte Carlo study, Kitagawa(1987, 1996, 2014)

denotes the j -th realization of the conditional joint density $p(x_1, \dots, x_n | Y_i)$. Then an algorithm for smoothing is obtained by replacing the Step 2 (d) of the algorithm for filtering;

(d-S) Generate $\{(s_{n-L|n}^{(j)}, \dots, s_{n-1|n}^{(j)}, s_{n|n}^{(j)})^T, j = 1, \dots, m\}$ by the resampling of $\{(s_{n-L|n-1}^{(j)}, \dots, s_{n-1|n-1}^{(j)}, p_n^{(j)})^T, j = 1, \dots, m\}$ with the sampling probability proportional to $\alpha_n^{(n)}$.

This is equivalent to applying the L -lag fixed lag smoother rather than the fixed interval smoother (Anderson and Moore 1979). The increase of lag, L , will improve the accuracy of the $p(x_n | Y_{n+L})$ as an approximation to $p(x_n | Y_N)$, while it is very likely to decrease the accuracy of $\{s_{n|N}^{(1)}, \dots, s_{n|N}^{(m)}\}$ as representatives of $p(x_n | Y_{n+L})$ (Kitagawa 1996). Since $p(x_n | Y_{n+L})$ usually converges quickly to $p(x_n | Y_N)$, it is recommended to take L not so large.

2.4.1 Example: smoothing accuracy of trend model

For empirical study on the accuracy of the particle filter, we consider the following first-order trend models:

$$\begin{aligned} x_n &= x_{n-1} + v_n \\ y_n &= x_n + w_n, \end{aligned} \tag{9}$$

where y_n is the observed time series, x_n is the trend component, v_n is the system noise and w_n is the observation noise. It is assumed that the observation noise w_n follows either the Gaussian distribution $N(0, \sigma^2)$ and the system noise v_n follows either the Gaussian distribution $N(0, \tau^2)$ or the Cauchy distribution $C(0, \tau^2)$. Figure 1 shows the data used in the Monte Carlo experiments in this paper, which were also used by Kitagawa (1987, 1996, 2014).

As in Kitagawa (2014), the following quantities will be used as criteria for evaluating the estimated trends:

$$\text{Dist}(D, \hat{D}) = \sum_{n=1}^{500} \sum_{i=1}^{6400} \left\{ D(x_i, n) - \hat{D}(x_i, n) \right\}^2 \Delta x, \tag{10}$$

where $D(x_i, n)$ and $\hat{D}(x_i, n)$ are the “true” and estimated probability distributions at time n defined on the sampling points $x_i, i = 1, \dots, 6400$. $x_i, i = 1, \dots, 6400$ are defined by $x_i = -8 + (i - 1)\Delta x$ with $\Delta x = 16/6400$. In actual evaluation, the $\hat{D}(x_i, n)$ is replaced with either the filter distribution $\hat{D}_f(x, n)$, or the smoother distribution $\hat{D}_s(x, n)$ obtained by the particle filter and $D(x_i, n)$ by the “true” filter distribution $D_f(x, n)$, or the fixed-interval smoother

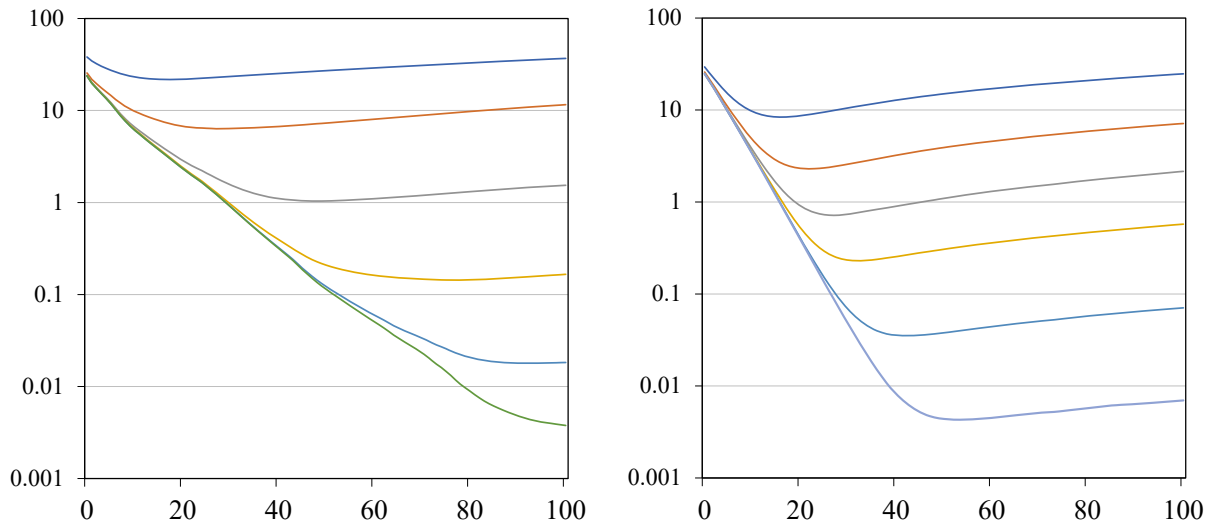


Figure 2: Accuracy of smoother with $\text{LAG}=1, \dots, 100$, number of particles $m = 10^k$, $k = 2, \dots, 7$. Left plot: Cauchy model, right plot: Gaussian model. Figure X in Kitagawa (2014) has been redrawn. In the original figure, it is drawn as a double-logarithmic graph.

Table 1: Orders of lags that attain the minimum of the “distance” of the estimated fixed-lag smoother and the “true” fixed-interval smoother

m	10^2	10^3	10^4	10^5	10^6	10^7
Gauss	16	22	27	32	43	53
Cauchy	17	28	48	80	93	108

distribution $D_s(x, n)$, respectively. For Gaussian distribution model, the true distribution is obtained by the Kalman filter. On the other hand, for Cauchy distribution model, the “true” distribution is obtained by numerical integration method (Kitagawa 1987).

Figure 2 reproduces the results of Kitagawa (2014), but note that the horizontal axis is not $\log(\text{Lag})$, but Lag as is. Table 1 shows the number of Lags for which the evaluation criterion $\text{Dist}(D_s, \hat{D}_s)$ is minimized for the number of particles $m = 10^k$, $k = 2, \dots, 7$. Left plot shows the case of Cauchy noise models and the right plot show the case of Gaussian noise model. In both models, the optimal Lag increases as the number of particles m increases. In the case of the Gaussian noise model, the increase is less pronounced and about 50 is sufficient. In the case of the Cauchy noise model, on the other hand, the optimal lag increases with the number of particles m faster than in the Gaussian model, reaching more than 100 for $m = 10^7$.

Figure 3 shows the posterior distribution of the trend component obtained by the standard particle smoother for the Cauchy noise model with number of particles $m=1,000,000$, 100,000, 10,000 and 1,000. The 0.13, 2.27, 15.87, 50.0, 84.13, 97.73 and 99.87% points corresponding to the mean and ± 1 , 2, and 3 standard deviations of the normal distribution are displayed. The “true” smoothed distribution, estimated by non-Gaussian smoothing algorithm using numerical integration, is shown in Kitagawa (2014). It can be seen that the distribution estimated by particle smoothing approaches the true smoothed distribution as the number of particles increases, and that fairly reasonable estimates of the 50% point (median) are obtained even when $m = 1,000$.

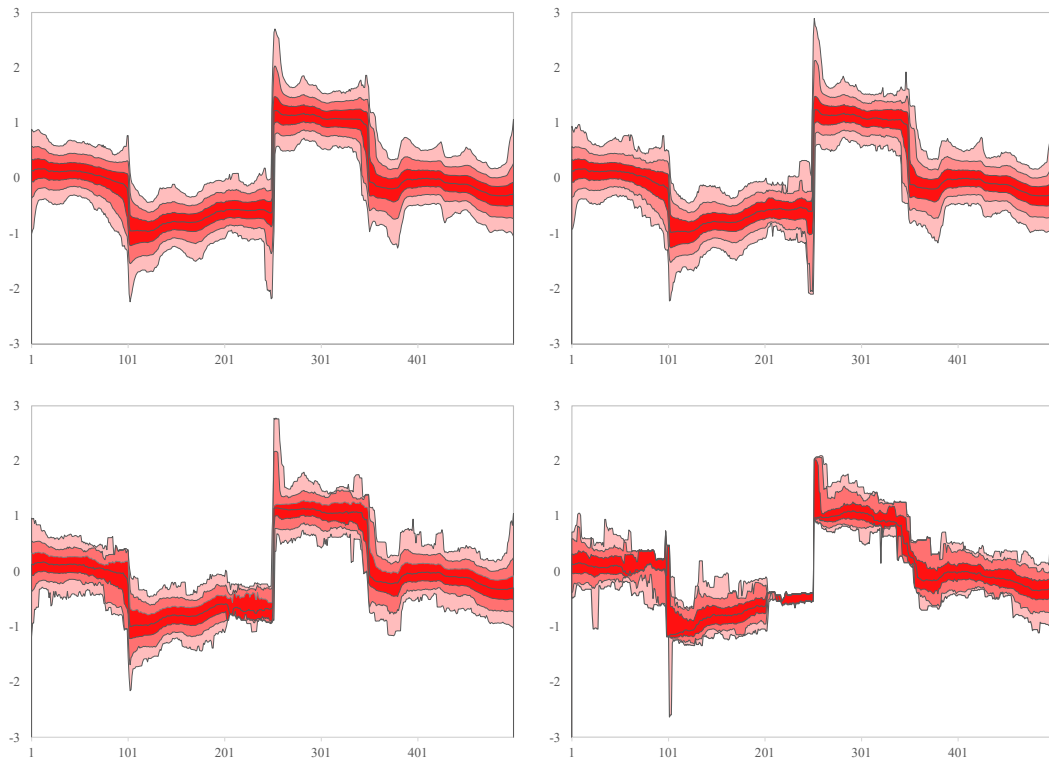


Figure 3: Smoothed posterior distribution of the trend component by the standard particle smoother with $L = 1$. From top left to bottom right, $m=1,000,000$, $100,000$, $10,000$ and $1,000$.

Table 2: Change of filter accuracy with the number of random numbers L ($L = 1, \dots, 10$) for various numbers of particles, $m = 100, 1,000, 10,000$ and $100,000$. The table shows the average of 100 calculations using different random numbers. Left: Gaussian model, right: Cauchy model.

L	Gauss				Cauchy				
	100	1,000	10^4	10^5	100	1,000	10^4	10^5	10^6
1	3.822	0.592	0.125	0.033	22.771	4.863	0.387	0.033	0.0038
2	3.274	0.512	0.100	0.020	17.735	2.803	0.235	0.024	0.0025
3	3.182	0.480	0.093	0.021	15.443	2.156	0.196	0.020	0.0022
4	3.076	0.471	0.096	0.020	13.863	1.826	0.175	0.018	0.0021
5	2.983	0.455	0.088	0.017	12.791	1.666	0.171	0.017	0.0019
6	3.009	0.450	0.081	0.019	11.986	1.518	0.159	0.017	0.0017
7	2.964	0.445	0.091	0.021	11.527	1.458	0.152	0.017	0.0018
8	2.981	0.434	0.092	0.028	10.860	1.427	0.147	0.016	0.0017
9	2.962	0.445	0.082	0.015	10.485	1.374	0.151	0.015	0.0017
10	2.938	0.432	0.085	0.016	10.285	1.349	0.151	0.015	0.0015

3 Multi-Particle Prediction

3.1 Multi-sampling in Prediction Step

Step 2.(a) of the particle filter algorithm usually generates one particle using one random number $v_n^{(j)}$, but in practice it is possible to generate two or more particles. Increasing the number of random numbers used to approximate the predictive distribution is expected to increase the accuracy of the approximation. If L random numbers, $v_n^{(j,i)}, i = 1, \dots, L$, are generated for each particle approximating the filter distribution of the previous time $n - 1$, $f_{n-1}^{(j)}$, then the step 2. of the particle filter is modified as follows:

- (a) Generate L ℓ -dimensional random numbers $v_n^{(j,i)} \sim q(v), i = 1, \dots, L$, for $j = 1, \dots, m$.
- (b) Generate L new particles by $p_n^{(j,i)} = F(f_{n-1}^{(j)}, v_n^{(j,i)}), i = 1, \dots, L$, for $j = 1, \dots, m$.
- (c) Compute the importance weight $\alpha_n^{(j,i)} = r(y_n - H(p_n^{(j,i)}))$, for $j = 1, \dots, m$ and $i = 1, \dots, L$.
- (d) Generate $f_n^{(k)} \sim (\sum_{j=1}^m \sum_{i=1}^L \alpha_n^{(j,i)})^{-1} \sum_{j=1}^m \sum_{i=1}^L \alpha_n^{(j,i)} I(x, p_n^{(j,i)})$, for $k = 1, \dots, m$ by the resampling of $L \times m$ particles, $p_n^{(1,1)}, \dots, p_n^{(1,L)}, \dots, p_n^{(m,1)}, \dots, p_n^{(m,L)}$.

3.2 Comparison with the Standard MCF ($L = 1$)

Table 2 shows the change in filter accuracy with the increase of random numbers L used for prediction. The number of particles m is considered for five types of $10^k, k = 2, \dots, 6$, and L is from 1 to 10. The table shows the average of $D(f; \hat{f})$'s obtained by NSIM times of filtering with different random numbers. NSIM is set to 1,000 for $m = 10^2$ and 10^3 , 400 for $m = 10^4$, 100 for $m = 10^5$ and 25 for $m = 10^6$. The four columns on the left represent filter accuracy of the Gaussian noise model and the five columns on the right represent the results for the Cauchy noise model.

Figure 4 illustrates the results of Table 2, the upper plots for the Cauchy noise model and the lower plots for the Gaussian noise model. The left plots show the accuracy on a logarithmic scale, and the right plots show how much the approximation error of the distribution is reduced for each number of particles, compared to the simple particle filter with $L = 1$.

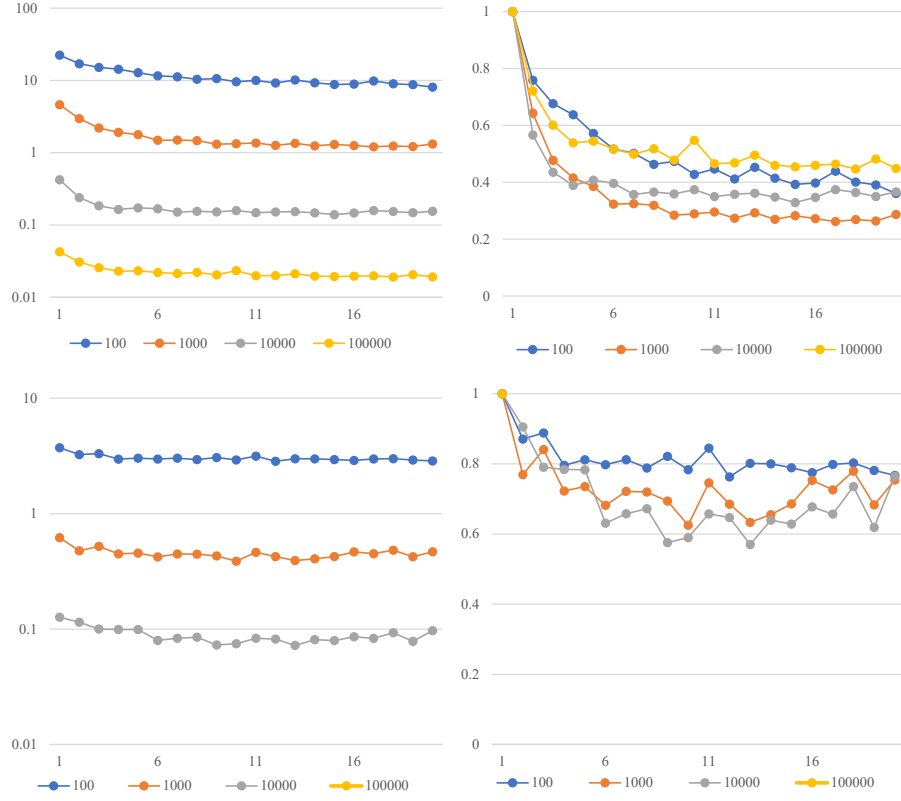


Figure 4: Changes of filter error variances for $m = 100, 1,000$ and $10,000$. Upper plots: Cauchy model, lower plots: Gaussian model. Left plots: variances in log-scale, right plots: decrease ratio relative to the case $L = 1$.

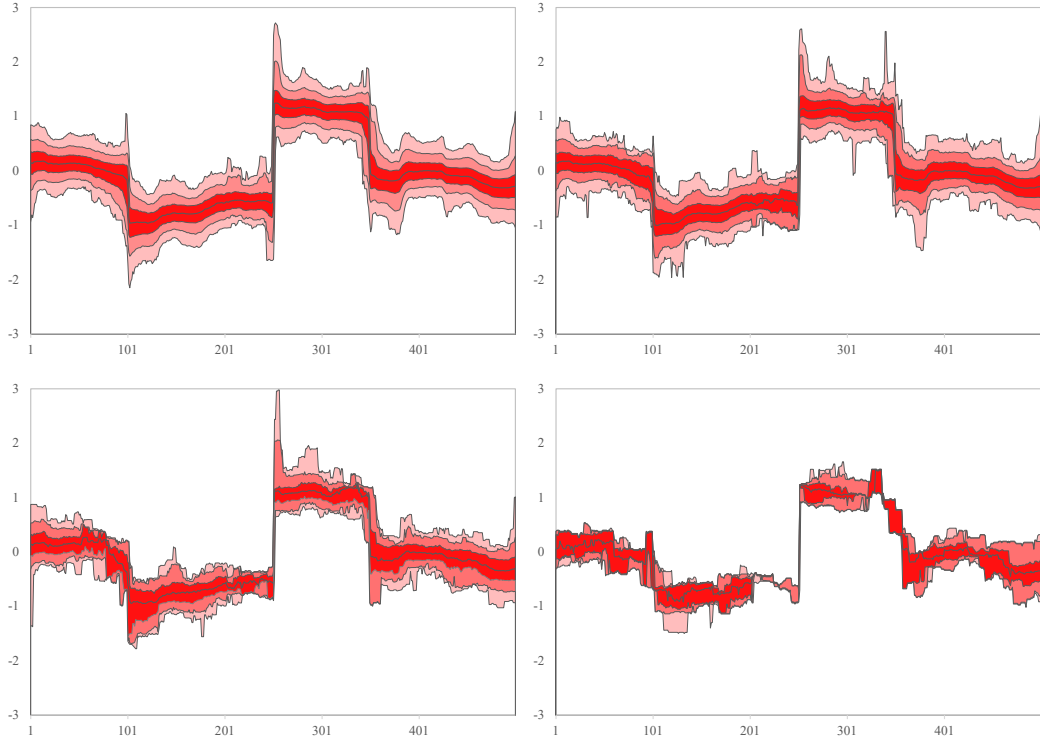


Figure 5: MCF with $L = 10$. From top left to bottom right $m = 100,000, 10,000, 1,000$ and 100 .

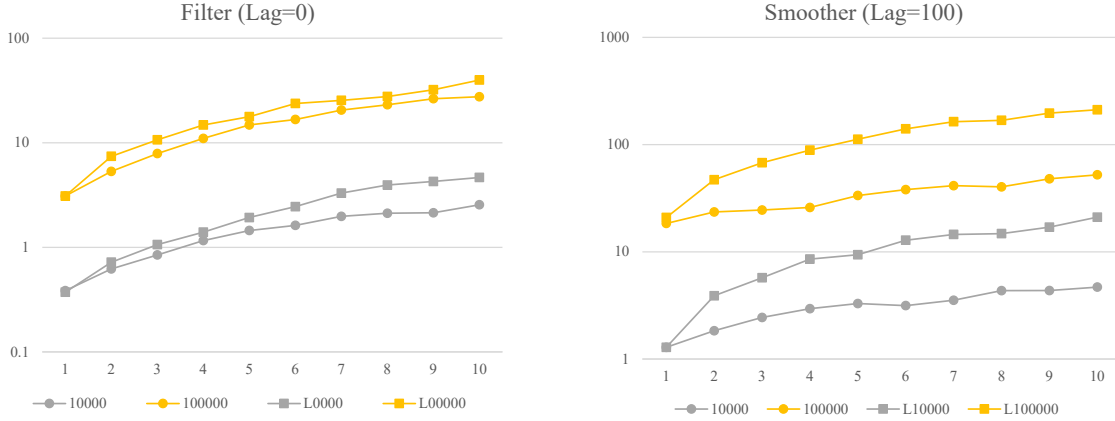


Figure 6: Comparison of CPU-time for m , $L = 1, \dots, 10$ (circle) and $m, 2 \times m, \dots, 10 \times m$ (square), $m = 10,000$ (gray) and $100,000$ (orange). Left plot: Filter (Lag=0), right plot: Smoother with Lag=100. Cauchy noise model case. Horizontal axis: L .

In both cases, the reduction in error is not significant above $L = 5$, indicating that L at most 5 is sufficient. It should be noted, however, that the error for the Cauchy noise model is reduced to 30% to 50%, while for the Gaussian noise model it is only 60% to 80%, indicating that the effect of using a large L is not significant for the Gaussian noise model.

Figure 5 shows the smoothed posterior distribution of the Cauchy model obtained with $m = 10^k$, $k = 5, 4, 3$ and 2 , and $L = 10$. Note that the number of particles are 1/10 of that in Figure 3 where the results for $m = 10^k$, $k = 6, 5, 4$ and 3 are shown. It can be seen that the smoothed posterior distribution obtained with m particles and $L = 10$ have an accuracy intermediate between that obtained with m particles and $L = 1$ and that obtained with $10m$ particles and $L = 1$. This is confirmed by the values in Table 2.

3.3 CPU-times for Multi-particle Prediction

Table 3 shows the increase in CPU time in second when the number of random numbers generated for each particle of filter is increased to $L = 1, \dots, 10$. The number of particles is $m = 10^k$, $k = 2, \dots, 6$. The left half of the table is for the filter case (Lag=0) and the right half is for the smoothing case with Lag=100. The CPU time was measured NSIM times on a Windows PC (Intel Core i7-8700, 3.20GHz, 32GB RAM), and the average is shown.

For the case of Lag=0, filtering with $L=10$ requires about 8 times more CPU time than with $L=1$, while for the case of Lag=100, it requires only about 3 times more CPU time. This is because the time required to exchange stored particles in the filter (and smoothing) step does not increase the computational complexity even with $L=10$.

Table 4 shows the results when the number of particles m used for filtering is increased as $m = m_0 \times l_0$. In this case, the CPU time for both filtering (Lag=0) and smoothing (Lag=100) increased more than 10 times when $l_0=10$ compared to the case with $l_0=1$.

Figure 6 illustrates the results of Table 4 only for the cases $m = 10^4$ and 10^5 . ■ shows the case where the number of particles is simply increased, and ● shows the case of multi-particle prediction where the number of particles is increased only in the prediction step without increasing the number of particles in the filter step. The left plot is for LAG=0, and the right plot is for Lag=100. In the case of Lag=0, the decrease in CPU time is not so significant by multi-particle prediction. This is confirmed by Figure 7, which shows Computational Efficiency defined as (CPU-time of multi-particle prediction)/(CPU-time of single-particle prediction). On

Table 3: Change of CPU-time with the number of random numbers L ($L = 1, \dots, 20$) for various numbers of particles, $m = 100, 1,000, 10,000$ and $100,000$ for Cauchy model. Left: Filter (Lag=0), right: Smoother with Lag=100.

L	Lag=0					Lag=100				
	100	1,000	10,000	10^5	10^6	100	1,000	10,000	10^5	10^6
1	0.004	0.039	0.385	3.095	38.786	0.018	0.168	1.286	18.389	181.875
2	0.006	0.061	0.622	5.320	74.016	0.022	0.193	1.835	23.506	221.012
3	0.008	0.091	0.846	7.881	95.113	0.025	0.219	2.441	24.515	262.762
4	0.013	0.119	1.161	11.005	129.009	0.030	0.243	2.949	41.217	297.918
5	0.014	0.157	1.139	14.802	191.639	0.030	0.292	3.292	42.184	363.965
6	0.017	0.181	1.357	16.688	197.459	0.036	0.331	3.149	45.131	417.066
7	0.018	0.213	1.976	20.548	218.151	0.040	0.348	3.533	41.389	447.738
8	0.027	0.238	2.116	23.077	241.167	0.044	0.444	4.346	40.310	459.441
9	0.029	0.271	2.137	26.380	257.848	0.044	0.483	4.353	56.978	534.910
10	0.027	0.318	2.553	27.529	268.546	0.047	0.519	4.686	51.445	535.230

Table 4: Change of CPU-time for various numbers of particles, $m = m_0 \times l_0$ for $m_0 = 100, 1,000, 10,000, 100,000$ and $l_0 = 1, \dots, 10$ for Cauchy model. Left: Filter (Lag=0), right: Smoother with Lag=100.

l_0	Lag=0					Lag=100				
	100	1,000	10,000	10^5	10^6	100	1,000	10,000	10^5	10^6
1	0.003	0.034	0.372	4.256	37.157	0.015	0.172	1.882	20.893	196.918
2	0.008	0.069	0.721	7.418	82.883	0.032	0.342	3.889	47.013	397.143
3	0.011	0.101	1.063	10.665	122.339	0.048	0.554	5.729	67.748	600.647
4	0.014	0.141	1.397	14.787	174.113	0.062	0.760	8.552	113.456	846.428
5	0.018	0.176	1.928	17.757	204.140	0.083	0.950	9.393	140.603	1080.004
6	0.022	0.215	2.447	23.755	249.149	0.098	1.069	12.842	160.852	1307.047
7	0.026	0.257	3.303	25.455	288.023	0.108	1.239	14.533	182.767	1376.278
8	0.029	0.328	3.940	27.676	313.691	0.125	1.484	14.796	168.385	1694.059
9	0.033	0.389	4.263	32.157	360.874	0.143	1.893	16.988	265.403	1900.401
10	0.035	0.378	4.654	42.685	469.183	0.184	1.909	21.040	196.918	2167.504

the other hand, in the case of smoothing with Lag=100, multi-particle prediction reduces the computation time to about 30%~20% for $L > 3$.

Figure 8 shows scatter plots with CPU time on the horizontal axis and accuracy of the particle filter or smoother on the vertical axis. The plots on the left are for the filter (Lag=0), while the plots on the right are for the smoother (Lag=100). The orange and gray lines show the cases, $L = 1, \dots, 10$, $m = 10^4$ and 10^5 , respectively. On the other hand, green line shows case that $m = m_0 \times l_0$, where $m_0 = 10^4$ and 10^5 , $l_0 = 1, \dots, 10$, and $L = 1$. The area below the green line indicates that the multi-particle method is more efficient than the simple method in terms of CPU time. From the left plot, there is no advantage to use L larger than 1 in the case of filter (Lag=0). On the other hand, in the case of smoothing (LAG=100), it can be seen that multi-particle smoothing with L larger than 2, such as $2, \dots, 6$, is more efficient than the ordinary smoothing. It should be noted that this increase in accuracy can be achieved without increasing the memory required for the smoothing algorithm.

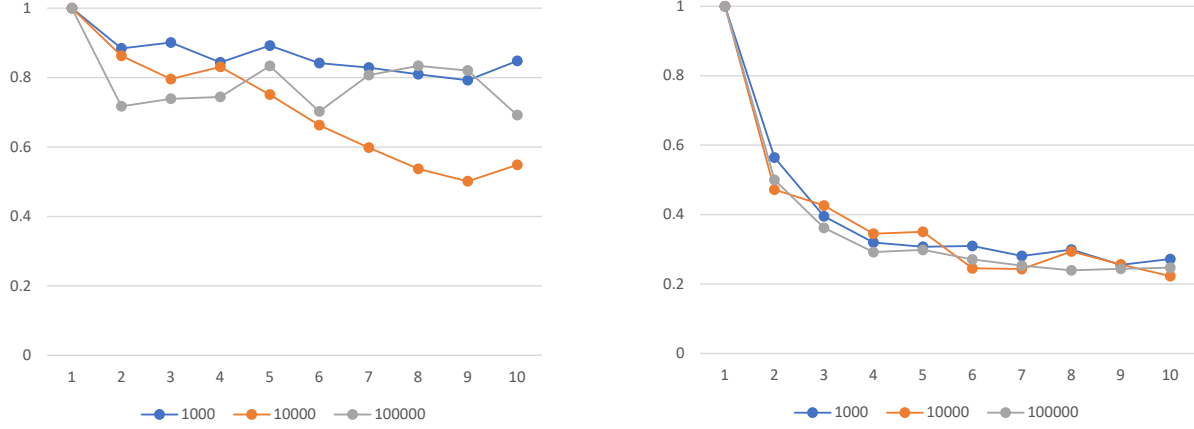


Figure 7: Efficiency of multi-particle prediction. Left plot: filter, Right plot: smoother with LAG=100

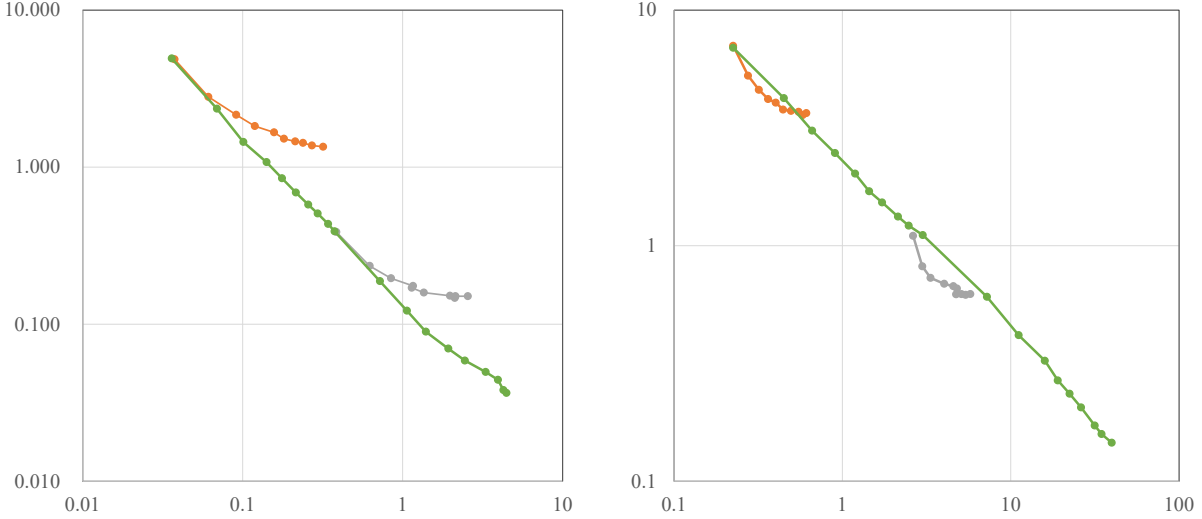


Figure 8: Scatter plot of Accuracy vs. CPU-time.

4 Balanced and Stratified System Noise

In the multiple sampling described in the previous section, L particles, $v_n^{(j)}, j = 1, \dots, L$, were randomly generated according to the Gaussian or Cauchy distribution, but it is expected that a better approximation can be obtained by balancing, such as setting the mean to 0, or by performing stratified sampling, especially for small values of L .

4.1 Balanced system noises

By setting the mean (i.e., the first-order moment) of the L random numbers to 0, the approximation accuracy of the MCF may be increased. For example, such system noise inputs can be generating by, for $L = 2$, $v_n^{(j,1)} \sim q(v)$, $v_n^{(j,2)} = -v_n^{(j,1)}$, and for $L = 3$, $r \sim q(v)$, $s \sim q(v)$, $v_n^{(j,1)} = |r|$, $v_n^{(j,2)} = -|s|$, $v_n^{(j,3)} = -(v_n^{(j,1)} + v_n^{(j,2)})$. However, with this ad hoc method, it is difficult to generate the particles for $L = 4$ or more.

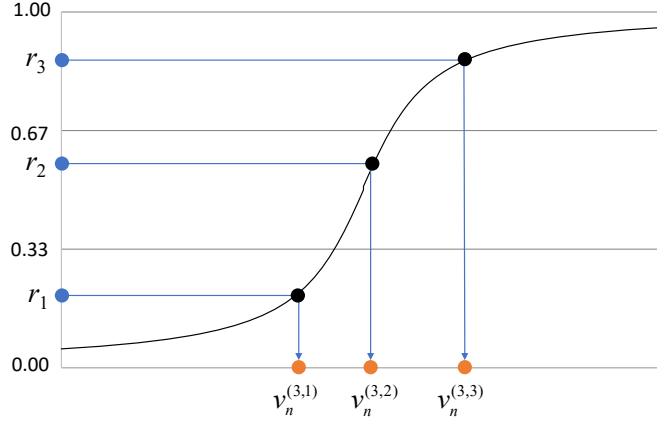


Figure 9: Example of generating stratified sampling for $L=3$.

4.2 Stratified system noises

A method that can generate random numbers more systematically than balanced sampling is stratified sampling. The stratified sampling in random number generation is considered here. In the generation of L system noises,

1. (a-S) Generate i -th system noise by $v_n^{(j,i)} = \Phi^{-1}(r_i)$, where $\Phi^{-1}(r)$ is the inverse function of the distribution function of the system noise v_n and r_i is the uniform random number on (u_0, u_1) obtained by $r_i \sim U(u_0, u_1)$ with $u_0 = (i-1)/L$ and $u_1 = i/L$.

Figure 9 shows an example of stratified sampling for $L=3$. The vertical axis shows the uniform random number r . The $[0,1]$ interval is divided into three layers $[0,1/3)$, $[1/3,2/3)$, $[2/3,1]$, and the random numbers r_1 , r_2 , r_3 are generated from each layer. Then, stratified random numbers can be generated by $v_n^{(3,i)} = \Phi^{-1}(r_i)$ using the inverse function of the noise distribution. Note that, if the noise distribution is Cauchy distribution, etc., the inverse function can be easily obtained as $\Phi(r) = \tan(\pi r)$.

Table 5 shows the comparison between stratified and random sampling for $m = 10^k$, ($k = 2, \dots, 6$), $L = 1, \dots, 10$ for the test data shown in Figure 1. These numbers represent the average of accuracy evaluated by $\text{DIST}(D_f, \hat{D}_f)$ when NSIM times of the particle filtering were performed using different random numbers. Here, NSIM=1,000 for $m = 10^2, 10^3$ and 10^4 and NREP=100 for $m = 10^5$ and NREP=25 for 10^6 . Figure 10 illustrates the same results for $m = 10^3, 10^4, 10^5$ and 10^6 . The results for the stratified sampling shown in red curves and the random sampling shown in black curves. The two curves almost overlap, unexpectedly, indicating that the accuracy can hardly be improved by using stratified sampling.

Table 5: Effect of stratified sampling

L	Stratified sampling					Random sampling				
	Number of particles, m					Number of particles, m				
	100	1,000	10^4	10^5	10^6	100	1,000	10^4	10^5	10^6
1	22.771	4.863	0.390	0.034	0.0038	22.771	4.863	0.387	0.033	0.0038
2	18.268	2.803	0.242	0.023	0.0024	17.735	2.803	0.235	0.024	0.0025
3	15.308	2.152	0.197	0.019	0.0021	15.443	2.156	0.196	0.020	0.0022
4	13.913	1.838	0.177	0.018	0.0020	13.863	1.826	0.175	0.018	0.0021
5	12.842	1.593	0.170	0.017	0.0017	12.791	1.666	0.171	0.017	0.0019
6	12.067	1.487	0.160	0.016	0.0019	11.986	1.518	0.159	0.017	0.0017
7	11.094	1.448	0.155	0.016	0.0017	11.527	1.458	0.152	0.017	0.0018
8	10.893	1.386	0.154	0.016	0.0015	10.860	1.427	0.147	0.016	0.0017
9	10.552	1.356	0.149	0.015	0.0015	10.485	1.374	0.151	0.015	0.0017
10	10.330	1.301	0.149	0.015	0.0017	10.285	1.349	0.151	0.015	0.0015

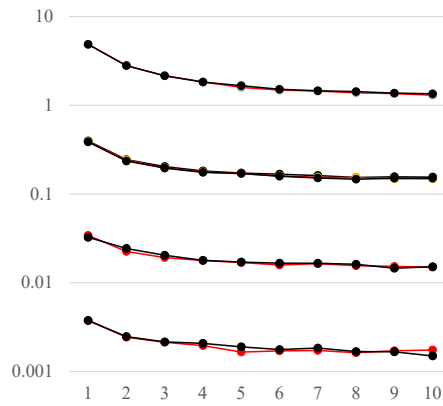


Figure 10: Comparison of accuracy of the filter with stratified system noise and simple MCF. From top to bottom: $m = 10^3, 10^4, 10^5$ and 10^6 . Red curve: stratified sampling, black curve: random sampling.

5 Conclusion

An empirical study on the effect of using multi-particle prediction in particle filtering and smoothing revealed the following:

1. Smoothing with Lag=100 for $L > 3$ by multi-particle prediction reduces computation time by about 70% compared to L times the number of particles, but only by about 20% for the filter.
2. As seen in Figure 8, there is little merit in using the multi-particle prediction in the case of the filter (Lag=0) in terms of computational efficiency. However, in the case of smoothing, there are two advantages of multi-particle prediction:
 - (a) The computational efficiency is improved for $L < 7$ or so.
 - (b) In the case of smoothing, a large memory, $m \times k \times \text{LAG} \times n$, is required, where k is the state-dimension, n is the number of data. However, in the case of multi-particle prediction, the accuracy of the smoothed distribution can be improved without increasing the memory required for smoothing.
3. At least as far as the data used in the empirical study are concerned, stratified sampling had no effect on improving accuracy at all.

References

- [1] Anderson, B.D.O., and Moore, J.B. (1979). *Optimal Filtering*, New Jersey, Prentice-Hall.
- [2] Doucet, A., Godsill, S. and Andrieu, C. (2000). On sequential Monte Carlo sampling methods for Bayesian filtering, *Statistics and Computing*, **10**, 197–208.
- [3] Doucet, A., de Freitas, N., and Gordon, N., (2001). *Sequential Monte Carlo Methods in Practice*. Springer-Verlag, New York.
- [4] Gordon, N. J., Salmond, D. J., and Smith, A. F. M., (1993). Novel approach to nonlinear/non-Gaussian Bayesian state estimation, *IEE Proceedings-F*, **140**, 107–113.
- [5] Harrison, P.J. and Stevens, C.F. (1976), Bayesian Forecasting (with discussion), *Journal of the Royal Statistical Society, Series B*, Vol. 34, 1-41.
- [6] Kitagawa, G. (1987), Non-Gaussian State Space Modeling of Nonstationary Time Series, *Journal of American Statistical Association*, Vol.76, No.400, 1032-1064.
- [7] Kitagawa, G. (1988), Numerical Approach to Non-Gaussian Smoothing and its Applications, *Computing Science and Statistics; Proceedings of the 20th Symposium on the Interface*, eds. E.J. Wegman, D.T. Gantz and J.J. Miller, 379-388.
- [8] Kitagawa, G., (1993). A Monte Carlo filtering and smoothing method for non-Gaussian nonlinear state space models, *Proceedings of the 2nd U.S.-Japan Joint Seminar on Statistical Time Series Analysis*, 110–131.
- [9] Kitagawa, G., (1996). Monte Carlo filter and smoother for non-Gaussian nonlinear state space model, *Journal of Computational and Graphical Statistics*, **5**, 1–25.

- [10] Kitagawa, G., (2010). *Introduction to Time Series Modeling*, Chapman & Hall/CRC Press, New York.
- [11] Kitagawa, G., (2014). Computational aspects of sequential Monte Carlo filter and smoother. *Annals of the Institute of Statistical Mathematics*, **66**, 443–471.
- [12] Kitagawa, G. and Gersch, W.(1984). A Smoothness Priors-State Space Approach to the Modeling of Time Series with Trend and Seasonality, *Journal of the American Statistical Association*, 79, No.386, 378-389.
- [13] Kitagawa, G., and Gersch, W., (1996). *Smoothness Priors Analysis of Time Series*, Springer-Verlag, New York.
- [14] Prado, R. and West, M. (2010). *Time Series Modeling, Computation, and Inference*, Chapman & Hall, CRC Press, Florida.
- [15] West, M. and Harrison, J. (1989). *Bayesian Forecasting and Dynamic Models* , Springer Series in statistics, Springer-Verlag, New York.