Self-driven lattice-m odel M onte C arlo sim u lations of alloy therm odynam ic properties and phase diagram s

A.van de W alle and M.Asta

M aterials Science and Engineering D epartment, N orthwestern University, 2225 N orth C am pus D rive, E vanston, IL 60208, U SA

E-m ail: avdw@alum.mit.edu

A bstract. M onte C arb (M C) simulations of lattice m odels are a widely used way to compute them odynamic properties of substitutional alloys. A limitation to their m ore widespread use is the di culty of driving a M C simulation in order to obtain the desired quantities. To address this problem, we have devised a variety of high-level algorithm s that serve as an interface between the user and a traditional M C code. The user speci es the goals sought in a high-level form that our algorithm s convert into elementary tasks to be performed by a standard M C code. For instance, our algorithm s perm it the determ ination of the free energy of an alloy phase over its entire region of stability within a speci ed accuracy, without requiring any user intervention during the calculations. O ur algorithm s also enable the direct determ ination of com positiontem perature phase boundaries without requiring the calculation of the whole free energy surface of the alloy system.

Submitted to: M odelling Simul. M ater. Sci. Eng.

PACS num bers: 61 50 Ah, 61.66 Dk, 64.60 Cn, 64.70 Kb, 64.10.+ h

1. Introduction

M onte Carb (MC) simulations [1{4] of lattice models are a widely used method to compute thermodynamic properties of substitutional alloys. A lattice model MC simulation only requires, as an input, a so-called cluster expansion [5{7], which de nes the energetics of the system by specifying the energy associated with any atom ic arrangement on a given lattice. Cluster expansions are typically constructed from a t to the energies of a set of structures calculated, for instance, from rstprinciples density-functional-theory calculations [8], thus enabling the prediction of therm odynamic properties even in the absence of experimental data.

In its simplest form, a cluster expansion speci es the energy di erence between nearest-neighbor chem ical bonds joining identical and distinct species in a binary alloy $(E_{AA} + E_{BB}) = 2)$ and predicts compound formation energies from the number (Е_{АВ} of each type of nearest-neighbor bond. However, this form alism can be extended [5] to allow for arbitrary interaction ranges and multibody interactions so that the energetics of the alloy can be modeled with an arbitrary accuracy by including a su cient number of such interactions. It has been demonstrated that the energetic contributions arising from displacements of the atom s away from their ideal lattice sites $[6,7,9\{14\}]$ can be accounted for within this framework. Moreover, by allowing temperature-dependent interactions, entropic contributions arising from vibrational and electronic excitations can be included as well (see [15] for a review and [16{19] for recent examples). Since long-range interactions are often needed to properly describe the energetics of an alloy system, MC sinulations have become a preferred method to compute therm odynamics properties from cluster expansions, because it would be di cult to account for such longrange interactions within accurate mean- eld methods, such as the Cluster Variation Method (CVM) [20] while e cient algorithms to include even in nite-range interactions in M C simulations have been devised [21]. M C simulations are also conceptually simple to understand, straightforward in plement, and can be easily adapted to compute a wide variety of properties.

Given these attractive features, it is not surprising that MC simulations of lattice models with cluster expansions determined from rst-principles calculations have been employed in a variety of context for metallic, sem i-conductor and ceramic systems, including the computation of: composition-temperature phase diagrams, therm odynamic properties of stable and metastable phases, short-range order in solid solutions, therm odynamic properties of planar defects (including surfaces or antiphase and interphase boundaries), and the morphology of precipitate microstructures [6,7,11, 22{25].

With the steadily increasing availability of computational resources, MC simulations of lattice models are likely to become even more prevalent in computational material science modeling. Despite the technological advances in computational hardware, the hum an time needed to select the appropriate simulation parameters and to analyze the data has remained essentially constant over the years. We are now in

a situation where the main limitation to the inclusion of atom istic M C simulations in standard therm odynamic software toolkits is not the lack of computational resources, but rather the di culty of controlling a M C simulation in order to obtain the desired quantities.

To address this problem, we have devised a variety of high-level algorithm s that serve as an interface between the user and a traditional MC code. The user speci es the goals sought in a high-level form that our algorithm converts into elementary tasks to be performed by a standard MC code. For instance, our algorithms perm it the determ ination of the free energy of a phase over all of its region of stability within a speci ed accuracy, without requiring any user intervention during the calculations. The proposed algorithm s have been in plemented in an easy-to-use software package [26].

In an e ort to make this article self-contained, we rst recall the basic theoretical results underlying sem i-grand-canonical M C simulations, which are especially suited for determ ination of therm odynam ic properties of alloys. We then proceed to describe the algorithm s that enable the autom ated calculation of therm odynam ic quantities from M C simulations. These algorithms address the following three questions. (i) How to determ ine when a M C simulation has run for a su ciently long of time to provide the desired quantities within a given target precision? (ii) How to detect phase transitions? (iii) How to e ciently determ ine the composition-tem perature phase boundaries of a phase diagram? We then provide a series of exam ples of applications that illustrate the features of our algorithm s.

2. Sem i-G rand-C anonical M onte C arlo

A very convenient way to obtain them odynam ic inform ation regarding an alloy system is to perform M C simulations which sample a sem i-grand-canonical ensemble, also known as the transmutation ensemble. In this ensemble, the energy and concentration of an alloy with a xed total number of atom s (N) are allowed to uctuate while temperature and chemical potentials are externally imposed. A lthough the results of this paper can be extended to general multicomponent systems, we are considering the case of binary alloys, for the bene t of notational simplicity. In an A B alloy, without loss of generality, only the composition x of element A and the di erence in chemical potential between the two species = A = B needs to be specified. For conciseness, we simply refer to the quantity as the \chemical potential" and x as the concentration.

The natural therm odynam ic potential (expressed per atom) associated with the sem i-grand-canonical ensemble can be de ned in terms of the partition function of the system as follows:

$$(;) = \frac{1}{N} \ln \sum_{i}^{X} \exp((N(E_{i} - x_{i})))$$
 (1)

where E_i and x_i are, respectively, the internal energy (per atom) and the concentration of state i, while = 1= (k_B T) is the reciprocal of the tem perature T and k_B is Boltzm ann's

constant. The therm odynamic potential is related to the Helm holtz free energy F through = F x.

The potential can also be de ned by the following total di erential:

$$d() = (E x) d x d$$
: (2)

where E and x are the system 's average internal energy (per atom) and concentration. Equation (2) enables the calculation of the therm odynam ic function (;) through therm odynam ic integration:

$$(_{1};_{1}) = (_{0};_{0}) + \frac{1}{2} (_{1};_{1}) (E x; x) d(;);$$
 (3)

where the integral is performed along a continuous path joining points ($_0$; $_0$) and ($_1$; $_1$) that does not encounter a phase transition. Sem i-grand-canonical MC simulations can be directly used to determ ine the values of E and x for any given and

The potential at the initial point $(_{0};_{0})$ is usually chosen to be a convenient point where can be computed analytically. One possible starting point is the high temperature lim it [11],

$$(;)! \ln (2) as ! 0$$
 (4)


where the lim it is taken while keeping nite (im plying that concentration x converges to 1=2 as ! 0). Another possible starting point is in the lim it of low temperature at a chem ical potential stabilizing a given ground state g. In this lim it, a \single-spin ip" low temperature expansion (LTE) [11,27,28] can be used to obtain:

$$(;) = E_g x_g - \frac{1}{N} \sum_{s}^{X} \exp((("_{sg} s_{gg}));$$
 (5)

where E_g is the energy (per atom) of ground state g with composition x, while "_{sg} is the variation in the system 's total energy (N E) associated with changing the identity of the atom sitting at site s in ground state g, and _{sg} is the variation in (N x) associated with the same change. This in nite sum can be reduced to a nite number of term s by making use of the translational periodicity of the ground state.

In order to avoid lengthy M C simulations, it is useful to possess a criterion to nd the highest possible temperature where the LTE is accurate. One attractive possibility is to compute both from the LTE and from a mean eld approximation (MFA). As long as both approaches give the same result within a user speci ed tolerance, we can be condent that \multiple spin ip events" are rare and that the LTE has the desired level of precision.

Using the LTE for each ground state of the system as a starting point to evaluate Equation (3), one can map out the whole potential surface (;) associated with any given ordered phase. Similarly, the high temperature limit can be used as a starting point to obtain (;) for the disordered phase. This process is illustrated in Figure 1.0 nce (;) has been determined for all phases, the boundary between two given phases and can be located by identifying the locus

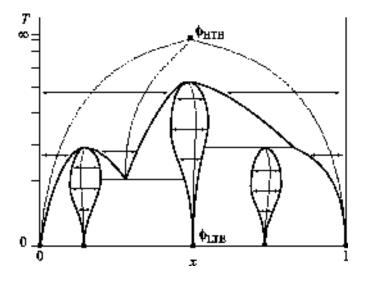

F igure 1. Example of paths of integration to determ ine the potential (;) of every phase. The starting points are given by either the Low Tem perature Expansion (LTE) or the High Tem perature Expansion (HTE).

f(i;): (i;) = (i;)g where the potential surfaces intersect. At such intersections (i;) 2 , the concentrations x and x of the two phases in equilibrium are simply given by the slopes of the potential surface at the point of intersection:

$$\mathbf{x} = \frac{\mathbf{\hat{q}} (\mathbf{i}; \mathbf{j})}{\mathbf{\hat{q}}} \tag{6}$$

$$\mathbf{x} = \frac{\mathbf{\hat{\mathbf{a}}} (\mathbf{;})}{\mathbf{\hat{\mathbf{a}}}}; \tag{7}$$

The calculations of therm odynam ic quantities based on sem i-grand-canonical M C simulations o er several advantages over their canonical counterparts.

- (i) For a given value of the control variables (;), the therm odynam ic equilibrium of the system is never a phase-separated m ixture, im plying that the calculated quantities always re ect the properties of pure phases, free of interfacial contributions that would otherw ise not be negligible due to the nite size of the simulation cell. (N ote that the M C simulation cellm ust be commensurate with the periodicity of the equilibrium structure for this property to hold.)
- (ii) The potential can be very directly determ ined through a simple therm odynam ic integration procedure (Equation (3)) where each required quantity takes the form of a therm odynam ic average of computationally inexpensive quantities (E, which must already be computed in order to perform the simulation, and x, which is trivial to obtain).
- (iii) Phase boundaries can be located by looking for intersections between curves, a criterion which is somewhat simpler to implement than the common tangent construction (although both methods are formally equivalent).

3. A lgorithm s

W hile the methods described in the previous section in principle enable the determ ination of therm odynam ic quantities from MC simulations, a number of practical issues need to be addressed before this process can be fully automated.

A typical M C code requires a substantial amount of user intervention and relies on the user's physical intuition to identify when a simulation is successful and reliable. The type of user interventions needed include:

- (i) Providing a variety of input parameters controlling the computational accuracy that need to be determined by trial and error.
- (ii) R equiring the user to m on itor the simulation periodically to ensure that the system has not undergone an unexpected phase transform ation.
- (iii) Performing a substantial amount of post-processing in order to obtain a phase diagram.

In this section we introduce algorithms to perform these tasks automatically and provide a form aljustication of their applicability.

3.1. Reaching a target precision

Three parameters control the precision of a therm odynamic quantity computed through M C simulations: the simulation cell size, the equilibration time and the averaging time. While the analysis of the elect of simulation cell size on the precision is beyond the scope of the present paper, this section provides a sound basis for the selection of the two remaining parameters. The equilibration time is the time the system takes to reach therm odynamic equilibrium from a given initial conguration. Once equilibrium is reached, the instantaneous value of a given quantity (e.g. the energy) then needs to be averaged over a certain number of M C steps in order for its average to be suiciently accurate. This de nes the averaging time, which is the instantaneous will focus on.

3.1.1. A veraging time W hile the approach presented in this section relies on standard statistical results, it is nevertheless included for the purpose of introducing our notation and clarifying the assumptions made. Consider a microscopic quantity taking the value Q_t at step t and whose expectation value is equal to the desired therm odynam ic quantity Q. If L observations of Q_t are available, a natural estimator of Q is the average:

$$\overline{Q}_{[1;L]} = \frac{1}{L} \sum_{t=1}^{X^L} Q_t;$$
(8)

The precision of this statistical quantity can be quantiled by calculating its variance. In general, the variance of $\overline{Q}_{[1:L_1]}$ is given by:

$$\operatorname{Var} \overline{Q}_{[l;L]} = \frac{1}{L^2} \sum_{t=1}^{X^L} V_{j,sj}$$
(9)

where $V_{\pm sj}$ is the covariance between Q_{\pm} and Q_s . The fact that the sequence Q_{\pm} is stationary when the system has reached therm odynamic equilibrium enables a simple estimator \hat{V}_1 of the covariance structure V_1 of the sequence through the equation

$$\hat{V}_{1} = \frac{1}{L} \frac{\overset{X}{L}^{1}}{\underset{t=1}{}^{2}} Q_{t} Q_{t+1} \quad \overline{Q}_{[L;L]}^{2}:$$
(10)

W hile Equation 9 is very general, it is also very computationally intensive, requiring on the order of L^2 operations to estimate the variance of $\overline{Q}_{[L,L]}$. Following most of the literature on MC simulation, we consider the more computationally tractable special case obtained when the covariance structure V_1 is assumed to be of the form

 $V_1 = V \quad \overset{jlj}{:} \tag{11}$

This approximation can be motivated as follows. A Markov chain can be represented by a linear superposition of components with exponentially decaying autocorrelation function. Each component is characterized by a certain correlation length and the component with the longest correlation length will typically give by far the largest contribution to the variance. Considering only the most slow ly decaying component should thus provide a good approximation to the true variance of the quantity of interest.

Under the assumption that the averaging time is much larger than the longest correlation time, z \boundary" e ects can be neglected and Equation (9) then reduces to

$$\operatorname{Var} \overline{Q}_{[l,L]} = \frac{1}{L^2} \sum_{t=1}^{X^L} V^{[l]}$$
(12)

Evaluating the geometric sum then yields:

$$\operatorname{Var} \overline{Q}_{[1;L]} = \frac{V}{L} \frac{1+\frac{1}{1}}{1} :$$
 (13)

Note that, since = exp (1=) where is the characteristic relaxation time, Equation (13) can be written, in the limit of large , in the more familiar form $V \text{ ar } \overline{Q}_{[1;L]} = 2 \text{ V}=L$.

W hile V can be directly estimated from Equation (10), setting l = 0, the parameter can be found in a variety of ways. We found the following algorithm to be both fast and accurate: Find the time interval 1 such that $\hat{V}_1 = \hat{V}_0 = \frac{1}{2}$ and then set $l = 2^{1-1}$. This approach o ers the important advantage that it uses, as an input, only the correlation between relatively distant values of Q_t . This ensures that will be determined by the most slowly decaying components of the M arkov process, which are the ones that the functional form V $j^{(j)}$ was meant to model. It is also a very fast algorithm, since a simple bracketing algorithm allows the determination of in about L log L operations. In the event that there are more than one 1 satisfying the equality, we chose the smallest one. The rationale behind this choice is that there is a small but nonzero chance that the

z This assumption should not be a concern because (i) this assumption tends to be violated only for averaging times such that the desired target precision on \overline{Q} has not yet been reached, and (ii) our expression overestimates the true variance when this assumption is violated.

estim ated covariances are such that $\hat{V}_1 = \hat{V}_0 = 1 = 2$ although the true covariances are not such that $V_1 = V = 1 = 2$. Choosing the smallest 1 m akes the procedure less sensitive to these spurious events since the probability of occurrence of one such event increases with the range of values of 1 considered.

In short, the averaging time L needed to reach a given precision can be found by computing the variance of $\overline{Q}_{[1;L]}$ through Equation (13) periodically and stopping the simulation when the variance goes below a user speci ed threshold:

$$\operatorname{Var} \overline{Q}_{[l;L]} = \frac{p}{z}^{2}; \qquad (14)$$

where p is the target precision on the value of Q while

$$z = 2 erf^{1}(1)$$
 (15)

is the critical value associated with the desired level of condence. For instance, if the error on Q is required to be less than 10³ with a probability of 99%, then $p = 10^3$, = 0.01 and z = 2.576.


3.1.2. Equilibration time W hen devising a criterion to determ inewhether a simulation has reached therm odynam ic equilibrium, approaches based on identifying correlation lengths can be unreliable because the system may be very far from equilibrium during equilibration. For this reason, we employ a relatively simple, and yet very robust approach that is based on the main de ning characteristic of therm odynam ic equilibrium. If the average of the quantity Q_t between steps t_1 and t_2 is not statistically signi cantly di erent from the average of Q between steps t_2 and t_3 , then the hypothesis that equilibrium has been reached at step t_1 and t_3 to be rejected. O focurse, the power of this test increases as t_2 to be recision p we seek to reach. This is to be expected since, strictly speaking, therm odynam ic equilibrium is never reached in a simulation of a nite length. Any de nition of equilibrium must include an arbitrary cuto and it is natural to choose this cuto to be a function of the precision we require.

Both the equilibration and averaging time needed to reach a precision p can thus be determined through an algorithm that can be outlined as follows (refer to Figure 2). Let L denote the number of samples of Q_t collected so far. Consider a range of values of $t_1 2$ [1;L] and for each, check whether

$$\overline{Q} \quad \overline{Q}_{[t_1;(t_1+L)=2]} \quad \overline{Q}_{[(t_1+L)=2;L]} \quad p;$$
(16)

where $Q_{[t_1,t_2]}$ denotes the average of Q_t for t 2 $[t_1;t_2]$. Then, verify that V ar $\overline{Q}_{[t_1;L_1]}$ satis es Equation (14). If both conditions are satis ed, then $\overline{Q}_{[t_1;L_1]}$ provides an estimate of Q with a precision p and with a condence level.

In its simplest form, the implementation of this algorithm involves storing all samples of Q_t collected so far and requires a loop over values of t_1 which make the complexity of the algorithm 0 (L²). Various techniques help reduce the resources

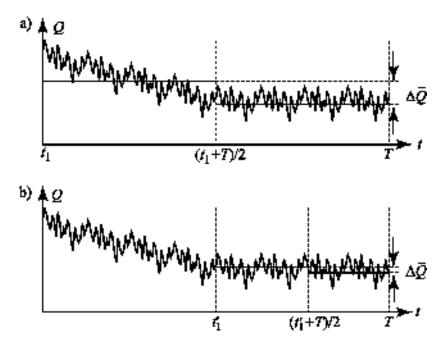


F igure 2. Criterion for testing whether therm odynam ic equilibrium has been reached in a MC simulation. In part a), the two blocks of data have signi cantly di erent m eans, in plying that the hypothesis that equilibrium has been reached at t_1 is rejected. In part b), the two blocks of data do have sim ilarm eans, indicating that the hypothesis that equilibrium has been reached at t_1^0 cannot be rejected.

required. First, sampling Q_t every MC pass, instead of at every spin ip, results in essentially no loss in precision since the correlation length of the simulation typically extends much beyond a MC pass. Second, one can $\lim it the search for t_1$ to values that are integer multiple of some block size L_b that is allowed to increase linearly with the total number of MC passes L. In this fashion, the number of operations needed to determ ine t_1 does not increase as the simulation progresses. The value of t_1 thus found by a search constrained to block boundaries di ers at most by I_{b} from the t_{i} which would have been found without block constraints. In the worst case, the simulation may have to be run for an additional L_b passes and it follows that the length of the simulation will be at most $(1 + L_{b}=L)$ larger than the optimal computational time that would have been needed without block constraints. A computationally convenient way to implement this scheme is to multiply the block size L_b by two whenever the total num ber of passes L doubles. Thanks to this approach, the entire history of values of Q_{+} does not need to be stored, only block averages of \overline{Q} , V and are needed, as illustrated in Figure 3. When the block size doubles, the values of \overline{Q} , V and for two consecutive blocks can be combined to obtain the corresponding value for the new block having twice the length k

x A M C pass consists of a number of attempted spin ips equal to the number of lattice sites in the simulation cell.

k The only drawback is that the resulting estimate of does not make use of all the available data

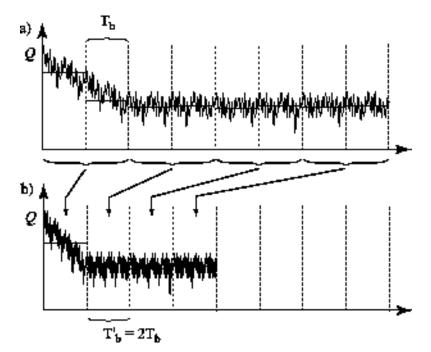

F igure 3. B lock-wise storage scheme. a) Only the mean variance and correlations within blocks of width L_b needs to be stored (the mean is represented by a thick horizontal line). b) As the simulation runs, blocks are periodically merged so that storage requirements do not grow.


3.2. D etecting phase transitions

Phase transitions can be identied by locating singularities in some function Q (C), where Q is some thermodynamic quantity (such as energy, concentration or an order parameter) and C is some control variable (such as temperature or chemical potential). In this section, we propose a simple algorithm to perform the detection of such singularities while accounting for the fact that quantities obtained from MC are intrinsically noisy. Our algorithm is applicable to the detection of both rst-order and second-order transitions, although the power of the test is clearly higher for rst-order transitions.

An analytic function has the property that the know ledge of its shape in some nite interval enables the prediction of its value outside of that interval. The failure of this extrapolation procedure in the presence of a singularity perm its its detection. Form ally, an analytic function can be extrapolated using a Taylor series. We approximate this operation by thing the output of the MC simulation by a polynom ial.

Consider n + 1 estimates $\overline{Q}_1; :::; \overline{Q}_{n+1}$ of the quantity Q (C) obtained for a sequence of values of the control variable $C_1; :::; C_{n+1}$. The general principle behind our singularity detection procedure is to tapolynomial through the rst n points and

points, because the product Q_tQ_s for t and s belonging to di erent blocks cannot be determ ined from within-block averages. A linearly it is ine cient, our estimate of is nevertheless unbiased and the loss of e ciency is negligible if the block size is large relative to the correlation time.

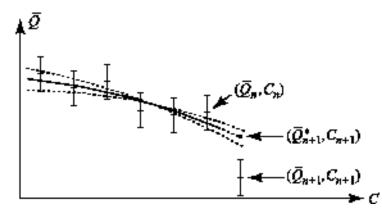

F igure 4. Criterion for detecting a phase transition. If the sequence \overline{Q}_n ; C_n predicts a value of \overline{Q}_{n+1} ; C_{n+1} but the actual value, \overline{Q}_{n+1} ; C_{n+1} is statistically significantly different, then a phase transition must have occurred. Both the noise in the prediction (represented by dashed lines) and the noise in \overline{Q}_{n+1} (represented by an error bar) must be taken into account to determ ine statistical significance.

if the observed value Q_{n+1} is far from the value predicted from the polynom ial tted to the previous data, a singularity must be present between point n and n + 1 (see Figure 4). To make this algorithm practical, two questions need to be answered. First, how do we choose the order of the polynom ial to be tted? Second, how do we select the maximum allowable prediction error that can be tolerated without claim ing the presence of a singularity?

To answer the st question, we make use of the well-known cross-validation criterion [29,30]: Choose the order k of the polynom ial that m inim izes the quantity:

$$CV = \frac{1}{n} \frac{X^{n}}{\sum_{i=1}^{n} Q_{i}} Q_{i}^{2}$$
(17)

where Q_i is the value of \overline{Q}_i predicted from a polynom ial least-squares to the remaining n 1 points: \overline{Q}_1 ; ...; \overline{Q}_{i1} ; \overline{Q}_{i+1} ; ...; \overline{Q}_n . Intuitively, this criterion tests the predictive power of the polynom ial using the points \overline{Q}_1 ; ...; \overline{Q}_n before we attempt to use it for the prediction of \overline{Q}_{n+1} . Once the order k of the polynom ial has been chosen, the standard theory of least-squares [31] provides the distribution of the predicted value Q_{n+1} , which can be used to determ ine whether the prediction error is statistically signi cantly di erent from zero. For i = 1; ...; n and j = 1; ...; k + 1, let

$$X_{ij} = (C_i)^{j}$$
 (18)

$$Y_{i} = \overline{Q}_{i}; \qquad (19)$$

so that the equation de ning the least-squares problem can be written in matrix form as Y = X a + ", where " is an n 1 vector of error term s. The vector a of the coe cients of the polynom ial can be estimated by

$$\hat{a} = X^{T}X^{-1}X^{T}Y$$
(20)

while the covariance matrix of â is given by

$$V = {}^{2} X^{T} X {}^{1}$$
(21)

where ² is the variance of the residuals "_i of the t. The quantity ² can be estimated in two asymptotically equivalent ways. Equation (13) provides an estimate of the variance of any of the \overline{Q}_{i} , which can be averaged over i to yield a single, more accurate estimate:

$$n^{2} = \frac{1}{n} \sum_{i=1}^{N^{n}} \operatorname{Var} \overline{Q}_{i} :$$
(22)

A Itematively, the residuals of the least-squares t can be used:

$$h^{2} = kY \quad X \; ak^{2} = (n \quad k \quad 1) :$$
 (23)

W hile Equation (22) is more accurate (especially if n is small), because it makes use of additional information, Equation (23) is simpler to implement as it minimizes the amount of information that needs to be transferred between the M onte C arb simulation code and the phase transition detection routine.

The predicted value of Q for point n + 1 is then given by

$$Q_{n+1} = x^{\mathrm{T}} \hat{a}$$
 (24)

where $x_j = (C_{n+1})^{j-1}$ for j = 1; ...; k + 1, while the variance of this prediction is given by:

$$\mathbf{v} = \mathbf{x}^{\mathrm{T}} \mathbf{V} \mathbf{x} \mathbf{:} \tag{25}$$

If there is no singularity, the variance of the di erence between \overline{Q}_{n+1} and Q_{n+1} is $v + {}^2$ because (i) the variance of Q_{n+1} is v w hile the variance of \overline{Q}_{n+1} is 2 , (ii) \overline{Q}_{n+1} and Q_{n+1} are independent. An asymptotically valid statistical test thus consists in rejecting the hypothesis that there is no phase transition if the prediction error $\overline{Q}_{n+1} = Q_{n+1}$ is such that{

$$\overline{Q}_{n+1} \quad Q_{n+1} \qquad z^{p} \overline{v+2}; \qquad (26)$$

For z de ned as in Equation (15), the probability that a phase transition is incorrectly identi ed is less than . The relevant quantities are represented in Figure 4.

The Equations presented above rely on the assumption that the deviations away from the true therm odynamic quantity, \overline{Q}_i Q (C_i) for i = 1; :::; n + 1, are statistically independent. This is an appropriate assumption if the system is given su cient time to equilibrate every time the value of the control variable C changes. Our method also assumes that the deviations \overline{Q}_i Q (C_i) all have the same variance. Both of these requirements are automatically satisfies ed if the points $\overline{Q}_1; :::; \overline{Q}_{n+1}$ are generated using the algorithm presented in Section 3.1.

[{] Note that Q_{n+1} must be an unbiased predictor of Q_{n+1} for this test to be valid, which is not the case for nite n due to the nite order of the approximating polynomial. Fortunately, the bias (squared) goes to zero as n ! 1 and eventually becomes negligible relative to ², ensuring the asymptotic validity of the procedure. Note that the variance v of the prediction is also negligible asymptotically relative to ². We nevertheless include the variance term v in Equation (26) in order to improve the accuracy of the test for nite n, since we do have an estimator of the variance (unlike the bias).

For the sole purpose of locating phase transitions, one particular type of them odynam ic function enables an especially sensitive test for phase transitions: order param eters. Unfortunately, order param eters that are invariant under any possible symmetry operation of the lattice are offen expensive to compute. However, if one always traverses phase transitions from an ordered phase toward a disordered phase (or another ordered phase), the task is dram atically simplified. When a M C cell is initialized with one specific ground state (i.e. an ordered phase) and before a phase transition is reached, there is a vanishing probability that the system will uctuate enough to reach a state that is different but symmetrically equivalent to the original state. Thus, an order param eter can be computed by simply keeping track of the number of sites that host an atom ic specie that is different from the specie found at the same e site at initialization. There is no need to check for every possible symmetry-related ordered context on the specie context of the system with ordered context of the specie context of the specie context of the system ordered context of the specie context of the system of sites that host an atom ic specie that is different from the specie found at the same of sites that host an atom is no need to check for every possible symmetry-related ordered context of the species context.

The algorithms just presented are especially useful when one desires to construct the potential surface (;) of a phase (using them odynam ic integration over the paths depicted in Figure 1) without requiring the user to manually determ ine when to stop the therm odynam ic integration along a given direction because a phase transition has occurred. The autom ated construction of such free energy surfaces provides a very natural pathway through which an atom istic MC simulation can be used to provide input to CALPHAD -type calculations based on phenom enological free energy m odels.

3.3. Phase boundary tracing

W hen one is solely interested in determ ining a system's phase diagram, it would be computationally advantageous to be able to follow the boundary of a phase without rst calculating the potential over the whole region where this phase is stable. In this section, we describe how, in the case of a rst-order transition, the entire boundary of a two-phase equilibrium can be determ ined, starting from a single point where a transition is known to occur. We rst focus on a simple method that neglects the unavoidable presence of statistical noise in MC simulations before describing how the presence of this noise can be handled.

Consider a value of the reciprocal temperature and of the chemical potential that is known to stabilize a phase-separated mixture between phases and . The know ledge of such a pair (;) could be provided, for instance, by the phase transition detection algorithm presented in the previous section, assuming that the hysteresis loop of the phase transition is su ciently narrow (which tends to be case at high temperature). A Itematively, if T = 0, the chemical potential that simultaneously stabilizes two ground states and can be found by a simple common tangent construction from the knowledge of the energy and composition of each ground state. At such a two-phase equilibrium point, the potentials of each phase are equal. Our task is to nd, as reciprocal temperature changes by an amount d, the changes in chemical potential needed to preserve the equality between each phase's therm odynam ic potential. By iterating this process, one can de ne a whole path () that traces out

the value of the chem ical potential at the phase transition as tem perature changes, and thus nd the concentrations x and x of each phase in equilibrium as a function of tem perature. The di erential equation whose solution provides the desired path () can be found by taking the total di erential of the equation = following from the identity between the potentials of each phase:

$$\frac{\underline{\theta}(}{\underline{\theta}} d + \frac{\underline{\theta}(}{\underline{\theta}} d = \frac{\underline{\theta}(}{\underline{\theta}} d + \frac{\underline{\theta}(}{\underline{\theta}} d$$
(27)

) (E x) d
$$x d = (E x) d x d$$
 (28)

)
$$\frac{d}{d} = \frac{(E \quad E \quad)}{(x \quad x \quad)} \quad -; \tag{29}$$

where E and x are the energy and concentration of phase at reciprocal temperature and chemical potential (and similarly for phase). All the quantities needed can be directly obtained from MC simulations. Thanks to the fact that both phases are metastable for values of the chemical potential in the neighborhood of the true phase transition, it is possible to obtain E and x for both phases at the same chemical potential. A very e cient way to implement this algorithm is to keep two simulations in memory at the same time | one for the phase and one for the phase . In this fashion, the

nalcon guration of the simulation of phase at reciprocal temperature can be used as an initial con guration for the simulation of phase at temperature + d (and similarly for phase). The long equilibration time associated with the crossing of a phase transition is thus avoided. Interestingly, this algorithm can be directly used even when the two phases in equilibrium are based on a completely di erent parent lattice.

We now address the issue that the quantities obtained from MC are contam inated by noise. The presence of noise causes the solution to Equation (29) calculated from MC to deviate from the true path (). This eventuality brings up two questions. First, is the solution to Equation (29) stable or unstable with respect to the presence of sm all perturbations? Second, what can one do if the noise becom es so large that the calculated chem ical potential leaves the region where both phases are m etastable?

To answer the st question, consider a perturbation "() of the chem ical potential away from its value () at the phase transition at reciprocal temperature . We now calculate how this error is further propagated when solving Equation 29. To the st order, the di erence between the potential of the two phases is (x () x ())"(). A stem perature changes, Equation (29) updates so as to preserve this di erence. We thus have the equality:

$$(x () x ())"() = (x (+d) x (+d))"(+d): (30)$$

Taking the limit of in nitesimald and rearranging yields:

$$\frac{d''}{d} = ''\frac{d}{d}\ln jx \quad x j \tag{31}$$

and it follows that the small perturbation " is unstable as increases when the di erence in concentration between the two phases in equilibrium jx = x j decreases with increasing . The practical consequence of this observation is that integrating

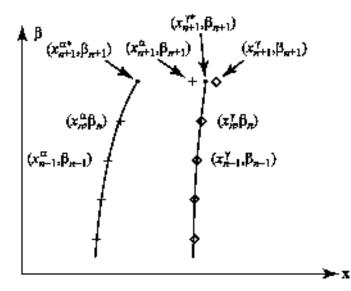



Figure 5. Criterion for detecting when the phase boundary tracing algorithm has exited the region of simultaneous m etastability of the two phases in presence. The point x_{n+1} ; $_{n+1}$ is better predicted by x_{n+1} ; $_n$ than by x_{n+1} ; $_n$. Hence, the M C simulation of phase must have undergone a transition to phase .

Equation (29) from high temperature to low temperature yields a method more robust to statistical noise, because $j_x = x$ jusually increases with decreasing temperature T.

We now address the second robustness issue, namely, what can we do if the algorithm wanders outside of the region of metastability of either phase? It is straightforward to detect when this happens by simply checking whether $j_{x} = x_{j}$ is not statistically signi cantly di erent from zero. One then needs to determ ine which of the two MC simulations (for phase or) underwent a phase transition. This can be accomplished by keeping track of the concentration of each phase $(x_{1}; :::; x_{n})$ and $x_{1}; :::; x_{n}$ and $x_{1}; :::; x_{n}$ at temperatures previously visited (1; :::; n) and using them the verify whether the new concentration $x_{n+1} = x_{n+1}$ at n+1 is best predicted by the sequence x_{i} or x_{i} , using the extrapolation described in the previous section (see Figure 5). The sequence that gives the worst prediction will point to the MC simulation that underwent a phase transition.

W ithout loss of generality consider the case when x < x and when the simulation of phase transformed to phase . We can then \recenter" the chemical potential to a good estimate of its true value at the phase transition as follows (refer to Figure 6).

- (i) G radually decrease the chem ical potential of the M C simulation of phase until its concentration can again be predicted by the sequence x_i within the magnitude of the statistical noise. Let _ denote the value of the chem ical potential when this happens and save the state S of simulation cell at that point.
- (ii) Then, gradually increase the chem ical potential of the MC simulation of phase until its concentration can be predicted by the sequence x_i within the magnitude of the statistical noise. Let denote the value of the chem ical potential when this

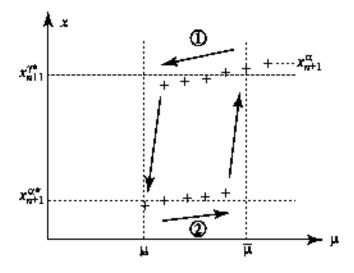

F igure 6. A loorithm to locate the center of the region of simultaneous m etastability of the two phases in presence. In step 1, the chemical potential in the simulation of phase is gradually decreased until concentration is once again best predicted by x_i . In step 2, the chemical potential is increased until the simulation transform back to phase . The two extreme values of the chemical potential _ and _ thus de ned bracket the true value of _ at the phase transition.


happens.

- (iii) Restore the state of the simulation cell of phase to the saved state S and set the chemical potential to = + = 2.
- (iv) Rerun the simulation for both phases and at chemical potential and continue the integration Equation (29) with the values of E and x obtained for each phase.

This approach results in a very robust algorithm that can run without user intervention to map out the whole two-phase equilibrium. Thanks to this safety mechanism, we found that it is feasible to integrate Equation (29) towards increasing temperature, despite the potential for instability with respect to noise. This proves useful since it is very easy to nd a starting point for our algorithm at T = 0. The boundary tracing algorithm may have to recenter itself a few times on its way to the end of the two-phase equilibrium. But once the location of the phase boundary at high temperature is known, a smooth phase boundary can then be calculated, starting from the highest temperature and following the phase boundary in the direction of decreasing temperature.

The end of the two-phase region can be detected by monitoring the occurrence of either one the following events (see Figure 7):

(i) The concentrations x and x are statistically signi cantly di erent, but either x or x is not predicted by the corresponding sequence x_i or x_i within statistical uncertainty.

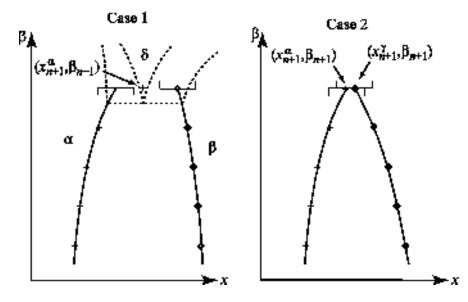

F igure 7. Criterion for detecting the end of a two-phase equilibrium. In Case 1, a new phase has appeared, as indicated by the fact that x_{n+1} lies outside of the error bar of the prediction of concentration for either phase or . In Case 2, a congruent or critical point has been reached since the concentrations of the two phases are no longer statistically signi cantly di erent.

(ii) The concentrations x and x are not statistically signi cantly di erent, but the sequences x_i and x_i both predict the same concentration, within statistical uncertainty.

Case 1 indicates that a third phase has become stable (i.e. a eutectic or peritectic point), while Case 2 indicates that the phase boundaries have met at a common composition (e.g. at a congruent point or a critical point). In the rst case, the algorithm will actually continue slightly beyond the true eutectic or peritectic point because of the presence of hysteresis at a rst-order phase transition. How ever, the true location of the three-phase equilibrium can be determined from the intersection of the and where how phase they have been determined.

and phase boundaries, once they have been determ ined.

4. A pplications

This section presents a num ber of examples of autom ated calculations of therm odynamic properties using the previously introduced algorithms. In each example, the cluster expansion describing the energetics of the alloy system was obtained from a to rst-principles structural energy calculations using the MAPS [32] code, which autom ates the process. A description of the algorithms enabling the autom atic construction of such a cluster expansion, as well as a description of the interaction parameters de ning each cluster expansion used below, can be found in [33].

Our rst example is the determination of the complete potential surface (T;) of the solid-state phases of the MgO-CaO pseudo-binary alloy system (see Figure


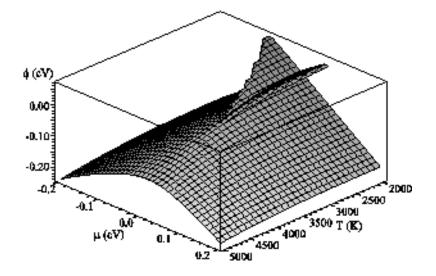


Figure 8. Potential surface for the M gO -C aO pseudobinary alloy system.


8). As the MqO-CaO system is phase separating (as shown in Figure 12), the therm odynam ic potential surface exhibits a characteristic butter y shape. Below the critical tem perature, the surface intersects with itself at a nonzero angle, indicating the presence of a miscibility gap. Since the MC simulation is able to sample metastable phases, for some values of the chemical potential, one can determine (T;) for both phases in the region of metastability, which explains the double-valued nature of the potential surface at low temperatures. Above the critical temperature, (T;) becomes single-valued and varies smoothly as varies. (Note that, in reality, the alloy melts before reaching that point at atmospheric pressure.) Figure 9 shows the G $ibbs^+$ free energy surface G (x;T) (T; (T;x)) +(T;x) x for the same system and, in this more familiar representation, the presence of miscibility gap at by temperature is clearly recognizable. The calculated Gibbs free energy surface can be directly used to t standard solution m odels, such as an ideal solution m odel, plus a polynom ial in tem perature and concentration to account for non-ideality. The order of the polynomial needed to represent the MC output can, for instance, be determined through cross-validation, as de ned in Section 32. The resulting very compact representation of the therm odynamics of the alloy system can be used in CALPHAD -type calculations to supplement existing experimental data or to llin data not yet determ ined experim entally.

Figure 10 shows the result of a similar calculation in the case of a ordering alloy system, the T i A l system. For clarity, the m etastable portions of the (T;) surface are om itted so that the potential is single-valued everywhere. The order-disorder transition is clearly visible from the kink in the surface, which is highlighted by a thick curve. The

 $^{^+}$ The di erence between the G ibbs and Helmholtz free energies can be neglected at atmospheric pressure in solid state systems because the product of pressure P with changes in speci c volume (V) are small.

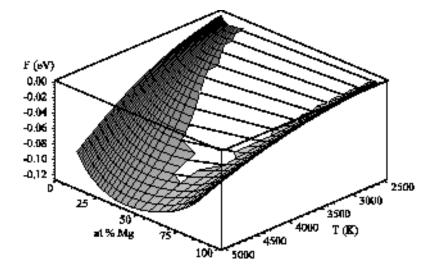

F igure 9. G ibbs free energy for the M gO -C aO pseudobinary alloy system . C om m on tangent constructions are shown at selected tem peratures.

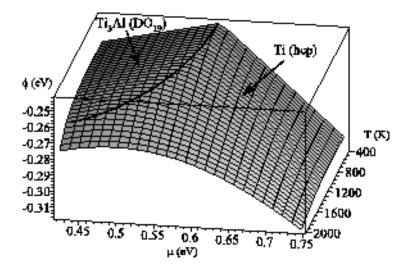

F igure 10. Potential surface for the Ti-Al alloy system . The thick curve indicates the location of a kink in the surface, associated with a rst-order transition.

corresponding G ibbs free energy representation of the same data is shown in Figure 11.

Figure 12 illustrates the usefulness of the boundary tracing algorithm described in Section 3.3. The examples shown even include a case (T iA l) where a equilibrium between two phases di ering by their lattice type: the L1 is fcc-based while the DO $_{19}$ and the T isolid solution are hcp-based). These examples show that one can obtain phase diagrams from rst-principles without rst obtaining the complete (T;) surface.

It is in portant to note that, in these examples, the MC code requires very little intervention or input from the user. Thanks to the algorithms introduced in Section 3.1, the code is able to autonom ously determ ine, at each value of the control variables (T;), when equilibrium has been reached and how long the simulation needs to be run

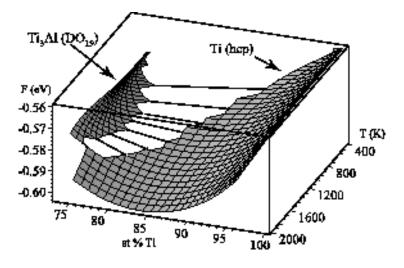


Figure 11. Gibbs free energy for the TiAl alloy system. Common tangent constructions are shown at selected tem peratures.

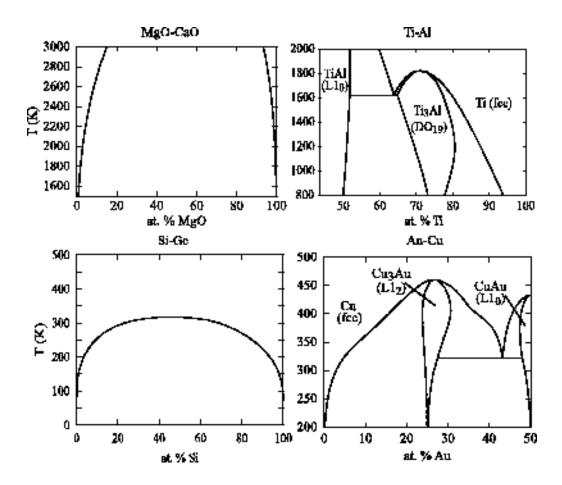


Figure 12. Sample phase diagram s calculated with the automatic boundary tracing algorithm.

in order to reach the target precision. The code is also able to determ ine when the region of stability of one phase has been exited, thanks to the algorithm s described in Section 3.2, so that the user does not need to specify when to stop the therm odynam ic integration. The only input parameters the user needs to specify are

- (i) which phase to scan (the code can determ ine the value of the chem ical potential stabilizing the desired two-phase equilibrium at OK);
- (ii) the target precision (here, 0:1 at % precision on the concentration variable is used as a criterion);
- (iii) the size of the simulation cell (in the present study, the simulation cell is always chosen such that it contains a sphere of a diameter equal to at least 10 times the nearest-neighbor interatom ic spacing).

5. Conclusion

The algorithm s we have introduced enable researchers to focus on high-level concepts when employing MC simulations. All the tasks that make traditional M onte C arlo simulations so tedious have been form alized into algorithms that can autonom ously initialize and control the appropriate MC simulation. The user only needs to specify high-level goals, such as the target precision or which phase to focus on. This autom ation of MC simulations, along with the earlier work that enabled the autom ation of cluster expansion construction [33], signi es that it is now possible for large community of researchers to employ inst-principles calculations to augment and complete existing experimental therm odynam ic databases without facing the steep learning curve that has traditionally been associated with inst-principles therm odynam ical calculations.

A cknow ledgm ents

This work was supported by the NSF under program DMR-0080766.

References

- M.E.J.Newman and G.T.Barkema, Monte Carlo Methods in Statistical Physics (Clarendon Press, Oxford, 1999).
- [2] K.Binder and D.W. Heerm ann, Monte Carlo Simulation in Statistical Physics (Springer-Verlag, New York, 1988).
- [3] B.Dunweg and D.P.Landau, Phys.Rev.B 48, 14182 (1993).
- [4] M. Laradji, D. P. Landau, and B. Dunweg, Phys. Rev. B 51, 4894 (1995).
- [5] J.M. Sanchez, F.D. ucastelle, and D.G. ratias, Physica 128A, 334 (1984).
- [6] D. de Fontaine, Solid State Phys. 47, 33 (1994).
- [7] A.Zunger, in NATO ASI on Statics and D ynam ics of A lby P hase Transform ation, edited by P.E. Turchi and A.G onis (P lenum P ress, New York, 1994), Vol. 319, p. 361.
- [8] R.O.Jones and O.Gunnarsson, Rev.M od. Phys. 61, 689 (1989).
- [9] D. de Fontaine, Solid State Phys. 34, 74 (1979).
- [10] D.B.Laks, L.G.Ferreira, S.Froyen, and A.Zunger, Physical Review B 46, 12587 (1992).

- [11] F.Ducastelle, Order and Phase Stability in Albys (Elsevier Science, New York, 1991).
- [12] G.Ceder, Com put.M ater.Sci.1, 144 (1993).
- [13] C.W olverton and A.Zunger, Phys. Rev. Lett. 75, 3162 (1995).
- [14] M.Asta and S.M. Foiles, Phys. Rev. B 53, 2389 (1996).
- [15] A.van de W alle and G.Ceder, Rev.M od.Phys.74, (2002), in press.
- [16] V.Ozolins and M.Asta, Phys. Rev. B 86, 448 (2001).
- [17] V.Ozolins, C.W olverton, and A.Zunger, Phys. Rev. B 58, R5897 (1998).
- [18] C.W olverton and V.O zolins, Phys. Rev. Lett. 86, 5518 (2001).
- [19] C.W olverton and A.Zunger, Phys. Rev. B 52, 8813 (1995).
- [20] R.Kikuchi, Phys.Rev. 81, 988 (1951).
- [21] Z.W. Lu, D.B. Laks, S.H. Wei, and A. Zunger, Phys. Rev. B 50, 6642 (1994).
- [22] A.Zunger, MRS Bull. 22, 20 (1997).
- [23] C.Wolverton, V.Ozolins, and A.Zunger, J.Phys.: Condens. Matter 12, 2749 (2000).
- [24] G.Ceder, A.van der Ven, C.M arianetti, and D.M organ, M odelling Simul.M ater SciEng. 8, 311 (2000).
- [25] M.Asta, V.Ozolins, and C.W oodward, JOM Journal of the M inerals M etals & M aterials Society 53, 16 (2001).
- [26] A .van de W alle, Easy M onte C arlo C ode (Em c2), 2001, http://cm s.northwestern.edu/atat/.
- [27] A.F.Kohan, P.D. Tepesch, G.Ceder, and C.Wolverton, Comp.Mat.Sci. 9, 389 (1998).
- [28] C.Woodward, M.Asta, G.Kresse, and J.Hafner, Phys. Rev. B 63, 094103 (2001).
- [29] M. Stone, J. Roy. Stat. Soc. B M et. 36, 111 (1974).
- [30] K.-C.Li, Ann. Stat. 15, 956 (1987).
- [31] A. S. Goldberger, A Course in Econometrics (Harvard University Press, Cambridge, Massachusetts, 1991).
- [32] A. van de Walle, MIT Ab-initio Phase Stability (MAPS) code, 2001, http://www.mit.edu/ avdw/maps/.
- [33] A . van de W alle and G . C eder, A utom ating First-Principles Phase D iagram Calculations, 2001, submitted to the Journal of Phase Equilibria.