# Correlations in Scale-Free N etworks: Tom ography and Percolation

 $R.Xulvi-Brunet^1, W.Pietsch^1, and IM.Sokolov^{1;2}$ 

<sup>1</sup> Institut fur Physik, Hum boldt Universitat zu Berlin, Invalidenstra e 110, D-10115 Berlin, Germ any

<sup>2</sup> Theoretische Polym erphysik, Universitat Freiburg, Herm ann Herder Str. 3, D-79104 Freiburg, Germ any

We discuss three related models of scale-free networks with the same degree distribution but dierent correlation properties. Starting from the Barabasi-A lbert construction based on grow thand preferential attachment we discuss two other networks emerging when random izing it with respect to links or nodes. We point out that the Barabasi-A lbert model displays dissortative behavior with respect to the nodes' degrees, while the node-random ized network shows assortative mixing. These kinds of correlations are visualized by discussing the shell structure of the networks around their arbitrary node. In spite of dierent correlation behavior, all three constructions exhibit sim ilar percolation properties.

PACS numbers: 89.75.-k, 05.50.+q, 89.75.Hc

#### INTRODUCTION

Scale-free networks, i.e. networks with power-law degree distributions, have recently been widely studied (see Refs. [1,2] for a review). Such degree distributions have been found in m any di erent contexts, for example in several technological webs like the Internet [3,4], the W W [5,6], or electrical power grids [7], in natural networks like the network of chem ical reactions in the living cell [8 [10] and also in social networks, like the network of hum an sexual contacts [11], the science [12,13] and the m ovie actor [14,15] collaboration networks, or the network of the phone calls [16].

The topology of networks is essential for the spread of information or infections, as well as for the robustness of networks against intentional attack or random breakdown of elements. Recent studies have focused on a more detailed topological characterization of networks, in particular, in the degree correlations among nodes [4,17{26]. For instance, many technological and biological networks show that nodes with high degree connect preferably to nodes with low degree [4,21], a property referred to as disassortative mixing. On the other hand, social networks show assortative mixing [17,25], i.e. highly connected nodes are preferably connected to nodes with high degree.

In this paper we shall study some aspects of this topology, speci cally the importance of the degree correlations, in three related models of scale-free networks and concentrate on the two important characteristics: the tomography of shell structure around an arbitrary node, and percolation.

# THE MODELS

O ur starting m odel is the one of B arabasi and A bert (BA) [27], based on the grow th algorithm with preferential attachment. Starting from an arbitrary set of initial nodes, at each time step a new node is added to the network. This node brings with it m proper links which are connected to m nodes already present. The latter are chosen according to the preferential attachment prescription: The probability that a new link connects to a certain node is proportional to the degree (number of links) of that node. The resulting degree distribution of such networks tends to [28{30]:

$$P(k) = \frac{2m(m+1)}{k(k+1)(k+2)} \quad k^{3}:$$
(1)

K rapivsky and R edner [30] have shown that in the BA – construction correlations develop spontaneously between the degrees of connected nodes. To assess the role of such correlations we shall random ize the BA -network.

Recently M aslov and Sneppen [21] have suggested an algorithm radom itzing a given network that keeps the degree distribution constant. A coording to this algorithm at each step two links of the network are chosen at random. Then, one end of each link is selected random ly and the attaching nodes are interchanged. However, in case one or both of these new links already exits in the network, this step is discarded and a new pair of edges is selected. This restriction prevents the apparearance of multiple edges connecting the same pair of nodes. A repeated application of the rew iring step leads to a random ized version of the original network. W e shall refer to this m odel as link-random ized (LR) m odel.

The LR model can be compared with another model which is widely studied in the context of scale-free networks, namely with the conguration model introduced by Bender and Can eld [31,32]. It starts with a given number N of nodes and assigning to each node a num – ber k<sub>i</sub> of ledge stubs" equal to its desired connectivity. The stubs of di erent nodes are then connected random ly to each other; two connected stubs form a link. One of the limitations of this lot reconnectivities, which is usually the case in complex networks, the algorithm generates multiple edges ipining the same pair of hub nodes and loops connecting the node to itself. However, the co guration m odel and the LR m odel get equivalent as N  $\ ! \ 1$  .

O ne can also consider a node-random ized (NR) counterpart of the LR random ize procedure. The only difference to the link-radom ized algorithm is that instead of choosing random ly two links we choose random ly two nodes in the network. Then the procedure is the sam e as in the LR m odel.

As we proceed to show, the three models have di erent properties with respect to the correlations between the degrees of connected nodes. While the LR (con guration) model is random, the genuine BA prescription leads to a network which is dissortative with respect to the degrees of connected nodes, and the NR model leads to an assortative network. This fact leads to considerable di erences in the shell structure of the networks and also to some (not extrem ely large) di erences in their percolation characteristics. We hasten to note that our sim ple models neglect many important aspects of real networks like geography [33,34] but stress the importance to consider the higher correlations in the degrees of connected nodes.

### TOM OGRAPHY OF THE NETW ORKS

R eferring to spreading of com puter viruses or hum an diseases, it is necessary to know how many sites get infected on each step of the infection propagation. Thus, we exam ine the local structure in the network. Cohen et al. [35] exam ined the shells around the node with the highest degree in the network. In our study we start from a node chosen at random . This initial node (the root) is assigned to shell number 0. Then all links starting at this node are followed. All nodes reached are assigned to shell num ber 1. Then all links leaving a node in shell 1 are followed and all nodes reached that don't belong to previous shells are labelled as nodes of shell 2. The sam e is carried out for shell 2 etc., until the whole network is exhausted. We then get N  $_{\rm lr}$ , the number of nodes in shell 1 for root r. The whole procedure is repeated starting at all N nodes in the network, giving  $P_1(k)$ , the degree distribution in shell 1. We de ne  $P_1(k)$  as:

$$P_{1}(k) = \frac{P_{r} N_{lr}(k)}{P_{kr} N_{lr}(k)};$$
 (2)

 $P = W e are most interested in the average degree hki_l = kP_1(k) of nodes of the shell l. In the epidem iological context, this quantity can be interpreted as a disease multiplication factor after l steps of propagation. It describes how m any neighbors a node can infect on average. Note that such a de nition of P_1(k) gives us for the degree distribution in the rst shell:$ 

$$P_{1}(k) = \frac{P_{1}(k)}{P_{1}(k)} = \frac{P_{1}(k)}{P_{1}(k)} = \frac{P_{1}(k)}{P_{1}(k)} = \frac{P_{1}(k)}{P_{1}(k)} = \frac{kP_{1}(k)}{hki}; \quad (3)$$

where P (k) and N<sub>k</sub> are the degree distribution and the number of nodes with degree k in the network respectively. We bear in m ind that every link in the network is followed exactly once in each direction. Hence, we nd that every node with degree k is counted exactly k times. From Eq.(3) follows that  $hk_{11} = hk^2 i=hki$ . This quatity, that plays a very important role in the percolation theory of networks [36], depends only on the rst and second m om ent of the degree distribution, but not on the correlations. Of course  $P_0(k) = P(k)$ .

Note that as N ! 1 we have  $hk^2i$ ! 1 : for our scalefree constructions the mean degree in shell 1 depends signi cantly on the network size determining the cuto in the degree distribution. However, the values of  $hk_{i_1}$  are the same for all three models: The rst two shells are determined only by the degree distributions. In all other shells the three models di er. For the LR (con guration) modelone nds for all shells in the therm odynam ic lim it  $P_1(k) = P_1(k)$ . However, since these distributions do not possess nite means, the values of  $hk_{i_1}$  are governed by the nite-size cuto , which is di erent in di erent shells, since the network is practically exhausted within the rst few steps, see Fig.1.

In what follows we compare the shell structure of the BA, the LR and the NR m odels. W e discuss in detail the networks based on the BA -construction with m = 2. For larger m the same qualitative results were observed. In the present work we refrain from discussion of a peculiar case m = 1. For m = 1 the topology of the BA-m odel is distinct from one form 2 since in this case the network is a tree. This connected tree is destroyed by the random ization procedure and is transform ed into a set of disconnected clusters. On the other hand, for m 2 the creation of large separate clusters under random ization is rather unprobable, so that most of the nodes stay connected. Fig. 1 show shki as a function of the shellnum ber 1. Panel (a) corresponds to the BA model, panel (b) to the LR model, and panel (c) to the NR model. The different curves show simulations for dierent network sizes: N = 3;000; N = 10;000; N = 30;000; and N = 100;000.All points are averaged over ten di erent realizations except for those for networks of 100,000 nodes with only one simulation. In panel (d) we compare the shell-structure for all three m odels at N = 30;000. The m ost signi cant feature of the graphs is the di erence in  $hki_2$ . In the BA and LR models the maximum is reached in the rst shell, while for the NR model the maximum is reached only in the second shell:  $hk_{2;BA} < hk_{2;LR} < hk_{2;NR}$ . This effect becom es m ore pronounced with increasing network size. In shells with large 1 for all networks mostly nodes with the lowest degree 2 are found.

The inset in graph (a) of Fig. 1 shows the relation between average age of nodes with connectivy k in the network as a function of their degree for the BA m odel. The age of a node n and of any of its proper links is dened as (n) = (N + h) = N where  $t_n$  denotes the time of birth of the node. For the random ized LR and NR m odels age has no meaning. The gure shows a strong correlation between age and degree of a node. The reasons for these strong correlations are as follows: First, older nodes experienced more time-steps than younger ones and thus have larger probability to acquire nonproper bonds. Moreover, at earlier times there are less nodes in the network, so that the probability of acquiring a new link per time step for an individual node is even higher. Third, at later time-steps older nodes already tend to have higher degrees than younger ones, so the probability for them to acquire new links is considerably larger due to preferential attachment. The correlations between the age and the degree bring som e nontrivial aspects into the BA model based on grow th, which are erased when random izing the network.

Let us discuss the degree distribution in the second shell. In this case we nd as that every link leaving a node of degree k is counted k 1 times. Let P (ljk) be a probability that a link leaving a node of degree k enters a node with degree 1. Neglecting the possibility of short loops (which is always appropriate in the therm odynam ical limit N ! 1) and the inherent direction of links (which may be not totally appropriate for the BA-m odel) we have:

$$P_{2}(l) = \frac{P_{kp} kP(k) (k \ 1)P(lk)}{k \ kP(k) (k \ 1)};$$
(4)

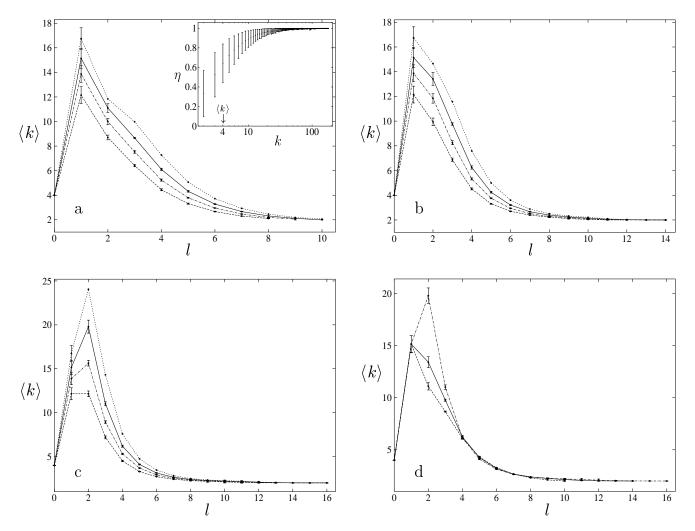


FIG.1. Mean degree value hki in shell: (a) for the BA-m odel, (b) for the LR-m odel, (c) for the NR-m odel. D i erent curves correspond to di erent network sizes: from top to bottom 100,000; 30,000; 10,000; 3,000 nodes. 10 simulations were done for each value except for the shells with 1 2 at N = 100;000 based on only one simulation. Panel (d) compares the tom ography of the m odels with N = 30;000: from top to bottom NR m odel; LR m odel; BA m odel. The inset in panel (a) shows the average age of a node as a function of its degree k.

The value of hki2 gives in portant inform ation about the type of m ixing in the network. To study m ixing in networks one needs to divide the nodes into groups with identical properties. The only relevant characteristics of the nodes that is present in all three models, is their degree. Thus, we can exam ine the degree-correlations between neighboring nodes, which we compare with the uncorrelated LR m odel, where the probability that a link connects to a node with a certain degree is independent from whatever is attached to the other end of the link:  $P(k_1) = kP(k) = kP(k) = 2m$ . All other relations would correspond to assortative or disassortative mixing. Qualitatively, assortativity then means that nodes attach to nodes with sim ilar degree more likely than in the LR-model:  $P(kj) > P(kj)_{LR} = kP(k)=hki fork$ 1. D issortativity means that nodes attach to nodes with very di erent degree m ore likely than in the LR-m odel: P(kj) > kP(k)=hki for klorl k. Inserting this in Eq.(4), and calculating the mean, one nds qualitatively that  $hk_{i_1} = hk_{i_2;LR} < hk_{i_2}$  for assortativity, and  $hki_1 > hki_2$  for dissortativity.

In the following we show where the correlations of the BA and NR model originate. A consequence of the BAalgorithm is that there are two di erent types of ends for the links. Each node has exactly m proper links attached to it at the moment of its birth and a certain number of links that are attached later. Since each node receives the sam e num ber of links at its birth, tow ards the proper nodes a link encounters a node with degree k with probability P (k). To compensate for this, in the other direction a node with degree k is encountered with the probability  $\frac{(k m)P(k)}{m} = 2\frac{kP(k)}{hki}$ P (k), so that both distributions together yield kP (k)=hki. On one end of the link nodes with small degree are predominant: P(k) < kP(k)=hkifor smallk. On the other end nodes with high degree are predom inant: (k m)P(k)=m > kP(k)=2m for k large. This corresponds to dissortativity. A ctually the situation is somewhat more complex since in the BA model these probability distributions also depend on the age of the link.

A ssortativity of the NR m odel is a result of the noderandom izing process. Since the nodes with smaller degree are predom inant in the node population, those links are preferably chosen that have on the end with the random ly chosen node a node with a smaller degree (P(k) > kP(k))=hki fork small). Then the random ization algorithm exchanges the links and connects those nodes to each other. This leads to assortativity for nodes with small degree, which is compensated by assortativity for nodes with high degree.

# PERCOLATION

Percolation properties of networks are relevant when discussing their vulnerability to attack or immunization which removes nodes or links from the network. For scale-free networks random percolation as well as vulnerability to a deliberate attack have been studied by several groups [36{40}]. One considers the rem oval of a certain fraction of edges or nodes in a network. Our simulations correspond to the node rem ovalm odel; q is the fraction of rem oved nodes. Below the percolation threshold  $q < q_c$ a giant component (in nite cluster) exists, which ceases to exist above the threshold. A giant component, and consequently  $q_c$  is exactly de ned only in the therm odynam ic lim it N ! 1 : it is a cluster, to which a nonzero fraction of all nodes belongs.

In [32] and [36] a condition for the percolation transition in random networks has been discussed: Every node already connected to the spanning cluster is connected to at least one new node. Ref. [36] gives the following percolation criterion for the con guration model:

$$l \quad q = \frac{hki}{hk^2 i \quad hki}; \tag{5}$$

where the m eans correspond to an unperturbed network (q = 0). For networks with degree distribution Eq.(1),  $hk^2i$  diverges as N ! 1. This yields for the random networks with a such degree distribution a percolation threshold  $q_c = 1$  in the therm odinam ic lim it, independent of the m inimal degree m; in the epidem iological terms this corresponds to the absence of herd immunities in such systems. Crucial for this threshold is the power-law tail of the degree distribution with an exponent 3. M oreover, Ref. [37] shows that the critical exponent governing the fraction of nodes M<sub>1</sub> of the giant component, M<sub>1</sub> / (q<sub>c</sub> q), diverges as the exponent of the degree distribution approaches 3. Therefore M<sub>1</sub> approaches zero with zero slope as q! 1.

In Fig. 2 we plotted for the three models discussed M $_1$  as a function of q. The behavior of all three models for a network size of 300;000 nodes is presented in panel (a). In the inset the size of the giant component was m easured in relation to the number of nodes remaining in the network (1 q)N and not to their initial number N. O therpanels show the percolation behavior of each of the m odels at di erent network sizes: P anel (b) corresponds to the BA model, (c) to the LR model, and (d) to the NR m odel. For the largest networks with N = 300;000 nodes we calculated 5 realizations for each model, for those with 30;000; 10;000; and 3;000 nodes averaging over 10 realization was performed. For all three models within the error bars the curves at di erent network sizes coincide. This show s that even the sm allest network is already close to the therm odynamical limit. R.Albert et al. have found a sim ilar behavior in a study of BA -networks [38]. They analyze networks of sizes N = 1000;5000 and 20000 concluding \that the overall clustering scenario and the value of the critical point is independent of the size of the system ".

In the simulations we nd two regimes: for moderate q we nd, that the sizes of the giant components of the BA, LR, and NR model obey the inequalities  $M_{1,BA} > M_{1,LR} > M_{1,NR}$ , while for q close to

unity the inequalities are reverted:  $M_{1,BA} < M_{1,LR} < M_{1,NR}$ . How ever, in this regime the di erences between  $M_{1,BA}$ ;  $M_{1,LR}$  and  $M_{1,NR}$  are subtle and hardly resolved on the scales of Fig. 2. We note that similar situation was observed in Ref. [17]. How ever, there the size of the giant cluster was measured not as a function of q but of a scaling parameter in the degree distribution.

The observed e ects can be explained by the correlations in the network. For q = 0 one has  $M_{1;BA} = M_{1;LR} = M_{1;NR}$ . Now, the probability that single nodes bose their connection to the giant cluster depends only on the degree distribution, and not on correlations. So, the di erence in the  $M_1$  must be explained by the break-o of clusters containing more than one node. The probability for such an event is smaller in the BA than in the LR model, since dissortativity implies that one nds fewer 'regions', where only nodes with low degree are present.

How ever, when we get to the region of large q, as nodes with low degree act as 'bridges' between the nodes with high degree, the connections between the nodes with high degree are weaker in the case of the BA model than in the case of the LR model. So, the probability that nodes with high degree break o is higher for the BA model than for the LR model. There is no robust core of highdegree nodes in the network [17]. The correlation e ects for the NR model, when com pared with the LR model, are opposite to those for the BA model.

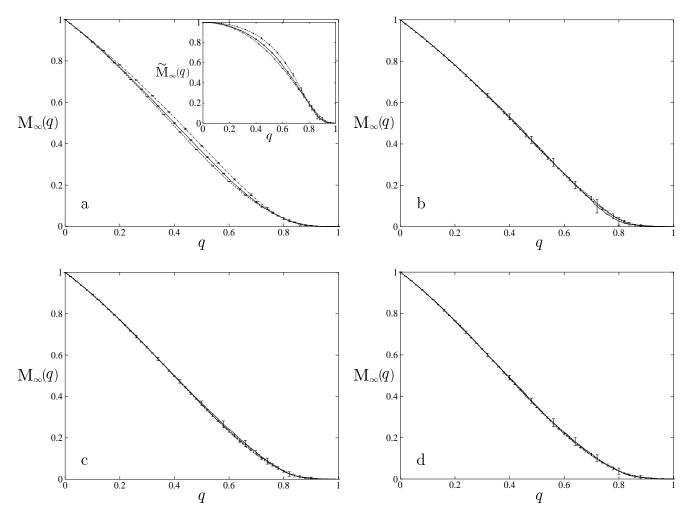


FIG.2. Fraction of nodes  $M_1$  in the giant component depending on the fraction q of nodes rem oved from the network: (b) for the BA-m odel, (c) for the LR-m odel, (d) for the NR-m odel. D i erent curves correspond to di erent network sizes: from top to bottom 300,000 (5 simulations); 30,000; 10,000; 3,000 nodes (10 simulations each). G raph (a) compares all three m odels at N = 300;000 (from top to bottom : BA-m odel, LR-m odel, NR-m odel). The inset shows the fraction  $M_1$  of the number of nodes in the giant component relative to the rem aining number of nodes in the network (1 q)N.

### CONCLUSION

W e consider three di erent models of scale-free networks: the genuine Barabasi-A lbert construction based on grow th and preferential attachment, and two networks emerging when randomizing it with respect to links or nodes. We point out that the BA model shows dissortative behavior with respect to the nodes' degrees, while the node-randomized network shows assortative mixing. How ever, these strong di erences in the shell structure lead only to moderate quantitative di erence in the percolation behavior of the networks.

# ACKNOW LEDGMENT

Partial nancial support of the Fonds der Chem ischen Industrie is gratefully acknow ledged.

- [L] R. A lbert and A.-L. Barabasi, Rev. M od. Phys. 74, 47 (2002).
- [2] SN. Dorogovtsev and JFF. Mendes, Adv. Phys. 51, 1079 (2002).
- [3] M. Fabutsos, P. Fabutsos, and C. Fabutsos, Comput. Commun. Rev. 29, 251 (1999).
- [4] R. Pastor-Satorras, A. Vazquez, and A. Vespignani, Phys. Rev. Lett. 87, 258701 (2001).
- [5] R. Albert, H. Jeong, and A.-L. Barabasi, Nature (London) 401, 130 (1999).
- [6] A.Broder, R.Kumar, F.Maghoul, P.Raphavan, S.Rajagopalan, R.Stata, A.Tomkins, and J.W iener, Comput.Netw. 33, 309 (2000).
- [7] D.J.W atts, and S.H.Strogatz, Nature (London) 393, 440 (1998).
- [8] H. Jeong, B. Tombor, R. Albert, ZN. Oltvai, and A.-L. Barabasi, Nature 407, 651 (2000).
- [9] D A. Fell, and A. W agner, N at. B iotechnol. 18, 1121 (2000).
- [10] H. Jeong, S.P. Mason, A.-L. Barabasi, and Z.N. Oltvai, Nature 411, 41 (2001).
- [11] F.Liljeros, C.Edling, LAN.Am aral, H E.Stanley, and Y.Aberg, Nature 411, 907 (2001).
- [12] M E J.Newman, Proc.Natl.Acad.Sci.98,404 (2001).
- [13] M E J.Newman, Phys.Rev.E 64, 016131 (2001).

- [14] A.L.N.Amaral, M.Barthelemy, and H.E.Stanley, Proc. Natl. A cad. Sci. 97, 11149 (2000).
- [15] R.Albert, and A.-L.Barabasi, Phys. Rev. Lett. 85, 5234 (2000).
- [16] J.Abello, A.Buchsbaum, and J.W estbrook, Lect.Notes Comput.Sci.1461, 332 (1998).
- [17] M.E.J.Newman, Phys.Rev.Lett.89, 208701 (2002).
- [18] J. Berg, and M. Lassig, Phys. Rev. Lett. 89, 228701 (2002).
- [19] V. M. Egu luz, and K. Klemm, Phys. Rev. Lett. 89, 108701 (2002).
- [20] M. Boguna, and R. Pastor-Satorras, Phys. Rev. E 66, 047104 (2002).
- [21] S.M aslov, and K. Sneppen, Science 296 910 (2002).
- [22] A. Vazquez, and Y. Moreno, Phys. Rev. E 67, 015101 (2003).
- [23] K.-I.Goh, E.Oh, B.Kahng, and D.Kim, Phys. Rev. E 67, 017101 (2003).
- [24] M.Boguna, R.Pastor-Satorras, and A.Vespignani, Phys. Rev.Lett. 90, 028701 (2003).
- [25] M.E.J.Newman, Phys.Rev.E 67, 026126 (2003).
- [26] M. A. Serrano, and M. Bogura, e-print condmat/0301015.
- [27] A.-L. Barabasi, and R. Albert, Science 286, 509 (1999).
- [28] P.L.K rapivsky, S.Redner, and F.Leyvraz, Phys.Rev. Lett. 85, 4629 (2000).
- [29] SN.Dorogovtsev, JFF.M endes, and AN.Samukhin, Phys.Rev.Lett. 85, 4633 (2000).
- [30] P.L.K rapivsky, and S.Redner, Phys. Rev. E 63 066123 (2001).
- [31] E.A.Bender, and E.R.Can eld, Journal of Combinatorial Theory (A) 24, 296 (1978).
- [32] M. Molloy, and B. Reed, Random Struct. A lgorithm s 6, 161 (1995).
- [33] L M .Sander, C P.W arren, and IM .Sokolov, Phys. Rev. E 66, 056105 (2002).
- [34] D. ben-Avraham, A.F. Rozenfeld, R. Cohen, and S. Havlin, e-print cond-m at/0301504.
- [35] R. Cohen, D. Dolev, S. Havlin, T. Kalisky, O. Mokryn, and Y. Shavitt, Leibniz Center Technical Report 2002-49
- [36] R. Cohen, K. Erez, D. ben-Avraham, and S. Havlin, Phys. Rev. Lett. 85, 4626 (2000).
- [37] R. Cohen, D. ben-Avraham, and S. Havlin, Phys. Rev. E 66,036113 (2002).
- [38] R. A Ibert, H. Jeong, and A.-L. Barabasi, Nature 406, 378 (2000).
- [39] R. Cohen, K. Erez, D. ben-Avraham, and S. Havlin, Phys. Rev. Lett. 86, 3682 (2000).
- [40] D. Callaway, M. Newman, S. Strogatz, and D. W atts, Phys. Rev. Lett. 85, 5468 (2000).