# W hy social networks are di erent from other types of networks

M.E.J.Newman and Juyong Park

Department of Physics and Center for the Study of Complex Systems, University of Michigan, Ann Arbor, MI 48109 and Santa Fe Institute, 1399 Hyde Park Road, Santa Fe, NM 87501

We argue that social networks di er from most other types of networks, including technological and biological networks, in two important ways. First, they have non-trivial clustering or network transitivity, and second, they show positive correlations, also called assortative mixing, between the degrees of adjacent vertices. Social networks are often divided into groups or communities, and it has recently been suggested that this division could account for the observed clustering. We demonstrate that group structure in networks can also account for degree correlations. We show using a simple model that we should expect assortative mixing in such networks whenever there is variation in the sizes of the groups and that the predicted level of assortative mixing com pares well with that observed in real-world networks.

### I. IN TRODUCTION

The last few years have seen a burst of interest within the statistical physics com m unity in the properties of networked systems such as the Internet, the W orld W ide W eb, and social and biological networks [1, 2, 3, 4]. Researchers' attention has, to a large extent, been focused on properties that seem to be com m on to m any di erent kinds of networks, such as the so-called \sm all-world effect" and skewed degree distributions [5, 6, 7]. In this paper, by contrast, we highlight some apparent di erences between networks, speci cally between social and nonsocial networks are fundam entally di erent from other types of networked system s.

W e focus on two properties of networks that have received attention recently. First, we consider degree correlations in networks. It has been observed that the degrees of ad jacent vertices in networks are positively correlated in social networks but negatively correlated in most other networks [8]. Second, we consider network transitivity or clustering, the propensity for vertex pairs to be connected if they share a mutual neighbor [5]. We argue that the level of clustering seen in many non-social networks is no greater than one would expect by chance, given the observed degree distribution. For social networks how ever, clustering appears to be far greater than we expect by chance.

W e conjecture that the explanation for both of these phenom ena is in fact the same. Using a simple network m odel, we argue that if social networks are divided into groups or communities, this division alone can produce both degree correlations and clustering.

The outline of the paper is as follows. In Sec. II we discuss the phenom enon of degree correlation and sum - m arize som e em pirical results for various networks. In Sec. III we do the same for clustering. We also present theoretical arguments that suggest that the clustering seen in non-social networks is of about the magnitude one would expect for a random graph model with parameters similar to real networks. Then in Sec. IV we present analytic results for a simple model of a social

network divided into groups. This model, which was introduced previously [9], is known to generate high levels of clustering. Here we show that it can also explain the presence of correlations between the degrees of adjacent vertices. In Sec. V we compare the model's predictions concerning degree correlations against two real-world social networks, of collaborations between scientists and between businesspeople. In the former case we nd that the model is in good agreement with empirical observation. In the latter we nd that it can predict some but not all of the observed degree correlation, and we conjecture that the remainder is due to true sociological or psychologicale ects, as distinct from the purely topological e ects contained in the model. In Sec. VI we give our conclusions.

#### II. DEGREE CORRELATIONS

In studies of the network structure of the Internet at the level of autonom ous systems, Pastor-Satorras et al. [10] have recently demonstrated that the degrees of adjacent vertices in this network appear to be anticorrelated. They measured the mean degree  $hk_{nn}i$  of the nearest neighbors of a vertex as a function of the degree k of that vertex, and found that the resulting curve falls o with k approximately as  $hk_{nn}i$  k<sup>1=2</sup>. Thus, vertices of high degree k tend to be connected, on average, to others of low degree, and vice versa. A simple way of quantifying this e ect is to measure a correlation co-e cient of the degrees of adjacent vertices in a network, de ned as follow s.

Suppose that  $p_k$  is the degree distribution of our network, i.e., the fraction of vertices in the network with degree k, or equivalently the probability that a vertex chosen uniform ly at random from the network will have degree k. The vertex at the end of a random ly chosen edge in the network will have degree distributed in proportion to  $kp_k$ , the extra factor of k arising because k tim es as many edges end at a vertex of degree k than at a vertex of degree one [11, 12, 13]. Commonly we are interested not in the total degree of the vertex at the end of an edge, but in the \excess degree," which is the number of edges attached to the vertex other than the one we arrived along, which is obviously one less than the total degree. The properly norm alized distribution of the excess degree is

$$q_{k} = \frac{(k+1)p_{k+1}}{\frac{p}{k}kp_{k}}:$$
 (1)

We then de ne the quantity  $e_k$ , which is the joint probability that a random ly chosen edge joins vertices with excess degrees j and k.

Now consider a network in which the vertices have given degrees (the value of the degrees being called the \degree sequence"), but which is in all other respects random . That is, the network is drawn uniform ly at random from the ensemble of all possible networks with the given degree sequence. This is the so-called con guration m odel [12, 13, 14, 15], which we can use as a handy null m odel for testing our results. In the con guration m odel the expected value of the quantity  $e_{jk}$  is sim ply  $e_{jk} = q_j q_k$ , and by its deviation from this value we can quantify the level of degree correlation present, relative to the nullm odel. We de ne [8]

$$r = \frac{1}{\frac{2}{q}} \sum_{jk}^{X} jk (e_{jk} qq_k);$$
 (2)

where  $\frac{2}{q} = \frac{P}{k} k^2 q_k \frac{P}{k} k q_k^2$  is the variance of the distribution  $q_k$ . The quantity r will be positive or negative for networks with positive or negative degree correlations respectively. In the ecology and epidem iology literatures these two cases are called \assortative" and \disassortative" m ixing by degree, and this nom enclature has been adopted by m any physicists also.

The ndings of Pastor-Satomas et al. [10] discussed above suggest that the Internet should have a negative value for r, and this indeed is the case. The most recent structuralm easurements of the autonom ous-system graph of the Internet [16] yield a value of r = 0.1930.002. It now appears that sim ilar results apply to essentially all other networks except social networks. In Refs. [8] and [17] we found that alm ost all networks seem to be disassortatively mixed, i.e., have negative values of the assortativity ose cient r, except for social networks, which are norm ally assortative. A sm all num ber of networks yield inconclusive results because the errors on r are bigger than its value, but other than these few, the pattern appears essentially perfect.

Here we propose that this striking pattern arises because disassortativity is the natural state for all networks, in a sense that we will make clear shortly. Left to their own devices, we conjecture, networks norm ally have negative values of r. In order to show a positive value of r, a network must have some speci c additional structure that favors assortative mixing. We suggest in Sec. IV that division into com munities or groups provides such a structure in social networks.

Our conjecture that most networks will be disassortative is motivated by the work of M aslov et al. [18]. U sing computer simulations, they showed that on small networks, disassortative mixing is produced if one restricts the network topology to having at most one edge between any pair of vertices. The same result can be demonstrated analytically as well [19]. How small a network need be to show this e ect depends on the degree distribution; to see signi cant disassortativity, the highestdegree vertices in the network need to have degree on the order of  $\frac{1}{n}$ , where n is the total num ber of vertices, so that there is a substantial probability of som evertex pairs sharing two or more edges. (O byiously if there is negligible probability of a double edge occurring anywhere in the network, then the restriction of having no double edges will have no e ect.) The Internet is a particularly good example of the e ect, since it has a degree distribution that appears approximately to follow a power law, with constant [16, 20], and the fat tail of k  $p_k$ the power law produces many vertices of su ciently high degree. However, a number of other networks also t the bill: the W orld W ide W eb, peer-to-peer networks, food webs, neural networks, and metabolic networks all have vertices of su ciently high degree, at least in som e cases. In their most common representations these networks also have only single edges between vertices, and hence we would expect them to have r < 0, and calculations of r from structural data con m that this is the case [17].

In fact, most networks have only single edges between their vertices. Although it is possible to have double edges in some networks, in practice these are usually ignored even where they exist and all edges are represented as single. For instance, in the W orld W ide W eb it is possible, and even common, for a W eb page to link twice orm ore to the sam e other page, creating a multiple link. Such links are however norm ally recorded as single by W eb craw ler program s, and hence any inform ation about multiple links is lost. Thus many networks may have single edges only because that is the way researchers have chosen to represent them, and observed properties such as disassortativity may be purely a product of this choice of representation rather than a fundam ental law of nature. O ther networks m ay truly have single edges m etabolic networks and food-webs are possible examples of this.

Social networks also usually have only single edges between vertex pairs. Two people are either acquainted with one another or not | we do not norm ally have a concept of being \doubly acquainted" with a person. Nonetheless, the assortativity coe cientrispositive, and som etimes very positive, for almost all social networks measured [8, 17]. This appears to indicate some special structure in social networks that distinguishes them from other types of networks. A revealing clue about what this special structure might be comes from network transitivity, as we now describe.

#### III. CLUSTERING

W atts and Strogatz [5] have pointed out that m ost networks appear to have high transitivity, also called clustering. That is, the presence of a connection between vertices A and B, and another between B and C, m akes it likely that there will also be a connection between A and C. To put it another way, if B has two network neighbors, A and C, they are likely to be connected to one another, by virtue of their common connection with B. In topological terms, there is a high density of triangles, ABC, in the network, and clustering can be quantied by measuring this density:

$$C = \frac{3 \text{ num ber of triangles on the graph}}{\text{num ber of connected triples of vertices}};$$
 (3)

where a \connected triple" means a vertex connected directly to an unordered pair of others. In physical terms, C is the probability, averaged over the network, that two of your friends will be friends also of one another. (This is in fact only one de nition of the clustering coe cient. An alternative de nition, given in [5], has also been widely used. The latter how ever is di cult to evaluate analytically, and so we avoid it here.)

The value of the clustering coe cient in the null conguration m odel can be calculated in a straightforw and fashion [21, 22]. Suppose that two neighbors of the same vertex have excess degrees j and k. The probability that one particular edge in the network falls between these two vertices is 2 j=(2m) k=(2m), where m is the total number of edges in the network. The total number of edges between the two vertices in question is m times this quantity, or jk=(2m). Both j and k are distributed according to (1), since both vertices are neighbors of A and, averaging over this distribution, we then get an expression for the clustering coe cient:

$$C = \frac{1}{2m} \int_{k}^{h_{X}} kq_{k} = \frac{1}{n} \frac{hk^{2}i hki^{2}}{hki^{3}}; \qquad (4)$$

where averages are over all vertices and we have m ade use of 2m = nhki.

N our ally this quantity goes as n<sup>-1</sup> and so is very sm all for large graphs. However, some graphs are not large, and hence C is not negligible. Consider for example the foodweb of organism in Little Rock Lake, W I, which was originally analyzed by M artinez [23] and has been widely studied in the networks literature. This network has n = 92, hki = 21.0, and hk<sup>2</sup>i = 6552. Plugging these gures into Eq. (4) gives C = 0.47. The measured value of C is 0.40. Thus it appears that we need invoke no special clustering process to explain the clustering in this network. Sim ilar results can be found for other sm all networks.

This argument can also be applied to some larger networks as well, particularly those with power-law degree distributions. The fat tail of the degree distribution in power-law networks can a ect the value of the clustering coe cient strongly. To see this consider st how the degree of the highest-degree vertex in the con guration model varies with system size [4].

The probability of there being exactly m vertices of degree k in the network and no vertices of degree greater than k is  $m p_k^m (1 P_k)^{n m}$ , where

$$P_{k} = \sum_{k^{0}=k}^{\lambda^{1}} p_{k^{0}}; \qquad (5)$$

is the probability that a vertex has degree greater than or equal to k. Then the probability  $h_k$  that the highest degree in the network is k is

$$h_{k} = \begin{pmatrix} X^{n} & n \\ m & p_{k}^{m} (1 P_{k})^{n} \end{pmatrix}^{m}$$
$$= (p_{k} + 1 P_{k})^{n} (1 P_{k})^{n}; \qquad (6)$$

and the expected value of the highest degree is  $k_{m ax} = k h_k$ .

The value of  $h_k$  tends to zero for both sm all and large values of k, and the sum over k is dominated by the term s close to the maxim um . Thus, in most cases, a good approximation to the expected value of the maxim um degree is given by the modal value. Dierentiating and observing that  $dP_k = dk = p_k$ , we not that the maximum of  $h_k$  occurs when

$$\frac{dp_{k}}{dk} = p_{k} (p_{k} + 1 P_{k})^{n-1} + p_{k} (1 P_{k})^{n-1} = 0;$$
(7)

or  $k_{m ax}$  is a solution of

$$\frac{dp_k}{dk}$$
 '  $nf_k^2$ ; (8)

where we have made the assumption that  $p_k$  is su ciently small for  $k\ ^>\ k_{m\ ax}$  that  $np_k$  1 and  $P_k$  1. For a degree distribution with a power-law tail  $p_k$  k, we then nd that

$$k_{max} n^{1=(1)}$$
: (9)

(As shown by Cohen et al. [24], a simple rule of thum b that leads to the same result is that the maximum degree is roughly the value of k that solves  $nP_k = 1$ .)

M ost networks of interest have < 3, which m eans  $hk^2i$   $k_{m\,ax}^3$   $n^{(3)=(-1)}$  and hki is independent of n. Then (4) gives

C 
$$n^{(7 \ 3)=(1)}$$
: (10)

If  $> \frac{7}{3}$ , this means that C tends to zero as the graph becomes large, although it does so slow er than the explicit C n<sup>1</sup> of Eq. (4). At  $= \frac{7}{3}$ , C becomes constant (or logarithm ic) in the graph size. And remarkably, for  $< \frac{7}{3}$  it actually increases with increasing system size, becoming arbitrarily large as n ! 1. Thus for  $< \frac{7}{3}$ , we might expect to see quite large values of C even in large networks.

Taking the case of the W orld W ide W eb, for example, we nd the predicted value of the clustering coe cient for the con guration m odel is C = 0.048 [21], while the m easured value is 0.11 | certainly not perfect agreem ent, but of the right order of m agnitude. O ther exam ples err in the opposite direction. M aslov et al. [18] for instance cite the example of the Internet, for which they show using num erical simulations that the observed clustering is actually lower than that expected for an equivalent random graph m odel.

It is worth noting that Eq. (10) in plies the clustering coe cient can be greater than 1 if  $< \frac{7}{3}$ . Physically this m eans that there will be m ore than one edge on average between two vertices that share a common neighbor. This is perhaps at odds with the conventional interpretation of the clustering coe cient as the probability that there exists any edge between the given two vertices | norm ally one would not distinguish between the case where there are two edges and the case where there is one. (Indeed, as mentioned in Sec. II, in many networks, one ignores double edges altogether.) If one takes this approach, then the value of the clustering coe cient is modi ed for networks that would otherwise have C > 1 as follow s.

C onsider again two vertices that are neighbors of vertex A, with excess degrees j and k. The probability that a particular edge falls between them is 2 = (2m) = k = (2m), as before, and the probability that it does not is 1 m inus this quantity. Then the probability that no edge falls between this pair is

$$1 \quad \frac{jk}{2m^2} \, {}^{m} \, {}^{\prime} \, e^{jk=2m} ; \qquad (11)$$

where the equality becomes exact in the limit of large m. Thus the probability of any edge falling between the two vertices is 1 e  $^{jk=2m}$ , and the correct expression for the clustering coecient is the average of this:

$$C = \begin{cases} X \\ q_{j}q_{k} & 1 \\ j_{k} \end{cases} :$$
 (12)

In fact, however, using this expression m akes only the sm allest of di erences to the expected value of C on, for example, the W orld W ide W eb.

A ll of this dem onstrates that for m any non-social networks, including foodwebs, the Internet, and the W orld W ide W eb, clustering can be explained by a simple random m odel. The same however is not true of social networks. It turns out that social networks in general have a far higher degree of clustering than the corresponding random m odel. W e give four examples: the widely studied network of Im -actor collaborations [5, 7], collaboration networks of m athem aticians [25, 26] and com pany directors [27], and an em ail network [28]. For these four networks the theory presented above predicts values of the clustering coe cient of 0:0098, 0:00015, 0:0035, and 0:017. The actual measured values are 0:20, 0:15, 0:59, and 0:17, in each case at least an order of magnitude greater than the prediction. The implication appears to be that there is some mechanism producing clustering in social networks that is not present at a signi cant level in non-social networks (or not at least in the exam ples studied here). Recent work [9, 29, 30, 31, 32] suggests a possible candidate theory, that social networks contain groups, or \community structure" [41].

# IV. COMMUNITY STRUCTURE IN NETWORKS

In [9] one of us proposed a simple model of a network with community structure and showed that this structure produces substantial clustering, with values of C that do not go to zero as the network size becomes large. Thus the results of the preceding section could be explained if social networks possess community structure and other types of networks do not (or they possess it to a lesser degree). We now show that the same distinction can also explain the observed di erence in degree correlations between social and non-social networks.

In our model the network is divided into groups and each individual can belong to any number of groups. Individuals do not necessarily know all those with whom they share a group, but instead have probability p of acquaintance. They have probability zero of know ing those with whom they do not share a group. M athem atically the model can be represented as a bond percolation process with occupation probability p on the network form ed by the projection of a suitable bipartite graph of individuals and groups onto just the individuals, as shown in F ig. 1. The percolation properties of the model can be solved exactly using generating function m ethods.

In [9] the model was studied in a simple version in which the size of all groups was assumed the same. This case can account for the presence of clustering in the network, and is straightforward to treat mathematically. However, it is inadequate for our purposes here, since it does not produce any degree correlation. Degree correlation arises because individuals who belong to small groups tend to have low degree and are connected to others in the same group, who also have low degree. Sim - ilarly those in large groups tend to have higher degree and are also connected to one another. Thus, the model should give rise to assortative mixing provided there is enough variation in the sizes of groups. As we will see, this is indeed the case.

In addition to the parameter p, we characterize the model by two probability distributions:  $r_m$  is the probability that an individual belongs to m groups and  $s_n$  is the probability that a group contains n individuals. Subject to the constraints in posed by these distributions, the assignment of individuals to groups is entirely random .

To proceed we calculate the joint distribution  $e_{jk}$  of the excess degrees of vertices at the ends of an edge. Noting

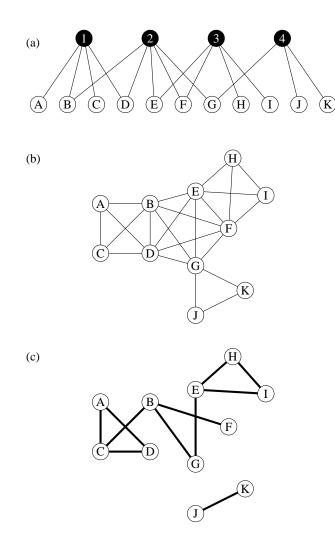


FIG.1: The structure of the network model studied in Sec. IV. (a) We represent individuals (A {K) and the groups (1{4) to which they belong with a bipartite graph structure. (b) The bipartite graph is projected onto the individuals only, giving a network with edges between any pair of individuals who share a group. (c) The actual social connections between individuals are chosen by bond percolation on this projection with bond occupation probability p. The net result is that individuals have probability p of knowing others with whom they share a group.

that the total number of edges in groups of size n goes as  $s_n n (n - 1)$ , we write

$$e_{jk} = e_0 s_n n (n 1) P (j; k j_n)$$
 (13)

where P (j;kjn) is the probability that an edge that belongs to a group of size n connects vertices of excess degrees j and k, and  $e_0$  is a constant whose value can be calculated from the requirement that  $e_{jk}$  be normalized, so that  $_{jk} e_{jk} = 1$ .

W e now decompose j and k in the form  $j = j_{in} + j_{out}$ , k =  $k_{in} + k_{out}$ , where  $j_{in}$ ,  $k_{in}$  are the numbers of connections to vertices within the group that the two vertices share, and  $j_{out}$ ,  $k_{out}$  are the num bers of connections outside that group. The distributions of  $j_{in}$  and  $k_{in}$  are simply binom ial, and hence P (j;kjn) factors into terms depending only on j and k thus:

$$P(j;kjn) = \begin{cases} X & n & 2 \\ j_{in} & p^{j_{in}} q^{n-2} & j_{in} P(j_{out}) \\ X & n & 2 \\ & & k_{in} & p^{k_{in}} q^{n-2} & k_{in} P(k_{out}); \end{cases} (14)$$

where P  $(j_{out})$  is the probability distribution of  $j_{out}$ , which is independent of  $j_{in}$ , and sim ilarly for  $k_{out}$ .

To evaluate this expression we introduce the following generating functions for the distributions  $r_{\!m}$  and  $s_n$ :

$$f_{0}(z) = \bigvee_{\substack{m=0\\ xi}}^{Xi} r_{m} z^{m}; f_{1}(z) = \frac{1}{f_{0}^{0}(1)} \bigvee_{\substack{m=0\\ m=0}}^{Xi} r_{m} z^{m-1}; (15)$$

$$g_0(z) = \int_{n=0}^{X} s_n z^n; \quad g_1(z) = \frac{1}{g_0^0(1)} \int_{n=0}^{X} n s_n z^{n-1}: \quad (16)$$

Physically,  $f_0(z)$  is the generating function for the num ber of groups an individual belongs to, and  $f_1(z)$  is the generating function for the number groups that an individual in a random ly selected group belongs to, other than the random ly selected group itself. Similarly  $g_0(z)$ generates the group sizes and  $g_1(z)$  generates the num ber of other individuals in a group to which a random ly selected individual belongs. Of these others, our random ly selected individual is connected to a number binom ially distributed according to the probability p and thus generated by the sim ple generating function pz + q, where q = 1p. A veraging over the group sizes, the number of neighbors of a random ly chosen individual within one of the groups to which they belong is generated by  $g_1(pz + q)$ , and an individual belonging to a random ly chosen group will have a num ber of neighbors in other groups generated by  $f_1 (g_1 (p_2 + q))$ . This then gives us precisely the quantity P  $(j_{out})$  of Eq. (14), which is equal to the coe cient of  $z^{j_{out}}$  in  $f_1(g_1(p_2 + q))$ , and sim ilarly for P (kout).

Combining Eqs. (13) and (14) we discrete nd that  $e_k$  is generated by the double probability generating function

$$E (x;y) = \begin{cases} X \\ = g_{jk} x^{j} y^{k} \\ = g_{2} (px + q) (py + q) \\ f_{1} (g_{1} (px + q)) f_{1} (g_{1} (py + q)); (17) \end{cases}$$

where

$$g_{2}(z) = \frac{1}{g_{0}^{(0)}(1)} \sum_{n=0}^{X^{1}} n(n-1)s_{n} z^{n-2}:$$
(18)

Then, making use of Eqs. (1) and (2) and the fact that  $q_k = \sum_{j \in j_k} e_{j_k}$ , we can write the assortativity coecient r

6

$$\frac{(\theta_{x}, \theta_{y} E)}{(\theta_{x}, E)} = (\theta_{y} E) (\theta_{y} E) \left( \left( \theta_{y} E \right) \right) \left( \left( \theta_{y$$

In this expression the quantities  $_n$  and  $_n$  are the nth m om ents of the distributions  $r_m$  and  $s_n$  respectively. Thus, given the distributions and the probability p it is elementary, if tedious, to calculate r. Below we apply this expression to two real-world example networks. First, however, a few points are worth noting.

It is straightforw and to show, though certainly not obvious to the eye, that the expression for r, Eq. (19), is non-negative for all distributions  $r_m$  and  $s_n$ , so that our model always produces an assortatively mixed network, as our intuition suggests.

Now consider the simple case in which each individual belongs to exactly one group, and the group sizes have a Poisson distribution. In this case, Eq. (19) gives r = p, and we can achieve any value of r by tuning the parameterp. In particular, if each individual knows all others in their group then p = 1 and we have perfect assortativity. This is reasonable, since in this case each individual in a group has the exact same number of neighbors. This case is a rather pathological one how ever, since if everyone belongs to only one group, then the network consists of m any isolated groups and m ost people are not connected to one another. To m ake things m ore realistic, let us allow the number of groups to which individuals belong also to vary according to a Poisson distribution. Then we nd that

$$r = \frac{p}{1 + + p};$$
 (21)

where 1 are the means of the two distri-1 and butions. Thus as the two means increase, the correlation decreases. The decrease with is easily understood the more groups an individual belongs to, the less the relative within-group degree correlation upon which the assortativity depends: the within-group correlation is diluted by all the other groups the individual belongs to. The behavior with is a little m ore subtle. The width of the Poisson distribution of group sizes goes as 1= as a fraction of the mean, and hence the e ective variation in size between groups decreases with increasing . It is this decrease that drives r towards zero.

# V. EXAMPLES

We now apply our model to two real-world example networks. In the rst case, as we will see, it gives a value of r in excellent agreement with the real network. In the second it underestimates r by about a factor of two, indicating that group structure can account for only a portion of the observed assortativity, the rest, we conjecture, being due to true social ects.

### A. Collaboration network

N etworks of coauthorship of scientists or other academ ics provide som e of the best-docum ented exam ples of social networks [25, 33]. U sing bibliographic databases it is possible to construct large coauthorship networks with high reliability, and these networks are true social networks, in the sense that it seems highly likely that two authors who write a paper together are acquainted.

Fig. 2 shows a coauthorship network of physicists who conduct research on networks. The network was constructed using names drawn from the large bibliography of Ref. [4] and coauthorship data from preprints submitted to the condensed matter section of the Physics E-print A rchive at arxiv.org between Jan 1, 1995 and A pril 30, 2003. To nd the groups in the network, we fed it through the community structure algorithm of G irvan and N ewm an [29], producing the division shown by the colors in the gure. The gure shows only the largest component of the network. There are also 36 sm aller com ponents, which were included in our calculations even though they are not shown.

The m om ents of the distributions  $r_m$  and  $s_n$  are easily extracted from the network by direct sum m ation. To nd the value of p, we counted the num ber of edges in the network and divided by the total num ber of possible w ithingroup edges, giving p = 0.178. Feeding this value and our gures for the m om ents into Eqs. (19) and (20), we then nd a predicted value of r = 0.145. The m easured

r=

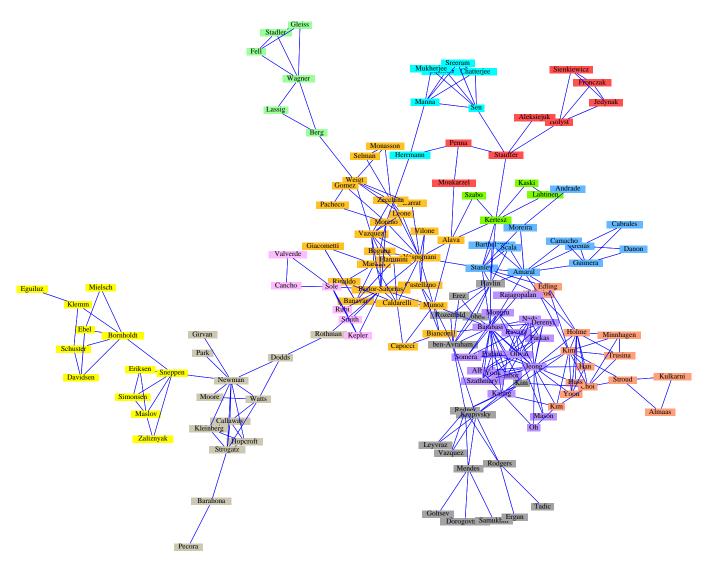


FIG. 2: The largest component of the network of coauthorships described in the text. This component contains 142 scientists, and there are 36 other components, of sizes ranging from 1 to 5, containing 84 m ore. The vertices are colored according to the communities found using the algorithm of R ef. [29]. The communities correspond reasonably closely to geographical and institutional divisions between the scientists shown.

value for the real network is 0.174 0.045. (The error is calculated according to the prescription given in [17].) These two gures are in agreement within the statistical error on the latter.

W hile this result by no means proves that the group structure is responsible for assortativity in this network, it tells us that no other assumption is necessary to give the observed value of r. W ith group structure as shown in the gure and otherwise random mixing, we would get a network with exactly the assortativity that is observed in reality, within expected error.

## B. Boards of directors

D avis and collaborators [27, 34] have studied networks of the directors of companies in which two directors are considered connected if they sit on the board of the sam e company. They studied the Fortune 1000, the one thousand US companies with the highest revenues, for 1999, and assembled a near-complete director network from publicly available data. The network consists of 7673 directors sitting on 914 boards. It provides a particularly simple example of our method, for two reasons. First, the groups in the network through which individuals are acquainted are provided for us they are the boards of directors. Second, it is assumed that directors are acquainted with all those with whom they share a board, so that the parameter p in our model is 1.

The distributions of boards per director and directors per board have been studied before [13]. We note that m ost directors (79%) sit on only one board and that there is considerable variation in the size of boards (from 2 to 35 members). Thus we would expect strong assortative mixing in the network, and indeed we nd that 0:004. Taking the moments of the mear = 0.276sured distributions  $r_m$  and  $s_n$  for the network and setting p = 1, Eq. (19) gives a value of r = 0.116 for our model. So it appears that the presence of groups in the network can explain about 40% of the assortativity we observe in this case, but not all of it. There is some additional assortativity in addition to the purely topological e ect of the groups, and we conjecture that this is due to som e true sociological or psychological e ect in the way in which acquaintanceships are form ed. One possibility is suggested by the analysis of the directorships data by Newm an et al. [13], who found that directors who sit on m any boards tend to sit on them with others who sit on m any boards. Since those who sit on m any boards will also tend to have high degree, we would expect this effect to add assortativity to the network, but the e ect is missing from our model in which board membership is assigned at random .

In a sense, ourm odel is giving a baseline against which to measure the value of r; it tells us when the value we see is simply what would be expect by random chance, as in the collaboration network above, and when there must be additional e ects at work, as in the boards of directors.

## VI. CONCLUSIONS

In this paper we have argued that social and non-social networks di er in two in portant ways. First, they show

8

distinctly di erent patterns of correlation between the degrees of adjacent vertices, with degrees being positively correlated (assortative mixing) in most social networks and negatively correlated (disassortative mixing) in most non-social networks. Second, social networks show high levels of clustering or network transitivity, whereas clustering in many non-social networks is no higher than one would expect on the basis of pure chance, given the observed degree distribution.

We have shown that both of these di erences can be explained by the same hypothesis, that social networks are divided into communities, and non-social networks are not. We have studied a simple model of community structure in social networks in which individuals belong to groups and are acquainted with others with whom they share those groups. The model is exactly solvable using generating function techniques, and we have shown that it gives predictions that are in reasonable and som etim es excellent agreem ent with empirical observations of realworld social networks.

A cknow ledgm ents

The authors would like to thank D uncan W atts for useful conversations. This work was funded in part by the N ational Science Foundation under grant num ber D M S { 0234188 and by the Jam es S.M cD onnell Foundation and the Santa Fe Institute.

- S.H. Strogatz, Exploring com plex networks.Nature 410, 268{276 (2001).
- [2] R. Albert and A. L. Barabasi, Statistical mechanics of complex networks. Rev. M od. Phys. 74, 47 (97 (2002).
- [3] S.N. D orogovtsev and J.F.F.M endes, Evolution of Networks: From B iological Nets to the Internet and W W W. Oxford University Press, Oxford (2003).
- [4] M.E.J.Newman, The structure and function of complex networks. SIAM Review 45, 167{256 (2003).
- [5] D. J. W atts and S. H. Strogatz, Collective dynamics of 'sm all-world' networks. Nature 393, 440{442 (1998).
- [6] A.-L. Barabasi and R. Albert, Emergence of scaling in random networks. Science 286, 509(512 (1999).
- [7] L.A.N.Amaral, A.Scala, M.Barthelemy, and H.E. Stanley, Classes of small-world networks. Proc. Natl. Acad. Sci. USA 97, 11149(11152 (2000).
- [8] M.E.J.Newman, Assortative mixing in networks. Phys. Rev. Lett. 89, 208701 (2002).
- [9] M. E. J. Newman, Properties of highly clustered networks. Preprint cond-m at/0303183 (2003).

- [10] R. Pastor-Satorras, A. Vazquez, and A. Vespignani, Dynam ical and correlation properties of the Internet. Phys. Rev. Lett. 87, 258701 (2001).
- [11] S.Feld, W hy your friends have m ore friends than you do. Am. J. Sociol. 96, 1464 (1477 (1991).
- [12] M. Molloy and B. Reed, A critical point for random graphs with a given degree sequence. Random Structures and Algorithm s 6, 161 (179 (1995).
- [13] M.E.J.Newman, S.H.Strogatz, and D.J.W atts, Random graphs with arbitrary degree distributions and their applications. Phys. Rev. E 64, 026118 (2001).
- [14] B.Bollobas, A probabilistic proof of an asymptotic formula for the number of labelled regular graphs. European Journal on Combinatorics 1, 311(316 (1980).
- [15] T.Luczak, Sparse random graphs with a given degree sequence. In A. M. Frieze and T.Luczak (eds.), Proceedings of the Sym posium on Random G raphs, Poznan 1989, pp. 165{182, John W iley, New York (1992).
- [16] Q. Chen, H. Chang, R. Govindan, S. Jamin, S. J. Shenker, and W. W illinger, The origin of power laws

in Internet topologies revisited. In Proceedings of the 21st Annual Joint Conference of the IEEE Computer and Communications Societies, IEEE Computer Society (2002).

- [17] M.E.J. Newman, Mixing patterns in networks. Phys. Rev. E 67, 026126 (2003).
- [18] S. Maslov, K. Sneppen, and A. Zaliznyak, Pattern detection in complex networks: Correlation pro le of the Internet. Preprint cond-mat/0205379 (2002).
- [19] J.Park and M.E.J.Newman, The origin of degree correlations in the Internet and other networks. Preprint cond-m at/0303327 (2003).
- [20] M. Faloutsos, P. Faloutsos, and C. Faloutsos, On powerlaw relationships of the internet topology. Computer Communications Review 29, 251{262 (1999).
- [21] M.E.J.Newman, Random graphs as models of networks. In S. Bomholdt and H.G. Schuster (eds.), Handbook of Graphs and Networks, pp. 35{68, W iley-VCH, Berlin (2003).
- [22] H.Ebel, L.-I.M ielsch, and S.Bomholdt, Scale free topology of e-m ail networks. Phys. Rev. E 66, 035103 (2002).
- [23] N.D.M artinez, A rtifacts or attributes? E ects of resolution on the Little Rock Lake food web. Ecological M onographs 61, 367 (392 (1991).
- [24] R. Cohen, K. Erez, D. ben-Avraham, and S. Havlin, Resilience of the Internet to random breakdowns. Phys. Rev. Lett. 85, 4626 (4628 (2000).
- [25] J.W. Grossman and P.D.F. Ion, On a portion of the well-known collaboration graph. Congressus Numerantium 108, 129(131 (1995).
- [26] V. Batagelj and A. M rvar, Som e analyses of Erdøs collaboration graph. Social Networks 22, 173 (186 (2000).
- [27] G.F.Davis, M.Yoo, and W.E.Baker, The smallworld of the corporate elite. Preprint, University of Michigan Business School (2001).
- [28] M. E. J. Newman, S. Forrest, and J. Balthrop, Em ail networks and the spread of computer viruses. Phys. Rev. E 66, 035101 (2002).
- [29] M.Girvan and M.E.J.Newman, Community structure

in social and biological networks. Proc. Natl. Acad. Sci. USA 99, 8271 (8276 (2002).

- [30] R.Guimera, L.Danon, A.D az-Guilera, F.Giralt, and A.A renas, Self-sim ilar community structure in organisations. Preprint cond-m at/0211498 (2002).
- [31] E. Ravasz and A.-L. Barabasi, Hierarchical organization in complex networks. Phys. Rev. E 67, 026112 (2003).
- [32] J. R. Tyler, D. M. W ilkinson, and B. A. Huberman, Email as spectroscopy: Automated discovery of community structure within organizations. Preprint condmat/0303264 (2003).
- [33] M.E.J.Newman, The structure of scientic collaboration networks. Proc. Natl. Acad. Sci. USA 98, 404 (409 (2001).
- [34] G.F.D avis and H.R.G reve, Corporate elite networks and governance changes in the 1980s. Am. J. Sociol. 103, 1{37 (1997).
- [35] D.L.Banks and K.M.Carley, M odels for network evolution. Journal of M athem atical Sociology 21, 173{196 (1996).
- [36] D. J. W atts, N etworks, dynamics, and the sm all world phenom enon. Am. J. Sociol. 105, 493(592 (1999).
- [37] E.M. Jin, M.G irvan, and M.E.J.Newman, The structure of growing social networks. Phys. Rev. E 64, 046132 (2001).
- [38] J.Davidsen, H.Ebel, and S.Bomholdt, Emergence of a smallworld from local interactions: Modeling acquaintance networks. Phys. Rev. Lett. 88, 128701 (2002).
- [39] K.Klemm and V.M.Eguiluz, Highly clustered scale-free networks.Phys.Rev.E 65, 036123 (2002).
- [40] J. Jost and M. P. Joy, Evolving networks with distance preferences. Phys. Rev. E 66, 036126 (2002).
- [41] An alternative theory is that individuals introduce pairs of their acquaintances to one another, thus completing network triangles and increasing the clustering coe – cient. Several models of this \triadic closure" process have been studied in the literature [35, 36, 37, 38, 39, 40].