

Bipartite Yule Processes in Collections of Journal Papers

Steven A. Morris
Oklahoma State University
Electrical and Computer Engineering
Stillwater, OK 74078, USA
(Dated: April 14, 2024)

Collections of journal papers, often referred to as 'citation networks', can be modeled as a collection of coupled bipartite networks which tend to exhibit linear growth and preferential attachment as papers are added to the collection. Assuming primary nodes in the first partition and secondary nodes in the second partition, the basic bipartite Yule process assumes that as each primary node is added to the network, it links to multiple secondary nodes, and with probability, $\frac{1}{N}$, each new link may connect to a newly appearing secondary node. The number of links from a new primary node follows some distribution that is a characteristic of the specific network. Links to existing secondary nodes follow a preferential attachment rule. With modifications to adapt to specific networks, bipartite Yule processes simulate networks that can be validated against actual networks using a wide variety of network metrics. The application of bipartite Yule processes to the simulation of paper-reference networks and paper-author networks is demonstrated and simulation results are shown to mimic networks from actual collections of papers across several network metrics.

Keywords: bipartite networks, citation networks, Yule process, Simon-Yule process, network growth model, preferential attachment

I. COLLECTIONS OF PAPERS AS COUPLED BIPARTITE NETWORKS

As shown in Figure 1, a collection of journal papers constitutes a series of coupled bipartite networks [8]. As diagrammed in Figure 1, a collection of papers contains 6 direct bipartite networks: 1) papers to paper authors, 2) papers to references, 3) papers to paper journals, 4) papers to terms, 5) references to reference authors, and 6) references to reference journals. Additionally, there are 15 indirect bipartite networks in collections of papers as

defined by the diagram. Examples of interesting indirect networks are paper author to reference author networks, and paper journal to reference journal networks, which can be used for author co-citation analysis [13] and journal co-citation analysis [5] respectively.

Modeling the growth of these bipartite networks helps characterize the underlying processes driving a research specialty, such as knowledge accretion, researcher productivity, or collaboration processes. Bipartite growth models produce many network metrics, allowing comprehensive validation of models against real collections of papers.

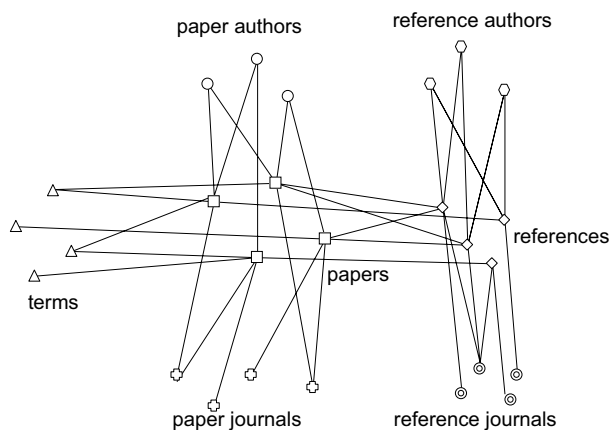


FIG. 1: Diagram showing a collection of papers as a series of coupled bipartite networks.

II. BASIC BIPARTITE YULE PROCESSES

As originally proposed, Yule processes do not model networks, but simply model the formation of power-laws of frequencies of items [1] [10] [12]. For a bipartite Yule process, assume a bipartite network where nodes fall into two partitions: 1) primary nodes and 2) secondary nodes. Typically, primary nodes are papers while secondary nodes are entities that are associated with papers, such as authors, references, journals, or terms.

Figure 2 shows a diagram of a bipartite paper-reference network, where the primary nodes are papers and the secondary nodes are references, and papers are linked to references by citations.

Figure 3 shows a diagram of a basic bipartite Yule process:

The network grows by adding primary nodes one at a time.

When a new primary node is added, it links to N secondary nodes. N is a random deviate drawn from a discrete probability distribution that is a

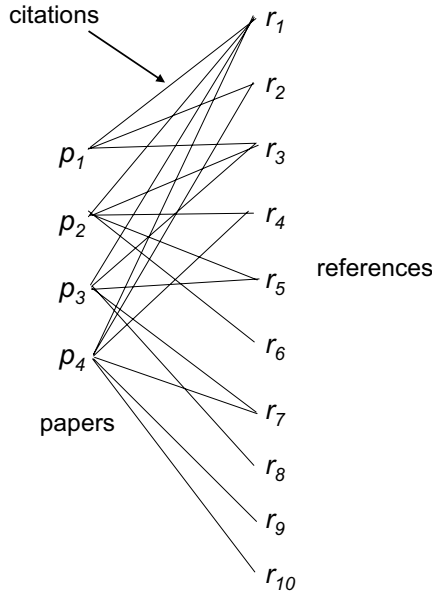


FIG. 2: Diagram showing a bipartite network of papers and the references that they cite.

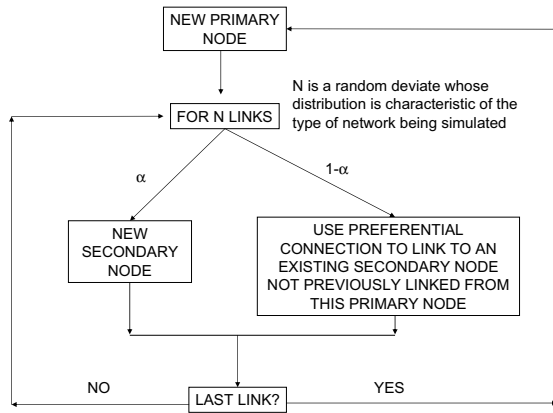


FIG. 3: Diagram of a basic bipartite Yule process.

characteristic of the type of network being modeled. For paper-reference networks N is lognormally distributed [6], while for paper-author networks N is 1-shifted Poisson distributed [2] [7]. For paper-journal networks, N is unity, since a paper is only linked to one journal, the one in which it was published. As defined here, a primary entity does not link to any specific secondary entity more than once.

For each of the N links, there is a probability, α , that it will link to a newly appearing secondary node.

If a link happens to be to an existing secondary

node, the linked node is selected using preferential attachment, that is, the probability of linking to a secondary node is proportional to the number of links that the node possesses.

The stationary distribution of the link degree of the secondary nodes is a Yule distribution [3][12], a power law whose exponent is $1 + 1/(1 - \alpha)$. The stationary distribution is independent of the distribution of N , but for finite collections of papers the distribution of N profoundly affects the tail of the distribution [6].

III. PRACTICAL BIPARTITE YULE PROCESSES

In practice, the basic bipartite Yule process outlined in the proceeding section must be modified to account for the characteristics of the specific type of bipartite network being studied.

A. Paper-reference Yule process

Figure 4 shows a diagram of a bipartite Yule process modified for the characteristics of paper-reference networks. The details of this model, its scope, and a discussion of evidence of the its validity, appear in [6]. Paper-reference networks in collections of papers covering scientific specialties are characterized by the accretion of highly cited exemplar references, which are cited at rates far higher than would be predicted by simple preferential attachment. These exemplar references tend to appear during the initial growth of the network and their rate of appearance decreases exponentially as papers are added to the collection.

As each paper is added to the collection, it links to a lognormally distributed number of references, as discussed in [6]. For each reference cited by a paper, there is a probability that the citation is to a newly appearing reference. When a new reference appears, there is a small probability that the reference will be a highly attractive exemplar reference. If so, the reference receives a large initial attraction, A_0 . Newly created non-exemplar references received no initial attraction. If a citation is to an existing reference, the probability that any particular existing reference will be cited is proportional to the sum of its attraction plus the number of times it has been cited. A specific reference can not be cited more than once by a paper.

B. Paper-author Yule process

Figure 5 shows a diagram of the basic bipartite Yule process modified for the characteristics of paper-author networks. The details of this model, its scope, and a discussion of evidence of the its validity, appear in [2] and

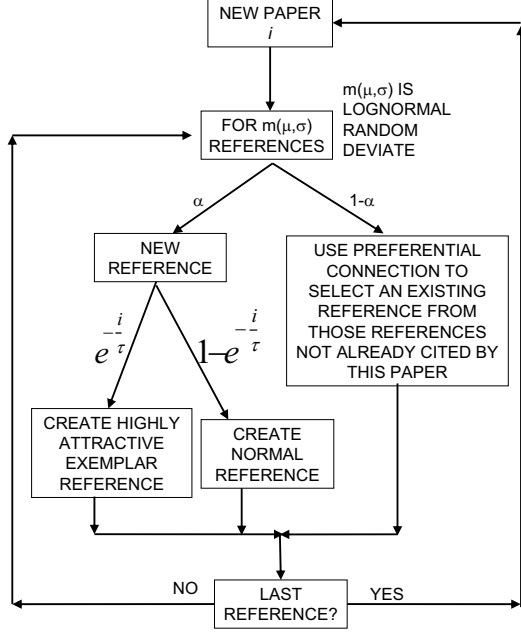


FIG . 4: D iagram showing a bipartite Yule process for paper-reference networks.

[7]. In this case the Yule process is applied to teams of researchers rather than individual researchers. As each paper is added, there is a probability that the paper will be authored by a new research team. If so, a team of N_G authors is added to the network, but only $N(\lambda)$ appear as authors of the team's first paper, where $N(\lambda)$ is a random deviate drawn from a 1-shifted Poisson distribution whose parameter is λ . If choosing an existing team, the teams are chosen using preferential attachment, that is, the probability that a team will author the new paper is proportional to the number of papers that the team has previously published.

When selecting authors for an existing team's paper, $N(\lambda)$ authors are chosen and the authors are selected using preferential attachment, specifically, the probability of selecting an author is proportional to 1 plus the number of papers that the author has published. Inter-team collaborations (weak ties) are modeled as random events; when an existing author is to be selected there is a probability that the author will be drawn randomly from some other team.

IV . NETWORK METRICS

Simulation using a bipartite Yule process fully preserves the topology of the network phenomenon being studied. The adjacency matrix for a bipartite network is a roughly lower triangular rectangular matrix. Figure 6

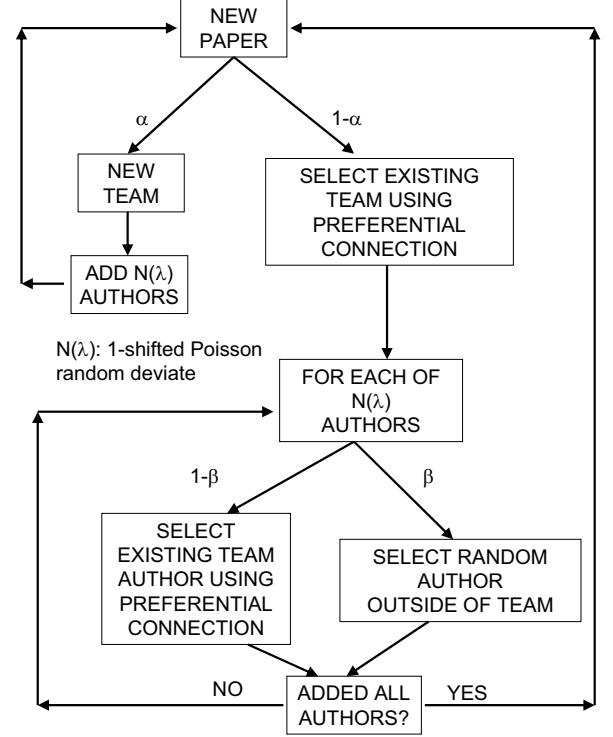


FIG . 5: D iagram showing a bipartite Yule process for paper-author networks.

shows the adjacency matrices of the paper-reference network, paper-author network, and paper-journal network in an actual collection of papers.

From each bipartite network, two co-occurrence networks can be derived with their own characteristic topology. For example, a paper-reference network yields two unipartite networks, a bibliographic coupling network of papers linked by common references and a co-citation network of references linked by their common papers. A paper-author network yields a collaboration network of authors connected by common papers and also a network of papers connected by common authors.

Network metrics that characterize a bipartite network can be derived from link degree distributions in the bipartite network and link degree distributions in the associated unipartite co-occurrence networks. Many of these metrics can be tied to indicators of the underlying research process generating the collection of papers.

A set of useful metrics for paper-reference networks includes:

reference per paper distribution – This tends to be a lognormal distribution whose mean, m , is from 15 to 30 references per paper [6].

paper per reference distribution – This tends to be a power-law distribution with a characteristic exponent that ranges from 2 to 4 [9][11].

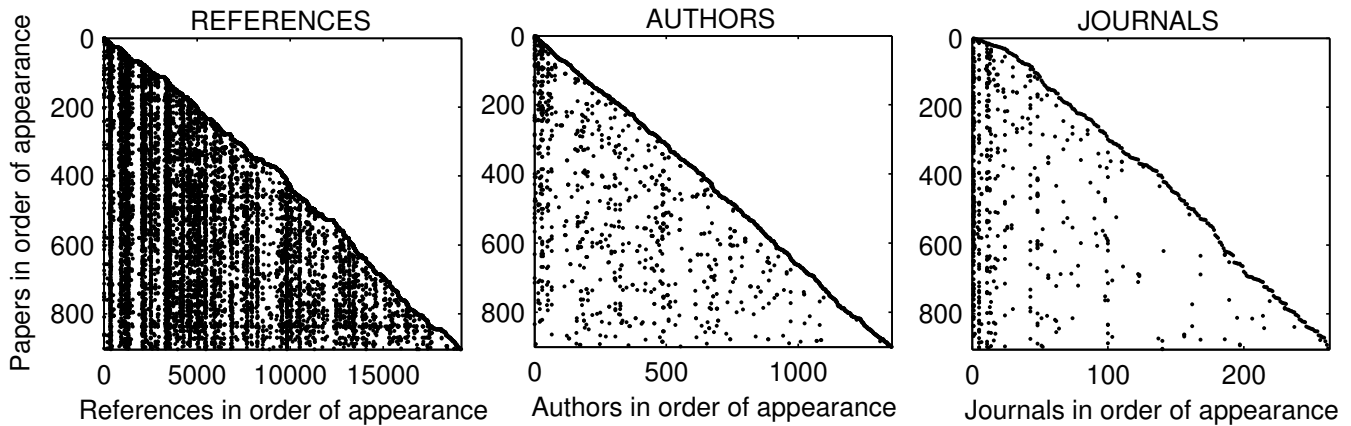


FIG. 6: Diagrams of adjacency matrices of bipartite networks in a collection of 902 papers on the topic of complex networks.

bibliographic coupling strength per paper pair distribution – This is the link weight distribution of the bibliographic coupling network.

co-citation coupling strength per reference pair distribution – This is the link weight distribution of the co-citation network.

bibliographic coupling clustering coefficient distribution – This is the distribution of the clustering coefficients for the bibliographic coupling network.

In paper-reference networks, the mean references per paper is typically about 30, while the mean papers per reference is typically about 1.4, the mean of a zeta (pure power-law) distribution with exponent of 3. This constrains the ratio of references to papers in the collection to be about 20, that is, a collection of papers typically has about 20 times more references than papers.

A set of useful metrics for paper-author networks includes.

authors per paper distribution – This tends to be a 1-shifted Poisson distribution whose mean varies from 2 for fields such as mathematics to more than 10 for biomedical fields [7].

paper per author distribution – This tends to be a power-law (Lotka's Law), whose exponent ranges from 2 to 4 [4].

collaborating author distribution – This is the distribution of the number of unique co-authors per author in the collection, and is the link degree distribution of the unweighted co-authorship network.

co-authorship per author pair distribution – This is the link weight distribution of the weighted co-authorship network.

co-authorship clustering coefficient distribution – This is the clustering coefficient of the unweighted co-authorship network.

minimum co-authorship path length distribution – This is the distribution of minimum path-lengths between author pairs in the unweighted co-authorship network.

V. EXAMPLES

A. Example simulation of paper-reference network

The Yule model for paper-reference networks was tested on a collection of papers that cover the topic of complex networks. This collection was gathered on September 8th, 2003 from ISI's Web of Science product using a series of queries to find all papers that cite key references and authors in the specialty. The collection contains 902 papers with 31355 citations to 19185 references. The Yule parameter, α , estimated by dividing the number of references by the number of citations to references, is 0.61. The mean references per paper is 34.8. The parameters used for the bipartite Yule simulation of this collection can be found in [6].

Figure 7 shows plots comparing network metrics from the actual data to a Yule simulation of network growth. The upper left plot is of papers per reference frequencies. Maximum likelihood expectation (MLE) estimated power-law exponents are 3.0 for the actual frequencies, and 2.85 for the simulation. The paper-reference Yule process mimics the phenomenon of exceptionally highly cited exemplar references in the extreme lower right of the plot. The upper right plot is of frequency of bibliographic coupling strength per paper pair. The Yule process-based simulation frequencies match the actual frequencies well. The series of high bibliographic coupling strength pairs in the lower right from actual data corresponds to pairs of review papers with long lists of almost identical references, a phenomenon not modeled by the Yule process. The lower left plot of Figure 7 is of frequency of co-citation strength per reference pair. The

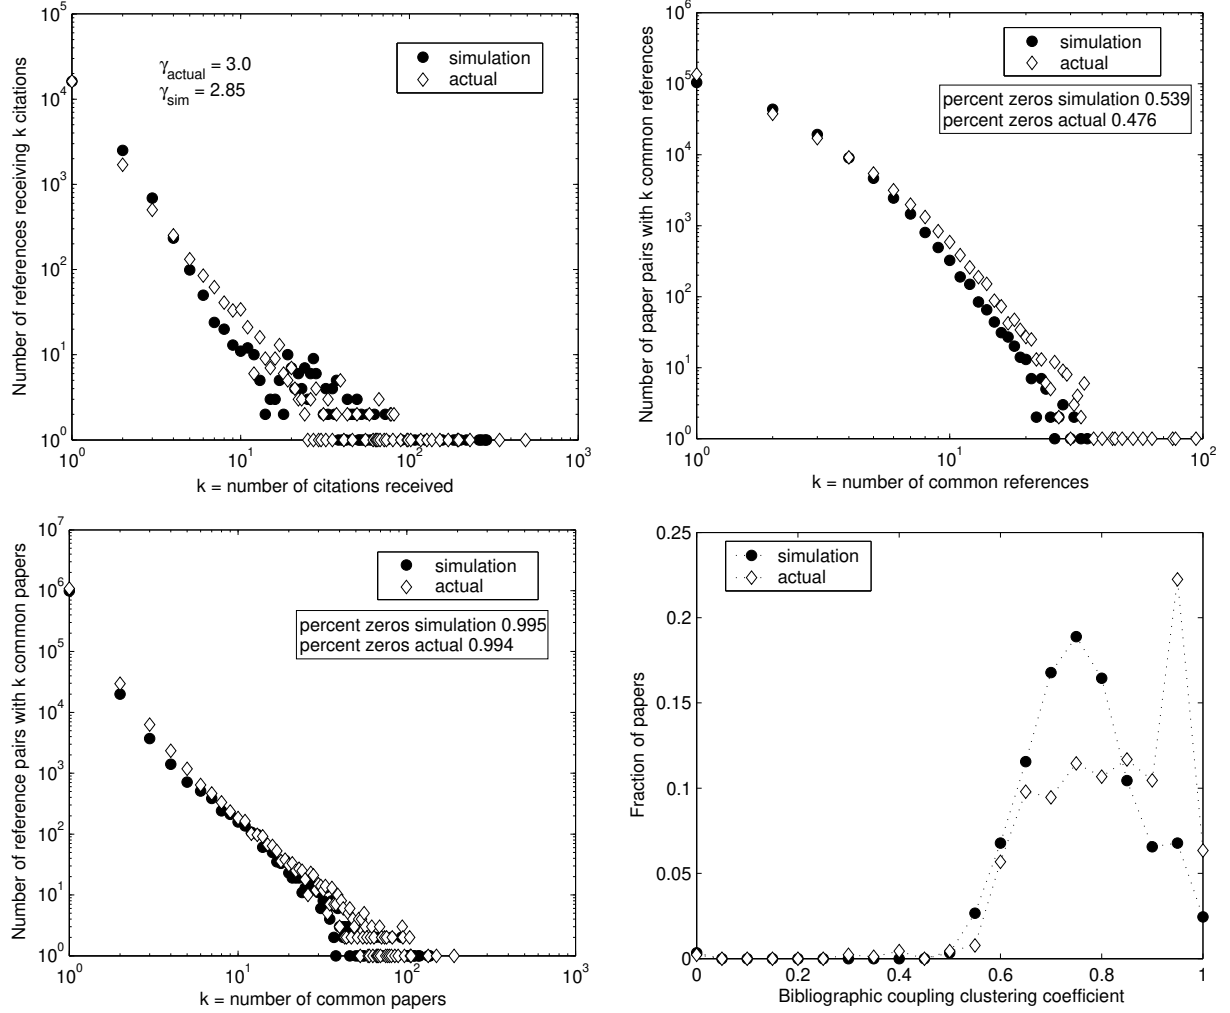


FIG. 7: Comparison plots of paper per reference frequency (upper left), bibliographic coupling strength frequency (upper right), co-citation strength frequency (lower left), and bibliographic coupling clustering coefficient distribution (lower right), from a collection of 902 papers on the topic of complex networks.

simulated frequencies match the actual frequencies well across the whole plot. The lower right plot is of bibliographic coupling clustering coefficient distribution. The simulated distribution matches the shape and scale of the actual data.

B. Example simulation of a paper-author network

The Yule model for paper-author networks was tested on three collections of papers representing specialties with a wide range of collaboration intensities. A collection of 1391 papers on the topic of distance learning with 51% single-authored papers represents a specialty with little collaboration. A collection of 900 papers on the topic of complex networks with 21% single-authored papers represents a specialty with typical amount of collaboration. Finally, a collection of 3095 papers on the topic of atrial ablation with 7% single-authored papers

represents a specialty with heavy collaboration [7]. The parameters used for bipartite Yule simulation of these paper-author networks can be found in [7].

Figures 8, 9 and 10 show the comparison of Yule model simulations to actual data for these three collections using two metrics: 1) paper per author frequency (Lotka's Law), and 2) collaborating author frequency.

The left plots in Figures 8, 9 and 10 are paper per author frequency plots. The bipartite Yule process produces excellent matches to actual data. The inset plots show Yule model predicted paper per author distributions derived by gathering statistics from 1000 simulations for each collection. A line representing an MLE fitted zeta (pure power-law) distribution is shown in each inset. The Yule model produces excellent fits to the zeta distribution for all three collections, confirming the Yule model's usefulness as a predictor of Lotka's Law. Note that the deviation of the distributions from the zeta distribution in the tail of the distributions is due to truncation.

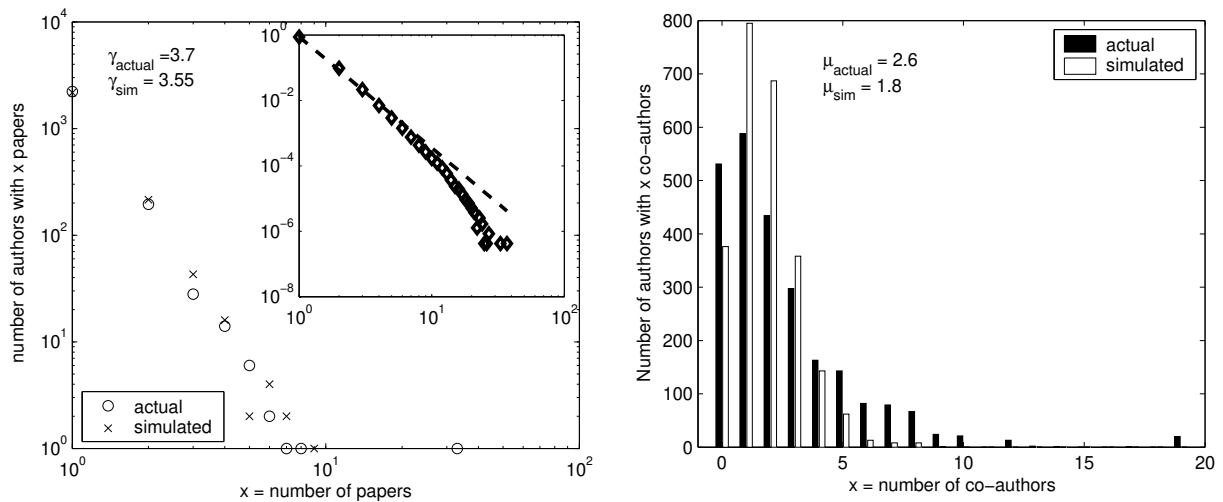


FIG. 8: Comparison of bipartite Yule simulation against actual data for plots of paper per author frequencies and collaborating author frequencies for the distance education paper collection.

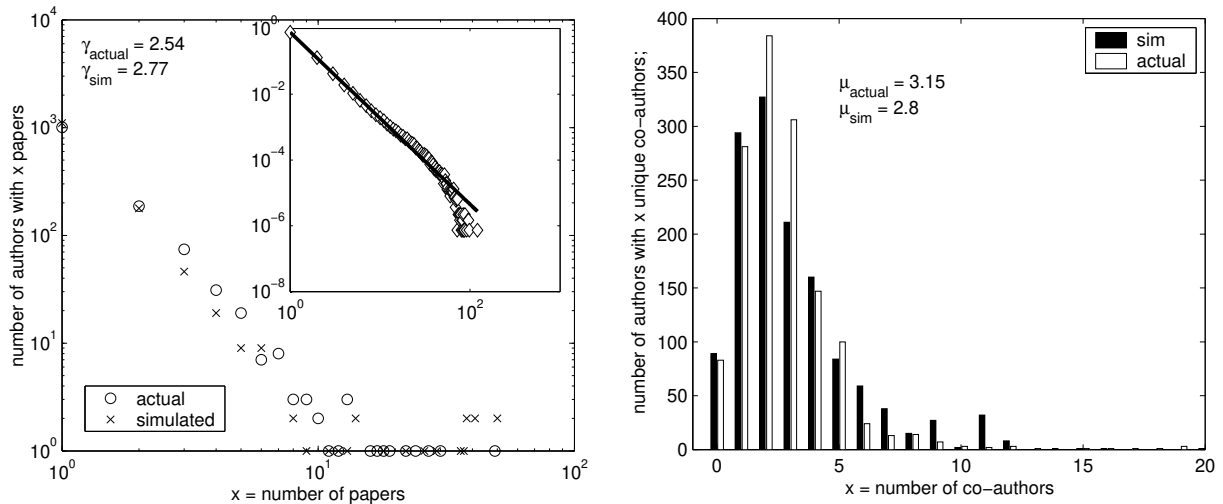


FIG. 9: Comparison of bipartite Yule simulation against actual data for plots of paper per author frequencies and collaborating author frequencies for the complex networks paper collection.

cating the simulations at the number of papers in each collection. The plots on the right side of Figures 8, 9 and 10 show that the bipartite Yule model produces good matches of collaborating author frequencies to actual data across the wide range of collaboration intensities represented by the three collections.

VI. FUTURE WORK

The research on bipartite Yule processes discussed here will be extended to modeling of coupled bipartite net-

works. Figure 10 shows an example of coupled bipartite networks, where a paper-author network is coupled to a paper reference network through common papers. The challenge is to invent a model that reproduces the correlation of groups of authors to groups of references, a phenomenon that cannot be modeled using two separate bipartite processes.

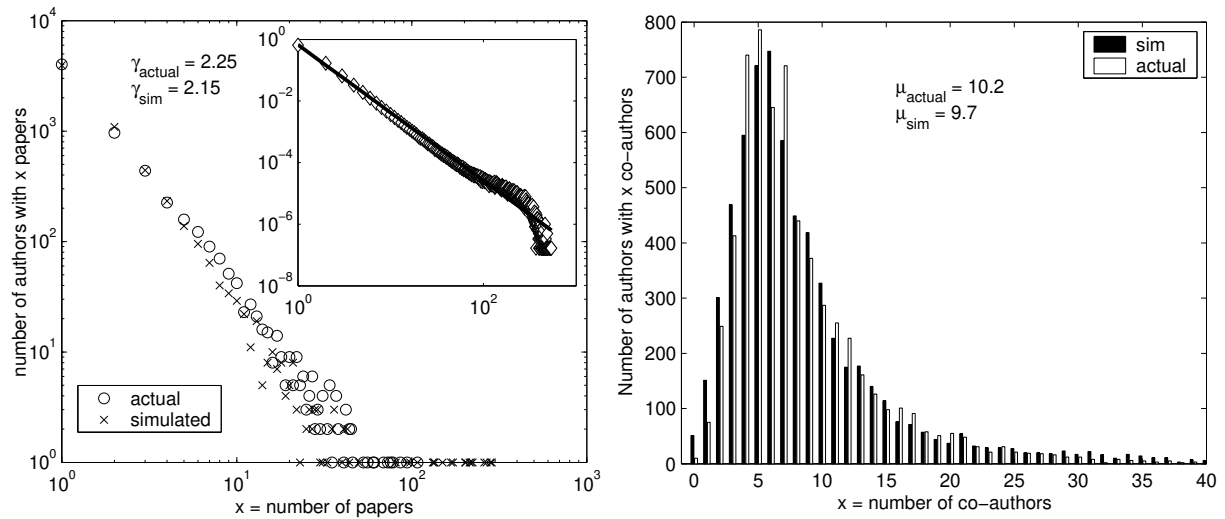


FIG. 10: Comparison of bipartite Yule simulation against actual data for plots of paper per author frequencies and collaborating author frequencies for the atrial ablation paper collection.

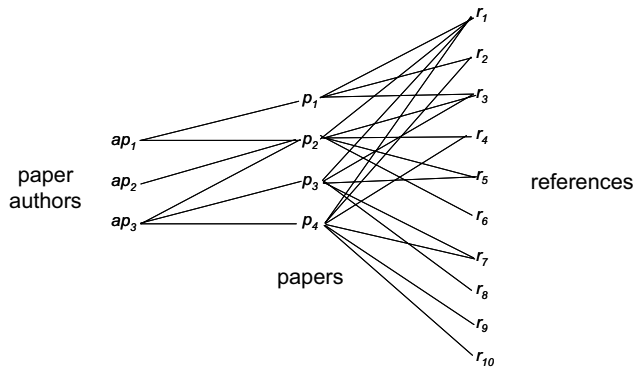


FIG. 11: Example of coupled bipartite networks. The paper-author network is coupled to the paper-reference network through common papers.

- [2] M. L. Goldstein, S. A. Morris, and G. G. Yen. A group-based model for bipartite author-paper networks. *Physical Review E* (cond-mat/0409205), 2004.
- [3] Norman Lloyd Johnson, Samuel Kotz, and Adrienne W. Kemp. Univariate discrete distributions. Wiley series in probability and mathematical statistics. Applied probability and statistics. John Wiley & Sons, New York, 2nd edition, 1992.
- [4] A. J. Lotka. The frequency distribution of scientific productivity. *Journal of the Washington Academy of Sciences*, 16:317{323, 1926.

- [5] K. W. M. O'Callaghan. Mapping economics through the journal literature: an experiment in journal cocitation analysis. *Journal of the American Society for Information Science*, 42(4):290{296, 1991.
- [6] S. A. Morris. Manifestation of emerging specialties in journal literature: a growth model of papers, references, exemplars, bibliographic coupling, co-citation, and clustering coefficient distribution. *Journal of the American Society for Information Science and Technology*, in print, 2004.
- [7] S. A. Morris, M. L. Goldstein, and C. F. DeYoung. Manifestation of research teams in journal literature: A growth model of papers, authors, collaboration, coauthorship, weak ties, and lotka's law. (submitted), 2004.
- [8] Steven A. Morris. Unified mathematical treatment of complex cascaded bipartite networks: the case of collections of journal papers. Dissertation, Oklahoma State University, 2005.
- [9] S. Narayan. Power law relations in science bibliography—a self-consistent interpretation. *Journal of Documentation*, 27(2):83{97, 1971.
- [10] D. Price. A general theory of bibliometric and other cumulative advantage processes. *Journal of the American Society for Information Science*, 27(5-6):292{306, 1976.
- [11] S. Redner. How popular is your paper? an empirical study of the citation distribution. *European Physical Journal B*, 4(2):131{134, 1998.
- [12] H. A. Simon. On a class of skew distribution functions. *Biometrika*, 42:425{440, 1955.
- [13] H. D. White and B. C. Grieth. Author cocitation: a literature measure of intellectual structure. *Journal of the American Society for Information Science*, 32(3):163{172, 1981.