

# Local-world evolving networks with tunable clustering

Zhongzhi Zhang<sup>a,b,\*</sup> Lili Rong<sup>c</sup> Bing Wang<sup>d</sup> Shuigeng Zhou<sup>a,b</sup>  
Jihong Guan<sup>e</sup>

<sup>a</sup>*Department of Computer Science and Engineering, Fudan University,  
Shanghai 200433, China*

<sup>b</sup>*Shanghai Key Lab of Intelligent Information Processing, Fudan University,  
Shanghai 200433, China*

<sup>c</sup>*Institute of Systems Engineering, Dalian University of Technology,  
Dalian 116024, Liaoning, China*

<sup>d</sup>*Department of Applied Mathematics, Dalian University of Technology,  
Dalian 116024, Liaoning, China*

<sup>e</sup>*Department of Computer Science and Technology, Tongji University,  
4800 Cao'an Road, Shanghai 201804, China*

---

## Abstract

We propose an extended local-world evolving network model including a triad formation step. In the process of network evolution, random fluctuation in the number of new edges is involved. We derive analytical expressions for degree distribution, clustering coefficient and average path length. Our model can unify the generic properties of real-life networks: scale-free degree distribution, high clustering and small inter-node separation. Moreover, in our model, the clustering coefficient is tunable simply by changing the expected number of triad formation steps after a single local preferential attachment step.

*Key words:* Local-world, Scale-free networks, Complex networks, Disordered systems

---



---

\* Corresponding author.

*Email addresses:* zhangzz@fudan.edu.cn (Zhongzhi Zhang),  
llrong@dlut.edu.cn (Lili Rong), sgzhou@fudan.edu.cn (Shuigeng Zhou),  
jhguan@mail.tongji.edu.cn (Jihong Guan).

## 1 Introduction

Complex networks [1,2,3,4,5] describe a number of systems in nature and society, such as Internet [6], World Wide Web [7], metabolic networks [8], protein networks in the cell [9], co-author networks [10] and sexual networks [11]. Many real-life networks share three apparent features: (a) The degree distribution of nodes is scale-free, i.e., it follows a power law. (b) The clustering coefficient is high. Two nodes having a common neighbor are far more likely to be linked to each other than are two nodes selected randomly. (c) The average path length (APL) is small. That is, the expected number of edges needed to pass from one arbitrarily selected node to another is low.

How to model real complex networks with these three properties? Traditionally the study of complex networks has been the scope of graph theory. While graph theory initially focused on regular graphs, since the 1950s large-scale networks with no apparent design principles have been depicted as random graphs [12,13], proposed as the simplest and most straightforward realization of a complex network. In the past ten years, scientists have found that most real-life networks are neither completely regular nor completely random, but have three properties above. So they proposed some new models to depict real-life networks. Among them, two are the most well known. One is the small-world network model [14] proposed by Watts and Strogatz (WS) in the year of 1998, which interpolates between regular and random graphs and has two properties of high clustering and short APL. The other is scale-free network model [15,16] with power-law degree distribution and low APL presented by Barabási and Albert (BA).

Although the two pioneering (WS and BA) models played an important role in network science and started an avalanche of research on complex networks [17,18,19,20,21], neither of them can completely describe the three common characteristics of real-life networks. After that, a great number of attempts have been made at constructing models [22,23,24,25,26,27,28,29,30,31] with the three properties coinciding with real-life networks. Holme and Kim extended the BA model to include a triad formation step [22]. Klemm and Eguíluz introduced a growing network model based on a finite memory of nodes [22,23]. Saramäki and Kaski presented an undirected scale-free network model generated by random walkers [25]. Andrade *et al.* [26] introduced Apollonian networks on the basis of the problem of Apollonian packing, which were also proposed by Doye and Massen [27]. Apollonian networks have received much attention from the scientific community. Zhou *et al.* presented a simple rule generating random two-dimensional Apollonian networks [28]. Zhang *et al.* offered a simple general algorithm producing high-dimensional deterministic and random Apollonian networks [29,30,31].

All above models may capture some mechanisms responsible for the three common traits shared by real-life networks, but they have ignored some other significant factors. For example, in various real-life networks such as World Trade Web [32,33] when a new node enters the system, it doesn't have the globe information of all existing nodes, so preferential attachment mechanism only works on the local-world of the new node. To better understand and describe this real-life phenomenon, Li and Chen (LC) proposed a local-world evolving network model [34], which has found applications in many fields such as Internet [35] and society [36]. However, LC model has a low clustering coefficient.

In this paper, in order to portray real-life network more appropriately, we present a local-world evolving network model with changeable local-world size and tunable clustering, which can capture both the mechanism of local preferential attachment [34] and triad formation [22]. In the model there is a random fluctuation in the number of new edges acquired by the network which is more realistic [38,39]. We analyze the geometric characteristics of the model both analytically and numerically. The analytical expressions are in good agreement with the numerical simulations. Our model has the three common features of real-life networks. Moreover, it represents a transition between exponential scaling and power-law, so it may depict some real-networks such as scientific collaboration network [37] whose degree distribution is neither power-law nor exponential.

## 2 The LC Local-world Evolving Network

Two ingredients, i.e. growth and preferential attachment in local-world, inspired Li and Chen to introduce the LC model [34] for dynamical evolving networks. The LC model can capture the localization of real-life networks, and its generation algorithm is as follows:

- (1) Initial condition: The network has a small number ( $m_0$ ) of nodes and small number ( $e_0$ ) of edges. And then we perform the following two steps:
- (2) Growth: At every time step, we add one node  $v$  with  $m$  ( $m < m_0$ ) edges to the existing network.
- (3) Determining local-world: Randomly choose  $M$  nodes from the existing network, which are considered as the "Local-world" of the new node  $v$ .
- (4) Local Preferential attachment (LPA): The node  $v$  connects to  $m$  different nodes in its local-world determined in step (3). We assume that the probability  $\Pi_{Local}(k_i)$  that node  $v$  will be connected to an old node  $i$ , which is in the local-

world of node  $v$ , depends on the degree  $k_i$  of node  $i$ :

$$\Pi_{Local}(k_i) = \frac{M}{m_0 + t} \frac{k_i}{\sum_{Local} k_j}. \quad (1)$$

In the case of  $m < M < m_0 + t$ , the LC model represents a transition between power-law and exponential scaling networks. In particular, the original BA model [15] is a special case of this local-world evolving network model.

### 3 Extended local-world evolving networks with changeable local-world size and tunable clustering

The LC model captures a common characteristic of many real-life networks: nodes have local-world connectivity. However, the clustering coefficient of the LC model approaches zero when the network size is large, which will be addressed in the following section. To incorporate the high clustering, we make use of the method introduced by Holme and Kim [22] to modify the LC model by adding an additional triad formation (TF) step: In the previous LPA step if there is an edge connecting the new node  $v$  and one existing node  $w$ , then we add one more edge from  $v$  to a randomly selected neighbor of  $w$  with a given probability (see Fig. 1). If all neighbors of  $w$  have been connected to  $v$ , do an LPA step instead.

The detailed description is as follows: at every time step, when a new node  $v$  enters the existing network, we perform an LPA step first, and then with the probability  $p$  we implement a TF step. In succession, we carry out an LPA step followed by a TF step with the probability  $p$ . After this process repeats  $m$  times we go to the next time step. It is worth noticing that in our model an LPA step is always followed by a TF step with probability  $p$ , which we take as the control parameter in our model. So in the present model, at every time step there are  $m$  LPA steps and  $p$ -dependent TF steps between 0 and  $m$  with expectation  $mp$ . That is to say, when new nodes are added to the network at different time steps, the number of new edges is generally not constant [39]. After  $t$  time steps, the model develops to a network with  $N_t = m_0 + t$  nodes and expected  $E_t = (1 + p)mt + e_0$  edges. Then the average node degree is  $\langle k \rangle_t = 2 E_t / N_t$  which is approximately equal to  $2m(1 + p)$  for infinite network size.

Additionally, with the network growth more information is available for the new nodes, so the size  $M$  of local-world increases with time. Thus, different from the LC model, we allow for a change in  $M$ , which is denoted here  $M_t$ . We assume that  $M_t = a(m_0 + t) + b$  and limit  $m \leq M_t \leq m_0 + t$ .

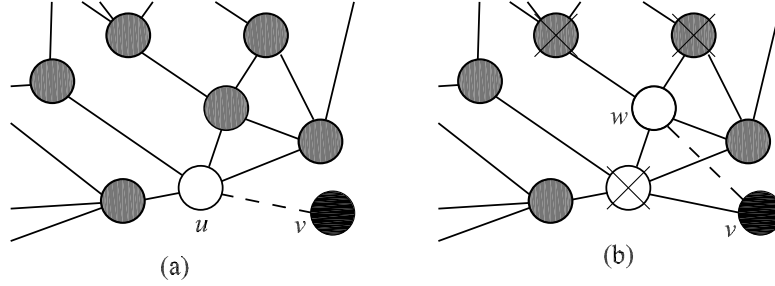


Fig. 1. Sketch of local preferential attachment and triad formation. In the LPA step (a) with a probability proportional to its degree a node  $u$  is selected to link to the new node  $v$ . In the TF step (b), we choose randomly one neighborhood  $w$  of node  $u$  that was selected connecting to the new node  $v$  in the previous LPA step, then we add a link between  $w$  and  $v$ .  $\times$  symbolizes “not allowed to attach to”.

Note that many real-life networks exhibit such an evolving mechanism as described in our model. For example, in the network of scientific citations, a new manuscript is more likely to cite well-known and thus much-cited publications than less-cited and consequently less-known papers in the same field of the manuscript (i.e. its local-world). Moreover, with the lapse of time, there are more papers available in the field for new manuscripts to refer, so the size of local-world increases with time. On the other hand, in the content of citations a not untypical scenario is that after citing a few famous references an author may simply cite secondary references from the famous ones (TP steps).

It is evident that at every time step, the parameters in the our model always meet the following conditions:  $m \leq M_t \leq m_0 + t$  and  $0 \leq p \leq 1$ . So there are at least three limiting cases as below:

Case A: When  $p = 0$ , and  $M_t = m$ , it is a growing network with uniform attachment which is the same case of model A in Ref. [16].

Case B: When  $p = 0$ , and  $M_t = t + m_0$ , the local-world of the new node is the whole network, our model reduces to the original BA model [15,16].

Case C: When  $p = 0$ ,  $M_t = \text{const}$  and  $m \leq M_t \leq m_0 + t$ , the model is reduced to the LC model [34].

As discussed in Section 2, when  $m \leq M_t \leq m_0 + t$ , the LC model represents a transition between power-law and exponential scaling networks. It is the same with our model, because the LC model is a special case of ours. So our

considered model may depict some real-life networks whose degree distribution is neither power-law nor exponential.

## 4 Analytical calculation of relevant network parameters

Topology properties are of fundamental significance to understand the complex dynamics of real-life systems. Here we focus on three important characteristics: degree distribution, clustering coefficient, and average path length.

### 4.1 Degree distribution

Degree distribution is one of the most important statistical characteristics of a network. Below we will show that the size of local-world has a significant effect on the degree distribution.

#### 4.1.1 Case of $M_t \gg m$

If the local-world scale has  $M_t \gg m$ , our model has a power-law degree distribution, similar to the BA network [15,16]. We can interpret this by calculating analytically based on the mean-field approach in Refs. [16,22,34]. We assume that the degree  $k_i$  of node  $i$  is continuous, and thus the probability given by Eq. (1) can be interpreted as a continuous rate of change of  $k_i$ . In an LPA step, node  $i$  increases its degree with the rate

$$\frac{\partial k_i}{\partial t} = \frac{M_t}{m_0 + t} \frac{k_i}{\sum_{Local} k_j}. \quad (2)$$

For a TF step, we can gain the average increase of  $k_i$  via the probability given by the following equation

$$\frac{\partial k_i}{\partial t} = \frac{M_t}{m_0 + t} \sum_{n \in \Omega} \frac{k_n}{\sum_{local} k_j} \frac{1}{k_n} = \frac{M_t}{m_0 + t} \frac{k_i}{\sum_{Local} k_j}, \quad (3)$$

where  $\Omega$  is the set of neighbors of node  $i$ , and  $k_i$  is the number of nodes in  $\Omega$ .

Similar to the fluctuation in Refs. [38,39], here the fluctuation of triad formation steps also has little impact on the growth dynamics  $k_i(t)$  of node  $i$  and degree distribution  $P(k)$  when the network size is large enough. So we can suppose that in one time step we perform  $m$  LPA steps and  $mp$  TF steps on

average. From Eqs. (2) and (3) the total rate per time step is expressed as

$$\frac{\partial k_i}{\partial t} = m \frac{M_t}{m_0 + t} \frac{k_i}{\sum_{Local} k_j} + mp \frac{M_t}{m_0 + t} \frac{k_i}{\sum_{Local} k_j} = \frac{m(1+p)M_t}{m_0 + t} \frac{k_i}{\sum_{Local} k_j}. \quad (4)$$

We assume that the cumulative node degree in the local-world [34] meets the following expression

$$\sum_{Local} k_j = \langle k \rangle M_t, \quad (5)$$

where  $\langle k \rangle$  is the average degree of all the nodes in the network. Substituting Eq. (5) into Eq. (4), we obtain

$$\frac{\partial k_i}{\partial t} = \frac{m(1+p)M_t}{m_0 + t} \frac{k_i}{\frac{2[(1+p)mt+e_0]M_t}{m_0+t}} \approx \frac{k_i}{2t}, \quad (6)$$

which has the same form as the original BA model [15,16]. The solution of this equation, with the initial condition that node  $i$  was added to the system at time  $t_i$  with the expected value of connectivity  $k_i(t_i) = m(1+p)$ , is

$$k_i(t) = m(1+p) \left( \frac{t}{t_i} \right)^{0.5}, \quad (7)$$

which results in the power-law degree distribution of form [20,21]

$$P(k) = \frac{2m(1+p)[m(1+p)+1]}{k(k+1)(k+2)}, \quad (8)$$

which at the limit  $m(1+p) \gg 1$  and  $k \gg 1$  can be written in the common form  $P(k) = 2(1+p)^2 m^2 k^{-3}$  [25].

In Fig. 2, we report the degree distribution at various values of  $p$  and  $m$ . In the process of simulation, the local-world size  $M_t$  scales as  $M_t = 0.3(m_0 + t) + m$ . From Fig. 2, one can easily see that the simulation results agree very well with the theoretical ones. Comparing (b) and (c) with (a) and (d), we observe that for small values of  $k$ , there is a deviation from power-law behavior in (b) and (c), which originates from the fluctuation in the number of new links acquired by the system (see Refs. [38,39]). It should be noted that many real-life networks such as the World Wide Web [7], the actor collaboration graphs [14] and scientific collaboration networks [37] indeed exhibit this phenomenon of deviation from power-law to some degree for small  $k$  values.

#### 4.1.2 Case of $M_t = m$

Now, we investigate the case of  $0 < p \leq 1$  and  $M_t = m$ . Obviously, for this particular case, the LPA is reduced to uniform attachment [16] which means that the new node is connected to existing nodes in the network with equal

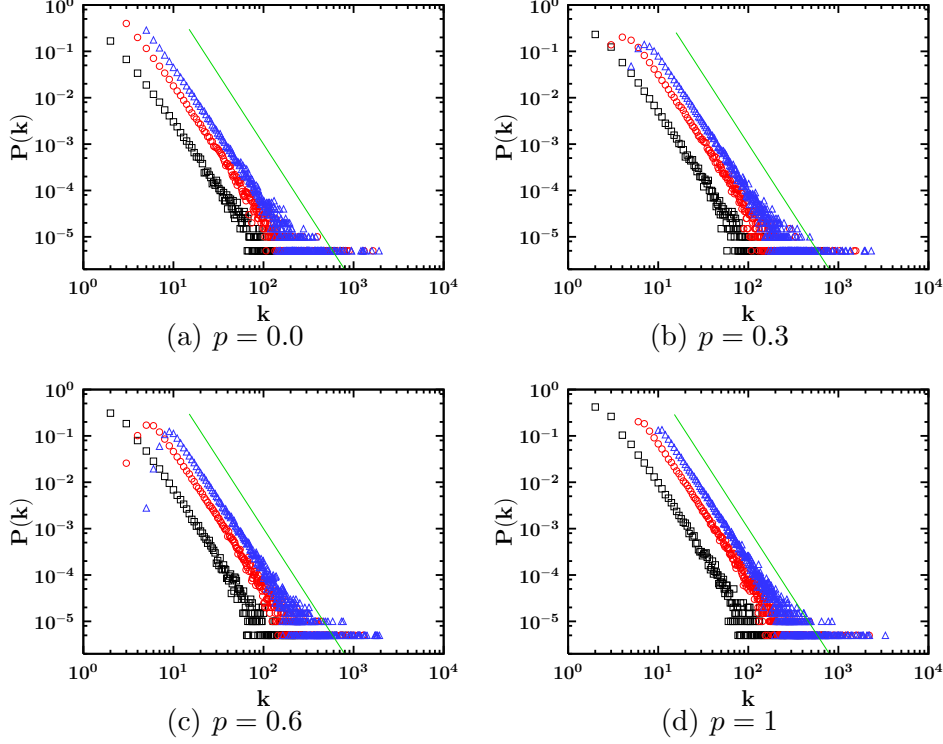


Fig. 2. Degree distribution  $P(k)$  versus  $k$  on a logarithmic scale. The size of networks is 200,000. The open squares, circles and triangles denote the cases of  $m=1, 3, 5$ , respectively. The slope of all the four straight lines is -3.

probability, and a TP step corresponds to a random walk in the network which implies that an old node acquires a new link with a probability proportional to its degree [25]. Thus, when  $t \gg m_0$ , the total change rate of degree  $k_i$  of an old node becomes

$$\frac{\partial k_i}{\partial t} = m \frac{1}{m_0 + t} + mp \frac{k_i}{2[m(1+p)t + e_0]} \approx m \frac{1}{t} + \frac{p}{1+p} \frac{k_i}{2t}. \quad (9)$$

The solution of Eq. (9), with initial condition  $k_i(t_i) = m(1+p)$ , has the form

$$k_i = \frac{m(p+2)(p+1)}{p} \left( \frac{t}{t_i} \right)^{\frac{p}{2(1+p)}} - \frac{2m(1+p)}{p}. \quad (10)$$

Using Eq. (10), the probability that a node has a degree  $k_i(t)$  smaller than  $k$ ,  $P(k_i(t) < k)$ , can be written as

$$\begin{aligned} P(k_i(t) < k) &= P \left[ t_i > \left( \frac{p(1+p)m + 2m(1+p)}{pk + 2m(1+p)} \right)^{\frac{2(1+p)}{p}} t \right] \\ &= 1 - P \left[ t_i \leq \left( \frac{p(1+p)m + 2m(1+p)}{pk + 2m(1+p)} \right)^{\frac{2(1+p)}{p}} t \right]. \end{aligned} \quad (11)$$



Assuming that we add the nodes at equal time intervals to the system, the probability density of  $t_i$  is [16]

$$P_i(t_i) = \frac{1}{m_0 + t} \approx \frac{1}{t}. \quad (12)$$

Thus, Eq. (11) may be rewritten as

$$P(k_i(t) < k) = 1 - \left( \frac{p(1+p)m + 2m(1+p)}{pk + 2m(1+p)} \right)^{\frac{2(1+p)}{p}}. \quad (13)$$

Then the degree distribution  $P(k)$  can be obtained using

$$\begin{aligned} P(k) &= \frac{\partial P(k_i(t) < k)}{\partial k} \\ &= \frac{2(1+p)}{p^{2+2/p}} [m(1+p)(2+p)]^{\frac{2(1+p)}{p}} \left[ k + \frac{2m(1+p)}{p} \right]^{-(3+\frac{2}{p})}. \end{aligned} \quad (14)$$

Equation (14) exhibits the extended power-law form as

$$P(k) \sim (k + \kappa)^{-\gamma}, \quad (15)$$

where  $\kappa = \frac{2m(1+p)}{p}$  and  $\gamma = 3 + \frac{2}{p}$ , which depends on  $p$  and is larger than 5. When  $k$  is much larger than  $\kappa$ , Eq. (15) is reduced to the scale-free form  $P(k) \sim k^{-\gamma}$ . Conversely, when  $k$  is much smaller than  $\kappa$ , we have

$$\ln[P(k)] \sim -\gamma \ln(k + \kappa) = -\gamma \left[ \ln \left( 1 + \frac{k}{\kappa} \right) + \ln \kappa \right] \sim -\gamma \left[ \frac{k}{\kappa} + \ln \kappa \right]. \quad (16)$$

Thus, we can obtain

$$P(k) \sim \frac{1}{\kappa^\gamma} \exp \left( -\frac{\gamma k}{\kappa} \right), \quad (17)$$

which shows that Eq. (15) reduces to the exponential form  $P(k) \sim \exp \left( -\frac{\gamma k}{\kappa} \right)$ .

From above discussion, we can easily see that the network in this limiting case follows a stretched exponential distribution, which has been observed in many real-life systems [40,41], such as public transport networks and actor collaboration networks. It should be noted that, for  $M_t \approx m$ , the network has obviously similar degree distribution as that of case  $M_t = m$ . In Fig. 3, we show the degree distribution for  $M_t = m$  and various values of  $p$ , the simulations are consistent with our theoretical prediction.

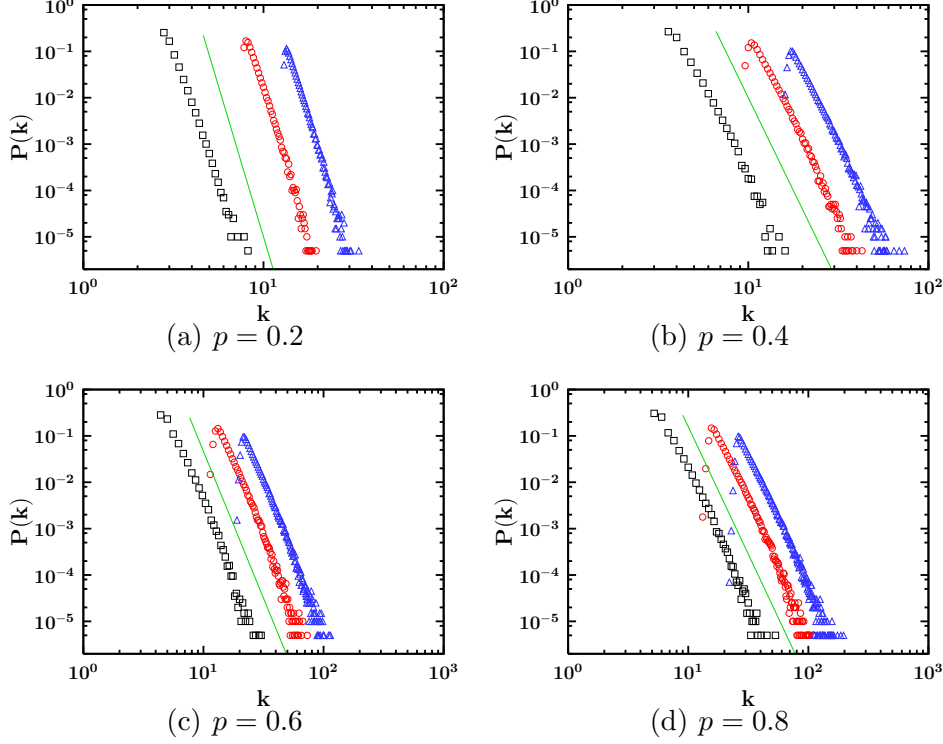


Fig. 3. Degree distribution  $P(k)$  versus  $k$  on a logarithmic scale. The size of networks is 200,000. The open squares, circles and triangles denote the cases of  $m=1, 3, 5$ , respectively. The four straight lines are the theoretic results predicted by Eq. (15).

#### 4.2 Clustering coefficient

Most real-life networks show a cluster structure which can be quantified by the clustering coefficient [1,2,3,4,5]. The clustering coefficient of a node gives the relation of connections of the neighborhood nodes connected to it. By definition, clustering coefficient [14]  $C_i$  of a node  $i$  is the ratio of the total number  $e_i$  of existing edges between all its  $k_i$  nearest neighbors and the number  $k_i(k_i - 1)/2$  of all possible edges between them, i.e.  $C_i = 2e_i/[k_i(k_i - 1)]$ . The clustering coefficient of the whole network is the average of all individual  $C'_i$ s.

Using the mean-field rate-equation theory [42] we can calculate  $C_i$  analytically. Here we place our emphasis on the case of  $M_t \gg m$ . Figure 4 illustrates the main microscopic mechanisms increasing  $e_i$ : (a) node  $i$  is connected to the new node in an LPA step, which is potentially followed by one TF step; (b) in an LPA step the new node attaches to one of the neighbors of  $i$ , and then in one of the subsequent TF steps the new node conversely gets linked to  $i$ ; (c) in an LPA step node  $i$  is connected to the new node and in another LPA step a neighbor of  $i$  is also selected for connection to the new node; (d) in a TF step node  $i$  is connected to the new node and in another TF step a neighbor of  $i$  is also selected for connection to the new node. (e) node  $i$  is connected

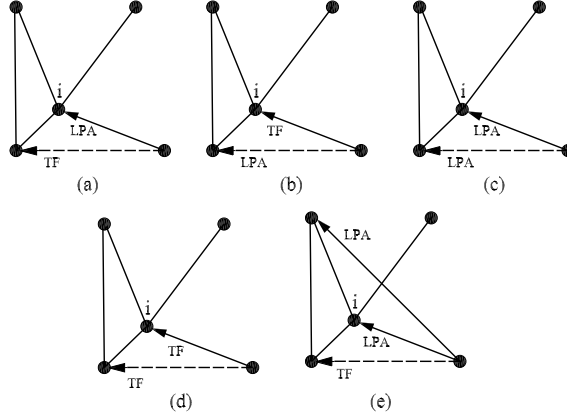


Fig. 4. The microscopic mechanisms increasing  $e_i$ . The dashed edges increase  $e_i$ .

to the new node in an LPA step, and in the potential TF steps which follow LPA steps when the new node connects to the neighbor nodes of  $i$ , the new node gets linked to  $i$ . Here we exclude secondary triangle formation that takes place if two TF steps from the new node form a triangle composed of two of  $i$ 's neighbors and the new node, which has little effect on the clustering of node  $i$ . So the rate equation for  $e_i$  reads

$$\begin{aligned}
\frac{\partial e_i}{\partial t} = & m \frac{k_i}{2m(1+p)t} p + m \sum_{n \in \Omega} \frac{k_n}{2m(1+p)t} \frac{1}{k_n} p \\
& + m \frac{k_i}{2m(1+p)t} (m-1) \sum_{n \in \Omega} \frac{k_n}{2m(1+p)t} \\
& + mp \frac{k_i}{2m(1+p)t} (m-1)p \sum_{n \in \Omega} \frac{k_n}{2m(1+p)t} \\
& + m \frac{k_i}{2m(1+p)t} (m-1)p \sum_{n \in \Omega} \frac{k_n}{2m(1+p)t}. \quad (18)
\end{aligned}$$

The five terms in the right hand of Eq. (18) give the increase in  $e_i$  by mechanisms from (a) to (e) in turn. It should be noted that the third term describes mechanism (c) and it is the only one that would remain if we consider the LC model. In Eq. (18),  $k_i/[2m(1+p)t]$  is the local preferential attachment probability to node  $i$ ,  $p$  is the triad formation probability;  $k_n$  denotes the degree of a neighbor of node  $i$ , and  $1/k_n$  comes from the fact that the neighboring node where a TF step links is chosen uniformly from the neighbors;  $\sum_{n \in \Omega} k_n$  is the sum of the degrees of all neighbors of  $i$ .

After some simplifications to Eq. (18), we obtain

$$\frac{\partial e_i}{\partial t} = \frac{k_i}{(1+p)t} p + (1+p+p^2) \frac{k_i}{2(1+p)t} (m-1) \sum_{n \in \Omega} \frac{k_n}{2m(1+p)t}. \quad (19)$$

In addition, for uncorrelated random networks we have [43]

$$\sum_{n \in \Omega} k_n = k_i \frac{\langle k \rangle}{4} \ln t = k_i \frac{(1+p)m}{2} \ln t. \quad (20)$$

We approximate  $e_i$  by integrating both sides in Eq. (19). The integral for the first term in the right hand of Eq. (19) is simply

$$\begin{aligned} \int_1^N \frac{k_i}{(1+p)t} p dt &= \frac{2p}{1+p} \int_1^N \frac{dk_i}{dt} dt \\ &= \frac{2p}{1+p} [k_i(N) - m(1+p)] \approx \frac{2p}{1+p} k_i(N), \end{aligned} \quad (21)$$

where we have made use of Eq. (6). Using Eqs. (7) and (20), we can integrate the second term in the right hand of Eq. (19)

$$\begin{aligned} &\int_1^N (1+p+p^2) \frac{k_i}{2(1+p)t} (m-1) \sum_{n \in \Omega} \frac{k_n}{2m(1+p)t} dt \\ &= (1+p+p^2) \frac{m-1}{4m(1+p)^2} \int_1^N \frac{k_i^2}{t^2} \frac{m(1+p)}{2} \ln t dt \\ &= (1+p+p^2) \frac{m^2(m-1)(1+p)}{8t_i} \left[ \frac{(\ln t)^2}{2} \right]_1^N \\ &= (1+p+p^2) \frac{m-1}{8(1+p)} \frac{(\ln N)^2}{N} k_i^2(N). \end{aligned} \quad (22)$$

Combining this with Eq. (21) yields

$$e_i = e_{i,0} + \frac{2p}{1+p} k_i(N) + (1+p+p^2) \frac{m-1}{8(1+p)} \frac{(\ln N)^2}{N} k_i^2(N). \quad (23)$$

Then the clustering coefficient for nodes with large degree  $k$  becomes

$$C(k) = \frac{e}{k(k-1)/2} \approx \frac{4p/(1+p)}{k} + (1+p+p^2) \frac{m-1}{4(1+p)} \frac{(\ln N)^2}{N}, \quad (24)$$

after neglecting  $n_{i,0}$  (see Fig. 5).

Thus, the parameter  $p$  in our model introduces the clustering effect into the system by allowing the formation of triads. By setting  $p$  to a value between 0 and 1 the clustering coefficient of individual nodes can be adjusted continuously and grows monotonically with an increasing  $p$ . In the expression of  $C(k)$ , the first term can be ascribed to the triad formation induced clustering, and shows the  $k^{-1}$  behavior that has been observed in several real-life systems [44]. This clustering property is similar to that in other networks such

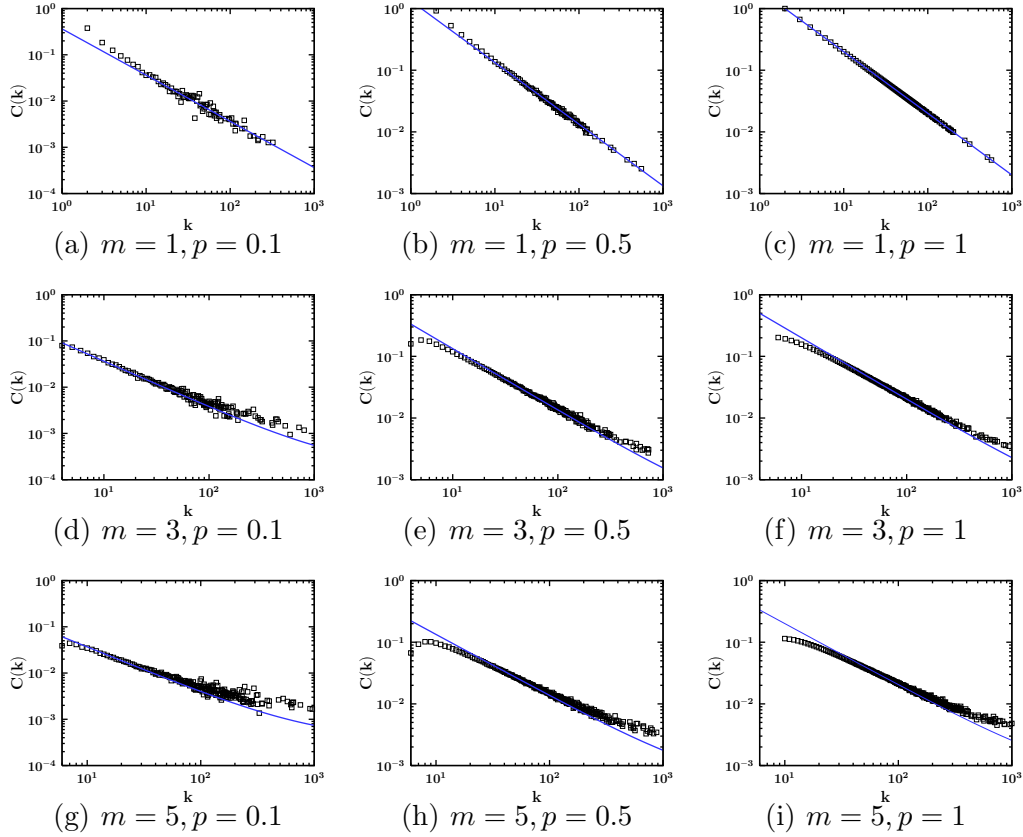


Fig. 5. Log-log graphs for clustering coefficient  $C(k)$  as a function of the node degree  $k$  for different  $m$  and  $p$ . The sizes of all networks are 200,000. The local-world size  $M_t$  scales as  $M_t = 0.2(m_0 + t) + m$ . The open squares represent the simulation result and the blue lines are the predictions given by Eq. (24). Simulations consistently confirm the analytical results obtained from the rate equation.

as deterministic (random) pseudofractal scale-free networks [45,46,47,48,49] and their variants [50,51,52], the highly clustered networks on the basis of a finite memory of nodes [23,24], and Apollonian networks [26,27,28,29,30,31]. Note that  $C(k)$  consists of a power law and a constant, so perfect power-law behavior follows only when the former one dominates. In the case of  $p = 0$ , we get the clustering coefficient  $C(k)$  of nodes in the LC model

$$C(k) = \frac{m-1}{8} \frac{(\ln N)^2}{N}, \quad (25)$$

which goes to zero as  $N$  becomes large enough.

The average clustering coefficient  $C$  can be obtained as the mean value of  $C(k)$  with respect to the degree distribution  $P(k)$  expressed by Eq. (8). The result is

$$C = \sum_{k=m(1+p)}^{\infty} P(k)C(k). \quad (26)$$

Although for general  $p$  and  $m$ , it is not easy to derive a closed formula for the average clustering coefficient  $C$ , for some limiting cases we can calculate  $C$  analytically. For example, when both  $p$  and  $m$  equal 1, equation (26) is reduced to

$$\begin{aligned} C &= \sum_{k=2}^{\infty} P(k)C(k) = \sum_{k=2}^{\infty} \frac{12}{k(k+1)(k+2)} \frac{2}{k} \\ &= \sum_{k=2}^{\infty} \left( -\frac{18}{k} + \frac{12}{k^2} + \frac{24}{k+1} - \frac{6}{k+2} \right) = 2\pi^2 - 19 \approx 0.7392, \end{aligned} \quad (27)$$

where we have used the fact that  $\sum_{m=1}^{\infty} \frac{1}{m^2} = \frac{1}{6\pi^2}$ . Thus, the average clustering coefficient is very large.

### 4.3 Average path length

From the above discussions, we find that the existing model shows both the scale-free nature and the high clustering at the same time. Moreover, our model exhibits small-world property. Next, we will show that our network has at most a logarithmic average path length (APL) with the number of nodes. Here APL means the minimum number of edges connecting a pair of nodes, averaged over all pairs of nodes.

First, using an approach similar to that presented in Ref. [28], we study the APL of our network for the particular case  $m = 1$  and  $p = 0$ . We label each of the network nodes according to their creation times,  $v = 1, 2, 3, \dots, N-1, N$ . We denote  $L(N)$  as the APL of our network with size  $N$ . It follows that  $L(N) = \frac{2S(N)}{N(N-1)}$ , where  $S(N) = \sum_{1 \leq i < j \leq N} d_{i,j}$  is the total distance, and where  $d_{i,j}$  is the smallest distance between node  $i$  and  $j$ . Note that the distances between existing node pairs are not affected by the addition of new nodes. Then we have the following equation:

$$S(N+1) = S(N) + \sum_{i=1}^N d_{i,N+1}. \quad (28)$$

As in the analysis of [28,30], Eq. (28) can be rewritten approximately as:

$$S(N+1) \approx S(N) + N + \frac{2S(N)}{N}, \quad (29)$$

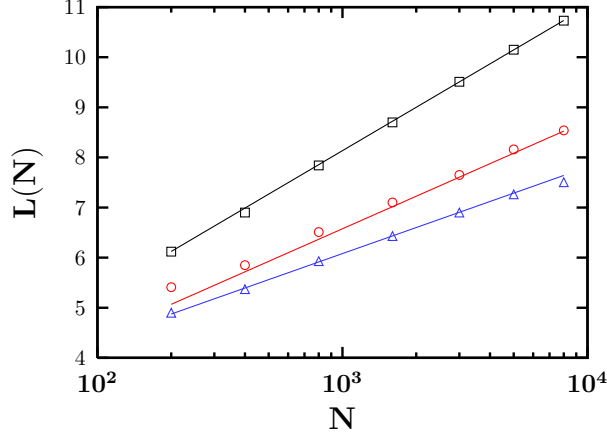


Fig. 6. Average path length  $L(N)$  versus network size  $N$  on a semilogarithmic scale with  $m = 1$ . The open triangles, circles, and squares denote the cases of  $p=0, 0.5, 1$ , respectively. The local-world size  $M_t$  scales as  $M_t = 0.2(m_0 + t) + m$ . The straight lines are fits to the data.

which implies

$$\frac{\partial S(N)}{\partial N} = N + \frac{2S(N)}{N}, \quad (30)$$

leading to

$$\varepsilon(N) = N^2(\ln N + \beta), \quad (31)$$

where  $\beta$  is a constant. When  $N$  is large enough,  $S(N) \sim N^2 \ln N$ , thus we have  $L(N) \sim \ln N$ . Therefore, we have presented that in the special case of  $m = 1$  and  $p = 0$ , there is a slow growth of the APL with the network size  $N$ . It should be noted that in our model, considering values of  $m$  greater than 1 and  $p > 0$ , then the APL will increase more slowly than in the case of  $m = 1$  and  $p = 0$ , since in those cases the larger  $m$  and  $p$  are, the denser the network becomes. In Fig. 6, we present average path length  $L(N)$  versus network size  $N$  with  $m = 1$  at various values of  $p$ . One can see that  $L(N)$  increases logarithmically with  $N$ .

## 5 Conclusions

In summary, we have presented an expanded local-world evolving network model with extended power-law degree distribution, a finite clustering and small average path length. We have obtained the analytic solutions for relevant network parameters of the considered model. By changing the expected value  $p$  of triad formation steps after a single LPA, one can tune the clustering coefficient in a systematic way. In addition, in the evolution of the network, random fluctuation in the number of new edges is involved which can be adjusted via tuning  $p$ . Our model may provide valuable insight into the real-life networks.

Although local-world exists in many real-life networks, it should be pointed out that the choice of a local-world in real-life world networks is more intricate and flexible. We use here the most generic case, i.e. random selection, in our proposed model as in the LC model [34]. Future work should include studying in detail the real formation mechanisms of local-worlds in different real-life networks as well as their impacts on network topology and dynamics.

## Acknowledgment

This research was supported by the National Natural Science Foundation of China under Grant Nos. 60373019, 60573183, and 90612007, and the Postdoctoral Science Foundation of China under Grant No. 20060400162. L.L. Rong gratefully acknowledges the partial support from NNSFC under Grant Nos. 70431001 and 70571011. The authors thank Zhen Shen for his assistance in preparing the manuscript.

## References

- [1] R. Albert and A.-L. Barabási, *Rev. Mod. Phys.* **74** (2002) 47.
- [2] S. N. Dorogvtsev and J. F. F. Mendes, *Adv. Phys.* **51** (2002) 1079.
- [3] M. E. J. Newman, *SIAM Rev.* **45** (2003) 167.
- [4] S. Boccaletti, V. Latora, Y. Moreno, M. Chavez and D.-U. Hwang, *Phys. Rep.* **424** (2006) 175.
- [5] K. Borner, S. Sanyal and A. Vespignani *Ann. Rev. Infor. Sci. Tech.* **41** (2007) 537.
- [6] M. Faloutsos, P. Faloutsos and C. Faloutsos, *Comput. Commun. Rev.* **29** (1999) 251.
- [7] R. Albert, H. Jeong and A.-L. Barabási, *Nature* **401** (1999) 130.
- [8] H. Jeong, B. Tombor, R. Albert, Z.N. Oltvai and A.-L. Barabási, *Nature* **407** (2000) 651.
- [9] H. Jeong, S. Mason, A.-L. Barabási and Z. N. Oltvai, *Nature* **411** (2001) 41.
- [10] M. E. J. Newman, *Proc. Natl. Acad. Sci. U.S.A.* **98** (2001) 404.
- [11] F. Liljeros, C.R. Edling, L. A. N. Amaral, H.E. Stanley, Y. Åberg, *Nature* **411** (2001) 907.
- [12] P. Erdős and A. Rényi, *Pub. Math* **6** (1959) 290.



- [13] P. Erdős and A. Rényi, Pub. Math. Insti. Hung. Acad. Sci. **5** (1960) 17.
- [14] D. J. Watts and S. H. Strogatz, Nature **393** (1998) 440.
- [15] A.-L. Barabási and R. Albert, Science **286** (1999) 509.
- [16] A.-L. Barabási, R. Albert and H. Jeong, Physica A **272** (1999) 173.
- [17] M. E. J. Newman and D. J. Watts, Phys. Lett. A **263** (1999) 341.
- [18] M. Barthélemy and L.A.N. Amaral, Phys. Rev. Lett. **82** (1999) 3180.
- [19] A. Barrat and M. Weigt, Eur. Phys. J. B **13** (2000) 547.
- [20] S. N. Dorogovtsev, J. F. F. Mendes and A. N. Samukhin, Phys. Rev. Lett. **85** (2000) 4633.
- [21] P. L. Krapivsky, S. Redner and F. Leyvraz, Phys. Rev. Lett. **85** (2000) 4629.
- [22] P. Holme and B. J. Kim, Phys. Rev. E **65** (2002) 026107.
- [23] K. Klemm and V. M. Eguíluz, Phys. Rev. E **65** (2002) 036123.
- [24] K. Klemm and V. M. Eguíluz, Phys. Rev. E **65** (2002) 057102.
- [25] J. Saramäki and K. Kaski, Physica A **341** (2004) 80.
- [26] J. S. Andrade Jr., H. J. Herrmann, R. F. S. Andrade and L. R. da Silva, Phys. Rev. Lett. **94** (2005) 018702.
- [27] J. P. K. Doye and C. P. Massen, Phys. Rev. E **71** (2005) 016128.
- [28] T. Zhou, G. Yan, B. H. Wang, Phys. Rev. E **71** (2005) 046141.
- [29] Z. Z. Zhang, F. Comellas, G. Fertin and L. L. Rong, J. Phys. A **39** (2006) 1811.
- [30] Z. Z. Zhang, L. L. Rong and F. Comellas, Physica A **364** (2006) 610.
- [31] Z. Z. Zhang, L. L. Rong and S. G. Zhou, Phys. Rev. E **74** (2006) 046105.
- [32] M. A. Serrano and M. Boguñá, Phys. Rev. E **68** (2003) 015101.
- [33] X. Li, Y. Y. Jin and G. R. Chen, Physica A **328** (2003) 287.
- [34] X. Li, and G. R. Chen, Physica A **328** (2003) 274.
- [35] G. R. Chen, Z. P. Fan, and X. Li, Modeling the complex Internet Topology, in *Complex Dynamics in Communication Networks*, edited by G. Vattay and L. Kocarev (Springer-Verlag, Berlin, 2005).
- [36] B. Wang, H. W. Tang, Z. Z. Zhang, and Z. L. Xiu, Int. J. Mod. Phys. B **19** (2005) 3951.
- [37] M. E. J. Newman, Phys. Rev. E **64** (2001) 016132.
- [38] Z. H. Liu, Y. C. Lai, N. Ye and P. Dasgupta Phys. Lett. A **303** (2002) 337.

- [39] Z. H. Liu, Y. C. Lai and N. Ye, Phys. Rev. E **66** (2002) 036112.
- [40] J. Laherrère and D. Sornette, Eur. Phys. J. B **2** (1998) 525.
- [41] P. P. Zhang, K. Chen, Y. He *et al*, Physica A **359** (2006) 835.
- [42] G. Szabó, M. Alava and J. Kertész, Phys. Rev. E **67** (2003) 056102.
- [43] V. M. Eguíluz and K. Klemm, Phys. Rev. Lett. **89** (2002) 108701.
- [44] E. Ravasz and A.-L. Barabási, Phys. Rev. E **67** (2003) 026112.
- [45] S. N. Dorogovtsev, A. V. Goltsev and J. F. F. Mendes, Phys. Rev. E **65** (2002) 066122.
- [46] F. Comellas, G. Fertin and A. Raspaud, Phys. Rev. E **69** (2004) 037104.
- [47] Z. Z. Zhang, L. L. Rong, and S. G. Zhou, Physica A **377** (2007) 329.
- [48] S. N. Dorogovtsev, J. F. F. Mendes, and A. N. Samukhin, Phys. Rev. E **63** (2001) 062101.
- [49] A. Barrat and R. Pastor-Satorras, Phys. Rev. E **71** (2005) 036127.
- [50] J. Ozik, B.-R. Hunt, and E. Ott, Phys. Rev. E **69** (2004) 026108.
- [51] Z.Z. Zhang, L. L. Rong and C. H. Guo, Physica A **363** (2006) 567.
- [52] Z. Z. Zhang, L. L. Rong and F. Comellas, J. Phys. A **39** (2006) 3253.