

Colouring random graphs and maximising local diversity

S. Bounkong, J. van Mourik, and D. Saad

Neural Computing Research Group, Aston University, Birmingham B4 7ET, UK

Abstract. We study a variation of the graph colouring problem on random graphs of finite average connectivity. Given the number of colours, we aim to maximise the number of different colours at neighbouring vertices (i.e. one edge distance) of any vertex. Two efficient algorithms, belief propagation and Walksat are adapted to carry out this task. We present experimental results based on two types of random graphs for different system sizes and identify the critical value of the connectivity for the algorithms to find a perfect solution. The problem and the suggested algorithms have practical relevance since various applications, such as distributed storage, can be mapped onto this problem.

PACS numbers: 89.75.-k, 02.60.Pn, 75.10.Nr

1. Introduction

The graph colouring problem [1, 2] has received a significant level of attention. Much of this interest stems from the fact many real-world optimisation problems can be represented as colouring problems. In the original formulation, given q colours, we aim at finding a colouring solution such that any two connected vertices have different colours. Here, the aim is to maximise the number of colours at one edge distance of any vertex.

One application can be found in the field of logistics, where each vertex represents a storage unit. The problem is then to find how to distribute the different types of goods such that, at each site, any type can be retrieved either from the given unit or from directly adjacent storage units. The problem that got us interested in this problem is that of distributed data storage where files are divided to a number of segments, which are then distributed over the graph representing the network. Nodes requesting a particular file collect the required number of file segments from neighbouring nodes to retrieve the original information. Distributed storage is used in many real world applications such as OceanStore [3].

It should be emphasised that the main problem we are interested to solve has several properties that should be taken into consideration when one considers a colour assignment algorithm: 1) The problem is characterised by a medium number of different file segments. 2) An adaptive assignment of colours may be required as the (arbitrary)

topology continuously changes due to the emergence and disappearance of nodes. 3) The networks considered are of moderate size, 100-1000 nodes. All this points to an efficient and fast algorithm, that can handle colour assignment in large systems.

Although this problem has not yet been shown to be NP-complete, it seems nonetheless intractable for a large system size. Since no research has been carried out on this specific problem, no dedicated tools exist either[‡]. However, as we report in this paper, existing optimisation algorithms can be adapted quite easily to solve this and similar problems. In particular, we investigate two well established techniques: belief propagation (BP) and a variant Walksat (WSAT) for this purpose.

In this paper, we show how message passing techniques (BP) can be used to solve this particular hard computational problem, and use the results to identify the transition point in terms of the connectivity above which the algorithms are able to find a perfect colouring for the graphs. For a given number of colours q , we identify the critical connectivity λ_c^q above which graphs are typically colourable by the algorithms, as well as the average minimum measure for the unsatisfaction $E^q(\lambda)$ as a function of the connectivity λ . In a general setup, the measure of unsatisfaction is $E^q(\lambda) = \sum_{i=1}^n E_i^q(\lambda)$ where for each vertex i with local connectivity λ_i

$$E_i^q(\lambda) = \min(q, \lambda_i + 1) - q_i \quad (1)$$

is the difference of the maximal number of available colours (from itself and its nearest neighbours, i.e. $\min(q, \lambda_i + 1)$), and the number of actually available colours at that node q_i . In this paper, we only consider graphs with local connectivities $\lambda_i \geq q - 1$, such that $E_i^q(\lambda) = q - q_i$ just counts the number of missing colours. One should note that, contrary to the original graph colouring problem, the problem of finding a colouring for our problem actually becomes easier with increasing connectivity.

The main goal of this paper is to introduce the problem, and to investigate the behaviour of two algorithms on realistic system sizes. The analysis of the model in the sense of a phase diagram for infinite system size, is a separate issue that is currently being investigated.

2. Belief propagation

Belief propagation, a non-local algorithm also called the sum-product algorithm, relies on iterative message passing and provides near optimal performance at low computational cost in a wide range of applications [5, 6]. Message passing techniques rely on conditional probabilistic messages passed from the immediate neighbourhood to find the most probable assignment of states to variables given the constraints. In our problem, the constraints correspond to the fact that at each vertex, one should be able to retrieve $\min(q, \lambda_i + 1)$ colours from the vertex itself and its first order neighbours.

These constraints can be represented by clusters of vertices on a graph as in Fig. 1a, where ‘A’, ‘B₁’, ‘B₂’, ‘C₁₁’ and ‘C₁₂’ correspond to the vertices, while ‘Z_A’, ‘Z_{B₁}’, ‘Z_{B₂}’,

[‡] It should be mentioned that different systems of similar topology have been investigated in [4].

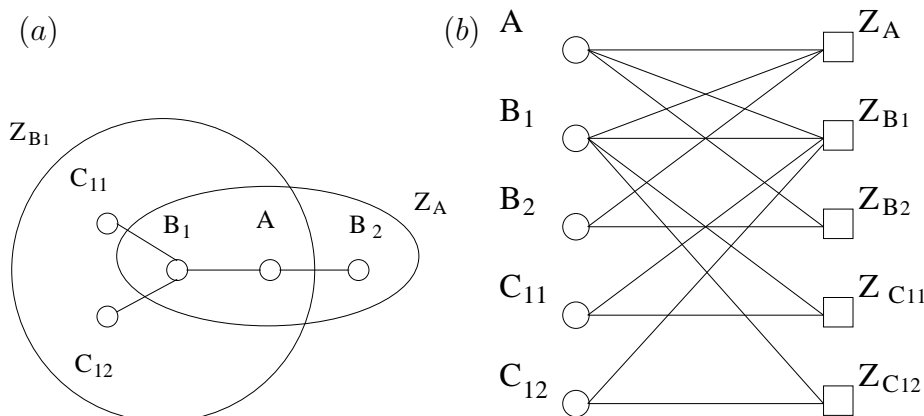


Figure 1. (a) A graph representing the successive local constraints. (b) A bi-partite graph representation of the problem.

‘ $Z_{C_{11}}$ ’ and ‘ $Z_{C_{12}}$ ’ are check variables corresponding to the constraints. The checks are variables related to the unsatisfaction of a given colour assignments for a node ‘A’ and its direct neighbours

$$P(Z_A|A, \{B_i\}) = e^{-\beta(q - q_A)}, \quad (2)$$

where q_A is the number of available colours to A and β is fixed to 20.

The graph can be transformed into a bipartite graph, which separates the vertices from the checks. The following update rules can be easily obtained by naively adapting the original belief propagation rules [5, 6]. Thus, the messages from a check to a vertex are given by

$$\begin{aligned} P(Z_A|A) &= \sum_{\{B_i\}} P(Z_A|A, \{B_i\}) P(\{B_i\} | \{Z_{B_i}\}, \{Z_{C_i}\}), \\ &\simeq \sum_{\{B_i\}} P(Z_A|A, \{B_i\}) \prod_i P(B_i | Z_{B_i}, \{Z_{C_i}\}), \end{aligned} \quad (3)$$

while the message from a vertex to a check is given by

$$P(A | \{Z_{B_i}\}) = \alpha_A \prod_{\{Z_{B_i}\}} P(Z_{B_i} | A), \quad (4)$$

Finally, the pseudo-posterior is given by

$$P(A | Z_A, \{Z_{B_i}\}) = \alpha P(Z_A | A) \prod_{\{Z_{B_i}\}} P(Z_{B_i} | A), \quad (5)$$

where α_A and α are normalisation coefficients. Note that the factorisation in (3) is a relatively crude approximation even in the large system limit, as the $\{B_i\}$ are correlated. To deal with this properly, a more advanced analysis using a cluster expansion [7] is currently being undertaken. Nevertheless, as we will see these approximations work remarkably well.

If convergence of the BP algorithm is reached, the colours of vertices whose (pseudo) posterior is greater than a pre-defined threshold set at 0.9 in our experiments can be fixed. If no such high posterior exists then the vertex with the highest posterior value has its colour fixed. Then, the update rules are re-iterated and the decimation process repeated until a global colouring is extracted.

A major drawback of BP algorithm is that convergence is not guaranteed. Since all the probabilities are initialised randomly, different parts of the graph may converge to different local solutions. Then, parts with incompatible colourings will continue to compete with each other, resulting in non convergence.

Time averaging [8] is a way of getting around the problem by carrying out the decimation and colour fixing process according to the average posterior (over time i.e. a number of iterations) instead of instantaneous posterior. In the case of non-convergence, this method will decimate the vertex with the strongest *average* colouring probability over all competing solutions and thus reduce the fluctuations due to the competition. After several trials, a time window of 30 iterations was chosen for all numerical data presented here. This turned out to give the best balance between the quality of the obtained colourings and the computational cost.

We have opted for BP combined with time averaging, as for the ultimate task of distributed storage we have in mind a scenario in which nodes may suddenly switch off and turn back on again (as is often the case in peer to peer networks). Then time averaging may have a significant benefit over other algorithms, being able to take the average probability that a node is able to provide a certain segment (or not), into account. This aspect however has not been included in the current paper.

3. Walksat

Walksat is a local search algorithm, originally designed to solve the problem of finding variable assignments that satisfy as many clauses as possible of a given conjunctive normal form [9]. Although Walksat local search may seem to be suboptimal at first sight, studies have shown it to be a powerful tool [10]. Many variants of the original algorithm exist [9, 11, 12]. In this study, we have adapted the variant referred to as SKC, for solving this specific colouring problem.

The original Walksat heuristic (SKC) uses the notion of the *breakcount* of a variable, which is the number of clauses that are currently satisfied, but would become unsatisfied if the variable assignment were to be changed. The SKC variable selection is as follows:

- (i) If there are variables with breakcount equal to 0, randomly select one such variable.
- (ii) Otherwise
 - with probability p randomly select a variable.
 - with probability $1 - p$ randomly select a variable with minimal breakcount.
- (iii) Flip the selected variable.
- (iv) Repeat until all clauses are satisfied or until the max-iterations is reached.

In our problem, the *breakcount* of a variable is given by the number of vertices for which the change of assignment would decrease q_i . Henceforth, the *breakcount* is now dependent on the replacement colour. In the first step (i) of the SKC procedure, the selected replacement colour is the one which leads to a *breakcount* equal to 0 (if more than one, choose one randomly). In the second step (ii), a replacement colour is selected at random. In our first few attempts, this adaptation of the Walksat algorithm showed mixed results, which were up to 50% worse than those obtained with the BP algorithm.

Therefore, we adapted another local search algorithm [13] related to Walksat. This other algorithm is also iterative and based on a mixture of gradient and “noisy” descent. At each iteration, one of these two descents is chosen at random, with some probability. Similarly to the Walksat algorithm, this step is repeated until all checks are satisfied, or until the maximal number of iterations is reached.

The gradient descent is operated by the algorithm named GSAT [14], which during an iteration changes the assignment of the variable that leads to the greatest decrease in total number of unsatisfied clauses. In our problem, the change will be made such that it leads to the greatest decrease in unsatisfaction as defined in (1). The “noisy” move of the original algorithm [13] is replaced here by the Walksat SKC heuristic. Therefore, the resulting algorithm is a mixture between SKC and GSAT, which is parameterised by a probability p_m that set to 0.5. Our experiments shows that this mixture between SKC and GSAT performs significantly better than SKC alone with no increase of the computational cost.

If not all checks are satisfied at the maximal number of iterations, the GSAT algorithm is iterated until a local minimal is reached. The choice of maximal number of iterations is discussed in the next section. The latter algorithm, referred to as Walksat, shows that results are qualitatively similar to the ones obtained using the BP algorithm both in terms of the measure of unsatisfaction $E^q(\lambda)$ and of the number of perfect colouring found.

4. Simulations

The experiments are carried out for $q = 4$ colours and based on two system sizes (n): graphs of 100 and 1000 vertices. The studied graphs have an average connectivity λ and are of two types, referred to as (cut-) Poissonian and linear graphs:

- The vertices of the (cut-) Poissonian graphs with average local connectivity λ have local connectivities λ_i given by

$$\lambda_i = \lambda_{\min} + z_{\lambda - \lambda_{\min}} = q - 1 + z_{\lambda - q + 1} \quad (6)$$

where $z_{\lambda - q + 1}$ is randomly drawn from a Poisson distribution with parameter $\lambda - q + 1$.

- The vertices of so-called linear graphs with average local connectivity λ , have local connectivities λ_i given by:

$$\lambda_i = \lfloor \lambda \rfloor + z_{\lambda - \lfloor \lambda \rfloor} \quad (7)$$

where $\lfloor \lambda \rfloor$ is the largest integer smaller or equal to λ , and where $z_{\lambda - \lfloor \lambda \rfloor}$ is 1 with probability $\lambda - \lfloor \lambda \rfloor$ and 0 otherwise.

We study the most interesting range of average connectivities from $\lambda = 3$ to $\lambda = 5$ with a step of 0.1. For each λ , 1000 graphs of each type were randomly generated and then coloured by both the BP and Walksat algorithms.

4.1. Graph characteristics

The graphs and the constraints are born from the original problem we have set to solve, namely distributed storage. Here, we shall point out two observations that may help in getting insight into the characteristics of the problem and solutions found by the algorithms.

The number of checks is always equal to the number of vertices. Indeed, each vertex is associated with a check, that connects it to all vertices at one edge distance. This check is obeyed when the vertex can retrieve all possible colours from vertices at one edge distance.

The second observation is related to the fact that edges are not directed: if the vertex ‘B’ is connected to the check of ‘A’, then the vertex ‘A’ is also connected to the check of ‘B’. Hence, there are always $\frac{n\lambda}{2}$ short loops, which correspond to the number of edges, in the belief network even in the large system limit. When the connectivity value λ increases, the number of loops increases as well, but it also becomes easier to get a lower value for the average unsatisfaction. Therefore, it is not clear whether the influence of the presence of loops on the performance of the (current) BP algorithm will increase or decrease with λ .

4.2. Walksat performance

In the Walksat algorithm, the maximal number of iterations *nbit* is an important parameter. A greater value increases performance, but also computational cost. Unfortunately, the relation between performance and cost is not linear and it is therefore difficult to estimate the optimal number of iterations. In order to understand this relation, we carried out several simulations with different values of *nbit* for the two systems sizes and all connectivity values.

Figure 2 and 3 show the results obtained for a system size of 100 vertices and a range of limits on the number of iterations. One notices that improvements in terms of unsatisfaction and perfect colouring is negligible for $\lambda \leq 3.8$ for linear graphs and for $\lambda \leq 4.1$ for Poissonian graphs. In these regions, no perfect solutions are actually found. Hence, the Walksat algorithm only stops when the maximum number of iterations is reached and returns the unsatisfaction of the nearest local minima. If the lowest unsatisfaction value over all examined colour assignments were returned instead, then one could expect improved results for larger values of *nbit*.

For $\lambda \gtrsim 3.8$ and $\lambda \gtrsim 4.1$ for respectively linear and Poissonian graphs, when some perfect colouring solutions exist and are found, increasing *nbit* does actually

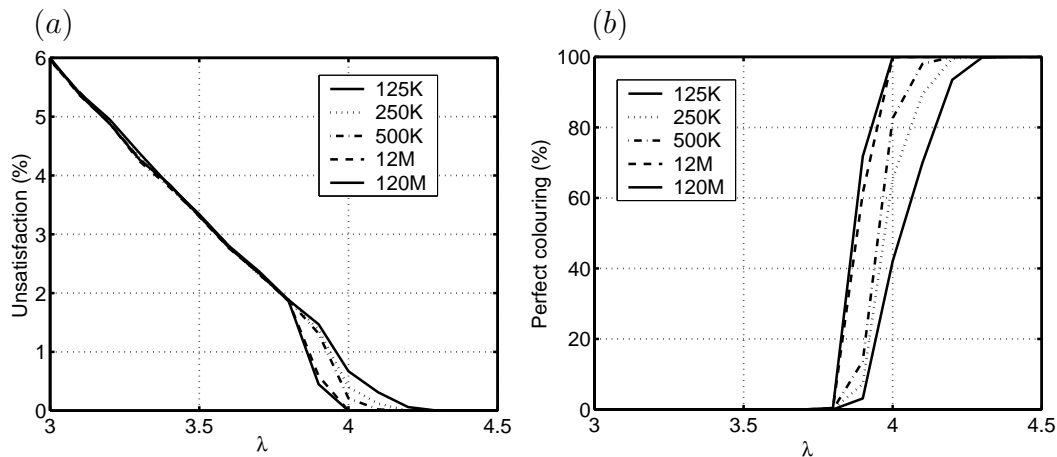


Figure 2. Walksat performance on linear graphs ($n=100$) for various $nbit$ (from 125K to 120M iterations) and connectivity values λ . (a) The unsatisfaction measure. (b) Percentage of perfect colouring solutions.

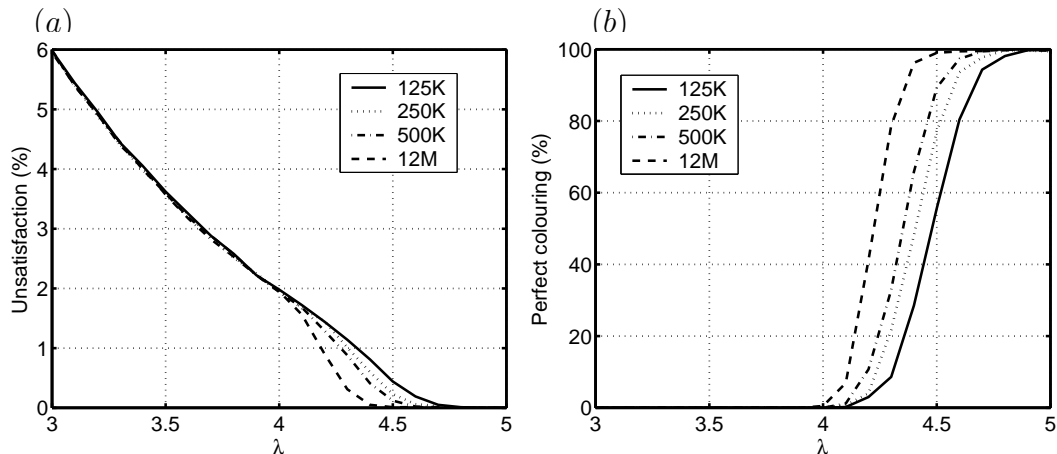


Figure 3. Walksat performance on Poissonian graphs ($n=100$) for various $nbit$ (from 125K to 12M iterations) and connectivity values λ . (b) Percentage of perfect colouring solutions.

decreased the unsatisfaction value. However, a larger number of vertices will also require an exponentially larger number of iterations to achieve the same performance. Ultimately, if $nbit$ were infinite, Walksat would find perfect colouring solutions.

Hence, to compare performance of the Walksat and BP algorithms, we take the results achieved by Walksat for roughly the same computational time as the one used by the BP algorithm. This means $nbit = 500K$ and $nbit = 12M$ iterations for systems sizes of 100 and 1000 vertices, respectively. We also amend the Walksat algorithm described in Sec. 3 such that the unsatisfaction returned will be the lowest unsatisfaction value over all examined colour assignments and not the one corresponding to the nearest local minima.

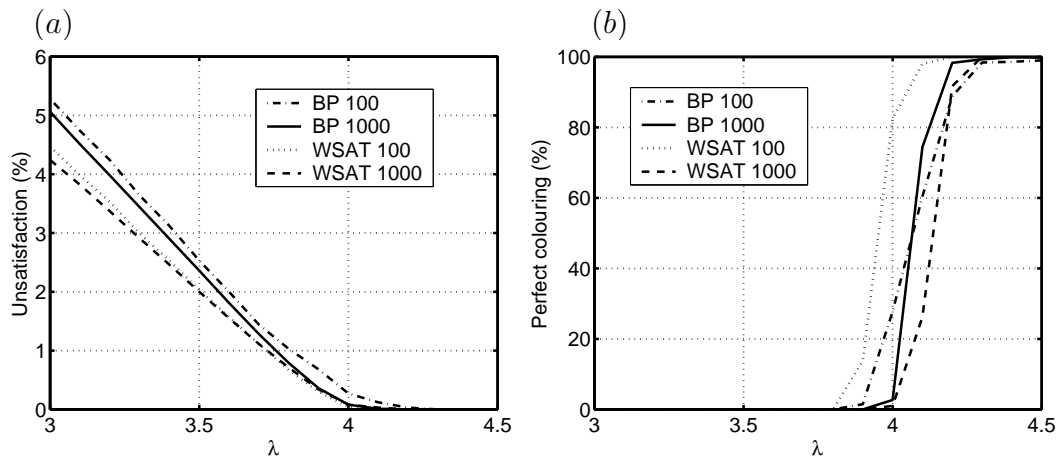


Figure 4. Comparison of belief propagation and Walksat algorithms for linear graphs. (a) Unsatisfaction measure. (b) Percentage of perfect colouring. Note that the percentage of perfect colouring solutions is 0 for Walksat on graphs with 1000 vertices.

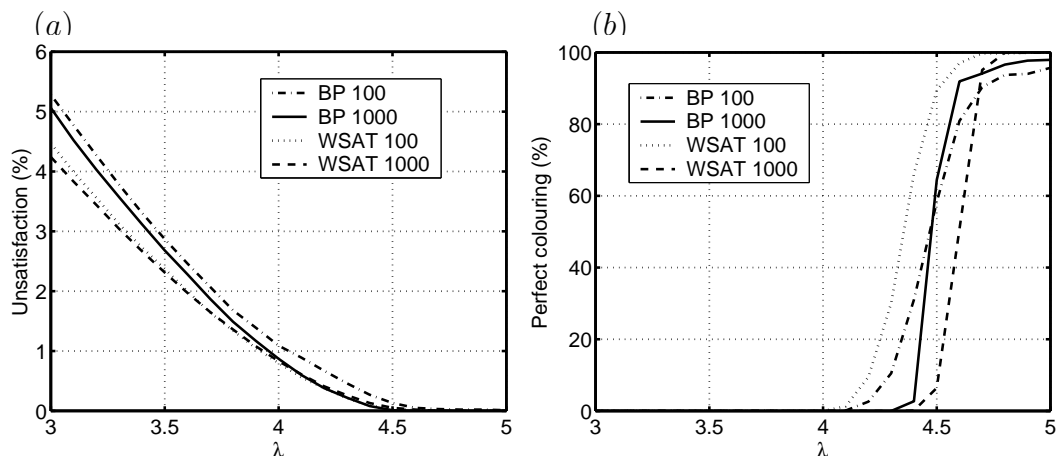


Figure 5. Comparison of belief propagation and Walksat algorithms for Poissonian graphs. (a) Unsatisfaction measure. (b) Percentage of perfect colouring.

4.3. Comparison of the performance of the BP and Walksat algorithms

Figure 4 and 5 show first that the BP algorithm is overall outperformed by the Walksat algorithm. We believe that the presence of the small loops discussed in Sec. 4.1 is the main cause that degrades the performance of the BP algorithm. Generalised belief propagation method [15] is currently being investigated to obtain improved performance. However, it also shows that the approximative BP algorithm works surprisingly well considering the crude approximation made in (3).

Then, it can be noticed that if Walksat clearly outperforms BP for 100 nodes systems both in terms of unsatisfaction and of perfect colouring, this is not the case when 1000 nodes systems are considered. Indeed, the results obtained by BP seem

better in terms of perfect colouring in that case for both linear and Poissonian graphs. Obviously, if *nbit* were to be increased significantly, the Walksat algorithm would naturally outperform BP as for 100 nodes systems. However, for an increasing system size and given computing resources BP is likely to outperform Walksat.

5. Discussion

We have studied a variation of graph colouring on random graphs of finite average connectivity, aimed at maximising the number of colours accessible by a vertex within one edge distance. The methods has significant practical relevance, especially in the area of distributed storage that can be mapped onto this problem. Two efficient algorithms, belief propagation and Walksat have been adapted to carry out the task.

We have presented experimental results based on two types of random graphs for different system sizes and identified the transition point, in terms of the connectivity, for both algorithms to find a perfect solution. For $q = 4$ colours, we have found that the critical connectivity is around $\lambda = 4$ for linear graphs and around $\lambda = 4.4$ for Poissonian graphs. In principle, the methods presented here can be used for random graphs of any connectivity profile and any number of colours.

We have found that both algorithms give qualitatively very similar results, and that the overall computer time needed to generate all the data presented here was roughly the same for both algorithms. The relative efficiency of both algorithms, in terms of the quality of obtained solutions and computing time, does however depend on the combination of parameters (λ , q , n) and graph characteristics. A more detailed analysis of this will be the subject of a separate study, as will be the thermodynamic phase diagram for this model. Further research will focus on improving the message passing approach by using the exact cluster expansion in the large system limit (i.e. focusing on stars and edges as our fundamental clusters instead of stars and nodes), combined with generalised BP, which will also provide us with a phase diagram for the model. It is assumed that this approach will remove the influence of short loops and therefore improve the performance of the algorithm, especially at low connectivity values.

If replica symmetry turns out to be broken, Survey Propagation [16] like algorithm may further improve the results. Furthermore, we will consider to increase the distance to which a vertex can extend its search to retrieve the missing colours (e.g. second nearest neighbours), which will obviously change the basic clusters needed in the cluster expansion.

Acknowledgments

Support from EU-FP6 IP EVERGROW is gratefully acknowledged.

Reference

- [1] T R Jensen and B Toft (1995), ‘Graph Coloring Problems’. *Wiley Interscience*.
- [2] J van Mourik and D Saad (2002), ‘Random Graph Colouring’. *Phys. Rev. E* **66**, 056120.
- [3] J Kubiawicz, D Bindel, Y Chen, P Eaton, D Geels, R Gummadi, S Rhea, H Weatherspoon, W Weimer, C Wells and B Zhao (1999), ‘OceanStore: An Extremely Wide-Area Storage System’. *UCB//CSD-00-1102 U.C. Berkeley*.
- [4] M Mézard and G Biroli (2002) ‘Lattice Glass Models’. *Phys. Rev. Lett.* **88**, 025501.
- [5] J Pearl (1988), ‘Probabilistic Reasoning in Intelligent Systems: Networks of Plausible Inference’. Morgan Kaufmann Publishers, 2nd Edition.
- [6] D J C MacKay (2003), ‘Information Theory, Inference, and Learning Algorithms’, Cambridge University Press.
- [7] G An (1988), ‘A note on the cluster variation method’. *Journal of Statistical Physics, Springer* **52**, 727-734.
- [8] J van Mourik, in prep. (2005), ‘Time averaged belief propagation’; J van Mourik, B Fabre (2003), ‘Algorithms for colouring random graphs’, *MSc thesis*, Aston University; J van Mourik, Y Fortune (2004), ‘Algorithms for solving optimization problem on large random graphs’, *MSc thesis*, Aston University.
- [9] B Selman, H Kautz and B Cohen (1996), ‘Local Search Strategies for Satisfiability Testing’. *DIMACS Series in Discrete Mathematics and Theoretical Computer Science* **26**, 521-532.
- [10] E Aurell, U Gordon and S Kirkpatrick, ‘Comparing Beliefs, Surveys, and Random Walks’, *to appear in NIPS 2005*.
- [11] D McAllester, B Selman and H Kautz (1997), ‘Evidence for Invariants in Local Search’, *Proc. AAAI-97*, 321-326.
- [12] D J Patterson and H Kautz (2001), ‘Auto-Walksat: a Self-Tuning Implementation of Walksat’, *Electronic Notes in Discrete Mathematics (ENDM)* **9**, 1-9.
- [13] B Selman, H Kautz and B Cohen (1994), ‘Noise Strategies for Improving Local Search’. *Proc. AAAI-94*, 337-343.
- [14] B Selman, H J Levesque and D Mitchell (1992), ‘A new method for solving hard satisfiability problems’, *Proc. AAAI-92*, 440-446.
- [15] J S Yedidia, W T Freeman and Y Weiss (2000), ‘Generalized Belief Propagation’. *NIPS 2000*, **13**, 689-695.
- [16] M Mézard, G Parisi and R Zecchina (2002), ‘Analytic and algorithmic solution of random satisfiability problems’ *Science* **297**, 812.