

Search in Complex Networks: a New Method of Naming

Shai Carmi¹, Reuven Cohen² and Danny Dolev³

¹Minerva Center and Dept. of Physics, Bar-Ilan University, Ramat-Gan, Israel

²Electrical and Computer Engineering Department, Boston University, Boston, MA, USA

³School of Engineering and Computer Science, Hebrew University, Jerusalem, Israel

We suggest a method for routing when the source does not possess full information about the shortest path to the destination. The method is particularly useful for scale-free networks, and exploits its unique characteristics. By assigning new (short) names to nodes (aka labelling) we are able to reduce significantly the memory requirement at the routers, yet we succeed in routing with high probability through paths very close in distance to the shortest ones.

In recent years it has been shown that many realworld networks, such as technological, social and biological networks, and in particular, the Internet, are scale free, i.e. have a power law degree distribution [1, 2, 3, 4]. The probability of a site to have degree k , $P(k) \sim k^{-\alpha}$, where in the Internet, it is assumed that $2.1 \leq \alpha \leq 2.5$. One of the most important tasks in networking is routing. Efficient routing is necessary in order to provide efficient transportation and utilization of the network resources. In the context of communication networks, routing is an important task in packet switched networks as well as in overlay networks (such as Peer-to-Peer). In this paper we present a method for searching for nodes and routing where no knowledge of the location of the destination node is given. Such methods are usually known as "compact routing" schemes.

In order to obtain good results several variables should be considered:

The stretch is defined as the ratio of the actual routing path to the shortest path between two given nodes. The smallest the ratio the more efficient the communication in the network.

The table size is the number of entries kept in the storage of each node. The smaller the table the more efficient the scheme in terms of memory requirements.

The label size is the number of bits presenting the name (or address) of each node. The smallest possible label size needed to distinguish between sites with a unique id is logarithmic. Most efficient routing schemes use larger labels in order to present more information about the node.

In many cases it is desirable to design an approximate routing schemes that require considerably smaller tables, in the cost of allowing for higher stretch (shortest path routing not guaranteed), and larger labels.

Partial knowledge search in a small-world lattice based network and power-law networks was investigated in [5, 6, 7]. The first work on generalized routing with a tradeoff of table size vs. label size and stretch was given by Peleg and Upfal [8]. This scheme has later been extended by Thorup and Zwick [9] and by Cowen [10]. All those schemes require a rather large table (of order N^{1-2}

to ensure an upper bound of 3 for the stretch, or, in general, $O(N^{\frac{2}{s+1}})$ for an odd stretch s). A numerical study of the actual stretch for scale free networks is presented in [11], showing that the actual performance of the above routing schemes, in terms of the average stretch, is much better than the worst case guarantee.

In this paper we discuss a class of routing schemes with a parameter H ($1 \leq H \leq N$), which is proportional to the memory requirement at the nodes. We give arguments showing that the ratio of the average routing distance to the average shortest path is below 2 with high probability, moreover what H is. For scale-free networks the stretch is usually much lower, and we show analytically and numerically that even for very small values of H , $H = O(\log N)$ for $\alpha \geq 0$, the actual stretch is very close to 1. Thus, a routing scheme that requires substantially small tables and poly-logarithmic labels (see below) may lead to a very efficient routing. When comparing properly, our scheme is more efficient than previous ones; moreover, our scheme is simpler and more intuitive (e.g. do not involve randomization), and the tradeoff between performance and memory requirements is controllable.

The random network model we use here is the Configuration Model of [12]. The networks in this model are created by the following process: given a network with N nodes, and a degree sequence $k_{i,1 \leq i \leq N}$, create a list containing k_i copies of each node i , and choose a random matching on this list to create the edges of the network. We ignore self loops and multiple edges, which are statistically insignificant [13].

The main degree sequence we will discuss is of scale free networks: $P(k) \sim k^{-\alpha}$, (with $k \leq k_{\max}$). This degree sequence has been shown to exist naturally in many networks [2], in particular, the Internet [1] and P2P networks [14] as discussed above. Another degree sequence which we will use for comparison is the one of the Erdős-Rényi (ER) random network model, $P(k) = \frac{e^{-k}}{k!}$.

The proposed routing scheme consists of two stages: the preprocessing and the actual routing.

Preprocessing The H highest degree nodes are designated as the "hubs". (Ties in the degree are broken arbitrarily). For each site i the closest hub h_i is searched (ties are broken by degree). Designate the shortest path from site i to its hub h_i by $\{v_{i,0}; v_{i,1}; v_{i,2}; \dots; v_{i,n_i}\}$; where $i = v_{i,0}$ and $v_{i,n_i} =$

h_i . The label for site i will be $L_i = h_i; v_{i,1}; v_{i,2}; \dots; v_{i,n_i-1}; h_i$. The routing table for each node in the network contains the link leading to the shortest path for each of the hubs, as well as a list of all of its immediate neighbors.

Actual Routing: Assume a packet is sent from some initial node towards the destination node t . As the packet reaches some intermediate node x , it is handled by the following algorithm:

1. If $x = t$ then stop.
2. If t is a neighbor of x , then send the packet directly to t .
3. Otherwise, if $x \in L_t$, i.e. $x = v_{t,j}$ for some j ; then move the packet to $v_{t,j-1}$.
4. Otherwise, search for h_t in the table and send the packet through the appropriate link.

Let us first show that our method is efficient by means of average running time.

Preprocessing: Choosing the H hubs and sorting them can be done in $O(N + H \log H)$ time [15]. Next, from each hub we need only to start a Breadth First Search, keeping for each node x that is reached its distance to the root and its predecessor (storing those in x 's routing table). Next for each node we decide which is the closest hub, find the path to that hub, and store it as its new label. All of this can be done in $O(MH)$ time, where M is the total number of edges (which is of the order of N in practical cases). Note that this running-time is better than in previously suggested schemes [9].

Routing decision: In each decision we need to search either the label or the routing table. In practical cases the label size is extremely small and can be considered constant; the routing table can be implemented as a hash table to provide average constant access time [15]. Therefore we conclude that an average routing decision can be done in constant time.

We now look at the average distance travelled by a packet relative to the average shortest path in the network. The average is taken over all pairs and all configurations of the network in the network model presented above.

We use the following lemma. Let a_1 and a_2 be nodes with respective degrees k_{a_1} and k_{a_2} , and b be any other random node. Denote by $d(a;b)$ the length of the shortest path between nodes a and b , then we claim that

$$P(d(a_1;b) \leq 1) \geq P(d(a_2;b) \leq 1) \quad (1)$$

for all b .

To see that, we consider only cases in which the paths $a_1 \rightarrow b$ and $a_2 \rightarrow b$ exist (otherwise the distance is not defined). Now delete the connections in the sub-network formed by deleting a_1 and a_2 from the original network, and consider the links between this sub-network and a_1 and a_2 . Assume that p of the links lead to paths of length l ; which is the length of the shortest path to b :

If the network is with high probability fully connected (as in random networks in which all degrees are at least 3 [16], and the case of the Internet), then the ratio of matchings for which $d(a_1;b) = 1$ and $d(a_2;b) > 1$ to those where $d(a_1;b) > 1$ and $d(a_2;b) = 1$ is $\frac{k_{a_1}}{p} = \frac{k_{a_2}}{p}$, and therefore the distance is a non-increasing function of the degree.

In cases where the network is not fully connected, we must condition the relevant matchings on the demand that both a_1 and a_2 are connected to b . It can be shown that also in these cases Eq. (1) is valid. Therefore we conclude that, $hd(a;b)$, for some random node b , is a non-increasing function of k_a :

$$hd(a_1;a_2;b) \geq \frac{k_{a_1}}{k_{a_2}} hd(a_2;b) \geq hd(a;b) \quad (2)$$

Next we use the notation $d(a;b)$ for the length of the shortest path between nodes a and b , and $r(a;b)$ for the distance travelled by a packet sent from a to b using the above algorithm (notice that $r(a;b)$ need not be symmetric, as opposed to $d(a;b)$). We argue, that in the proposed routing scheme, the expected average stretch $S = \frac{hr(a;b)}{hd(a;b)} \geq 2$.

Denote the source node as s , the destination as t , the hub of t as h_t , and the lengths of the direct paths between them $d(s;t)$, $d(s;h_t)$, $d(h_t;t)$. By the construction of the scheme:

$$\begin{aligned} S &= \frac{hr(s;t)}{hd(s;t)} = \frac{hd(s;h_t) + d(h_t;t)}{hd(s;t)} \\ &= \frac{hd(s;h_t)}{hd(s;t)} + \frac{d(h_t;t)}{hd(s;t)} \end{aligned} \quad (3)$$

Consider first the case that the hub h_t is just a random node, call it r . Because of symmetry, there no reason why any of the distances $d(s;t)$, $d(s;r)$, $d(r;t)$ would be larger than the other, therefore on average the total routing distance $d(s;r) + d(r;t)$ is just twice the shortest distance $d(s;t)$, or the average stretch is 2.

This is true for any random node being a hub, but we are choosing the hubs as nodes with high degree. Since eq. (2) states that the average distance between a random node and a hub is smaller than the distance between two random nodes, we expect the average distances to and from the hub to be small, i.e. we expect $d(s;h_t) \leq d(s;t)$ and $d(h_t;t) \leq d(s;t)$, thus we expect that the average stretch $S \geq 2$.

(The cases in which $k_s, k_t > k_{h_t}$ are treated easily. Since h_t is the hub of t , then even if s is a hub then by the definition of the scheme h_t is closer to t than s , and $d(h_t;t) \leq d(s;t)$; if t is a hub the routing is shortest path by construction. Thus we can assume that s and t are not hubs and $k_s, k_t \leq k_{h_t}$).

Note that direct application of eq. (2) is not possible since in the derivation we assumed the three nodes a_1, a_2, b are fixed, while in our case rewiring might cause h_t not to be the hub closest to t anymore. Nevertheless, there is no reason to assume the inequalities will

be invalid for the reduced configuration space where we force h_t to be the hub closest to t . Paradoxically, if there is only one hub, then the three nodes are fixed and we can apply eq. (2) directly, to prove $S \leq 2$. It is however obvious, and confirmed by simulations, that increasing H would decrease the stretch.

Other properties of the proposed scheme are:

1. The label size (in bits) for the proposed scheme is at most $(D + 1) \log N$, where D is the diameter of the network.
2. The table size at every node contains $H + k$ entries, where k is the degree.
3. The contents of the packet need not to be changed through the routing process.
4. The scheme is a shortest-path routing for a tree.

To explain 1, recall that the label contains the shortest path to the closest hub. The distance is at most D (and add one for the site itself), and each node requires at most $\log N$ bits to identify. Thus, property 1 follows. The second and third parts follow from the definition of the scheme. The fourth follows since in a tree there is only one path between any two nodes, so either the hub is on the path, or the destination is on the path to the hub, or there exists some node in the path to the hub which is also on the path to the destination. (In a different way, if there was a shortest path different from the path source ! hub ! destination, then a loop would be constructed, contradicting the network being a tree).

For scale-free networks we can show some better bounds on the label size and the stretch. It has been shown [17, 18] that with high probability the average distance between nodes is $O(\log \log N)$ and the diameter is $O(\log N)$ (for $k_{\min} \geq 2$ the diameter is also expected to be $O(\log \log N)$). Therefore, it can be concluded that the maximum label size is of order $O(\log^2 N)$ and the average label size is $O(\log N \log \log N)$. For scale free networks with $\gamma < 3$, tighter bound for the stretch can be obtained. The radius of the core (the location of all high degree nodes) is of order $\log \log N$, and almost all the mass is concentrated outside the core (see, e.g., [17, 19]). Now, looking at a ball around a random site with a radius a little smaller than the radius of the network, it is expected that the ball will not include the largest hub (since most sites are outside the core). Since the size of the largest hub is of order $O(N^{1-(\gamma-1)}) = N^{1-\gamma/2}$ [20] for $\gamma < 3$; it is expected that the ball has less than $N^{1-\gamma/2}$ outgoing links (since any 2 balls with more than $N^{1-\gamma/2}$ are connected with high probability). Any 2 such balls are not expected to be connected between them, since the product of their "degree" (number of outgoing links) is less than N , so the distance between any two random sites is expected to be almost twice the radius (for a rigorous proof of this see [19]). Thus the path through the hubs is almost optimal with high probability, and the

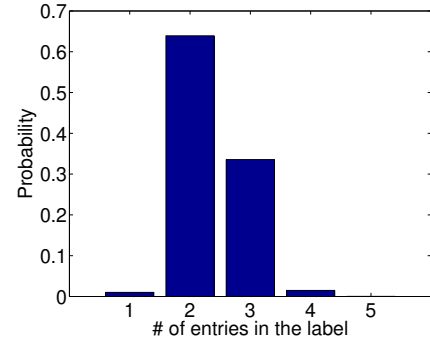


FIG. 1: Label size distribution for scale-free networks. Typical label is extremely short, what makes our scheme efficient also in terms of bandwidth utilization.

stretch between 2 randomly selected sites is expected to approach 1 for large N .

One other nice property of the proposed scheme is that the labelling and table construction can be achieved using a distributed rather than a centralized algorithm, and in an efficient manner (the number of messages transfers needed is almost linear in the size of network times H . Details are to be published elsewhere). Cases of a node or link failures can be bypassed in a standard way, without affecting the other nodes of the network. Having all the above properties in mind, our scheme can be considered seriously for applications in real-world systems, in which not always there is a central management of the network that has the knowledge of the topology of the entire network.

To demonstrate the efficiency of the scheme, we present computer simulation results. For all networks, we use the parameters $N = 10000$, $\gamma = 2.3$, and average over many realizations. (The stretch of a network is calculated as an average over the stretch of all pairs, as in [11]). To begin with, we verify that the labels are indeed small (Fig. 1).

Next we have tested the scheme with the most recent representation of the Internet at the AS level [21]; the average stretch factor turned out to be as low as 1.067, with 79% of paths shortest (As opposed to 1.09 and 71% in [11]). In Fig. 2 we show the cumulative distribution of stretch values for routing between all pairs in a random realization of the configuration model (with power-law degree distribution), for different system sizes. It can be seen that not only that most of the routes are along the shortest path, but the number of exceptionally high stretches becomes more and more rare as the system grows.

Fig. 3 shows the average stretch value as a function of the network size, compared for a few values of γ (in $H \propto \log N$) in power-law networks, and for $H \propto \log^3 N$ for ER networks. It can be seen that the average stretch in the scale-free networks is significantly better than in the ER case and is virtually independent of the network size. One can also see that the stretch depends only weakly on the number of hubs; therefore, to

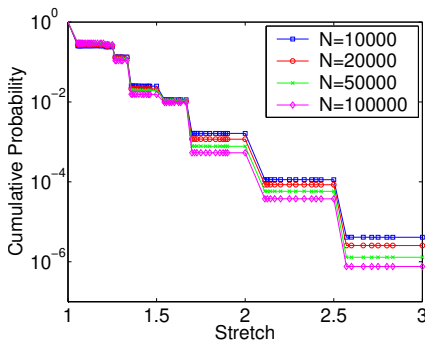


FIG. 2: Stretch distribution for a scale-free network ($H = \log(N)$). The (inverse) cumulative probability distribution is shown, i.e. for a given stretch value, we see the probability to have a larger stretch. In the case of $N = 10000$, 75% of the paths are the shortest ones.

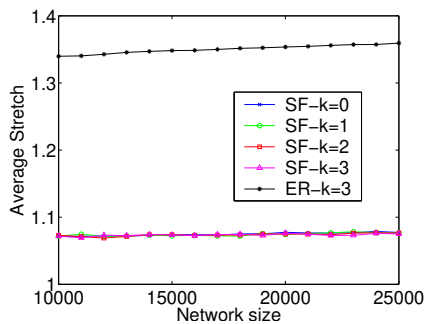


FIG. 3: Average stretch vs. network size, for scale-free networks with different number of hubs, $H = \log N$, $k = 0; 1; 2; 3$ and ER network ($k_{in} = 7$) with $\gamma = 3$. In all simulations H was scaled such that $H(N = 10000) = 100$. It can be seen that the performance of the scheme is much better for the scale-free network, with virtually no dependence in the network size and the number of hubs.

achieve an efficient routing, one need not use too many hubs.

In Fig. 4 we study the variation in the stretch when the parameters of the power-law degree distribution are changed. We compute the stretch for $k_{min} = 1; 2; 3$ and for various values of γ . The behaviour of the stretch can

be explained, as when we move to higher values of γ , the network becomes more sparse and tree-like. On the one hand recall that the scheme is optimal for tree structure, on the other hand when γ increases we have less and less \textit{real hubs}, the network becomes similar to an ER network, on which the scheme performs worse, as shown above. For $k_{min} = 1$ the tree structure effect is much stronger, for $k_{min} = 3$ many loops remain thus the effect of losing the hubs is stronger, for $k_{min} = 2$ neither of the effects is more significant.

In summary, we have presented an efficient method for routing or searching in an environment where full knowledge of the network topology is not available. Our scheme changes the names of the nodes to more mean-

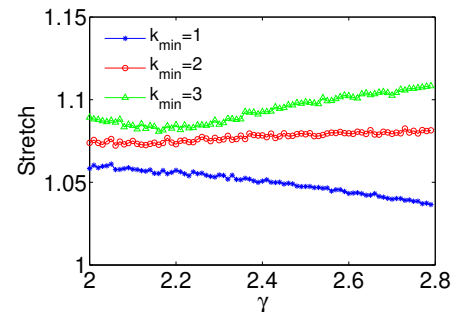


FIG. 4: Average stretch vs. γ for a power-law network with $k_{min} = 1; 2; 3$.

ingful names, that contain the path to the closest hub, where the hubs are chosen as nodes with highest degree. We have shown that this simple and intuitive method can be extremely useful in scale-free networks, such as the Internet. Using computer simulations, we have explored the performance of our scheme with variations in the network and scheme parameters.

We thank Shlomo Havlin and Ittai Abraham for fruitful discussions. The research was supported by the Israel Internet Association, the Israel Science Foundation and the European research NEST/PATHFINDER project DYSONET 012911.

[1] M. Faloutsos, P. Faloutsos and C. Faloutsos, ACM SIGCOMM (1999).
 [2] R. Albert and A.-L. Barabasi, Rev. Mod. Phys. 74, 47 (2002).
 [3] R. Pastor-Satorras and A. Vespignani \textit{Evolution and Structure of the Internet"} (Cambridge University Press, Cambridge, 2004).
 [4] S.N. Dorogovtsev and J.F.F. Mendes, \textit{Evolution of Networks: From Biological nets to the Internet and WWW"} (Oxford University Press, Oxford, 2003).
 [5] J. Kleinberg, Proc. 32nd ACM Symposium on Theory of

Computing (2000).
 [6] L.A. Adamcic, R.M. Lukose, B. Huberman and A.R. Puniyani, Phys. Rev. E 64, 46135 (2001).
 [7] M. Rosvall, A. G. Ronkum, P. Minnhagen and K. Sneppen, Phys. Rev. E 72 046117 (2005).
 [8] D. Peleg and E. Upfal, J. ACM 36, 510 (1989).
 [9] M. Thorup and U. Zwick, Proc. of the thirteenth annual ACM symposium on Parallel algorithms and architectures, 1 (ACM Press, 2001).
 [10] D. Peleg, J. of Algorithms, 38, 170 (2001).
 [11] D. Krioukov, K. Fall and X. Yang, IEEE INFOCOM,

- (IEEE, 2004).
- [12] B. Bollobas, *European Journal of Combinatorics*, 1, 311 (1980).
 - [13] M. E. J. Newman, *SIAM Review* 45, 167 (2003).
 - [14] M. Ripeanu and I. Foster, *Lect. Notes in Comp. Sci.* 2429, 85 (Springer, 2002).
 - [15] T. H. Cormen, C. E. Leiserson and R. L. Rivest, "Introduction to Algorithms", (MIT Press, 1990).
 - [16] C. Gkantsidis, M. Mihail and A. Saberi, *ACM SIGMETRICS (ACM, 2003)*.
 - [17] R. Cohen and S. Havlin, *Phys. Rev. Lett.*, 90, 058701 (2003).
 - [18] F. Chung and L. Lu, *Internet Mathematics*, 1, 91 (2003).
 - [19] R. van der Hofstad, G. Hooghiemstra and D. Znamenski, <http://arxiv.org/abs/math.PR/0502581>.
 - [20] R. Cohen, K. Erez, D. ben-Avraham and S. Havlin, *Phys. Rev. Lett.* 85, 4626 (2000).
 - [21] Y. Shavitt and E. Shir, *ACM SIGCOMM Computer Communication Rev.* 35, 71 (2005).