

Boosting for Functional Data

Nicole Krämer*

March 29, 2022

Abstract

We deal with the task of supervised learning if the data is of functional type. The crucial point is the choice of the appropriate fitting method (also called learner). Boosting is a stepwise technique that combines learners in such a way that the composite – boosted – learner outperforms the single learner. This can be done by either reweighting the examples or with the help of a gradient descent technique. In this paper, we explain how to extend Boosting methods to problems that involve functional data.

Keywords: Functional Data Analysis, Boosting

1 A Short Introduction to Boosting

The task is the following: We try to estimate a relationship

$$F : \mathcal{X} \rightarrow \mathcal{Y} \quad (1)$$

based on a finite set $S = \{(x_1, y_1), \dots, (x_n, y_n)\} \subset \mathcal{X} \times \mathcal{Y}$ of observations. A popular strategy is to fix a class of functions \mathcal{F} and to minimize the empirical risk

$$\frac{1}{n} \sum_{i=1}^n L(y_i, f(x_i)) \quad (2)$$

over all elements $f \in \mathcal{F}$. Here

$$L : \mathcal{Y} \times \mathcal{Y} \rightarrow \mathbb{R} \quad (3)$$

is a loss function. Sometimes, a regularization term $r(f)$ is added to (2). We call fitting methods like this learners. Popular examples for multivariate data are trees, support vector machines or smoothing splines. The choice of the learner is crucial, as too complex learners lead to overfitting, whilst 'weak' learners

*TU Berlin – Department of Computer Science and Electrical Engineering, Franklinstr. 28/29, 10587 Berlin, Germany nkraemer@cs.tu-berlin.de

fail to capture the relevant structure. The term weak learner has its seeds in the machine learning literature. In classification problems, a weak learner is a learner that is slightly better than random guessing. (The exact definition can be found in e.g. [MR03].) For regression problems, we might think of a learner that has a high bias compared to its variance, or a learner that has only a few degrees of freedom.

The basic idea of Boosting is to proceed stepwise and to combine weak learners in such a way that the composite – boosted – learner

$$f_M(x) = \sum_{m=1}^M \alpha_m \cdot g_m(x) \quad (4)$$

(or $\text{sign}(f)$ for classification problems) performs better than the single weak learners g_m . The single learners are usually called base learners and M is called the number of Boosting iterations. The learners g_m and the weights α_m are chosen adaptively from the data. AdaBoost [FS97] – the first Boosting algorithm – is designed for classification problems. It is presented in algorithm 1. The weak base learner is repeatedly applied to the weighted training sample S . Points which were hard to approximate in step m are given higher weights in the next iteration step. For some learners, it is not possible to compute a

Algorithm 1 AdaBoost

Input: sample S , weak learner, M , initial weights $D_1(x_i) = 1/n$

for $m = 1, \dots, M$ **do**

 Fit a function g_m to the weighted sample (S, D_m) using the weak learner

 Compute the weighted error

$$\epsilon_m = \sum_{i=1}^n D_m(x_i) I_{\{y_i \neq g_m(x_i)\}}.$$

 Set $\alpha_m = \ln \left(\frac{1-\epsilon_m}{\epsilon_m} \right)$.

 Update the weights:

$$D_{m+1}(x_i) = D_m(x_i) \exp(-\alpha_m y_i g_m(x_i)).$$

end for

return $h(x) = \text{sign} \left(\sum_{m=1}^M \alpha_m g_m(x) \right)$.

weighted loss. Instead, in each step we draw with replacement a sample of size n from S and use the weights D_m as probabilities.

It can be shown [Bre98, Bre99] that Boosting is a forward stage-wise fitting method using gradient descent techniques. More precisely, in each step we fit a weak learner to x_i and the negative gradient

$$u_i = - \left. \frac{\partial L(y_i, f)}{\partial f} \right|_{f=f_m(x_i)} \quad (5)$$

of the loss function (3). The connection between Boosting and gradient descent methods has lead to a wide range of new algorithms [Fri01], notably for regression problems. Note that if we use the quadratic loss

$$L(y, y') = \frac{1}{2} (y - y')^2 ,$$

the negative gradient is simply the vector of residuals, i.e. we iteratively fit the residuals using a weak learner. This method is called L_2 Boost [BY03, Fri01] and is presented in algorithm 2. Boosting with the loss function

Algorithm 2 L_2 Boost

Input: sample S , weak learner, M

Fit a function $g_1(x)$, using the weak learner and set $f_1 = g_1$.

for $m=1, \dots, M$ **do**

 Compute the residuals

$$u_i = y_i - f_m(x_i), i = 1, \dots, n .$$

 Fit a function g_{m+1} to (x_i, u_i) by using a weak learner

 Update

$$f_{m+1} = f_m(x) + g_{m+1}(x) .$$

end for

return $f_M = \sum_{m=1}^M g_m(x)$

$$L(y, y') = \log(1 + \exp(-yy')) ,$$

is suited for classification problems and called LogitBoost [FHT00](see algorithm 3). The function f_M is an estimate of one-half of the log-odds ratio

$$\frac{1}{2} \log \left(\frac{P(Y = 1|X = x)}{1 - P(Y = 1|X = x)} \right) .$$

As a consequence, this classification algorithm also produces estimates of the class probabilities $P(Y = 1|X = x)$. Generic Boosting algorithms for a general loss function can be found in [BY03, Fri01].

How do we obtain the optimal number of Boosting iterations? One possibility is to use cross validation. Depending on the data, this can lead to high computational costs. If we use L_2 Boost, it is possible to compute the degrees of freedom of the Boosting algorithm [BY03, Böh06]. As a consequence, we can use model selection criteria as the Akaike Information Criterion (AIC) or the Bayesian Information Criterion (BIC).

Algorithm 3 LogitBoost

Input: sample S , weak learner, M Initialize probabilities $p_1(x_i) = 1/2$ and set $f_0(x) = 0$ **for** $m=1, \dots, M$ **do**

Compute weights and negative gradients

$$D_m(x_i) = p_m(x_i)(1 - p_m(x_i))$$

$$u_i = \frac{y_i - p_m(x_i)}{D_m(x_i)}, i = 1, \dots, n.$$

 Fit a regression function g_m to (x_i, u_i) by weighted least squares

Update

$$f_m = f_{m-1}(x) + \frac{1}{2}g_m(x),$$

$$p_{m+1}(x_i) = (1 + \exp(-2f_m(x_i)))^{-1}.$$

end for**return** f_M

2 Functional Data Analysis

The content of this section is condensed from [RS05]. We speak of functional data if the variables that we observe are curves. Let us first consider the case that only the predictor samples x_i are curves, that is

$$x_i \in \mathcal{X} = \{x : T \rightarrow \mathbb{R}\}.$$

Examples for this type of data are time series, temperature curves or near infrared spectra. We usually assume that the functions fulfill a regularity condition, and in the rest of the paper, we consider the Hilbert space $\mathcal{X} = L^2(T)$ of all square-integrable functions $T \rightarrow \mathbb{R}$.

2.1 How to Derive Functions from Observations?

In most applications, we do not measure a curve, but discrete values of a curve. An important step in the analysis of functional data is therefore the transformation of the discretized objects to smooth functions. The general approach is the following: We represent each example as a linear combination

$$x_i(t) = \sum_{l=1}^{K_x} c_{il} \psi_l(t) \tag{6}$$

of a set of base functions $\psi_1, \dots, \psi_{K_x}$. The coefficients c_{il} are then estimated by using (penalized) least squares. The most frequently used base functions are Fourier expansions, B-splines, wavelets and polynomials. A different possibility

is to derive an orthogonal basis directly from the data. This can be done by using functional principal component analysis.

2.2 Inference from Functional Data

We only consider linear relationships (1), i.e. in the regression setting ($\mathcal{Y} = \mathbb{R}$), elements $f \in \mathcal{F} = L^2(T)$ are assumed to be linear (up to an intercept) and continuous. As \mathcal{F} is a Hilbert space, it follows that any function $f \in \mathcal{F}$ is of the form

$$f(x(t)) = \beta_0 + \int_T \beta(t)x(t)dt. \quad (7)$$

In the two-class classification setting ($\mathcal{Y} = \{\pm 1\}$), we use $\text{sign}(f)$ instead of f . As already mentioned in Sect. 1, we estimate f or β by minimizing the empirical risk (2). Note that this is an ill-posed problem, as there are (in general) infinitely many functions β that fit the data perfectly. There is obviously a need for regularization, in order to avoid overfitting. We can solve this problem by using a base expansion of both the predictor variable $x_i(t)$ as in (6) and the function

$$\beta(t) = \sum_{l=1}^{K_\beta} b_l \psi_l(t). \quad (8)$$

This transforms (2) into a parametric problem. If we use the quadratic loss, this is a matrix problem: We set

$$C = (c_{ij}) \quad , \quad J = \left(\int_T \psi_i(t) \psi_j(t) dt \right) \quad , \quad Z = CJ.$$

It follows that (for centered data)

$$\hat{\vec{b}} = (Z^t Z)^{-1} Z^t y. \quad (9)$$

As already mentioned, we have to regularize this problem. There are two possibilities: We can either constrain the number of base functions in (8). That is, we demand that $K_\beta \ll K_x$. However, we show in Sect. 3 that this strategy can lead to trivial results in the Boosting setting. The second possibility is to add a penalty term $r(f)$ to the empirical risk (2). If we consider functional data, it is common to use a penalty term of the form

$$r(\beta) = \lambda \int_T \left(\beta^{(k)}(t) \right)^2 dt.$$

Here $\beta^{(k)}$ is the k th derivative of β – provided that this derivative exists. The choice of k depends on the data at hand and our expert knowledge on the problem.

Finally, let us briefly mention how to model a linear relationship (1) if both the predictor and response variable are functional. We consider functions

$$\begin{aligned} f : L^2(T) &\rightarrow L^2(T) \\ f(x(t)) &= \alpha(t) + \int_T \beta(s, t) x(s) ds. \end{aligned}$$

We estimate β by expanding y_i, x_i, α in terms of a basis and by representing β by

$$\beta(s, t) = \sum_{k=1}^{K_1} \sum_{l=1}^{K_2} b_{kl} \psi_k(s) \psi_l(t).$$

The optimal coefficients b_{kl} are determined using the loss function

$$L(y, y') = \int_T (y(t) - y'(t))^2 dt.$$

Again, we have to regularize in order to obtain smooth estimates that do not overfit.

3 Functional Boosting

In order to apply a Boosting technique to functional data, we have to extend the notion 'weak learner'. In the classification setting, we can adopt the loose definition from Sect. 1. A weak learner is a learner that is slightly better than random. What are examples of weak learners? Note that it is possible to apply most of the multivariate data analysis tools to functional data. We use a finite-dimensional approximation as in (6) and simply apply any appropriate algorithm. In this way, it is possible to use stumps (that is, classification trees with one node) or neural networks as base learners.

In the regression setting, we propose the following definition: A weak learner is a learner that has only a few degrees of freedom. Examples include the two regularized least squares algorithms presented in Sect. 2 – restriction of the number of base functions in (8) or addition of a penalty term to (2). Note however that the first method leads to trivial results if we use L_2 Boost. The learner is simply the projection of y onto the space that is spanned by the columns of Z (recall (9)). Consequently, the y -residuals are orthogonal on Z and after one step, the Boosting solution does not change anymore. Another example of a weak learner is the following [Büh06]: In each Boosting step, we only select one base function using x_i and the residuals u_i . To select this base function, we estimate the regression coefficients b_j of

$$u_i \sim b_j \int_T x_i(t) \psi_j(t) dt, \quad j = 1, \dots, K_\beta. \quad (10)$$

We choose the base function that minimizes the empirical risk (2). For centered data, this equals

$$\begin{aligned} m^* &= \arg \min_j \sum_{i=1}^n L \left(u_i, \hat{b}_j \int_T \psi_j(t) x_i(t) dt \right) \\ \hat{b}_j &= \text{Least Squares estimate of } b_j \text{ in (10)} \end{aligned}$$

Boosting for multivariate data with this kind of weak learner has been studied in e.g. [Büh06].

If the response variable is functional, we can adopt the same definition of weak learner as in the regression setting: A weak learner is a learner that uses only a few degrees of freedom.

4 Example: Speech Recognition

This example is taken from [BBW05]. The data consists of 48 recordings of the word 'Yes' and 52 recordings of the word 'No'. One recording is represented by a discretized time series of length 8192. The data can be downloaded from <http://www.math.univ-montp2.fr/~biau/bbwdata.tgz>. All calculations are performed using R [R D04].

The task is to find a classification rule that assigns the correct word to each time series. We apply the LogitBoost algorithm to this data set. First, we represent the time series in terms of a Fourier basis expansion of dimension $K_x = 100$. We opted to include a lot of basis functions, as experiments indicate that the results of LogitBoost are insensitive to the addition of possibly irrelevant basis functions. The weak learner is a classification tree with two final nodes. The misclassification rate was estimated using 10fold cross-validation (cv). Figure 1

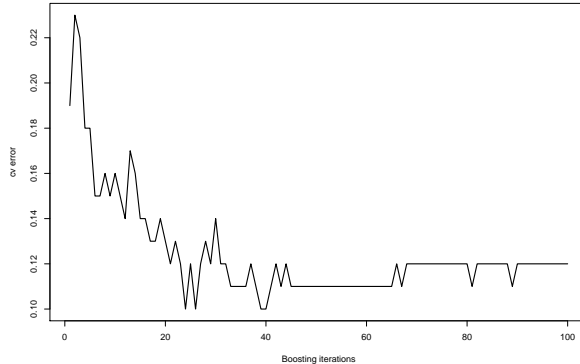


Figure 1: Cross validated error for the speech recognition problem. The optimal number of Boosting iterations is $M_{opt} = 24$.

shows the cross-validated error as a function of the number of Boosting iterations. The minimal cv error over all Boosting iterations is 0.1, obtained after 24 Boosting iterations. This is the same error rate that is reported in [BBW05]. There, a functional k -nearest-neighbor-algorithm is applied to the data. Finally, we remark that the cv error curve stays rather flat after the minimum is attained. This seems to be a feature of all Boosting methods. As a consequence, the selection of the optimal number of Boosting iterations can be done quite easily.

5 Conclusion

The extension of Boosting methods to functional data is straightforward. After choosing a base algorithm (which we called a weak learner), we iteratively fit the data by either applying this algorithm to reweighted samples or by using a gradient descent technique. In many applications, we use a finite-dimensional expansion of the functional examples in terms of base functions. This finite-dimensional representation can then be plugged into existing algorithms as AdaBoost, LogitBoost or L_2 Boost.

We focused on linear learning problems in Sect. 2 for the sake of simplicity and brevity, but it should be noted that Boosting methods can also be applied to solve nonlinear functional data problems.

References

- [BBW05] Biau, G., Bunea, F., Wegkamp, M.H.: Functional Classification in Hilbert Spaces. *IEEE Trans. Inform. Theory*, **51**, 2163–2172 (2005)
- [Bre98] Breiman, L.: Arcing Classifiers (with Discussion). *Ann. Statist.*, **26**(3), 801–849 (1998)
- [Bre99] Breiman, L.: Prediction Games and Arcing Algorithms. *Neural Comput.*, **11**(7), 1493–1517 (1999)
- [Büh06] Bühlmann, P.: Boosting for High-Dimensional Linear Models. to appear in: *Ann. Statist.*, (2006)
- [BY03] Bühlmann, P., Yu, B.: Boosting with the L2-Loss: Regression and Classification. *J. Am. Stat. Assoc.*, **98**, 324–339, (2003)
- [FHT00] Friedman, J., Hastie, T., Tibshirani, R.: Additive Logistic Regression: a Statistical View of Boosting (with Discussion). *Ann. Statist.*, **28**, 337–407 (2000)
- [Fri01] Friedman, J.: Greedy Function Approximation: A Gradient Boosting Machine. *Ann. Statist.*, **29**, 1189–1232 (2001)
- [FS97] Freund, Y., Schapire, R.E.: A Decision-Theoretic Generalization of Online Learning and an Application to Boosting. *J. Comput. Syst. Sci.*, **55**(1), 119–139 (1997)
- [MR03] Meir, R., Rätsch, G.: An Introduction to Boosting and Leveraging. In: Mendelson, S., Smola, A. (eds) *Advanced Lectures on Machine Learning*. Springer, Berlin Heidelberg New York (2003)
- [R D04] R Development Core Team: *R: A Language and Environment for Statistical Computing*. R Foundation for Statistical Computing, Vienna, Austria, (2004)

- [RS05] Ramsay, J.O., Silverman, B.W.: Functional Data Analysis. Springer, Berlin Heidelberg New York. Second edition, (2005)