

# Limit to non-destructive optical detection of atoms

J.J. Hope and J.D. Close

Australian Centre for Quantum Atom Optics, Department of Physics,  
Australian National University, ACT 0200, Australia

All optical techniques used to probe the properties of Bose-Einstein condensates have been based on dispersion and absorption that can be described by a two-level atom. Both phenomena lead to spontaneous emission that is destructive. Recently, both were shown to lead to the same limit to the signal to noise ratio for a given destruction. We generalise this result to show that no single-pass optical technique using classical light, based on any number of lasers or coherences between any number of levels, can exceed the limit imposed by the two-level atom. This puts significant restrictions on potential non-destructive measurement schemes.

PACS numbers: 03.75.Kk, 32.80.Pj, 42.50.Ct

**Introduction.**— The advent of modern cooling techniques has led to the creation of ultra-cold atomic samples in which the recoil of a single photon has a significant effect on the motional state of the system. Laser cooling, and more recently evaporative cooling, have allowed the creation of a Bose-Einstein condensate (BEC) of weakly interacting gases, in which a large number of atoms enter the ground state of the system, forming a large, coherent matter wave [1]. Observation and control of the motional states of these atoms requires a detection method that does not involve spontaneous photon recoil.

Previously all ground state BECs have been detected via optical methods, with photon absorption providing a simple, though clearly destructive, measure of the atomic density and the phase shift of a laser beam providing a less destructive measure under some circumstances [2]. Both methods are based on physics that can be described by the two-level atom. It was recently shown in the limit of optically thin samples, that absorption and phase shift measurements have equal sensitivity for a given level of destruction, and that the signal to noise ratio (SNR) in this limit is a function of destruction (spontaneous emission rate) and bandwidth only [3]. In this way, there is a hard limit on the SNR achievable from any single-pass technique based on the two-level atom and classical light beams.

It is known that in three-level systems in the presence of a strong second laser, it is possible for a weak probe beam to experience a non-zero phase shift without any absorption, suggesting that manipulation of coherences in a three-level system might provide a less destructive detection method [5, 6]. In this Letter we show this is not the case and, further, that no single-pass optical detection method can beat the limit imposed by the two-level atom. The only solution is to multipass the beam with a cavity or to use non-classical light.

The phase shift of a far-detuned laser beam passing through a gas of two-level atoms is inversely proportional to the detuning. The excited state population and accompanying spontaneous emission is inversely propor-

tional to the square of the detuning. As a consequence it might be thought that detuning further from resonance will provide improved sensitivity for a given excited state population. Careful analysis shows, however, that the SNR for the shot noise limited measurement of a phase shift is also proportional to the electric field amplitude of the beam. Consequently, the SNR is proportional to the square root of the excited state population with no free parameters that can improve the performance of the system. In the limit of an optically thin sample, the prefactors are in fact identical to that of an absorption measurement. There are three ways of beating this limit with two-level atoms, but they have either limited application or impose significant technical difficulties for moderate gains using current technology. Measuring the resonance fluorescence can provide a fixed improvement in the ultra-thin limit where both the SNR and the excitation go to zero. Using resonant interferometry provides a factor of the square root of the density of the system [3]. Using squeezed light improves the SNR by a factor of the squeezing. These technically challenging methods provide techniques by which the SNR can be enhanced [4], but would not be worth pursuing unless the limit imposed by the two-level atom were fundamental to all single-pass optical detection schemes using classical light.

The properties of dark states alluded to earlier (absorption-free phase shift of a probe) suggest that a three-level system could provide a less destructive detection method. The correct measure of destructiveness is not, however, the total absorption of the probe beam, but the total spontaneous emission rate due to all laser beams or, succinctly, the excited state population. For the three-level lambda system, there is a dark state that has exactly no excited state population, but it also gives no phase shift to the laser beams. To determine whether the two-level limit can be beaten by such a scheme, we must calculate both the phase shift on the probe and the excited state populations for all states. The relationship between the phase shift on any laser beam in a multiple laser, multiple level system and the excited state popula-

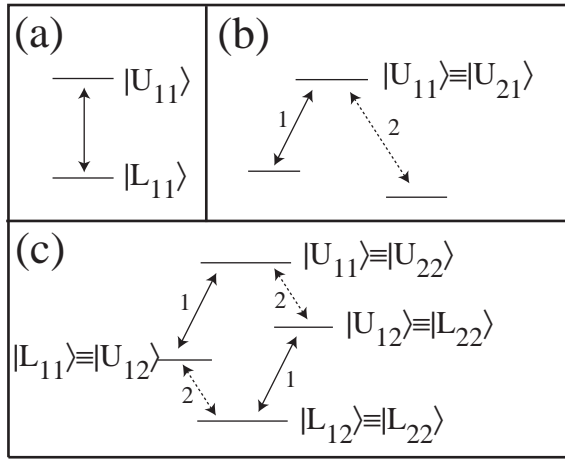


FIG. 1: Examples of lasers and atomic energy level schemes that are allowable in our analysis. (a) shows the two-level atom. This can be connected only by a single laser, or else it would be possible to return to the ground state without returning to the original momentum state. (b) shows a Raman transition with two laser fields. Each laser still causes only one transition, but the excited state for each of those transitions is identical, so in our notation  $|U_{11}\rangle \equiv |U_{21}\rangle$ . (c) shows a more exotic system where each laser causes multiple transitions but the atom will still return to the starting state without momentum diffusion. In this example, all four states are multiply defined in the  $|U_{ji}\rangle; |L_{ji}\rangle$  notation.

tion can be determined in various limits, but in order to determine whether there is any non-destructive scheme this must be calculated without resorting to linearisation of the susceptibility or other perturbative methods.

Non-perturbative phase shift in multilevel systems. The phase shift on a laser beam can be determined using a semiclassical analysis and the wave equation, but this has a tendency to become extremely complicated in the presence of non-linear susceptibilities and multiple transitions. The fully quantum method described in this Letter is a surprisingly efficient computation of the phase shift where the non-linear dynamics is entirely included in the calculation of the dressed state energies of the atoms. The phase shift on a laser beam interacting with a complicated system is easiest to calculate by identifying its origin in the level shifts of the dressed states of the system. Let us describe the initial atomic state as  $|j\rangle_i$ , which will be connected to a series of other atomic states  $|j\rangle_k$  by optical fields that are each in a coherent state  $|j\rangle_k$ .

While we do not wish to make assumptions as to the nature of the system we are investigating, our analysis is simplified in that we are looking for a non-destructive detection scheme, and we can immediately rule out combinations of lasers and level systems that lead to a net change in the atomic electronic state or momentum after the interaction with the lasers. The combined system of atoms and lasers must therefore reduce to a series of manifolds in which each atomic level is associated with

a definite number of photons in each optical mode, or else the atoms will experience momentum diffusion during their interaction with the lasers. For a two-level system, for example, only one laser can couple the states  $|j\rangle_i$  and  $|j\rangle_i$ . During the interaction, the total quantum state will reduce to a set of non-interacting manifolds of pairs of states  $|j\rangle_i; n_i; |j\rangle_n$  lig, where  $|j\rangle_i; n_i$  is the state with the atom in electronic state  $j$  with  $n$  photons in the laser beam [7]. A three-level system in a lambda configuration where lower energy states  $|j\rangle_i$  and  $|j\rangle_i$  are each coupled to the excited state  $|j\rangle_i$  by a separate laser mode is another example. In this case the independent manifolds are  $|j\rangle_i; n_i; m_i; |j\rangle_n$  lig,  $|j\rangle_i; n_i; m_i; |j\rangle_n$  lig,  $|j\rangle_i; n_i; m_i; |j\rangle_n$  lig.

In general, the closed manifolds can be indexed by the atomic state alone, although the full quantum state will include the number of photons in each optical mode,  $|j\rangle_i; n_i + b_{1j}; n_2 + b_{2j}; \dots; m_i; n_i + b_{Mj}$  lig, where  $b_{1j}$  are the elements of an integer-valued, constant matrix.

The interaction picture Hamiltonian for such a system with  $N$  atomic levels and  $M$  different lasers can be written, after the rotating wave approximation, as

$$H = \sum_{n=1}^N \epsilon_n |j\rangle_n \langle j| + \sum_{j=1}^M \sum_{l=1}^N (g_{jl} \hat{a}_j^\dagger |j\rangle_{j+1} \langle j| + \text{adj.})$$

where  $\epsilon_n$  is the energy of atomic level  $n$ ,  $\hat{a}_j$  is the annihilation operator for the optical mode of the  $j^{\text{th}}$  laser,  $m_j$  is the number of transitions caused by the  $j^{\text{th}}$  laser,  $|j\rangle_{j+1}$  and  $|j\rangle_j$  are the lower and upper atomic energy levels respectively of the appropriate laser transition, and  $g_{jl}$  is its dipole coupling strength. Examples of systems with different numbers of atomic levels and lasers are shown in Fig. (1).

The requirement that the atoms be left in their starting electronic state can be solved either by requiring that the lasers perform a multi-level equivalent of a 2-pulse, or by assuming that the atoms adiabatically follow the dressed states. For a pulsed system, the phase shift vanishes. For the second case, we have found an efficient method of calculating the phase shift for a system with an arbitrary number of atomic levels and incident lasers.

If the atoms adiabatically follow the dressed state and the photon number of each laser is conserved, the final state can differ at most by a phase factor that is the product of the eigenvalue of the relevant dressed state,  $H |j\rangle_i; n_i; m_i; \dots; m_i; n_i + b_{Mj}$  lig, and the time of the interaction. If this total phase factor is linear in each photon number,  $|j\rangle_i; n_i + b_{1j}; n_2 + b_{2j}; \dots; m_i; n_i + b_{Mj}$  lig, the total state is trivially separable into the outer product of coherent states each with an associated phase shift  $\phi_j$ . This is true for the two-level atom interacting with a single laser, but will not be true in general. The effect of an atomic medium on the light fields can be more complicated than a simple phase shift on each beam, even in

the absence of absorption or spontaneous emission. Lasing modes have relatively well defined photon number and linearisation of the dressed state eigenvalue around those photon numbers yields a reasonable approximation of the final state. To the extent that the laser fields have something as simple as a phase shift, it is given by:

$$\phi_{\text{atom}}^j = \frac{1}{\hbar c} \frac{\partial H}{\partial n_j} \bigg|_{(n_1; \dots; n_M) = (n_1; \dots; n_M)}$$

where  $n_j$  is the average photon number in the  $j^{\text{th}}$  laser,  $l$  is the length of the interacting region and  $c$  is the speed of light.

Within each manifold, the Hamiltonian is an  $N \times N$  matrix:

$$H = \sum_{n=1}^N \hbar \omega_n |n\rangle\langle n| + \frac{\hbar}{2} \sum_{j,l=1}^M (J_{j,l} |l\rangle\langle j| + \text{adj.})$$

where  $\tilde{\omega}_{j,l} = 2g_{j,l} \sqrt{n_j + 1 + b_{j,l} U_{j,l}}$  is a shorthand for the resultant coupling term that can be identified as the resonant Rabi frequency of the transition, making a simple connection with the semiclassical picture. The phase shift per atom on each laser beam is:

$$\phi_{\text{atom}}^j = \frac{1}{\hbar c} \sum_{l=1}^M \frac{\partial H}{\partial n_j} \bigg|_{(n_1; \dots; n_M)}$$

Multiplying by the total number of atoms in the quantisation volume, we find the total phase shift on the laser:

$$\phi_{\text{total}}^j = \sum_{l=1}^M \frac{\tilde{\omega}_{j,l}}{2} \frac{\partial H}{\partial \tilde{\omega}_{j,l}} \bigg|_{(n_1; \dots; n_M)}$$

where  $\tilde{\omega}_{j,l}$  is the column density of the atoms,  $\sigma_{j,l} = 6 \times 10^{-28} \text{ m}^2$  is the single atom cross-section, and  $\gamma_{j,l}$  is the spontaneous emission rate of the excited state  $|j\rangle$ . The derivative of the dressed state eigenvalue can be found from first order perturbation theory using the Hellmann-Feynman theorem [8]. As the Hamiltonian is linear with respect to  $\tilde{\omega}_{j,l}$ :

$$\frac{\partial H}{\partial \tilde{\omega}_{j,l}} = \hbar \sum_{n_1; \dots; n_M} \frac{\langle j | \tilde{H} | n_1; \dots; n_M \rangle}{2 \tilde{\omega}_{j,l}}$$

and we can write the total phase shift in terms of the real parts of the off-diagonal density matrix elements:

$$\phi_{\text{total}}^j = \sum_{l=1}^M \frac{\tilde{\omega}_{j,l}}{2} \frac{\text{Re} \langle j | \tilde{H} | n_1; \dots; n_M \rangle}{\tilde{\omega}_{j,l}}$$

A measurement of this phase is therefore a measurement of column density. For a purely shot-noise limited measurement without using squeezing or a resonant cavity, the maximum achievable SNR is limited by the temporal and spatial bandwidth, detector efficiency and the

strength of the electric field in the interferometer:

$$\text{SNR}_j = \frac{P_j}{B \hbar \tilde{\omega}_{j,l}}$$

where  $P_j$  is the power in the  $j^{\text{th}}$  laser mode,  $\eta$  is the quantum efficiency of the detector and  $B$  is the temporal bandwidth of the measurement. The square root of the power and the inverse Rabi frequency in the phase shift have opposite dependence on the electric field, and we obtain a SNR that depends only on fixed atomic parameters and the off-diagonal elements of the density matrix of the relevant dressed state.

$$\text{SNR}_j = \sum_{l=1}^M \frac{\tilde{\omega}_{j,l}}{2} \frac{\text{Re} \langle j | \tilde{H} | n_1; \dots; n_M \rangle}{B \hbar \tilde{\omega}_{j,l}}$$

where  $A$  is the area of the atoms that was sampled – essentially the spatial bandwidth of the measurement.

Using basic properties of the density matrix we can immediately write this as an inequality:

$$\text{SNR}_j \leq \sum_{l=1}^M \frac{\tilde{\omega}_{j,l}}{2} \frac{A}{B \hbar \tilde{\omega}_{j,l}} \quad (1)$$

where  $\gamma_{j,l} = \gamma_{j,l} U_{j,l} U_{j,l}$  is the spontaneous emission rate per atom due to the population  $U_{j,l}$  in the upper state of the  $l^{\text{th}}$  transition due to that laser. This new result shows that there is a fundamental limit to the sensitivity for any coherent optical detection method for a given level of disruption of that state.

Relationship to other theorems – It is important to put this work in perspective with other general theorems in optics. The Kramers-Kronig (KK) relations relate the imaginary part of the refractive index of a gas at a particular frequency to the integral of its real part over all frequencies, and vice versa [9]. In contrast, equation (1) addresses the achievable SNR in a quantum noise-limited measurement for fixed total absorption at a particular frequency. Although superficially related, the two are quite different. The KK relations relate purely classical aspects of the fields in a way that is not applicable to the question of shot-noise limited signal to noise at fixed destruction. In their simple form, KK relations assume a linear response to the driving fields. Equation (1) includes all non-linear terms, assuming only that the atom returns to its original state after an adiabatic interaction with the driving fields, a necessary condition if we are to investigate minimally destructive processes. In our analysis, the non-linearities manifest themselves in the dressed state energies.

Equation (1), and its extension to a cavity containing a gas of two level atoms, predicts that the cavity based measurement is enhanced over the single-pass measurement by the square root of the necessary fixed destruction in the quantum noise limit [3]. This enhancement in

signal to noise is obtained from measurements of the transmitted or reflected beams for impedance matched, under-coupled and over-coupled cavities. KK relations between amplitude and phase (as opposed to real and imaginary components) exist for reflection from under-coupled and impedance-matched cavities, but do not exist for light reflected from an over-coupled cavity, and do not exist for transmitted light in any case [10]. The existence of the KK relations for a system that does not obey our theorem shows that the limit expressed in (1) cannot be derived from them. Conversely, the KK relations cannot be generated by integrating our result over all frequencies.

The relationship of the present work to the optical theorem also warrants consideration. The optical theorem relates the imaginary part of the forward scattering amplitude of a plane wave to the total absorption cross-section. It can be applied to any wavelike scattering from a single scattering centre, whether they be electromagnetic waves, matter waves, acoustic waves or gravitational waves. The scattering event causing the decreased flux can be elastic or inelastic. For the scattering of electromagnetic radiation from an extended sample of scatterers, integration of the optical theorem yields a phase shift proportional to the real part of the forward scattering amplitude [9, 11]. This quantity cannot be related to the total cross section. The absorption-free dispersion associated with a dark state that motivated this work is not predicted by the optical theorem. It is correctly described by equation (1) which predicts that there is no sensitivity advantage to such a scheme.

Conclusions.— For a two level atom, the SNR for a quantum noise limited measurement of the column density, either via absorption or phase shift in the thin cloud limit, depends only on destruction (spontaneous emission rate) and bandwidth. We have shown that the use of coherent dark states or any other combination of coherences between levels in a multilevel atom using any number of lasers will not improve the SNR for such a measurement. Dark states can exhibit phase shifts that change very quickly with detuning, but any large phase shift on either laser is always associated with a large total excited state population and accompanying spontaneous emission. According to the theorem derived in this Letter, any attempt to search for a superior scheme using a

more complicated level structure will not be successful.

Although squeezed states of light or multi-pass interferometry are experimentally challenging for (at present) moderate gains in the SNR, they are the only ways we have found to improve on the single-pass limit imposed by the two-level atom using classical light. As a consequence, it is important that both techniques be developed. The only alternative is to investigate non-optical detection. Sensitive cryogenic detectors such as SQUIDS make this an interesting possibility for any atomic species with non-zero spin in a cryogenic environment, such as atomic hydrogen.

The Australian Centre for Quantum Atom Optics is an Australian Research Council Centre for Excellence. The research was supported by the Australian Partnership for Advanced Computing.

---

Electronic address: joseph.hope@anu.edu.au

- [1] F. Dalfovo et al., Rev. Mod. Phys. 71, 463 (1999); A. J. Leggett, Rev. Mod. Phys. 73, 307 (2001); M. H. Anderson et al., Science 269, 198 (1995); K. B. Davis et al., Phys. Rev. Lett. 75, 3969 (1995); C. C. Bradley, C. A. Sackett, J. J. Tollett, and R. G. Hulet, Phys. Rev. Lett. 75, 1687 (1995).
- [2] W. Ketterle, D. S. Durfee and D. M. Stamper-Kurn, in "Bose-Einstein Condensation in Atomic Gases", Proceedings of the International School of Physics, IOS Press 67-164 (1999).
- [3] J. E. Lye, J. J. Hope and J. D. Close, Phys. Rev. A 67, 043609 (2003).
- [4] P. Horak et al., Phys. Rev. A 67, 043806 (2003); R. Long et al., Philosophical Transactions of the Royal Society of London Series A Mathematical Physical & Engineering Sciences 361, 1375 (2003).
- [5] E. Arimondo, Progress in Optics 35, 257 (1996).
- [6] M. O. Scully and M. S. Zubairy, Quantum Optics, Cambridge University Press (1997).
- [7] Claude Cohen Tannoudji, Jacques Dupont-Roc, Gilbert Grynberg, Atom Photon Interactions, Wiley (1992).
- [8] E. Merzbacher, Quantum Mechanics, Wiley (1998).
- [9] J. D. Jackson, Classical Electrodynamics, Wiley (1999).
- [10] Rik H. J. Kop et al., Opt. Commun. 118, 138 (1997); L. J. Wang, Opt. Commun. 213, 27 (2002).
- [11] M. Lax, Rev. Mod. Phys. 23, 287 (1951).