

Eavesdropping Attack with Hong-Ou-Mandel Interferometer and Random Basis Shuffling in Quantum Key Distribution

Chil-Min Kim*

National Creative Research Initiative Center for Controlling Optical Chaos, Pai-Chai University, Daejeon 302-735, Korea

Yun Jin Choi and Young-Jai Park†

Department of Physics and Center for Quantum Spacetime, Sogang University, Seoul 121-742, Korea

We introduce new sophisticated attacks with a Hong-Ou-Mandel interferometer against quantum key distribution (QKD) and propose a new QKD protocol grafted with random basis shuffling to block up those attacks. When the polarization basis is randomly and independently shuffled by sender and receiver, the new protocol can overcome the attacks even for not-so-weak coherent pulses. We estimate the number of photons to guarantee the security of the protocol.

PACS numbers: 03.67.Dd, 03.67.Hk

A cryptography based on quantum mechanics has received much attention since the seminal works on quantum key distribution (QKD) by Bennett and Brassard (BB84) [1] and Ekert [2]. Up to now, various QKD protocols have been proposed [3, 4, 5, 6, 7, 8] and experimentally realized [6, 9, 10]. Also their security was continuously examined [1, 2, 5, 6, 11, 12]. Recently, single photon QKD [1] and entangled-state QKD [2] were much studied because when one does not use a single photon most protocols have their own serious security holes against such eavesdropping attacks as photon number splitting (PNS) [13], intercept and resend (IAR) [14], and impersonation attack [15]. However, single photon QKD is not economical because it is difficult to have a reliable single-photon source and also a photon can be easily lost due to imperfect channel efficiency [16]. For this reason, the development of a secure QKD protocol with not-so weak coherent pulses is indispensable to real communication.

Very recently, two new QKD protocols that use not-so-weak coherent pulses (faint laser pulse) were proposed; One is based on a two-way communication without entanglement (LM protocol) [17] and the other a three-way communication with blind polarization [18]. In the former, in brief, the user “Bob” prepares a qubit in one of the four states of Pauli operators X and Z , and sends it to his counterpart “Alice.” With probability c , Alice measures the prepared state and, with probability $1 - c$, she uses it to encode the message. She sends the qubit back to Bob. Then Bob can deterministically decode Alice’s message by measuring the qubit in the same basis he prepared it.

In the latter, Alice sends two randomly and independently polarized not-so-weak coherent pulses to Bob. Bob rotates the polarization of pulses with another random angle, shuffles it with $\pm\frac{\pi}{4}$ or $\mp\frac{\pi}{4}$, and sends back

the pulses to Alice. Alice compensates her random angles, encodes a key bit, and sends one of the pulses to Bob after randomly blocking the other. Then Bob reads the polarization of the return qubit after compensating his random angle. When Alice publicly announces the blocking factor, Bob recovers the key bit.

The security of the former protocol was examined in a noisy channel against a spy pulse. And it was claimed that the protocol is robust against the PNS attack because of a lack of symmetry in the photon states. In the latter, the security of the random polarization was examined against the PNS and the IAR attacks. And though it was expected that the shuffling and random blocking would play a crucial role in enhancing security, the protocol turned out insecure, particularly against the impersonation attack [19]. So Kye and Kim modified the protocol by randomly and independently shuffling the qubit polarization with $\frac{\pi}{4}$ or $-\frac{\pi}{4}$ (KK protocol) [20].

However, we are still doubtful about the security of both the LM and the KK protocols. To use them in practice, the security must be rigorously examined. So we develop new sophisticated eavesdropping attacks using a Hong-Ou-Mandel interferometer (HOMI) [21], which are the most advanced ones against these type QKD protocols. In this Letter, first, we introduce the new attacks to show the security holes of the LM and the KK protocols. Next, we propose a new QKD protocol that uses not-so-weak coherent pulses. Last, we prove the security of our protocol against the attacks that we introduce.

We introduce the PNS attack with a HOMI to examine the security of the LM protocol. The attack procedure is like this. When a not-so-weak coherent pulse is used in a lossy channel, an eavesdropper Eve replaces the lossy channel with a perfect one and splits out photons from the forward and the backward path. Then Eve measures the interference between the split photons from both the paths with a HOMI. If interference appears, the coding is “0”; if not, it is “1.” Thus Eve obtains the key bit regardless of the lack of symmetry.

For the security of the KK protocol, we now introduce a new impersonation attack with a HOMI. When

*Electronic address: chkim@mail.pcu.ac.kr

†Electronic address: yjpark@sogang.ac.kr

Eve has a HOMI in her superiority, she can easily attack the protocol even though the shuffling method is modified to block up an impersonation attack. The procedure is as follows: (1) Eve intercepts the two qubits $|\psi_1\rangle = |\theta_1\rangle \otimes |\theta_2\rangle$ from Alice to Bob, and stores them. Then Eve prepares two highly coherent qubits $|\psi'_1\rangle = |\theta'_1\rangle \otimes |\theta'_2\rangle$, and sends them to Bob. (2) When the qubits are back from Bob, Eve compensates her random angles (let the compensated qubits be $|\Psi\rangle$), splits out one photon from both qubits of $|\Psi\rangle$ and measures the angle difference with a HOMI. Because of the random and independent shuffling $\pm\frac{\pi}{4}$, the qubits in $|\Psi\rangle$ are either parallel or orthogonal: if interference occurs, the two qubit states are parallel; if not, they are orthogonal. When they are parallel, Eve applies $\hat{U}_y(\frac{\pi}{4}) \otimes \hat{U}_y(\frac{\pi}{4})$ to $|\psi_1\rangle$; if not, she applies $\hat{U}_y(-\frac{\pi}{4}) \otimes \hat{U}_y(\frac{\pi}{4})$. She sends the qubits to Alice. (3) Eve measures the pre-key bit after intercepting the return qubit from Alice, and estimates the key bit according to the blocking factor. She applies the estimated key bit to one of the qubits of $|\Psi\rangle$ depending on the blocking factor and sends the chosen qubit to Bob. (4) When Alice publicly announces the blocking factor, Eve recovers the key bit.

In this attack, let us consider the case that the two qubits in $|\Psi\rangle$ are parallel. In (3), the qubit state, in Eve's measurement, is either $|0\rangle$ or $|\frac{\pi}{2}\rangle$, since Eve applies $\hat{U}_y(\frac{\pi}{4}) \otimes \hat{U}_y(\frac{\pi}{4})$ to $|\psi_1\rangle$. Then Eve obtains the key bit regardless of the blocking factor. After the measurement, Eve applies $\hat{U}_y((-1)^k\frac{\pi}{4})$ to any of the qubits in $|\Psi\rangle$ depending on her measurement, and sends it to Bob without revealing her presence in the channel. When the two qubits in $|\Psi\rangle$ are orthogonal, Zhang's attack protocol [19] is valid. Thus Eve can attack the KK protocol perfectly.

Protocol. — To block up the impersonation attack with a HOMI and to use not-so-weak coherent pulses, we adopt the basic idea of the BB84 protocol, which is to use the four photon states of 0 , $\frac{\pi}{2}$, and $\pm\frac{\pi}{4}$ polarization. The four states can be written as $(-1)^s\frac{\pi}{4} + \{(-1)^r + 1\}\frac{\pi}{8}$, where s is the random polarization shuffling and r is the random basis shuffling. Here the basis shuffling plays a crucial role in blocking up the impersonation attack. Our new protocol with random basis shuffling proceeds as follows:

- (P.1) Alice sends two qubits of $|\psi_1\rangle = |\theta_1\rangle \otimes |\theta_2\rangle \equiv \bigotimes_{b=1}^2 |\theta_b\rangle$ to Bob.
- (P.2) After receiving $|\psi_1\rangle$, Bob applies a unitary operator $\bigotimes_{b=1}^2 \hat{U}_y(\phi + (-1)^{s_b}\frac{\pi}{4} + \{(-1)^{r_b} + 1\}\frac{\pi}{8})$ where $s_b = \{0, 1\}$ and $r_b = \{0, 1\}$ are the independent random numbers to shuffle the photon state and the polarization basis, respectively. He returns the qubits $|\psi_2\rangle$ to Alice.
- (P.3) On receiving $|\psi_2\rangle$, Alice applies $\bigotimes_{b=1}^2 \hat{U}_y(-\theta_b + (-1)^{k_b}\frac{\pi}{4} + \{(-1)^{p_b} + 1\}\frac{\pi}{8})$, where $k_b \in \{0, 1\}$ is the key bit and $p_b \in \{0, 1\}$ is Alice's basis shuffling

parameter. She block one of the qubits and sends the other $|\psi_3\rangle$ to Bob.

- (P.4) When $|\psi_3\rangle$ arrives, Bob compensates his random angle with $-\phi$, divides the qubit $|\psi_3\rangle$ into two with a 50 percent beam splitter, and measures each pre-key bit on the $|\pm\frac{\pi}{4}\rangle$ and the $|0\rangle$ and $|\frac{\pi}{2}\rangle$ bases. He stores the pre-key bit.
- (P.5) After repeating the procedure from (M.1) to (M.4) N -times, Alice publicly announces b and p_b . Then Bob decodes the original key bit.
- (P.6) When Eve misses the key bit because of the division of the return qubit, Bob publicly announces on which turns qubits have been missed in measurement. Then Alice and Bob repeat the procedure from (M.1) to (M.5) for the missed key bit until the full key bit stream is generated.
- (P.7) In order to verify the integrity of the shared keys, Alice and Bob evaluate the hash values, $h_a = H(k_a)$ and $h_b = H(k_b)$, where k_a and k_b are Alice's and Bob's shared keys, respectively. Then they exchange and compare them. If $h_a = h_b$, they keep the shared keys, otherwise, they abolish the keys.

In this protocol, the efficiency of key distribution depends on the number of photons of $|\psi_3\rangle$. The efficiency is $1 - 1/2^n$ for an n -photon qubit. If one wants to increase the efficiency, (s)he can slightly modify the protocol like this. In (M.4) Bob stores the return qubit $|\psi_3\rangle$ in a quantum storage like a fiber and publicly announces to Alice his reception of the qubit. Then when Alice announces b and p_b , Bob decodes the original key bit by measuring the polarization of the stored qubit.

Now, we focus on the security against the impersonation attack, since it was proved that a protocol using random angle polarization is secure against the PNS and the IAR attacks [18].

Attack-1. — We suppose that the superior Eve knows the angle difference of the two qubits in $|\Psi\rangle$ and the pre-key bit exactly. Then the attack procedure is as follows:

- (A.1) After (P.1), Eve intercepts and stores $|\psi_1\rangle$, and sends $|\psi'_1\rangle = \bigotimes_{b=1}^2 |\theta'_b\rangle$ to Bob.
- (A.2) After (P.2), Eve intercepts $|\psi'_2\rangle$ and compensates her random angle with $-\theta'_b$. Then Eve has $|\Psi\rangle = \bigotimes_{b=1}^2 |(\phi + (-1)^{s_b}\frac{\pi}{4} + \{(-1)^{r_b} + 1\}\frac{\pi}{8})\rangle$. Eve splits out a few photons from both pulses of $|\Psi\rangle$ and stores the rest. Then Eve measures the angle difference of the split photons with a HOMI. There are three cases of results: first, on complete non-interference the angle difference of the two pulses is $\frac{\pi}{2}$; second, on complete interference it is 0 ; and third, on partial interference it is $\pi/4$. On each case, Eve applies $\hat{U}_y(\frac{\pi}{4}) \otimes \hat{U}_y(-\frac{\pi}{4})$, $\hat{U}_y(\frac{\pi}{4}) \otimes \hat{U}_y(\frac{\pi}{4})$, and $\hat{U}_y(\frac{\pi}{4}) \otimes \hat{U}_y(0)$ to $|\psi_1\rangle$, respectively. And Eve sends $|\psi_2^e\rangle$ to Alice, where the superscript e implies Eve's action to Alice's qubits.

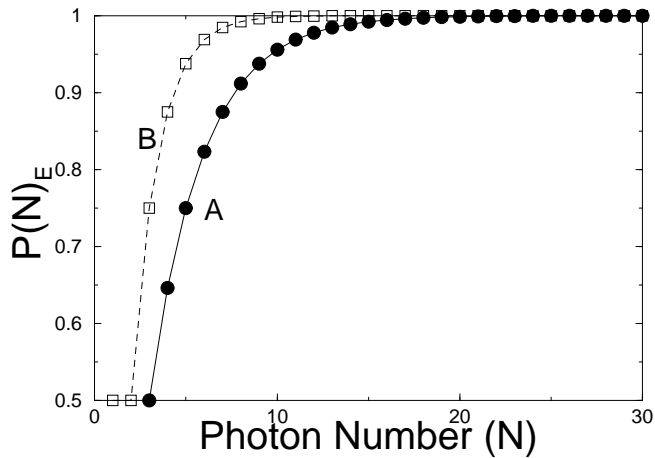


FIG. 1: The probability of Eve's estimation depending on the photon number: Line A is the pre-key bit estimation with the use of POVM, and Line B is the angle difference and sequence estimation with a HOMI.

(A.3) After (P.3), Eve measures the pre-key bit from $|\psi_3^e\rangle$, estimates Alice's unitary operation depending on b from the pre-key bit, chooses one qubit of $|\Psi\rangle$, and applies the unitary operator that she has estimated.

In order to show the security of our new protocol, we consider the case that Bob applies a unitary operator $\hat{U}_y(\phi) \otimes \hat{U}_y(\phi + \frac{\pi}{4})$. In (A.2), on receiving the qubits, Eve compensates her random angles. Then the qubit state becomes $|\Psi\rangle = |\phi\rangle \otimes |\phi + \frac{\pi}{4}\rangle$. Suppose that Eve applies $\hat{U}_y(\frac{\pi}{4}) \otimes \hat{U}_y(0)$ to the qubits $|\psi_1\rangle$ and returns the qubits $|\psi_2^e\rangle$ to Alice, since she does not know the sequence of the qubits. She can measure only the angle difference with a HOMI. Also suppose that, on receiving the qubits, Alice compensates her random angles, blocks the second qubit, rotates the first by $\frac{\pi}{4}$, and sends the first to Bob. Then the parameters of the qubit are $b = 1$, $k_1 = 0$, and $p_1 = 1$. Eve intercepts the return qubit $|\psi_3^e\rangle$ and measures the polarization of the qubit that is $\frac{\pi}{2}$. Here Eve must estimate the rotation angle depending on b . When Eve chooses $b = 2$, the rotation angle is $\frac{\pi}{2}$. Then the parameters that Eve estimates are $k_2 = 0$ and $p_2 = 0$. Eve rotates the second qubit of $|\Psi\rangle$ by $\frac{\pi}{2}$, and sends it to Bob. Then Bob's pre-key bit is $|\frac{3}{4}\pi\rangle = -\frac{\pi}{4}$. When Alice announces b and p_b , Bob recovers the key bit as $k = 1$. When Eve chooses $b = 1$, Bob's key bit is $k = 0$. Whether the angle difference of the two qubits in $|\Psi\rangle$ is $\frac{\pi}{2}$ or 0, there is no error, whatever the sequence of the qubits in $|\Psi\rangle$ is. Bob's wrong recovery is caused by Eve's wrong choice of the sequence when the polarization difference between the two qubits in $|\Psi\rangle$ is $\frac{\pi}{4}$. Owing to the possibility of the $\frac{\pi}{4}$ angle difference, sequence mismatch, and wrong choice of b , Bob's error rate is 12.5 percent. This means our new protocol is secure against Eve's impersonation attack, even when she knows the angle difference between the two qubits in $|\Psi\rangle$ and the pre-key bit.

Attack-2. — When Eve knows not only the pre-key bit but also the angle difference and the sequence of the two qubits in $|\Psi\rangle$, she can recover the key bit completely without Bob's recognition. However, a measurement of all of them is not easy in practice because of the limited number of photons. To estimate the number of photons for the security of our new protocol, first, we consider Eve's attack on the pre-key bit with the positive operator-valued measurement (POVM) [22]. In this measurement, when we consider one of the four photon states and N identical copies of the state, we can obtain the probability of Eve's estimation of the pre-key bit depending on the number of photons. According to ref.[22], the probability is $P(N)_E = 1 - (1/2)^{\lfloor (N-1)/2 \rfloor}$, where $\lfloor \cdot \rfloor$ is the rounding to the closest lower integer. Line A in Fig. 1 shows about 95 percent accuracy for $N = 10$.

Next, we consider Eve's attack on the angle difference and the sequence between the two qubits in $|\Psi\rangle$. Suppose that Eve replaces the lossy second and third channels with perfect ones and that she has perfect technology to split a certain number of photons from both the qubits, although this is far beyond today's technology. Eve splits out the same number of photons from both the qubits in $|\Psi\rangle$ in consideration of the channel efficiency. She picks out one photon from N photons split from the first qubit (let it be T_1 and the others T_2), and picks out one photon from N photons split from the second qubit (let it be R_1 and the others R_2). From the interference between T_2 and R_2 , Eve measures the angle difference between the two qubits in $|\Psi\rangle$ using the method in (A.2). When T_2 and R_2 give rise to partial interference, the angle difference is $\pi/4$. Then Eve rotates T_1 by $\pi/4$ and measures the interference between T_1 and R_1 . When she observes interference, the angle of the first qubit to the second one is $-\frac{\pi}{4}$, while with no-interference it is $\frac{\pi}{4}$. Then Eve knows the sequence of the qubits for the $\pi/4$ angle difference. In the case of partial interference between T_2 and R_2 , let us assume that j photons make interference while $N-1-j$ photons give rise to no interference. Then the probability of Eve's estimation for the partial interference is $\frac{1}{2^{N-1}} \sum_{j=1}^{N-2} \binom{N-1}{j}$. For the other cases of complete interference and no interference, Eve regards that the photon states of T_2 and R_2 are parallel and orthogonal, respectively. Then Eve's probability for the estimation of the angle difference and the sequence of $|\Psi\rangle$ is $P(N)_E = \frac{1}{2} + \frac{1}{2^N} \sum_{j=1}^{N-2} \binom{N-1}{j}$ because of the probability of the $\pi/4$ angle difference.

Line B in Fig. 1 is the probability of Eve's estimation for the angle difference and the sequence of the two qubits in $|\Psi\rangle$ depending on the number of split photons. When Eve splits out 5 photons from each qubit she can measure both the angle difference and the sequence of the two qubits with about 93 percent accuracy. Lines A and B in Fig. 1 show that the estimation of the pre-key bit of $|\psi_3^e\rangle$ is less efficient than that of the angle difference and the sequence of the two qubits in $|\Psi\rangle$, even when the channel efficiency is considered. When we consider that the qubits of $|\Psi\rangle$ are at Eve's mercy, we can understand

that most of the errors by Eve can occur in the measurement of the pre-key bit due to the basis shuffling. So the basis shuffling is decisive in blocking up Eve's attack.

Attack-3. — Another instance of the impersonation attack in our new protocol is the attack on b and the photon state of $|\psi_3^e\rangle$. In this attack, Eve applies $\hat{U}_y(\frac{\pi}{8}) \otimes \hat{U}_y(0)$ to $|\psi_1\rangle$ in (A.2) and sends $|\psi_2^e\rangle$ to Alice. Since Alice applies a key bit and basis shuffling, after she compensates her random angle with $-\theta_b$, the qubit state $|\psi_3^e\rangle$ in (A.3) is one of the four states $(1 + 2n)\pi/8$ for the first qubit or one of the four states $2n\pi/8$ for the second, where $n = 0, 1, 2, 3$. Then by measuring the qubit state with POVM, Eve can obtain b and $k \oplus p_b$. Depending on b , Eve applies $k \oplus p_b$ to the b -th qubit of $|\Psi\rangle$ and sends the qubit to Bob. When Alice publicly announces b and p_b , Eve recovers the key bit.

In this attack protocol, Eve should measure the return qubit state with POVM among eight states. We can intuitively understand that the photon state estimation with POVM among eight states is less efficient than that of among four states, since POVM for eight states needs at least 7 photons [22]. The attack on the pre-key bit is more serious than the attack on b . Eve can also attack b by counting the number of photons of the two pulses [19]. To block up this attack, in (P.3), the number of the photons of the returning pulse should be randomly reduced to be less than either of the photon numbers of the two received pulses.

Attack-4. — Eve can add an invisible spy pulse, whose wavelength is different from that of Alice's qubits [23]. The removal of this spy pulse is so trivial when Alice uses a commercial band-pass filter, a spectrometer, and

a Fabry-Perot interferometer. To block up this kind of attack, the use of quasi-monochromatic photons is crucial. For another instance, Eve can add a spy pulse with time delay to the original qubits. Alice and Bob can easily remove this spy pulse with an optical switcher. Alice and Bob can also recognize the spy pulse by randomly measuring the pulse intensity.

In conclusion, we have shown that the LM and the KK protocols are vulnerable to sophisticated eavesdropping attacks with a Hong-Ou-Mandel interferometer. The LM protocol is insecure against the PNS attack with a HOMI and the KK protocol against the impersonation attacks with a HOMI. These attacks are effective to these protocols. To overcome these attacks, we have proposed a new protocol with basis shuffling as an alternative. In the three-way communication protocol, when both the polarization basis and the photon state are randomly and independently shuffled, the protocol with random polarization becomes robust against not only the PNS and the IAR attacks but also the sophisticated impersonation attacks with a HOMI, even with not-so-weak coherent state pulses. As we have shown, the number of photons of Alice's qubits is very important in blocking up the impersonation attacks. This new QKD protocol can be applicable to real communication because of the merit of robustness and the use of not-so-weak coherent pulses.

This work was supported by the Creative Research Initiatives of the Korean Ministry of Science and Technology. Y. J. Park were supported by the Science Research Center Program of the Korean Science and Engineering Foundation with grant number R11-2005-021.

-
- [1] C.H. Bennett and G. Brassard, in Proceedings IEEE International Conference on Computers, Systems and Signal Processing, Bangalore, India (IEEE, New York, 1984), pp. 175-179.
- [2] A. K. Ekert, Phys. Rev. Lett. **67**, 661 (1991).
- [3] For a review, see N. Gisin, G. Ribordy, W. Tittel, and H. Zbinden, Rev. Mod. Phys. **74**, 145 (2002).
- [4] C. H. Bennett, Phys. Rev. Lett. **68**, 3121 (1992).
- [5] M. Curty, M. Lewenstein, and N. Lütkenhaus, Phys. Rev. Lett. **92**, 217903 (2004).
- [6] F. Grosshans, G. Van Assche, J. Wenger, R. Brouri, N. J. Cerf, and P. Grangier, Nature (London) **421**, 238 (2003).
- [7] K. Bostroem and T. Felbinger, Phys. Rev. Lett. **89**, 187902 (2002).
- [8] F. G. Deng and G. L. Long, Phys. Rev. A **69**, 052319 (2004); *ibid.* **70**, 012311 (2004).
- [9] C. Kurtsiefer, P. Zarda, M. Halder, H. Weinfurter, P. M. Gorman, P. R. Tapster, and J. G. Rarity, Nature (London) **419**, 450 (2002).
- [10] E. Waks, K. Inoue, C. Santori, D. Fattal, J. Vuckovic, G. S. Solomon, and Y. Yamamoto, Nature (London) **420**, 762 (2002).
- [11] A. Wójcik, Phys. Rev. Lett. **90**, 157901 (2003); Q. Y. Cai, Phys. Rev. Lett. **91**, 109801 (2003); H. Hoffmann, K. Boström, and T. Felbinger, quant-ph/0406115 (2004).
- [12] D. Mayers, J. of ACM **48**, 351 (2001); H.-K. Lo and H. F. Chau, Science **283**, 2050 (1999); P. W. Shor and J. Preskill, Phys. Rev. Lett. **85**, 441 (2000)
- [13] G. Brassard, N. Lutkenhaus, T. Mor, B. C. Sanders, Phys. Rev. Lett. **85**, 1330 (2000).
- [14] C. H. Bennett, F. Bessette, G. Brassard, L. Salvail, J. Smolin, J. Cryptology, **5** 3 (1992).
- [15] M. Dusek, O. Haderka, M. Hendrych, and R. Myska, Phys. Rev. A **60**, 149 (1999).
- [16] The loss rate of a recent commercial fiber is about 0.2 dB/km for 1.55 μm wavelength. G. P. Agrawal, *Fiber-Optic Communication Systems*, 2nd ed., (John Wiley & Sons, Inc., New York, 1997).
- [17] M. Lucamarini and S. Mancini, Phys. Rev. Lett. **94**, 140501 (2005).
- [18] W. H. Kye, C. M. Kim, M. S. Kim, and Y. J. Park, Phys. Rev. Lett. **95**, 040501 (2005).
- [19] Q. Zhang, X. B. Wang, Y. A. Chen, T. Yang, and J. W. Pan, quant-ph/0508030 (2005).
- [20] W. H. Kye and M. S. Kim, quant-ph/0508065 (2005).
- [21] C. K. Hong, Z. Y. Ou, and L. Mandel Phys. Rev. Lett. **59**, 2044 (1987).
- [22] A. Chefles, Phys. Rev. A **64**, 062305 (2002); and A.

Acín, N. Gisin, and V. Scarani, Phys. Rev. A **69**, 012309 (2004). [23] Q. Y. Cai, quant-ph/0508002 (2005).