# Post-Quantum Key Exchange Protocols

X iangdong Li<sup>a</sup>, Lin Leung<sup>b</sup>, Andis Chi-Tung Kwan<sup>c</sup>, X iaowen Zhang<sup>c</sup>, D amm ika K ahanda<sup>c</sup>, M ichael Anshel<sup>d</sup>

<sup>a</sup> CST, NYC College of Technology, CUNY, 300 Jay Street, Brooklyn, NY 11201

<sup>b</sup> Computer Information Science, BMCC, CUNY, 199 Chambers Street, NY, NY 10007

<sup>c</sup> Computer Science, Graduate Center, CUNY, 365 5<sup>th</sup> Ave, NY, NY 10016

<sup>d</sup> Computer Science, CCNY, CUNY, 138<sup>th</sup> Street, NY, NY 10031

## ABSTRACT

If an eavesdropper Eve is equipped with quantum computers, she can easily break the public key exchange protocols used today. In this paper we will discuss the post-quantum Di e-Hellm an key exchange and private key exchange protocols.

K eyw ords: Post-quantum, K ey Exchange, Di e-Hellman, Quantum protocols, Teleportation, Quantum C lock, Quantum R andom W alk

## 1.W HY POST-QUANTUM KEY EXCHANGE?

D i e and Hellm an proposed the rst public-key agreem ent for key exchange in 1976. This protocol relies on the di culty of computing discrete logarithms in a nite eld. The most popular public key algorithm for encryption and digital signature is RSA. The security of RSA is based on the intractability of the integer factorization problem. There are a few other cryptographic schemes that are used in practice, for example, the D igital Signature Algorithm (DSA) and the Elliptic Curve D igital Signature Algorithm (ECDSA). The security of these schemes is based on the discrete logarithm problem in the multiplicative group of a prime eld or in the group of points of an elliptic curve over a nite eld.

But in 1994 Shor<sup>1</sup> showed that quantum computers can break all digital signatures that are used today. In 2001 Chuang et al<sup>2</sup> in plem ented Shor's algorithm on a 7 qubit quantum computer. When quantum computers reach approximately 30 to 40 q bits they will start to have the speed (parallelism) needed to attack the methods society uses to protect data and processes, including encryption, digital signatures, random num ber generators, key transmission, and other security algorithm s.

We cannot predict exactly when this will happen because each advance in the number of q bits has had radically di erent hardware architecture. We believe quantum computers will surpass the speed of M oore's Law " computers in the next 15 years, break encryption in 25 years, and break the responding enhanced encryption (with much longer key lengths) in 30 to 50 years.

M ost planners don't bok 20 years into the future, and propose to defend against quantum computer attacks by lengthening the keys. However, we can also defend against quantum computer attacks by researching a way which is somewhat or wholly immune to quantum computer attacks. M any quantum public key exchange protocols have been studied, for example BB 84 and B  $92^3$ . We will bok at two schemes that achieve key agreement protocol.

The heart of our key exchange protocol is to use a public satellite { continually broadcasting random bits at a rate so high that no one could store more than a sm all fraction of them. Parties that want to communicate in privacy share a relatively short key that they both use to select a sequence of random bits from the public broadcast; the selected bits serve as an encryption key for their messages. An eavesdropper cannot decrypt an intercepted message without a record of the random broadcasts, and cannot keep such a record because it would be too volum inous. How much random ness would the satellite have to broadcast? Rabin and Ding<sup>4</sup> mention a rate of 50 gigabits per second, which would llup som e 800;000 CD ROM s per day.


The general fram ework is shown in Figure 1:

Students from Quantum Computing and Quantum Cryptography classes at the CUNY G raduate Center m ade contributions to this study.

Further information please contact:

X iangD ong Li: E-m ailxli@ citytech.cuny.edu

M ichaelAnshel: E-m ailm ikeAt1140@ aol.com

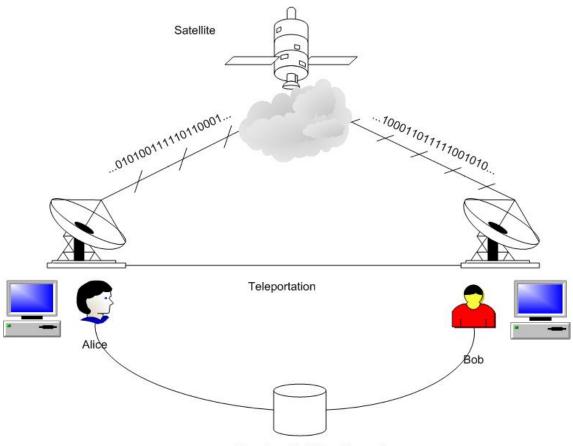

Quantum Clock Synchronzation

Figure 1. General fram ework of the post-quantum key exchange scheme.

GeneralKeyAgreementFramework

- 1. Random source: a satellite sends random bit signals.
- 2. The two communicating parties A lice and B ob get these signals
- 3. They need to know when they should count the bits as the key.
- 4. Two ways: Teleportation or Quantum clock synchronization.
- 5. They agree to ip one bit or more.

A geostationary satellite can be used as a data source generating a random bit stream. Two communicating parties, A lice and B ob with dish antennas, are able to receive the bit signal from the satellite. When they want to encrypt the message, they catch the random bits of the signal as a key. They make a public agreement on the key size, for example, 1024 bits. The key is never stored in the computer's memory, so they essentially vanish even as the message is being encrypted and decrypted.

In order for both A lice and B ob to count the same bits as the key from the satellite signals, three problems should be solved:

- 1. Due to the di erent distances between the satellite to A lice and to B ob, they will not count the same bits.
- 2. A lice and Bob should know the starting times that they can count the same number of bits as a key.

3. A lice and B ob should determ ine the time di erence between their spatially separated clocks. For example, the determ ination of the di erence should be better than 100 ns.

The rst problem is easily solved by using G lobal Position System s (G P S) to determ ine their positions and calculate the time delay due to the dimension distance from the satellite to the receivers. We propose to use the technology of quantum teleportation and quantum clock synchronization to solve the latter two problem s.

The organization of the paper is as follows: In Section 2 and 3, we describe post-quantum Di e-Hellman key, private key exchange and quantum random walk protocols. A conclusion is given in Section 4. We provide the fundam entals of random source, random number generator, quantum teleportation, quantum clock synchronization, and quantum random walk in the Appendix.

### 2.POST-QUANTUM KEY EXCHANGE

## 2.1.Di e-Hellm an Key Exchange

W ith a symmetric cryptosystem, it is necessary to transfer a secret key to both communicating parties before secure communication can begin. Die Hellman key exchange protocol allows two parties that have no prior know ledge of each other, to jointly establish a shared secret key over an insecure communication channel. The rst practical scheme, Die Hellman Discrete Log (see A.1 for classes of candidate) key exchange protocol,

begins with two users A lice and Bob who want to exchange two secret integers a and b. They agree on two public parameters, large prime p and base g. The protocol is specified as follows:

D i e-H ellm an K ey Exchange P rotocols Public announcement:  $G = hg^p i$ , g as generator and p is the order of the group G Common input: (p; g) O utput: an element k 2 G shared between A lice and B ob

1. A lice chooses random number a 2 U 1 and p, and send g<sup>a</sup> to B ob

- 2. Bob: Choose random number b between 1 and p, and send g<sup>b</sup> to A lice
- 3. A lice: com pute (g<sup>b</sup>)<sup>a</sup>
- 4. Bob: com pute (g<sup>a</sup>)<sup>b</sup>
- 5. By commutativity, A lice's  $k_a = g^{ba} = g^{ab} = k_b$ . Notice that an adversary Eve intercepts g,  $g^a$ ,  $g^b$  public information and cannot break the scheme with non-negligible probability. However this scheme is vulnerable to man-in-the-middle attack.

## 2.2. Post-Quantum Public Key Exchange

Public key cryptosystems and related protocols have been constructed on the Turing machine model. The underlying theories are based on Church-Turing's thesis, which asserts that any reasonable computation can be e ciently simulated on a probabilistic Turing machine. New model of computing, quantum computation, has been investigated since 1980. Two most successful results are Shor's probabilistic polynom ial time algorithms for integer factorization and discrete logarithm in the quantum Turing machine (QTM) model<sup>1</sup> and G rover's unstructured search method in  $\frac{1}{N}$ . A lthough Shor's result demonstrates the power of QTM s, B ennett, B emstein, B rassard, and Vazirani<sup>6</sup> show that relative to an oracle chosen uniform ly at random, with probability 1, class N P cannot be solved on a QTM in time O (2<sup>n=2</sup>). Many researchers consider that it is hard to nd a probabilistic polynom ial time algorithm to solve an N P -com plete problem even in the QTM model.

Since Shor's result and G rover's search algorithm reduced m any practical public-key cryptosystem s (R SA, multiplicative group/elliptic curve versions of D i e-Hellm an and E G am al schemes) to insecure status, we need a quantum public-key cryptosystem (Q PKC). M any public key schemes such as B B 84 and B 92 were studied. In 2000, O kam oto, et al<sup>7</sup> proposed a theoretical paradigm of Q PKC that consist of quantum public-key encryption (Q PKE) and quantum digital signature (Q D S). In our studies of quantum channel and satellite communication, we realize an extension of Q PKC model and construct two practical schemes that achieve key agreement. We discuss the possible attack and counterm easure of our schemes.

If Eve has a quantum computer, she can easily break the logarithm and get a and b, then the secret key  $((g^b m \text{ od } p)^a m \text{ od } p)$ .

The protocol of the Post-quantum Die-Hellman Key Exchange is described below:

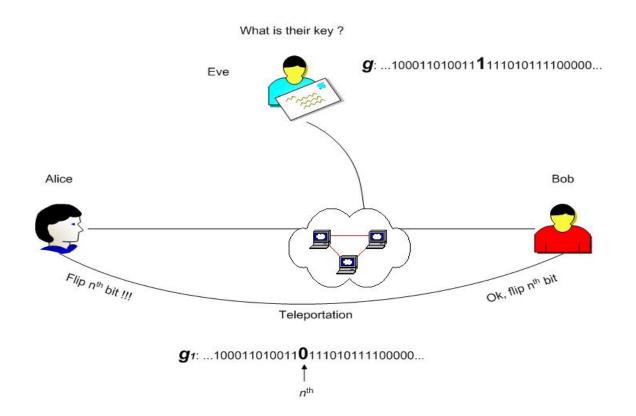


Figure 2. Post-quantum Di e-Hellm an Key Exchange.

Quantum Public Key Exchange Scheme

- 1. A lice and B ob use a quantum clock to synchronize their clocks.
- 2. W hen A lice sends the message to Bob, she publicly announces to Bob that they will start to count the bits at time t. (Due to the di erent distance, Bob knows when he will start to count the bits at time t<sub>1</sub>). The key is g. They also agree on a prime number p. g and p are public.
- 3. A lice teleports a quantum particle state to B ob and inform s B ob that she ips the  $r^{th}$  bit of g. The position of the bit ipped depends on the quantum state teleported by A lice to B ob. So both A lice and B ob have the new key called  $g_1$ .
- 4. A lice and B ob choose their secret keys a, and b, respectively. A lice sends B ob  $((g_1)^a \pmod{p})$ , and B ob sends A lice  $((g_1)^b \pmod{p})$ . B oth A lice and B ob have arrived at the same value  $(((g_1)^b \mod{p})^a \mod{p})^b \mod{p})^b \mod{p}$ .
- 5. The key vanishes after it is used on A lice and B ob's site.

Only p is public, E ve could intercept  $(g_1)^a$  (m od p) and  $(g_1)^b$  (m od p). Alla, b and  $g_1$  are secret. E ve could not gure out the key even she has a quantum computer or this would make it too hard for her to compute the secret key. See Figure 2.

2.3. Post-quantum Private Key Exchange Protocol

The Private K ey Encryption uses the same key to encrypt and decrypt the message. Only A lice and B ob know the key. How do A lice and B ob make the agreem ent on the key? They must trust the security of som e means of communications. Further, how do A lice and B ob secure the key on their site? The key may be stolen.

The protocol of the post-quantum private key exchange is described below :

- 1. First, A lice and B ob use a quantum clock to synchronize their clocks.
- 2. When A lice sends the message to Bob, she teleports a quantum particle state to Bob. Both of them understand they will start to count the bits at time t, (due to the dimentidistance, Bob knows when he will start to count the bits at time t<sub>1</sub>).
- 3. The key vanishes after it is used by A lice and B ob.

Eve could not get this entangled inform ation, so she does not know when A lice and B ob start to count the bits. Even Eve is at the same site of A lice or B ob, she could not get the key since it disappears after it is used. The keys used in encoding and decoding are used once and are never stored.

3.QUANTUM RANDOM WALK PROTOCOL

In this section, we look at the quantum key distribution problem under a slightly di erent consideration. We assume both A lice and B ob have a simple quantum device, whereas E ve has a quantum computer. Since the sem in ar work of BB 84 and B 92, quantum key distribution (QKD) receives widespread attention because its security is guaranteed by the law of physics and is di erent from the classical counterparts<sup>8</sup>. Our scheme based on the experimental realization<sup>9</sup> and security proof<sup>10{12</sup> extends the KKKP scheme<sup>13</sup> in two ways.

The procedure for the proposed quantum protocol is as follows:

Quantum W alk Agreem ent Protocol

- 1. A lice and B ob perform a random walk on the random bits. In order to get an agreement, they both must use the same operator.
- 2. A lice and Bob teleport or synchronize with a quantum clock to exchange the \operator"
- 3. Once they are in synchronization with the same operator, they apply the \operator" on random bits stream, i.e. tree-walk the graph.
- 4. A lice and B ob yield to the sam e key, i.e. the path of the operator-oriented walk on the graph.

Security of our scheme which minimizes the common problem of high transmission rate of errors and defeats man-in-the-middle attack is cleverly directed by quantum walk on one q bit. Once quantum walk determines the q bit, A lice and Bob can use the agreed operator to perform classical tree-walking on the random bits stream and determine the key e ciently. Our scheme can be applied to any quantum device that satis es the above requirement.

In a similar vein, we form ulate a quantum walk on a graph. Consider a spin 1=2 particle that shifts to left or right depending on its spin state. Let a set of orthonorm albasis states correspond to vertices of the graph. If a particle is in the state jgi, that corresponds to a vertice g. (A nother name for this technique is commonly used by computational group theorists to carry argument through for Cayley-graphs of A belian groups and in nite groups.)

We will look at the possible attacks from Eve's perspective. Eve with a quantum computer can intercept all messages and perform a quantum walk search.<sup>14,15</sup> Our procedure modiles the discrete quantum random walk result<sup>16</sup> with a dimension of the discrete quantum device. Our quantum walk U searches the graph G as follows:

Quantum W alk Agreem ent Search Algorithm 1. Initialize the quantum system in the uniform superposition j<sub>0</sub>i. 2. Do T times: Apply the marked walk U<sup>0</sup>. 3. M easure the position register.

4. Check if the m easured vertex is the m arked item .

The physical attack is that Eve can place a beam splitter attack between the quantum channel and am plify the error rate. Another attack is by eavesdropping with phase shifters. Once Eve has an estimate on the state pulse of quantum state, she can perform probabilistic search of the key space N, i.e. the random bits stream, on a N N grid in time O (N log N) (See A.6 for de nitions).

Since the quantum walk search is restricted by initial condition and localization of the quantum walk search, Eve is not guaranteed to discussion of the key in timely fashion for practical purpose.

## 4.CONCLUSION

We have shown that our schemes are secure against weak impersonation attack, and quantum eavesdropping attacks. For future research on quantum key agreement protocol, we like to consider the potential weakness of random source generation on the satellite and carry out experiment on the E lliptic pseudo random generation functions. One open question is whether it is possible to extend our schemes with the additional capability of entity authentication and signature? For example, currently we are looking at the challenge of designing quantum cryptographic voting protocols.<sup>17</sup>

A nother line of research undertaken by us investigates whether quantum computer based on topological quantum computation<sup>18</sup> with Anyons<sup>19</sup> and quantum knots is easier to build and perform faster. Current schemes of designing quantum computers use techniques to control interference of quantum system with the ambient environment and lower the error rates. As an alternative approach to the open problems of quantum circuit complexity,<sup>20</sup> what can we say about braiding operator<sup>21</sup> as the universal quantum gates?

On the quantum search problem s, we are looking to extend the quantum random walk techniques to arbitrary graphs, i.e. independent of initial condition and localization problem s and provide a better bound on time and space.

## 5.ACKNOW LEDGEMENTS

It is a pleasure to thank Professor M ark H illery for a discussion on the quantum random walk subject.

## APPENDIX A.M ISCELLANEOUS FUNDAMENTALS

## A .1.D iscrete Logarithm Problem

We let  $G = h g^n$  i be a cyclic group generated by g. By repeated squaring method, it is easy to compute  $g^n$  in O (log n) steps. Finding n from g and  $g^n$  is a hard problem with exponential complexity. The degree of computational complexity depends on the representation of the group. More generally in group-theoretic setting, given an isomorphism of two nite group  $G_1$ , and  $Z_k$  for k 2 N, noting the image of an element g under the isomorphism map is equivalent to solving the discrete log problem. A large variety of groups are studied for use in the discrete logarithm problem.

- 1. Subgroups of  $Z_P$  for som e prim e p.
- 2. Subgroups of  $F_{p^n}$  for prime p = 2
- 3. Cyclic subgroups of the group of an elliptic curve  $E_{a,b}(F_{p})$  over the nite eld F with

$$Y^{2} = X^{3} + ax + b; a; b 2 F_{p}$$
 (1)

4. The natural generalizations of the group of an elliptic curve to the Jacobian of a hyperelliptic curve

5. Ideal class group of an algebraic number eld

A rigorous and form al security analysis with syntactical and sem antical consideration is in here.8

#### A.2.Random Resource

M ost com puter program ming languages could generate random num bers. In Lisp the expression (random 100) produces an integer in the range between 0 and 99, with each of the 100 possible values having equal probability. But these are pseudo-random num bers: They \look" random, but under the surface there is nothing unpredictable about them.<sup>22</sup>

The only source of true random ness in a sequence of pseudo-random numbers is a \seed" value that gets the series started. If you supply identical seeds, you get identical sequences; di erent seeds produce di erent numbers. The crucial role of the seed was made clear in the 1980s by B lum. He pointed out that a pseudorandom generator does not actually generate any random ness; it stretches or dilutes whatever random ness is in the seed, spreading it out over a longer series of numbers like a drop of pigm ent m ixed into a gallon of paint.

For most purposes, pseudo-random numbers serve perfectly well offen better than true random numbers. A lm ost all M onte C arb work is based on them. Nevertheless, true random ness is still in dem and, if only to supply seeds for pseudo-random generators. Finding events that are totally patternless turns out to be quite di cult.

A obvious scheme for digitizing noise is to measure the signal at certain instants and emit a 1 if the voltage is positive or a 0 if it is negative. A nother popular source of random ness is the radioactive decay of atom ic nuclei, a quantum phenom enon that seems to be near the ultimate in unpredictability.

Next we show an algorithm <sup>23</sup> that achieves excellent uniform distribution on seed generation.

## A.3. R andom N um ber G enerator and E lliptic-Zeta function

R andom number generator is an important mathematical tool. Van Dam<sup>24</sup> shows that many known hard computational problems can be exploited and solved by quantum factoring method and quantum search algorithm, e.g. G auss Sums over nite rings. We have not seen work that reduces E lliptic-Zeta function to G auss Sums estimation. We will reproduce de nitions and theorems from the Anshel and G oldfeld pape<sup>23</sup> and describe three candidates of one-way functions  $F_{K \ ronecker}$ ;  $F_{E \ lliptic}$ , and  $F_{A \ rtin}$ .

#### A .3.1. P seudorandom N um ber G enerator.

We adopt the notion of a pseudorandom generator suggested and developed by B lum and M icali and Yao. A pseudorandom number generator is a determ inistic polynom ial time algorithm that expands short seeds into longer bit sequences such that the output of the ensemble is polynom ial-time indistinguishable from a target probability distribution. We shall present an algorithm for a cryptographically secure pseudorandom number generator that is based on the candidate one-way function for the class  $Z_{E\ lliptic}$ , and  $Z_{A\ rtin}$ . We shall call this pseudorandom number generator PNG<sub>E\ lliptic</sub>. It has the property that it transforms a short seed into a long binary string of zeros and 1s with the target probability (1/3, 2/3) (i.e., the probability of zero appearing is 2/3 while the probability of a 1 is 1/3). The proofs of these assertions are based on Theorem s below.

De nition. Let P be a set of primes having a certain property. We de ne the density of P to be

$$\lim_{\substack{x! \ 1 \\ p^{2}P, p \ x \ p \ x}} X X$$

provided the lim it exists. If the lim it does not exist, then the density of P is not de ned.

W ith this de nition, we now propose the following theorem s.

THEOREM 1. Let a; b determ ine an elliptic curve  $E: y^2 = x^3 + ax + b$ . De ned to be the degree of the eld obtained by adjoining the roots of the cubic equation  $x^3 + ax + b = 0$  to Q. If d = 1,2, then  $q_E$  (p) will be even for all except nite m any rational primes p. If d = 3, then the density of primes for which  $q_E$  (p) is even is 1/3 while if d = 6, the density is 2/3.

THEOREM 2. (Chebotarev). Let K be a nite Galois extension of Q with Galois group G = Gal(K = Q). For each subset H G stable under conjugation (i.e., H <sup>1</sup> = H; 8 2 G), let

 $P_{H} = fp 2 Q$ ; prim e jF  $r_{p} 2 H$  and p unram if ied in K g:

Then  $P_{H}$  has density  $H \neq f$ ; where  $H \neq f$ ; jdenote the cardinalities of H; G, respectively.

THEOREM 3. Let E be an elliptic curve de ned over Q. Let K denote the eld obtained by adjoining the 2-torsion points of E to Q. Then there exists an entire Artin L-function

$$L_{K}(s) = b(n) n^{s} 2 Z_{A rtin}$$

of K with the property that

 $b(p) \quad c_E(p) \pmod{2}$ 

for all except nitely many rational primes p.

A .3.2. Coin Flipping by Telephone.

A lice and Bob want to simulate a random coin toss over a telephone. The following algorithm provides a mechanism for accomplishing this task. The algorithm assumes that B ! 1 and  $m = (log B)^k$  for some constant k > 2.

Step 1: A lice chooses integers a; b such that the roots of the equation  $x^3 + ax + b = 0$  generate a eld of degree 6 over Q, and the discriminant  $4 = 4a^3 + 27b^2$  lies in the interval B 4 2B. A lice then computes the vector v of the rst m coe cients

of the Zeta function associated to E  $:y^2 = x^3 + ax + b$ . A lice transmits v to Bob.

Step 2: Bob random ly chooses two prime numbers  $p < p^0 w$  ith p > m.

Step 3: A lice computes trial  $(p;p') = (a(p) \pmod{2}, a(p^0) \pmod{2})$ . If

 $trial(p;p^0) = (1;0);$ 

then the coin toss is heads. If

$$trial(p;p^0) = (0;1);$$

then the coin toss is tails. If neither of these possibilities occur, go back to Step 2.

Step 4: Bob can verify the correctness of the coin ip when A lice announces the elliptic curve E. O therw ise it is not feasible for him to compute trial  $(p;p^0)$ .

The probability of either of the events, trial  $(p;p^0) = (1,0)$  or (0,1), is 2/9, so they will occur with equal frequency.

## A.4.Quantum Teleportation

Q uantum teleportation (Q T)<sup>18,19,21</sup> is a particularly attractive paradigm. It involves the transfer of a quantum state over an arbitrary spatial distance by exploiting the prearranged entanglement (correlation) of \carrier" quantum systems in conjunction with the transmission of a minimal amount of classical information. This concept was rst discussed by A haronov and A lbert<sup>5</sup> (AA) using the method of nonlocal measurements.

O ver a decade later, Bennett, Brassard, Crepeau, Jozsa, Peres, and W ootters (BBC JPW)<sup>26</sup> developed a detailed alternate protocol for teleportation. It consists of three stages. First, an Einstein-Podolsky-Rosen (EPR)<sup>27</sup> source of entangled particles is prepared. Sender and receiver share each a particle from a pair em itted by that source. Second, a Bell-operator m easurem ent is performed at the sender on his EPR<sup>27</sup> particle and the teleportation-target particle, whose quantum state is unknown. Third, the outcome of the Bell measurem ent is transmitted to the receiver via a classical channel. This is followed by an appropriate unitary operation on the receiver's EPR particle. To justify the name <code>\teleportation",<sup>26</sup> notice</code> that the unknown state of the transfertarget particle is destroyed at the sender site and instantaneously appears at the receiver site. A ctually, the state of the EPR particle at the receiver site becomes its exact replica. The teleported state is never located between the two sites during the transfer.

The rst laboratory in plan entation of QT was carried out in 1997 at the University of Innsbruck by a team led by Anton Zeilinger.<sup>28</sup> It involved the successful transfer of a polarization state from one photon to another.

## A .5.Quantum C lock Synchronization

C lock synchronization<sup>29,30</sup> is an important problem with many practical and scienti c applications. A lice and Bob, both have good local clocks that are stable and accurate, and wish to synchronize these clocks in their common rest frame. The basic problem is easily formulated: determine the time di erence between two spatially separated clocks, using the minimum communication resources.<sup>31</sup> G enerally, the accuracy to which can be determined is a function of the clock frequency stability, and the uncertainty in the delivery times for messages sent between the two clocks. G iven the stability of present clocks, and assuming realistic bounded uncertainties in the delivery times, protocols have been developed which presently allow determination of to accuracies better than 100 ns (even for clock separations greater than 8000 km); it is also predicted that accuracies of 100 ps should be achievable in the near future.

A quantum bit (q-bit) behaves naturally much like a small clock. For example, a nuclear spin in a magnetic eld processes at a frequency given by its gyrom agnetic ratio times the magnetic eld strength. And an optical q-bit, represented by the presence or absence of a single photon in a given mode, oscillates at the frequency of the electrom agnetic carrier. The relative phase between the Di and Jli states of a q-bit thus keeps time, much like a clock, and ticks away during transit. Unlike a classical clock, how ever, this phase inform ation is lost after measurement, since projection causes the q-bit to collapse onto either Di or Jli, so repeated measurements and many q-bits are necessary to determine . On the other hand, with present technology it is practical to communicate q-bits over long distances through bers<sup>32, 33</sup> and even in free space.<sup>34</sup>

Let  $t^a$  and  $t^b$  be the local times on A lice and B ob's respective clocks. We assume that their clocks operate at exactly the same frequency and are perfectly stable. The goal is to determ ine the dimension  $t^b - t^a$ , which is initially unknown to either of them. Quantum synchronization<sup>35(37</sup> comes in many schemas. Chuang<sup>31</sup> accomplished this goal by using the Ticking qubit handshake (TQH) protocol. He also established an upper bound on the number of q-bits which must be transmitted in order to determ ine to a given accuracy. Chuang found that only O (n) q-bits are needed to obtain n bits of the have the freedom of sending q-bits which tick at dimensional constants.

## A.6.Quantum Random Walk

W e provide the standard notation<sup>38</sup> and m odelon tree and graph for our discussion. Then we also brie y describe the connection between the coined quantum random walk and the graph representation of quantum state. We cite the main result of quantum random walk theorem <sup>16</sup> used in our arguments.

Let us bok at an example of tree T (V; E) that consists of vertices and edges. Consider a 3 bits binary tree T.T with depth of 3, has  $2^3 = 8$  (vertices) binary numbers represented at its leaves. The topm ost level of T is denoted 'root' and the bottom level of T is denoted leaf. The pre xes associated with subtrees are denoted in italics. In this example, we consider three leaves the 001,011, and 110 vertice. The tree-walking algorithm, a recursive depth stalgorithm, here is singulates the 001 leave. It does this by following the path that connects two vertices and the complexity is O (log n).

Form ally, given an undirected graph G = (V; E) that each vertex v stores a variable  $a_v 2$  f0;1g, our goal is to nd a vertex v for which  $a_v = 1$  (assuming such vertex exists). We will often call such vertices marked and vertices for which  $a_v = 0$  unmarked.

In one step, an algorithm can exam ine the current vertex or move to a neighboring vertex in the graph G. The goal is to nd a marked vertex in as few steps as possible.

A quantum algorithm is a sequence of unitary transform ations on a Hilbert space<sup>14</sup>. H<sub>i</sub> H<sub>V</sub>. H<sub>V</sub> is a Hilbert space spanned by states jvi corresponding to vertices of G. H<sub>i</sub> represents the algorithm 's internal state and can be of arbitrary xed dimension. A t-step quantum algorithm is a sequence  $U_1, U_2, :::, U_t$  where each  $U_i$  is either a query or a local transform ation. A query  $U_i$  consists of two transform ations  $(U_i^0, U_i^1)$ .  $U_i^0$  I is applied to all H<sub>i</sub> jvi for which  $a_v = 0$  and  $U_i^1$  I is applied to all H<sub>i</sub> jvi for which  $a_v = 1$ .

A local transform ation can be de ned in several ways. In this paper, we require them to be Z-local. A transform ation  $U_i$  is Z-localif, for any v 2 V and j i 2 H<sub>i</sub>, the state  $U_i$  (j i jvi) is contained in the subspace  $H_i$  H<sub>(v)</sub> where  $H_{(v)}$  H<sub>V</sub> is spanned by the state jvi and the states jv<sup>0</sup> if for all v<sup>0</sup> adjacent to v. Our results also apply if the local transform ations are C-local.

The algorithm starts in a xed starting state  $j_{start}i$  and applies  $U_1, :::, U_t$ . This results in a nal state  $j_{final}i = U_t U_t_1 ::: U_1 j_{start}i$ . Then, we measure  $j_{start}i$ . The algorithm succeeds if measuring the  $H_v$  part of the nal state gives  $j_i$  such that  $a_i = 1$ .

THEOREM <sup>16</sup> 4. The associated quantum walk search algorithm takes 0  $\binom{V}{N}$  log N) steps and the probability to measure the marked state is (1= log N). This yields a local search algorithm running in time 0  $\binom{V}{N}$  log N).

#### REFERENCES

- 1. P. Shor, \Polynom ialtim e algorithms for prime factorization and discrete logarithms on a quantum com puter," SIAM J. Computing 26 (5), pp. 1484{1509, 1997.
- 2. L.Vandersypen, M.Ste en, G.Breyta, C.Yannoni, M.Sherwood, and I.Chuang, \Experimental realization of shor's quantum factoring algorithm using nuclear magnetic resonance," Nature 414, pp. 883{887,2001.
- 3. C. Bennett, \Quantum cryptography: Uncertainty in the service of privacy," Science 257, pp. 752{3, 1992.
- 4. Y.D ing and M.Rabin, \Hyper-encryption and everlasting security," in STACS 2002, 19th Annual Symposium on Theoretical A spects of Computer Science, Antibes – Juan les Pins, France, March 14–16, 2002, Proceedings, H.Alt and A.Ferreira, eds., Lecture Notes in Computer Science 2285, pp. 1{26, Springer, 2002.
- 5. L.G rover, \A fast quantum mechanical algorithm for database search," in STOC, pp.212{219,1996.
- 6. C.Bennett, E.Bernstein, G.Brassard, and U.Vazirani, \Strengths and weaknesses of quantum computing," SIAM J.Computing 26 (5), pp. 1510{1523, 1997. quant-ph/9701001.
- 7. T.O kam oto, K. Tanaka, and S.U chiyam a, \Q uantum public-key cryptosystem s," in Advances in Cryptology - CRYPTO 2000, 20th Annual International Cryptology Conference, Santa Barbara, California, USA, August 20-24, 2000, Proceedings, M.Bellare, ed., Lecture Notes in Computer Science 1880, pp. 147{165, Springer, 2000.
- 8. W .M ao, M odern C ryptography: Theory and Practice, Prentice Hall, New Jersey, 2004.
- 9. N.G isin, G.R. ibordy, W.T. ittel, and H.Zbinden, \Quantum cryptography," Reviews of Modern Physics 74, pp.145{195,2002.
- 10. D. Mayers, \Unconditional security in quantum cryptography," Journal for the Association of Computing Machinery 48, p. 351, 2001. quant-ph/0501014.
- 11. H.K. Lo and H.Chau, \Unconditional security of quantum key distribution over arbitrary long distances," Science 283, pp.2050{2056,1999.quant-ph/9803006.
- 12. P. Shor and J. Preskill, \Simple proof of security of the bb84 quantum key distribution protocol," Phys. Rev. Lett. 85, pp. 441{444,2000.
- 13. W.-H. Kye, C.-M. Kim, M. S. Kim, and Y.-J. Park, Quantum key distribution with blind polarization bases," Phys. Rev. Lett. 95 (040501), 2005. quant-ph/0501014.
- 14. D.Aharonov, A.Ambainis, J.Kempe, and U.Vazirani, \Quantum walks on graphs," in STOC, pp.50{59, 2001.
- 15. E.Feldm an and M.Hillery, \Scattering theory and discrete-time quantum walks," Physics Letters A 324, p.277, 2004. quant-ph/0312062.
- 16. J.K em pe, \Q uantum random walks-an introductory overview, "Contem p.Phys.44(4), pp.307{327,2003. quant-ph/0303081.
- 17. T. O kam oto, K. Suzuki, and Y. Tokunaga, \Quantum voting cryptosystems (invited lecture)," in D I-MACS W orkshop on Electronic Voting { Theory and Practice, Rutgers University, Piscataway, NJ, May 26 - 27, 2004, M. Jakobsson and A. Juels, eds., D IMACS: the Special Focus on Communication Security and Information Privacy and the Special Focus on Computation and the Socio-Economic Sciences. http://dimacs.rutgers.edu/W orkshops/Voting/.
- 18. L.Kau man, \Teleportation topology," Opt. Spectrosc. 9, pp. 227{232, 2005. quan-ph/0407224.
- 19. G. Collins, \Computing with quantum knots," Scienti cAmerican, pp. 56{63, April 2006.
- 20. A. C. -C. Yao, \Quantum circuit com plexity," in FOCS, 34th Annual Sym posium on Foundations of Com puter Science, 3-5 November 1993, Pab Alto, California, USA, pp. 352{361, EEE, 1993.
- 21. L.Kau man and S.Lomonaco, Jr., \Braiding operators are universal quantum gates," New J.Phys. 6, p.134, 2004. quant-ph/0401090.
- 22. B. Hayes, \R andom ness as a resource," Am erican Scientist 89(4), pp. 300{4, 2001.
- 23. M. Anshel and D. Goldfeld, \Zeta functions, one-way functions, and pseudorandom number generators," Duke M ath. J. 88 (2), pp. 371 { 390, 1997.
- 24. W . van Dam and G. Seroussi, \E cient quantum algorithms for estimating gauss sum s," arxiv: quant-ph/0207131.
- 25. Y. Aharonov and D. Albert, \Can we make sense of the measurement process in relativistic quantum mechanics?," Phys. Rev. D 24 (2), pp. 359{370, 1981.
- 26. C. Bennett, G. Brassard, C. Crepeau, R. Jozsa, A. Peres, and W. Wootters, \Teleporting an unknown quantum state via dual classical and einstein-podolsky-rosen channels?," Phys. Rev. Lett. 70 (13), pp.1895{ 1899, 1993.
- 27. A. Einstein, B. Podolsky, and N. Rosen, \Can quantum mechanical description of physical reality be considered complete?," Phys. Rev. 47, pp. 777{780, 1935.
- 28. D.Bouwm eester, J.W. Pan, K.M attle, M.Eibl, H.W einfurter, and A.Zeilinger, \Experimental quantum teleportation," Nature 390, pp. 575{579, 1997.

- 29. B. Sim ons, J.W elch, and N. Lynch, \An overview of clock synchronization," in Fault-Tolerant D istributed Computing, B. Sim ons and A. Spector, eds., Lecture Notes in Computer Science 448, Springer-Verlag, (New York), 1990.
- 30. W .Lew andow ski, J.A zoubib, and W .J.K lepczynski, \G ps: Prim ary tool for tim e transfer (invited paper)," in Proc. IEEE 87, 163, 1999.
- 31. I. Chuang, \Quantum algorithm for distributed clock synchronization," 2000. arxiv: quant-ph/0005092.
- 32. R. Hughes and et al., \Quantum cryptography," Contem p. Phys. 36, p. 149, 1995. quant-ph/9504002.
- 33. A.Muller, H.Zbinden, and N.Gisin, \Quantum cryptography over 23 km in installed under-lake telecom bre," Euro.phys.Lett. 33 334, 1996.
- 34. W .Buttler and et al., \Free-space quantum -key distribution," Phys. Rev. A 57, p. 2379, 1998.
- 35. M. Burgh and S. Bartlett, \Quantum methods for clock synchronization: Beating the standard quantum lim it without entanglement," Phys. Rev. A, 72, p. 042301, 2005.
- 36. A. Valencia, G. Scarcelli, and Y. Shih, \D istant clock synchronization using entangled photon pairs," Appl. Phys. Lett. 85, p. 2655, 2004.
- 37. D. Janzing and T. Beth, \Synchronizing quantum clocks with classical one-way communication: Bounds on the generated entropy," quant-ph/0306023.
- 38. T. H. Cormen, C. E. Leiserson, and R. L. Rivest, Introduction to Algorithms (First Edition), The M IT Press, Cambridge, M assachusetts, 1990.