

A New Decidable Class of Tuple Generating Dependencies: The Triangularly-Guarded Class

Vernon Asuncion and Yan Zhang

School of Computing, Engineering and Mathematics
Western Sydney University, Australia

Abstract

In this paper we introduce a new class of tuple-generating dependencies (TGDs) called *triangularly-guarded* TGDs, which are TGDs with certain restrictions on the atomic derivation track embedded in the underlying rule set. We show that conjunctive query answering under this new class of TGDs is decidable. We further show that this new class strictly contains some other decidable classes such as weak-acyclic, guarded, sticky and shy, which, to the best of our knowledge, provides a unified representation of all these aforementioned classes.

1 Introduction

In the classical *database management systems* (DBMS) setting, a query Q is evaluated against a database D . However, it has come to the attention of the database community the necessity to also include ontological reasoning and description logics (DLs) along with standard database techniques [Calvanese *et al.*, 2007]. As such, the *ontological database management systems* (ODBMS) has arisen. In ODBMS, the classical database is enhanced with an ontology [Baader *et al.*, 2016] in the form of logical assertions that generate new intensional knowledge. A powerful form of such logical assertions is the tuple-generating dependencies (TGDs), i.e., Horn rules extended by allowing existential quantifiers to appear in the rule heads [Cabibbo, 1998; Patel-Schneider and Horrocks, 2007; Cali *et al.*, 2009].

Queries are evaluated against a database D and set of TGDs Σ (i.e., $D \cup \Sigma$) rather than just D , as in the classical setting. Since for a given database D , a set Σ of TGDs, and a conjunctive query Q , the problem of determining if $D \cup \Sigma \models Q$, called the *conjunctive query answering* (CQ-Ans) problem, is *undecidable* in general [Beeri and Vardi, 1981; Baget *et al.*, 2011; Rosati, 2011; Cali *et al.*, 2012; Cali *et al.*, 2013], a major research effort has been put forth to identifying syntactic conditions on TGDs for which CQ-Ans is decidable. Through these efforts, we get the decidable syntactic classes: *weakly-acyclic* (WA) [Fagin *et al.*, 2005], *acyclic graph of rule dependencies* (aGRD) [Baget *et al.*, 2011], *linear*, *multi-linear*, *guarded*, *weakly-guarded* (W-GUARDED) [Rosati, 2006;

Cali *et al.*, 2013], *sticky*, *sticky-join*, *weakly-sticky-join* (WSJ) [Cali *et al.*, 2012; Gogacz and Marcinkowski, 2017], *shy* (SHY) [Leone *et al.*, 2012] and *weakly-recursive* (WR) [Civili and Rosati, 2012]. The *weakly-recursive* class is only defined for the so-called *simple* TGDs, which are TGDs where the variables are only allowed to occur once in each atom and each atom do not mention constants [Civili and Rosati, 2012].

Another research direction that springs up from those previously identified classes is the possibility of obtaining more expressive languages by a direct combination (i.e., union) of those classes, e.g., see [Krötzsch and Rudolph, 2011; Cali *et al.*, 2012; Grau *et al.*, 2013; Gottlob *et al.*, 2013]. A major challenge then in this direction is that the union of two decidable classes is not necessarily decidable [Baget *et al.*, 2011], e.g., it has been shown in [Gottlob *et al.*, 2013] that the union of the classes linear and sticky is undecidable.

At a model theoretic level, the results in [Rosati, 2006] and [Bárány *et al.*, 2010] had respectively shown that the finite model property holds for the linear and guarded fragments of TGDs. It is folklore that a class of *first-order* (FO) theories \mathcal{C} is said to have the *finite model* (FM) property if $\phi \in \mathcal{C}$ satisfiable iff ϕ has a finite model. The recent work in [Gogacz and Marcinkowski, 2017] had further extended the result in [Rosati, 2006] for linear TGDs into the sticky-join TGDs. As will be revealed from this paper, our work further generalizes these previous results.

Despite these efforts, there are still some examples of simple TGDs that do not fall under the aforementioned classes.

Example 1. Let Σ_1 be a set of TGDS comprising of the following rules:

$$\sigma_{11} : t(X, Y) \wedge \rightarrow \exists Z t(Y, Z) \wedge u(Y, Z), \quad (1)$$

$$\sigma_{12} : t(X, Y) \wedge u(Y, Z) \rightarrow t(Y, Z) \wedge u(X, Y). \quad (2)$$

Then it can be checked that Σ_1 does not fall into any of the classes previously mentioned above, and neither is it *glut-guarded* (G-GUARDED) [Krötzsch and Rudolph, 2011] nor *tame* (TAME) [Gottlob *et al.*, 2013]. On the other hand, because none of the head atoms “ $t(Y, Z)$ ” and “ $u(X, Y)$ ” of σ_{12} mentions the two cyclically-affected body variables “ X ” and “ Z ” together (which is under some pattern that we will generalize in Section 3), then it can be shown that for any

database D and query Q , it is sufficient to only consider a finite number of *labeled nulls* in $\text{chase}(D, \Sigma_1)$ to determine if $\text{chase}(D, \Sigma_1) \models Q$. Actually, Σ_1 falls under the new class of TGDs we call *triangularly-guarded*, which is a new class of TGDs that strictly contains several of the main syntactic classes, including WA, W-GUARDED, WSJ, G-GUARDED, SHY, TAME and WR.

The rest of the paper is structured into three main parts as follows: Section 2 provides background notions and definitions about databases, TGDs and the problem of (boolean) conjunctive query answering; Section 3 introduces the triangularly-guarded TG class of TGDs; while Section 4 looks at the main results and shows that TG is both decidable and strictly contains some of the main syntactic classes mentioned above, and also concludes the paper with some remarks.

2 Preliminaries

2.1 Basic notions and notations

We assume three countably infinite pairwise disjoint sets Γ_V , Γ_C and Γ_N of *variables*, *constants* and *labeled nulls*, respectively. We further assume that Γ_V is partitioned into two disjoint sets Γ_V^\forall and Γ_V^\exists (i.e., $\Gamma_V = \Gamma_V^\forall \cup \Gamma_V^\exists$), where Γ_V^\forall and Γ_V^\exists denote the sets of *universally* (\forall) and *existentially* (\exists) quantified variables, respectively. We also assume that the set of labeled nulls Γ_N contains elements of the form $\{n_i \mid i \in \mathbb{N}\}$, where \mathbb{N} is the set of natural numbers. Intuitively, Γ_N is the set of “fresh” Skolem terms that are disjoint from the set of constants Γ_C .

A *relational schema* \mathcal{R} (or just *schema*) is a set of *relational symbols* (or *predicates*), where each is associated with some number $n \geq 0$ called its *arity*. We denote by r/n as the relational symbol $r \in \mathcal{R}$ whose arity is n , and by $|r|$ as the arity of r , i.e., $|r| = n$. We further denote by $r[i]$ as the i -th *argument* (or *attribute*) of r where $i \in \{0, \dots, |r|\}$. We denote by $\text{ARG}(r)$ as the set of arguments $\{r[i] \mid i \in \{0, \dots, |r|\}\}$ of r . We extend this notion to the set of relational symbols \mathcal{R} , i.e., $\text{ARG}(\mathcal{R}) = \bigcup_{r \in \mathcal{R}} \text{ARG}(r)$.

A *term* t is any element from the set $\Gamma_V \cup \Gamma_C \cup \Gamma_N$. Then an *atom* \mathbf{a} is a construct of the form $r(t_1, \dots, t_n)$ such that: (1) $r \in \mathcal{R}$; (2) $n = |r|$; and (3) t_i (for $i \in \{1, \dots, n\}$) is a term. We denote tuples of atoms by $\vec{\mathbf{a}}$, e.g., $\vec{\mathbf{a}} = \mathbf{a}_1 \dots \mathbf{a}_l$, $\vec{\mathbf{b}} = \mathbf{b}_1 \dots \mathbf{b}_m$, $\vec{\mathbf{c}} = \mathbf{c}_1 \dots \mathbf{c}_n$, etc., and its length by $|\vec{\mathbf{a}}|$.

We denote by $\text{REL}(\mathbf{a})$, $\text{TERMS}(\mathbf{a})$, $\text{VAR}(\mathbf{a})$, $\text{CONST}(\mathbf{a})$ and $\text{NULLS}(\mathbf{a})$ as the relational symbol, the set of terms, variables, constants and labeled nulls mentioned in atom \mathbf{a} , respectively. We extend these notions to a set or tuples of atoms S such that $\text{TERMS}(\mathbf{a})$, $\text{VAR}(S)$, $\text{CONST}(S)$ and $\text{NULLS}(S)$ denotes the sets $\bigcup_{\mathbf{a} \in S} \text{TERMS}(\mathbf{a})$, $\bigcup_{\mathbf{a} \in S} \text{VAR}(\mathbf{a})$, $\bigcup_{\mathbf{a} \in S} \text{CONST}(\mathbf{a})$ and $\bigcup_{\mathbf{a} \in S} \text{NULLS}(\mathbf{a})$, respectively. We say that a tuple of atoms $\vec{\mathbf{a}} = \mathbf{a}_1 \dots \mathbf{a}_l$ is *connected* if either: (1) $\vec{\mathbf{a}}$ is an atom, or (2) $\text{TERMS}(\mathbf{a}_i) \cap \text{TERMS}(\mathbf{a}_{i+1}) \neq \emptyset$ holds, for each $i \in \{1, \dots, l-1\}$.

An *instance* I is any set (can be infinite) of atoms such that $\text{VAR}(I) = \emptyset$, i.e., contains no variables. A *database* D is a finite set of ground atoms $\text{VAR}(D) = \emptyset$ and $\text{NULLS}(D) = \emptyset$.

Given an atom $\mathbf{a} = r(t_1, \dots, t_n)$, we denote by $\text{ARG}(\mathbf{a})$ as the set of arguments $\{r[i] \mid i \in \{1, \dots, n\}\}$. For a tuple of variables \mathbf{X} and atom $\mathbf{a} = r(t_1, \dots, t_n)$, we denote by $\text{ARG}(\mathbf{a})|_{\mathbf{X}}$ as the set of arguments $\{r[i] \mid i \in \{1, \dots, n\}$ and $t_i = X\}$, i.e., the set of arguments in $\text{ARG}(\mathbf{a})$ but *restricted* to those mentioned variables from \mathbf{X} . Symmetrically, using similar notions to the “ARG” concept just previously mentioned above, for a given atom $\mathbf{a} = r(t_1, \dots, t_n)$ and set of arguments $A \subseteq \text{ARG}(\mathbf{a})$, we denote by $\text{VAR}(\mathbf{a})|_A$ as the set of variables $\{X \mid t_i = X \text{ and } r[i] \in A\}$, i.e., the set of all the variables mentioned in \mathbf{a} but restricted to those appearing in argument positions from A .

Given two sets of terms T_1 and T_2 , an assignment $\theta : T_1 \rightarrow T_2$ is a *function* from T_1 onto T_2 such that $t \in (T_1 \cap \Gamma_C)$ implies $\theta(t) = t$, i.e., identity for the constants Γ_C . Then for a given atom $\mathbf{a} = r(t_1, \dots, t_n)$, a set of terms T and an assignment $\theta : \text{VAR}(\mathbf{a}) \rightarrow T$, a *substitution of \mathbf{a} under θ* (or just *substitution* for convenience), denoted $\mathbf{a}\theta$ (or sometimes $\theta(\mathbf{a})$), is the atom such that $\mathbf{a}\theta = r(\theta(t_1), \dots, \theta(t_n))$. We naturally extend to conjunctions of atoms $\mathbf{a}_1 \wedge \dots \wedge \mathbf{a}_n$ so that $\theta(\mathbf{a}_1 \wedge \dots \wedge \mathbf{a}_n) = \mathbf{a}_1\theta \wedge \dots \wedge \mathbf{a}_n\theta$. Given two assignments $\theta_1 : T_1 \rightarrow T_2$ and $\theta_2 : T_2 \rightarrow T_3$, we denote by $\theta_2 \circ \theta_1$ as the *composition* of θ_1 with θ_2 such that $\theta_2 \circ \theta_1 : T_1 \rightarrow T_3$ and $(\theta_2 \circ \theta_1)(t) = \theta_2(\theta_1(t))$, for all $t \in T_1$. Then lastly, given again an assignment $\theta : T_1 \rightarrow T_2$ and some set of terms $T' \subseteq T_1$, we denote by $\theta|_{T'}$, we denote by the *restriction* of the assignment θ to the domain $T' \subseteq T_1$ such that $\theta|_{T'} : T' \rightarrow T_2$, and where $\theta|_{T'}(t) = \theta(t) \in T_2$, for each $t \in T' \subseteq T_1$.

2.2 TGDs, BCQ-Ans and Chase

A *tuple generating dependency* (TGD) rule σ of schema \mathcal{R} is a *first-order* (FO) formula of the form [Beeri and Vardi, 1981]:

$$\forall \mathbf{X} \mathbf{Y} (\Phi(\mathbf{X}, \mathbf{Y}) \rightarrow \exists \mathbf{Z} \Psi(\mathbf{Y}, \mathbf{Z})), \quad (3)$$

where:

- $\mathbf{X} = X_1 \dots X_k$, $\mathbf{Y} = Y_1 \dots Y_l$ and $\mathbf{Z} = Z_1 \dots Z_m$ are pairwise disjoint tuple of variables, and where they are called the *local*, *shared* and *existential* variables, respectively, and thus, we assume that $\mathbf{X} \mathbf{Y} \subseteq \Gamma_V^\forall$ and $\mathbf{Z} \subseteq \Gamma_V^\exists$;
- $\Phi(\mathbf{X}, \mathbf{Y}) = b_1(\mathbf{V}_1) \wedge \dots \wedge b_n(\mathbf{V}_n)$ is a conjunction of atoms such that $\mathbf{V}_i \subseteq \mathbf{X} \mathbf{Y}$ and $b_i \in \mathcal{R}$, for $i \in \{1, \dots, n\}$;
- $\Psi(\mathbf{Y}, \mathbf{Z}) = r_1(\mathbf{W}_1) \wedge \dots \wedge r_m(\mathbf{W}_m)$ is a conjunction of atoms where $\mathbf{W}_i \subseteq \mathbf{Y} \mathbf{Z}$ and $r_i \in \mathcal{R}$, for $i \in \{1, \dots, m\}$.

For a given TGD σ of the form (3), we denote by $\text{BD}(\sigma)$ as the set of atoms $\{b_1(\mathbf{V}_1), \dots, b_n(\mathbf{V}_n)\}$, which we also refer to as the *body* of σ . Similarly, by $\text{HD}(\sigma)$ we denote the set of atoms $\{r_1(\mathbf{W}_1), \dots, r_m(\mathbf{W}_m)\}$, which we also refer to as the *head* of σ . For convenience, when it is clear from the context, we simply drop the quantifiers in (3) such that a TGD rule σ of the form (3) can simply be referred to as: $\Phi(\mathbf{X}, \mathbf{Y}) \rightarrow \Psi(\mathbf{Y}, \mathbf{Z})$. Then, for a given set of TGDs Σ , we denote by $\text{ATOMS}(\Sigma)$ as the set of all atoms occurring in Σ such that $\text{ATOMS}(\Sigma) = \bigcup_{\sigma \in \Sigma} (\text{BD}(\sigma) \cup \text{HD}(\sigma))$, and by $\text{REL}(\Sigma)$ as the set of all relational symbols mentioned in Σ . Then lastly, for convenience later on, for a given rule σ of the form (3) and atom $\mathbf{a} \in \text{HD}(\sigma)$, we denote by $\forall\text{-VAR}(\mathbf{a})$ and $\exists\text{-VAR}(\mathbf{a})$ as

the set of variables $\text{VAR}(\mathbf{a}) \cap \mathbf{Y}$ and $\text{VAR}(\mathbf{a}) \cap \mathbf{Z}$, respectively, i.e., the set of all the universally (\forall) and existentially (\exists) quantified variables of \mathbf{a} , respectively. We extend this notion to the TGD rule σ of the form (3) so that we set $\text{VAR}(\sigma) = \mathbf{XYZ}$, $\forall\text{-VAR}(\sigma) = \mathbf{XY}$ and $\exists\text{-VAR}(\sigma) = \mathbf{Z}$.

A *boolean conjunctive query* (BCQ) Q is a FO formula $\exists \mathbf{X} \varphi(\mathbf{X}) \rightarrow q$ such that $\varphi(\mathbf{X}) = r_1(\mathbf{Y}_1) \wedge \dots \wedge r_l(\mathbf{Y}_l)$, where $r_i \in \mathcal{R}$ and $\mathbf{Y}_i \subseteq \mathbf{X}$, for each $i \in \{1, \dots, l\}$, and where we set $\text{BD}(Q) = \{r_1(\mathbf{Y}_1), \dots, r_l(\mathbf{Y}_l)\}$. Given a database D and a set of TGDs Σ , we say that $D \cup \Sigma$ *entails* Q , denoted $D \cup \Sigma \models Q$, iff $D \cup \Sigma \models \exists \mathbf{X} \varphi(\mathbf{X})$. The central problem tackled in this work is the *boolean conjunctive query answering* (BCQ-Ans): *given a database D , a set of TGDs Σ and BCQ Q , does $D \cup \Sigma \models Q$? It is well known that BCQ-Ans is undecidable in general [Beeri and Vardi, 1981].*

The *chase procedure* (or just *chase*) [Maier et al., 1979; Johnson and Klug, 1984; Abiteboul et al., 1995; Fagin et al., 2005; Deutsch et al., 2008; Zhang et al., 2015] is a main algorithmic tool proposed for checking implication dependencies [Maier et al., 1979]. For an instance I , assignment η and TGD $\sigma = \Phi(\mathbf{X}, \mathbf{Y}) \rightarrow \Psi(\mathbf{Y}, \mathbf{Z})$, we have that $I \xrightarrow{\sigma, \eta} I'$ defines a single *chase step* as follows: $I' = I \cup \{\eta'(\Psi(\mathbf{Y}, \mathbf{Z}))\}$ such that: (1) $\eta : \mathbf{XY} \rightarrow \Gamma_C \cup \Gamma_N$ and $\eta(\Phi(\mathbf{X}, \mathbf{Y})) \subseteq I$; and (2) $\eta' : \mathbf{XYZ} \rightarrow \Gamma_C \cup \Gamma_N$ and $\eta' \upharpoonright_{\mathbf{XY}} = \eta$. As in the literatures, we further assume here that each labeled nulls used to eliminate the \exists -quantified variables in \mathbf{Z} follows lexicographically all the previous ones, i.e., follows the order $n_i, n_{i+1}, n_{i+2}, \dots$, etc. A *chase sequence* of a database D w.r.t. to a set of TGDs Σ is a sequence of chase steps $I_i \xrightarrow{\sigma_i, \eta_i} I_{i+1}$, where $i \geq 0$, $I_0 = D$ and $\sigma_i \in \Sigma$. An infinite chase sequence $I_i \xrightarrow{\sigma_i, \eta_i} I_{i+1}$ is *fair* if $\eta(\Phi(\mathbf{X}, \mathbf{Y})) \subseteq I_i$, for some $\eta : \mathbf{XY} \rightarrow \Gamma_C \cup \Gamma_N$ and $\sigma = \Phi(\mathbf{X}, \mathbf{Y}) \rightarrow \Psi(\mathbf{Y}, \mathbf{Z}) \in \Sigma$, implies $\exists \eta' : \mathbf{XYZ} \rightarrow \Gamma_C \cup \Gamma_N$, where $\eta' \upharpoonright_{\mathbf{XY}} = \eta$, such that $\eta'(\Psi(\mathbf{Y}, \mathbf{Z})) \subseteq I_k$ and $k > i$. Then finally, we let $\text{chase}(D, \Sigma) = \bigcup_{i=0}^{\infty} I_i$.

Theorem 1. [Deutsch et al., 2008; Cali et al., 2012] *Given a database D , TGDs Σ and BCQ Q , $D \cup \Sigma \models Q$ iff $\text{chase}(D, \Sigma) \models Q$.*

2.3 Cyclically-affected arguments

As observed in [Leone et al., 2012], the notion of *affected arguments* in [Cali et al., 2013] can sometimes consider arguments that may not actually admit a “firing” mapping \forall -variables into nulls. For this reason, it was introduced in [Leone et al., 2012] the notion of a “null-set.” Given a set of TGDs Σ , let $\mathbf{a} \in \text{ATOMS}(\Sigma)$, $a \in \text{ARG}(\mathbf{a})$ and $X = \text{VAR}(\mathbf{a}) \upharpoonright_a$. Then the *null-set* of a in \mathbf{a} under Σ , denoted as $\text{NULLSET}(a, \mathbf{a}, \Sigma)$ (or just $\text{NULLSET}(a, \mathbf{a})$ if clear from the context), is defined inductively as follows: If $\mathbf{a} \in \text{HD}(\sigma)$, for some $\sigma \in \Sigma$, then: (1) $\text{NULLSET}(a, \mathbf{a}) = \{n_X^\sigma\}$,¹ if $\text{VAR}(\mathbf{a}) \upharpoonright_a = X \in \exists\text{-VAR}(\sigma)$, or (2) $\text{NULLSET}(a, \mathbf{a})$ is the intersection of all null-sets $\text{NULLSET}(b, \mathbf{b})$ such that $\mathbf{b} \in \text{BD}(\sigma)$, $b \in \text{ARG}(\mathbf{b})$ and $\text{VAR}(\mathbf{b}) \upharpoonright_b = X$. Otherwise, if $\mathbf{a} \in \text{BD}(\sigma)$, for some $\sigma \in$

Σ , then $\text{NULLSET}(a, \mathbf{a})$ is the union of all $\text{NULLSET}(a, \mathbf{a}')$ such that $\text{REL}(\mathbf{a}') = \text{REL}(\mathbf{a})$ and $\mathbf{a}' \in \text{HD}(\sigma')$, where $\sigma' \in \Sigma$.

Borrowing similar notions from [Krötzsch and Rudolph, 2011] used in the identification of the so-called *glut variables*, the *existential dependency graph* $\mathcal{G}_\exists(\Sigma)$ is a graph (N, E) , whose nodes N is the union of all $\text{NULLSET}(a, \mathbf{a})$, where $\mathbf{a} \in \text{ATOMS}(\Sigma)$ and $a \in \text{ARG}(\mathbf{a})$, and edges:

$$E = \{ (n_Z^{\sigma'}, n_Z^\sigma) \mid \exists \sigma \in \Sigma \text{ of form (3), } \exists Y \in \mathbf{Y},$$

$$n_Z^{\sigma'} \in \bigcap \text{NULLSET}(Y, \sigma, \Sigma) \text{ and } \text{NULLSET}(a, \mathbf{a}) = \{n_Z^\sigma\},$$

for some $\mathbf{a} \in \text{HD}(\sigma)$ and $Z \in \mathbf{Z} \}$,

where $\bigcap \text{NULLSET}(Y, \sigma, \Sigma)$ denotes the intersection of all $\text{NULLSET}(b, \mathbf{b}, \Sigma)$ such that $\mathbf{b} \in \text{BD}(\sigma)$, $b \in \text{ARG}(\mathbf{b})$ and $Y = \text{VAR}(\mathbf{b}) \upharpoonright_b$. We note that our definition of a dependency graph here generalizes the *existential dependency graph* in [Krötzsch and Rudolph, 2011] by combining the notion of null-sets in [Leone et al., 2012]. Then with the graph $\mathcal{G}_\exists(\Sigma) = (N, E)$ as defined above, we denote by $\text{CYC-NULL}(\Sigma)$ as the smallest subset of N such that $n_Z^\sigma \in \text{CYC-NULL}(\Sigma)$ iff either: (1) n_Z^σ is in a cycle in $\mathcal{G}_\exists(\Sigma)$, or (2) n_Z^σ is reachable from some other node $n_Z^{\sigma'} \in \text{CYC-NULL}(\Sigma)$, where $n_Z^{\sigma'}$ is in a cycle in $\mathcal{G}_\exists(\Sigma)$.

3 Triangularly-Guarded (TG) TGDs

This section now introduces the triangularly-guarded class of TGDs, which is the focus of this paper. We begin with an instance of a BCQ-Ans problem that corresponds to a need of an infinite number of labeled nulls in the underlying chase derivation.

Example 2 (Unbounded nulls). *Let $\Sigma_2 = \{\sigma_{11}, \sigma_{12}^*\}$ be the set of TGDs obtained from $\Sigma_1 = \{\sigma_{11}, \sigma_{12}\}$ of Example 1 by just changing the rule σ_{12} into the rule σ_{12}^* such that:*

$$\sigma_{12}^* : t(X, Y) \wedge u(Y, Z) \rightarrow t(X, Z) \wedge u(X, Y). \quad (4)$$

Then we have that σ_{12}^ of Σ_2 above is obtained from σ_{12} of Σ_1 by changing the variable “Y” in the head atom “ $t(Y, Z)$ ” of σ_{12} into “X”, i.e., to obtain “ $t(X, Z)$ ”. Intuitively, this allows the two variables “X” and “Y” to act as place holders that combines labeled nulls together in the head atom “ $t(X, Z)$ ” of Σ_{12}^* . Now let $D_2 = \{t(c_1, c_2), u(c_1, c_2)\}$ be a database, where $c_1, c_2 \in \Gamma_C$ and $c_1 \neq c_2$, and Q_2 the BCQ $\exists X t(X, X) \rightarrow q$. Then we have that $D_2 \cup \Sigma_2 \cup \{\exists X t(X, X)\} \equiv D_2 \cup \Sigma_2 \cup \{\forall X \neg t(X, X)\}$ can only be satisfied by the infinite model M of the form $M = D_2 \cup \bigcup_{1 \leq i < j} \{t(c_i, c_j)\}$, where we assume $i \neq j$ implies $c_i \neq c_j$. Therefore, since $D_2 \cup \Sigma_2 \cup \{\forall X \neg t(X, X)\}$ is satisfiable, (albeit infinitely), it follows that $D_2 \cup \Sigma_2 \not\models Q_2$.*

In database D_2 and set TGDs $\Sigma_2 = \{\sigma_{11}, \sigma_{12}^*\}$ of Example 2, we get from σ_{11} the sequence of atoms $t(c_2, n_1), t(n_1, n_2), t(n_2, n_3), \dots, t(n_{k-1}, n_k) \in \text{chase}(D_2, \Sigma_2)$, where $n_i \in \Gamma_N$, for each $i \in \{1, \dots, k\}$. Moreover, by the repeated applications of σ_{12}^* , we further get that $t(n_i, n_k) \in \text{chase}(D_2, \Sigma_2)$, for each $i \in \{1, \dots, k-1\}$, i.e., n_i and n_k , for each $i \in \{1, \dots, k-1\}$, will be “pulled” together in some relation

¹We assume that $(\sigma, X) \neq (\sigma', X')$ implies $n_X^\sigma \neq n_{X'}^{\sigma'}$, for each pair of elements $(n_X^\sigma, n_{X'}^{\sigma'})$ of all null-sets [Leone et al., 2012].

of t in $\text{chase}(D_2, \Sigma_2)$. As such, for the given BCQ $Q_2 = \exists X t(X, X) \rightarrow q$ also from Example 2, since $D_2 \cup \Sigma_2 \models Q_2$ iff $D_2 \cup \Sigma_2 \cup \{\forall X \neg t(X, X)\}$ is not satisfiable, then the fact that we have to satisfy the literal “ $\neg t(X, X)$ ” for all “ X ”, and because $t(n_i, n_k) \in \text{chase}(D_2, \Sigma_2)$, for $i \in \{1, \dots, k-1\}$, implies that each of the n_i must be of different values from n_k , and thus cannot be represented by a finite number of distinct labeled nulls.

3.1 Triangular-components of TGD extensions

In contrast to Σ_2 from Example 2, what we aim to achieve now is to identify syntactic conditions on TGDs so that such a “distinguishable relation” of labeled nulls is limited in the chase derivation. As a consequence, we end up with some nulls that need not be distinguishable from another, and as such, we can actually *re-use* these nulls without introducing new ones in the chase derivation. This leads BCQ-Ans to be decidable.

Definition 1 (TGD extension). *Given a set of TGDs Σ , we denote by Σ^+ as the extension of Σ , and is inductively defined as follows:*

$$\Sigma^0 = \{ \langle \text{BD}(\sigma), \text{HD}(\sigma) \rangle \mid \sigma \in \Sigma \}; \quad (5)$$

$$\Sigma^{i+1} = \Sigma^i \cup \quad (6)$$

$\{ \langle B_1 \eta_1 \cup B^*, H_2(\eta_2 \circ \theta) \rangle \mid \langle B_1, H_1 \rangle \in \Sigma^i, \langle B_2, H_2 \rangle \in \Sigma^i$
and where $\eta_1 : \text{VAR}(B_1 \cup H_1) \rightarrow \text{TERMS}(B_1 \cup H_1)$ and
 $\eta_2 : \text{VAR}(B_2 \theta \cup H_2 \theta) \rightarrow \text{TERMS}(B_1 \eta_1 \cup B_2 \theta \cup H_2 \theta)$
such that:

- (1) θ is a renaming (bijective) substitution such that
 $\text{VAR}(B_1 \cup H_1) \cap \text{VAR}(B_2 \theta \cup H_2 \theta) = \emptyset$;
- (2) $\exists H'_1 \subseteq H_1$ and $\exists B'_2 \subseteq B_2 \theta$ such that $H'_1 \eta_1 = B'_2 \eta_2$
corresponds to the MGU of H'_1 and B'_2 , and
 $\eta_1(X) = X$, for each $X \in \text{VAR}(B_1) \setminus \text{VAR}(H'_1)$;
- (3) $B^* = B_2(\eta_2 \circ \theta) \setminus B'_2 \eta_2$. (7)

Then we set $\Sigma^+ = \Sigma^\infty$ as the fixpoint of Σ^i . We note that even though Σ^+ can be infinite in general, it follows from Theorem 5 that it is enough to consider a finite number of iterations Σ^i to determine “recursive triangular-components” (as will be defined exactly in Definition 2).

The TGD extension Σ^+ of Σ contains as elements pairs of sets of atoms of the form “ $\langle B, H \rangle$ ”. Loosely speaking, the set B represents the body of some TGD in Σ while H as the head atoms that can be linked (transitive) through the repeated applications of the steps in (6)-(7) (which is done until a fixpoint is reached). The base case Σ^0 in (5) first considers the pairs $\langle B, H \rangle$, where $B = \text{BD}(\sigma)$ and $H = \text{HD}(\sigma)$, for each $\sigma \in \Sigma$. Inductively, assuming we have already computed Σ^i , we have that Σ^{i+1} is obtained by adding the previous step Σ^i as well as adding the set as defined through (6)-(7).

More specifically, using similar ideas to the *TGD expansion* in [Calì *et al.*, 2012] that was used in identifying the *sticky-join* class of TGDs and *tame reachability* in [Gottlob *et al.*, 2013] used for the *tame* class, the set (6)-(7) considers the other head types that can be (transitively)

reached from some originating TGD. Indeed, as described in (6)-(7), for $\langle B_1, H_1 \rangle \in \Sigma^i$ and $\langle B_2, H_2 \rangle \in \Sigma^i$, we add the pair $\langle B_1 \eta_1 \cup B^*, H_2(\eta_2 \circ \theta) \rangle$ into Σ^{i+1} . Intuitively, with the assignment “ $\eta_2 \circ \theta$ ” as described in (6)-(7), the aforementioned pair $\langle B_1 \eta_1 \cup B^*, H_2(\eta_2 \circ \theta) \rangle$ encodes the possibility that “ $H_2(\eta_2 \circ \theta)$ ” can be derived transitively from bodies $B_1 \eta_1$ and $B^* = B_2(\eta_2 \circ \theta) \setminus B'_2 \eta_2$. We note that the renaming function “ θ ” is only used for pair $\langle B_2, H_2 \rangle$ in (6)-(7) (and no renaming for pair $\langle B_1, H_1 \rangle$) so that we can track some of the originating variables from B_1 all the way through the head “ $H_2(\eta_2 \circ \theta)$ ”, and which can be retained through iterative applications of the criterion given in (6)-(7). Importantly, we note that the connection between B_1 and H_2 is inferred with $H'_1 \eta_1 = B'_2 \eta_2$ (where $H'_1 \subseteq H_1$ and $B'_2 \subseteq B_2 \theta$) corresponding to the *most general unifier* (MGU) of H'_1 and B'_2 (please see Condition (2) of set (6)-(7)).

Example 3. *Let Σ_3 be the following set of TGD rules:*

$$\begin{aligned} \sigma_{31} &: t(X, Y) \rightarrow \exists Z t(Y, Z), \\ \sigma_{32} &: t(X, Y) \rightarrow \mathbf{s}(X) \wedge \mathbf{s}(Y), \\ \sigma_{33} &: t(X_1, V) \wedge \mathbf{s}(V) \wedge t(W, Z_1) \rightarrow u(X_1, V, W, Z_1), \\ \sigma_{34} &: u(X_2, Y, Y, Z_2) \rightarrow v(X_2, Z_2), \\ \sigma_{35} &: v(X_3, Z_3) \rightarrow t(X_3, Z_3). \end{aligned}$$

Then from the rules σ_{33} , σ_{34} and σ_{35} , we get the three pairs $p_{01} = \{ \{ t(X_1, V), \mathbf{s}(V), t(W, Z_1) \}, \{ u(X_1, V, W, Z_1) \} \}$, $p_{02} = \{ \{ u(X_2, Y, Y, Z_2) \}, \{ v(X_2, Z_2) \} \}$ and $p_{03} = \{ \{ v(X_3, Z_3) \}, \{ t(X_3, Z_3) \} \}$ in Σ_3^0 , respectively. Then through the unification of head atom “ $u(X_1, V, W, Z_1)$ ” of rule σ_{33} with the body atom “ $u(X_2, Y, Y, Z_2)$ ” of σ_{34} , we get the pair $p_{11} = \{ \{ t(X_1, V), \mathbf{s}(V), t(V, Z_1) \}, \{ v(X_1, Z_1) \} \} \in \Sigma_3^1$. Then finally, through the unification of the head atom “ $v(X_2, Z_2)$ ” of σ_{34} and the body atom “ $v(X_3, Z_3)$ ” of σ_{35} , we further get the pair $p_{21} = \{ \{ t(X_1, V), \mathbf{s}(V), t(V, Z_1) \}, \{ t(X_1, Z_1) \} \} \in \Sigma_3^2$.

As will be seen in Definition 2, the last pair p_{21} in Example 3 corresponds to what we will call a “recursive triangular-component” that will be defined precisely in Definition 2.

3.2 Triangularly-guarded TGDs

In this section, we now introduce the key notion of triangularly-guarded TGDs, which are the *triangular-components*. It will first be necessary to introduce the following notions of cyclically-affected only and link variables of body atoms, as well as variable markups that borrows some concepts from [Calì *et al.*, 2012].

We first introduce the notion of *cyclically-affected* only variables in the body (i.e., set B) of some pair $\langle B, H \rangle \in \Sigma^+$ where Σ is a set of TGDs. So towards this purpose, for a given pair $\langle B, H \rangle \in \Sigma^+$, we define $\widehat{\text{VAR}}(\Sigma, B)$ (i.e., “ $\widehat{\text{VAR}}$ ” is read *var-hat*) as the set of variables: $\{ X \mid X \in \text{VAR}(B) \text{ and } \bigcap \text{NULLSET}(X, \sigma, \Sigma)[B] \cap \text{CYC-NULL}(\Sigma) \neq \emptyset \}$, where $\bigcap \text{NULLSET}(X, \sigma, \Sigma)[B]$ denotes the intersection of the unions $\bigcup_{b \in \text{ARG}(b'), b' \in \text{HD}(\sigma'), \sigma' \in \Sigma} \text{NULLSET}(b, b', \Sigma)$, for each pair (b, \mathbf{b}) such that $b \in \text{ARG}(\mathbf{b}) \upharpoonright_X$ and $\mathbf{b} \in B$. For convenience and when clear from the context, we simply refer to $\widehat{\text{VAR}}(\Sigma, B)$ as $\widehat{\text{VAR}}(B)$. Intuitively, variables in

$\widehat{\text{VAR}}(B)$ are placement for which an infinite number of labeled nulls can possibly be propagated in the set of atoms B with respect to Σ . Loosely speaking, if $B = \text{BD}(\sigma)$, for some set of TGDs Σ , then $\widehat{\text{VAR}}(B)$ contains the *glut-variables* in [Krötzsch and Rudolph, 2011] that also fails the *shyness* property [Leone *et al.*, 2012] (please see Section 2.3 of this paper).

Next, we introduce the link variables between “body atoms”. Given two atoms $\mathbf{b}_1, \mathbf{b}_2 \in B$, for some $\langle B, H \rangle \in \Sigma^+$ where Σ is a set of TGDs, we set $\text{LINK}(\Sigma^+, B, \mathbf{b}_1, \mathbf{b}_2)$ (or just $\text{LINK}(B, \mathbf{b}_1, \mathbf{b}_2)$ when clear from the context) as the set of variables in the intersections $(\text{VAR}(\mathbf{b}_1) \cap \text{VAR}(\mathbf{b}_2)) \cap \widehat{\text{VAR}}(\Sigma, B)$. Intuitively, $\text{LINK}(B, \mathbf{b}_1, \mathbf{b}_2)$ denotes the cyclically-affected only variables of B that can actually “join” (link) two common nulls between the body atoms \mathbf{b}_1 and \mathbf{b}_2 that can be obtained through some firing substitution.

Lastly, we now introduce the notion of variable markup. Let \mathbf{a}, \mathbf{c} and \mathbf{a}' be three atoms such that $\text{REL}(\mathbf{a}) = \text{REL}(\mathbf{a}')$. Then similarly to [Cali *et al.*, 2012], we define the “markup procedure” as follows. For the base case, we let \mathbf{a}^0 (resp. \mathbf{c}^0) denote the atom obtained from \mathbf{a} (resp. \mathbf{c}) by marking each variable $X \in \text{VAR}(\mathbf{a})$ (resp. $X \in \text{VAR}(\mathbf{c})$) such that $X \notin \text{VAR}(\mathbf{c})$ (resp. $X \notin \text{VAR}(\mathbf{a}')$).

Inductively, we define \mathbf{a}^{i+1} (resp. \mathbf{c}^{i+1}) to be the atom obtained from \mathbf{a}^i (resp. \mathbf{c}^i) as follows: for each variable $X \in \text{VAR}(\mathbf{c})$ (resp. $X \in \text{VAR}(\mathbf{a}')$), if each variables in positions $\text{ARG}(\mathbf{c}) \upharpoonright_X$ (resp. $\text{ARG}(\mathbf{a}') \upharpoonright_X$) occurs as marked in \mathbf{c}^i (resp. \mathbf{a}^i), then each occurrence of X is marked in \mathbf{a}^i (resp. \mathbf{c}^i) to obtain the new atom \mathbf{a}^{i+1} (resp. \mathbf{c}^{i+1}). Then naturally, we denote by \mathbf{a}^∞ (resp. \mathbf{c}^∞) as the fixpoint of the markup applications. Finally, we denote by $\text{M-VAR}(\mathbf{a}, \mathbf{c}, \mathbf{a}')$ as the set of all the marked variables mentioned *only* in \mathbf{a}^∞ under atoms \mathbf{c} and \mathbf{a}' as obtained through the method above.

Loosely speaking, in the aforementioned variable markup above, we can think of \mathbf{a} as corresponding to some “body atom” while \mathbf{c} and \mathbf{a}' as “head atoms” that are reachable through the TGD extension Σ^+ (see Definition 1) as will respectively occur in some derivation track. Intuitively, the marked variables represent element positions that may fail the “sticky-join” property, i.e., disappear in the derivation track. Intuitively, the sticky-join property insures decidability because only a finite number of elements can circulate among the derivation tracks. As will be revealed in following Definition 2, we further note that we only consider marked variables in terms of the triple $\langle \mathbf{a}, \mathbf{c}, \mathbf{a}' \rangle$ because we only consider them for “recursive triangular-components.”

Definition 2 (Recursive triangular-components). Let Σ be a set of TGDs and Σ^+ its extension as defined in Definition 1. Then a recursive triangular-component (RTC) \mathcal{T} is a tuple

$$\langle \langle B, H \rangle, \langle \mathbf{a}, \mathbf{b}, \mathbf{c} \rangle, \langle X, Z \rangle, \mathbf{a}' \rangle, \quad (8)$$

where: **1.)** $\langle B, H \rangle \in \Sigma^+$; **2.)** $\{\mathbf{a}, \mathbf{b}\} \subseteq B$, $\mathbf{a} \neq \mathbf{b}$ and $\mathbf{c} \in H$; **3.)** \mathbf{a}' is an atom and there exists an assignment $\theta : \text{VAR}(\mathbf{a}) \rightarrow \text{VAR}(\mathbf{a}')$ such that $\mathbf{a}\theta = \mathbf{a}'$ and either one of the following holds:

- (a) $\mathbf{c} = \mathbf{a}'$, or
- (b) there exists $\langle B', H' \rangle \in \Sigma^+$ and function $\eta : \text{VAR}(B' \theta' \cup H' \theta') \rightarrow \Gamma_{\mathbf{c}} \cup \Gamma_{\mathbf{a}'}$, where θ' is just a renaming substi-

tution such that $\text{VAR}(B' \theta' \cup H' \theta') \cap \text{VAR}(B \cup H) = \emptyset$, and where $\mathbf{c} \in B'(\eta \circ \theta')$ and $\mathbf{a}' \in H'(\eta \circ \theta')$;

4.) X and Z are two distinct variables where $\{X, Z\} \subseteq \widehat{\text{VAR}}(B)$, and $X \in \text{VAR}(\mathbf{a})$, $Z \in \text{VAR}(\mathbf{b})$, $\{X, Z\} \subseteq \text{VAR}(\mathbf{c})$ and $X \in \text{VAR}(\mathbf{a}')$; and lastly, **5.)** there exists a tuple of distinct atoms $\vec{\mathbf{d}} = \mathbf{d}_1 \dots \mathbf{d}_m \subseteq B$ such that:

- (a) $\mathbf{a} = \mathbf{d}_1$ and $\mathbf{d}_m = \mathbf{b}$, and for each $i \in \{1, \dots, m-1\}$, there exists $Y_i \in \text{LINK}(B, \mathbf{d}_i, \mathbf{d}_{i+1})$;
- (b) for some $i \in \{1, \dots, m-1\}$, there exists $Y' \in \text{LINK}(B, \mathbf{d}_i, \mathbf{d}_{i+1}) \setminus \{X, Z\}$ such that $Y' \in \text{VAR}(\mathbf{a}')$ implies all occurrences of variables in positions $\text{ARG}(\mathbf{a}') \upharpoonright_{Y'}$ in the atom \mathbf{a} are in $\text{M-VAR}(\mathbf{a}, \vec{\mathbf{c}}, \mathbf{a}')$.

Loosely speaking, a recursive triangular-component (RTC) \mathcal{T} of the form (8) (see Definition 2 and Figure 1), can possibly enforce an infinite cycle of labeled nulls being “pulled” together into a relation in the chase derivation. We explain this by using again the TGDs $\Sigma_2 = \{\sigma_{11}, \sigma_{12}^*\}$ and database D_2 of Example 2. Here, let us assume that $B = \text{BD}(\sigma_{12}^*)$ and $H = \text{HD}(\sigma_{12}^*)$ such that $\langle B, H \rangle$ is the pair mentioned (8). Then with the body atoms $\mathbf{t}(X, Y)$, $\mathbf{u}(Y, Z) \in \text{BD}(\sigma_{12}^*)$ and head atom $\mathbf{t}(X, Z) \in \text{HD}(\sigma_{12}^*)$ also standing for the atoms \mathbf{a} , \mathbf{b} and \mathbf{c} in (8), respectively, then we can form the RTC:

$$\langle \langle B, H \rangle, \langle \mathbf{t}(X, Y), \mathbf{u}(Y, Z), \mathbf{t}(X, Z) \rangle, \langle X, Z \rangle, \mathbf{t}(X, Z) \rangle. \quad (9)$$

We note here from Condition **3.)** of Definition 2 that the atom \mathbf{c}' in (8) is also the head atom “ $\mathbf{t}(X, Z)$ ”, i.e., the choice (a) $\mathbf{c} = \mathbf{a}'$ of Condition **3.)** holds in this case. For simplicity, we note that our example RTC in (9) retains the names of the variables “ X ” and “ Y ” mentioned in (8). Loosely speaking, for two atoms $\mathbf{t}(n_i, n_j)$, $\mathbf{t}(n_j, n_k) \in \text{chase}(D_2, \Sigma_2)$, we have that rule σ_{12}^* and its head atom “ $\mathbf{t}(X, Z)$ ” would combine the two nulls “ n_i ” and “ n_j ” into a relation “ $\mathbf{t}(n_i, n_j)$ ” in $\text{chase}(D_2, \Sigma_2)$. Since the variable “ X ” is retained in each RTC cycle via Condition **4.)** (see Figure 1), this makes possible that nulls held by “ X ” in each cycle (in some substitution) to be pulled together into some other nulls held by “ Z ” as derived through the head atom “ $\mathbf{t}(X, Z)$ ”.

We further note that the connecting variable “ Y ” between the two body atoms “ $\mathbf{t}(X, Y)$ ” and “ $\mathbf{u}(Y, Z)$ ” corresponds to the variables $Y_i \in \text{LINK}(B, \mathbf{d}_i, \mathbf{d}_{i+1})$ of point (a) of Condition **5.)**, and for some i , some $Y' \in \text{LINK}(B, \mathbf{d}_i, \mathbf{d}_{i+1}) \setminus \{X, Z\}$ also appears as marked (i.e., $Y' \in \text{M-VAR}(\mathbf{a}, \mathbf{c}, \mathbf{a}')$) in point (b) of Condition **5.)** with respect to the atom \mathbf{a}' . Intuitively, we require in (b) of Condition **5.)** that *some* of these variables Y' occur as marked (w.r.t. \mathbf{a}') so that labeled nulls of some link variables have a chance to disappear in the RTC cycle for otherwise, they can only link and combine a bounded number of labeled nulls due to the *sticky-join* property [Cali *et al.*, 2012].

Example 4. Consider again the pair $p_{21} = \langle \{\mathbf{t}(X_1, V), \mathbf{s}(V), \mathbf{t}(V, Z_1)\}, \{\mathbf{t}(X_1, Z_1)\} \rangle \in \Sigma_3^2$ from Example 3. Then with the pair p_{21} standing for $\langle B, H \rangle$ in (8), the atoms “ $\mathbf{t}(X_1, V)$ ”, “ $\mathbf{t}(V, Z_1)$ ”, “ $\mathbf{t}(X_1, Z_1)$ ” and “ $\mathbf{t}(X_1, Z_1)$ ” for the atoms \mathbf{a} , \mathbf{b} , \mathbf{c} and \mathbf{c}' in (8), respectively, and variables $\langle X_1, Z_1 \rangle$ for the variables $\langle X, Z \rangle$ in (8), then we can get a corresponding RTC $\mathcal{T}_1 = (p_{21}, \langle \mathbf{t}(X_1, V), \mathbf{t}(V, Z_1), \mathbf{t}(X_1, Z_1) \rangle, \langle X_1, Z_1 \rangle, \mathbf{t}(X_1, Z_1))$ as illustrated in Figure 2.

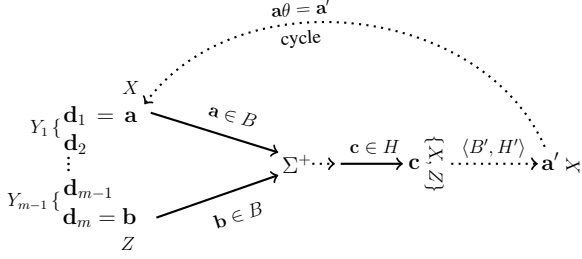


Figure 1: Recursive triangular-component (RTC).

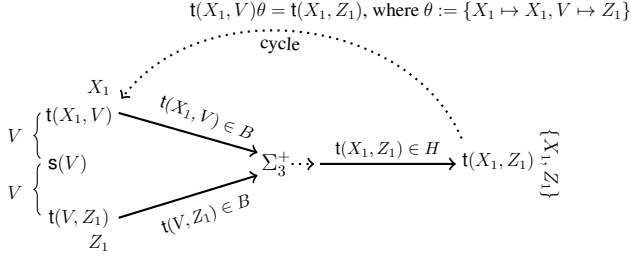


Figure 2: RTC \mathcal{T}_1 of Σ_3 with $\langle B, H \rangle = p_{21}$ of Example 3.

Definition 3 (Triangularly-guarded TGDs). We say that a set of TGDs Σ is triangularly-guarded (TG) iff for each RTC \mathcal{T} of the form (8) (see Definition 2 and Figure 1), we have that there exists some atom $\mathbf{d} \in B$ such that $\{X, Z\} \subseteq \text{VAR}(\mathbf{d})$.

For convenience, we denote by TG as the class of all the triangularly-guarded TGDs.

Example 5. Consider again the TGDs Σ_1 in Example 1 containing rules σ_{11} and σ_{12} . Then because there cannot be any derivation track that would combine the two variables “ X ” and “ Z ” of rule σ_{12} into a single head atom in Σ_1^+ , then it follows that Σ_1 cannot have any RTC. Therefore, it trivially follows from Definition 3 that Σ_1 is in the class TG.

4 Main Results and Concluding Remarks

We now examine the important properties of this TG class of TGDs. In particular, we show that BCQ-Ans under the new class TG of TGDs is decidable.

Definition 4 (Interchangeable nulls). Let $\vec{\mathbf{a}} = \mathbf{a}_1 \dots \mathbf{a}_l$ be a tuple of atoms where $\text{TERMS}(\vec{\mathbf{a}}) \subseteq \Gamma_V$, D be a database, Σ a set of TGDs and $n_i, n_j \in \Gamma_N$ ($i, j \in \mathbb{N}$). Then we say that n_i and n_j are $\vec{\mathbf{a}}$ -interchangeable under $\text{chase}(D, \Sigma)$ if for each connected tuple of atoms $\vec{\mathbf{a}}\theta = \theta(\mathbf{a}_1) \dots \theta(\mathbf{a}_l) \subseteq \text{chase}(D, \Sigma)$, where θ is a bijective (renaming) substitution, we have that $\{n_i, n_j\} \subseteq \text{NULLS}(\vec{\mathbf{a}}\theta)$ implies there exists an assignment $\theta' : \text{NULLS}(\vec{\mathbf{a}}\theta) \rightarrow \Gamma_N$ such that: (1) $\theta'(n_i) = \theta'(n_j)$; and (2) $\vec{\mathbf{a}}(\theta' \circ \theta) \subseteq \text{chase}(D, \Sigma)$.

Intuitively, with the tuple of atoms $\vec{\mathbf{a}} = \mathbf{a}_1 \dots \mathbf{a}_l$ as above, we have that n_i and n_j are “ $\vec{\mathbf{a}}$ -interchangeable” under $\text{chase}(D, \Sigma)$ guarantees that if for some BCQ $Q = \exists \mathbf{X} \varphi(\mathbf{X}) \rightarrow q$ we have that $\text{chase}(D, \Sigma) \models Q$, then if $\varphi = \theta(\mathbf{a}_1) \wedge \dots \wedge \theta(\mathbf{a}_l)$ for some renaming substitution θ (i.e., $\vec{\mathbf{a}}$ is the same “type” as φ), then we have that simultaneously replacing all occurrences of n_j by n_i in $\text{chase}(D, \Sigma)$ would not affect the fact that $\text{chase}(D, \Sigma) \models Q$.

Before we present the following Theorem 2, it is necessary to firstly introduce the notion *level* in a chase that we define inductively as follows [Cali *et al.*, 2012]: (1) for an atom $\mathbf{a} \in D$, we set $\text{LEVEL}(\mathbf{a}) = 0$; then inductively, (2) for an atom $\mathbf{a} \in \text{chase}(D, \Sigma)$ obtained via some chase step $I_k \xrightarrow{\sigma, \eta} I_{k+1}$, we set $\text{LEVEL}(\mathbf{a}) = \text{MAX}(\{\text{LEVEL}(\mathbf{b}) \mid \mathbf{b} \in \text{BD}(\sigma\eta)\}) + 1$. Then finally, for some given $k \in \mathbb{N}$, we set $\text{chase}^k(D, \Sigma) = \{\mathbf{a} \mid \mathbf{a} \in \text{chase}(D, \Sigma) \text{ and } \text{LEVEL}(\mathbf{a}) \leq k\}$. Intuitively, $\text{chase}^k(D, \Sigma)$ is the instance containing atoms that can be derived in a fewer or equal to k chase steps.

Theorem 2 (Bounded nulls). Let D be a database and $\Sigma \in \text{TG}$. Then for each tuple of atoms $\vec{\mathbf{a}}$, $\exists N \in \mathbb{N}$ such that $\forall k \in \mathbb{N}$, we have that $n_j \in [\text{NULLS}(\text{chase}^{N+k}(D, \Sigma)) \setminus \text{NULLS}(\text{chase}^N(D, \Sigma))]$ implies $\exists n_i \in \text{NULLS}(\text{chase}^N(D, \Sigma))$ where n_i and n_j are $\vec{\mathbf{a}}$ -interchangeable under $\text{chase}(D, \Sigma)$.

Proof (Sketch). A contradiction can be derived by assuming that $\exists \vec{\mathbf{a}}, \forall N \in \mathbb{N}, \exists k \in \mathbb{N}, \exists n_j \in \Gamma_N, \forall n_i \in \Gamma_N$, where: $n_j \in [\text{NULLS}(\text{chase}^{N+k}(D, \Sigma)) \setminus \text{NULLS}(\text{chase}^N(D, \Sigma))]$, $n_i \in \text{NULLS}(\text{chase}^N(D, \Sigma))$ and n_i and n_j are not $\vec{\mathbf{a}}$ -interchangeable under $\text{chase}(D, \Sigma)$. Then the fact that n_i and n_j are not $\vec{\mathbf{a}}$ -interchangeable under $\text{chase}(D, \Sigma)$ implies the existence of an infinite distinguishing relation among all those nulls n_i and n_j . Therefore, it follows that there must exist some RTC \mathcal{T} of the form (8) in Σ^+ and where there are no body atom \mathbf{d} that guards variables “ X ” and “ Z ”, i.e., $\{X, Z\} \subseteq \text{VAR}(\mathbf{d})$ (see Definition 3). \square

Theorem 3 (Finite model property). For database D , TGDs $\Sigma \in \text{TG}$ and BCQ Q , $D \cup \Sigma \cup \{-Q\}$ have the FM property.

Proof (Sketch). Let $\vec{\mathbf{a}} = \mathbf{a}_1 \dots \mathbf{a}_l = \text{BD}(x)$, for some $x \in \Sigma \cup \{Q\}$. Then by Lemma 2, each of the null $n_j \in [\text{NULLS}(\text{chase}^{N+k}(D, \Sigma)) \setminus \text{NULLS}(\text{chase}^N(D, \Sigma))]$ is always $\vec{\mathbf{a}}$ -interchangeable with some null $n_i \in \text{NULLS}(\text{chase}^N(D, \Sigma))$. It then follows that $\text{chase}(D, \Sigma)$ can be represented by a finite number of nulls from which the finite model property follows. \square

Theorem 4 (Comparison with other syntactic classes). For each class $\mathcal{C} \in \{\text{WA}, \text{W-GUARDED}, \text{WSJ}, \text{G-GUARDED}, \text{SHY}, \text{TAME}, \text{WR}\}$, we have that $\mathcal{C} \subsetneq \text{TG}$.

Proof (Sketch). A contradiction is derived by assuming that $\mathcal{C} \in \{\text{WA}, \text{W-GUARDED}, \text{WSJ}, \text{G-GUARDED}, \text{SHY}, \text{TAME}, \text{WR}\}$ but where $\mathcal{C} \notin \text{TG}$, since we have by Definition 3 that $\mathcal{C} \notin \text{TG}$ implies that there exists some RTC where the variables X and Z are not guarded by some atom $\mathbf{d} \in B$. \square

Theorem 5 (Computational complexities). (1) Determining if $\Sigma \in \text{TG}$ is in 2-EXPTIME (upper-bound) but is PSPACE-hard (lower-bound); (2) The BCQ-Ans combined complexity problem under the class TG is in 4-EXPTIME (upper-bound) but is 3-EXPTIME-hard (lower-bound).

In this paper, we have introduced a new class of TGDs called *triangularly-guarded* TGDs (TG), for which BCQ-Ans is decidable as well as having the FM property (Theorems 2 and 3). We further showed that TG strictly contains the

current main syntactic classes: WA, W-GUARDED, WSJ, G-GUARDED, SHY, TAME and WR (Theorem 4), which, to the best of our knowledge, provides a unified representation of those aforementioned TGD classes.

References

- [Abiteboul *et al.*, 1995] Serge Abiteboul, Richard Hull, and Victor Vianu. *Foundations of Databases*. Addison-Wesley, 1995.
- [Baader *et al.*, 2016] Franz Baader, Meghyn Bienvenu, Carsten Lutz, and Frank Wolter. Query and predicate emptiness in ontology-based data access. *J. Artif. Intell. Res.*, 56:1–59, 2016.
- [Baget *et al.*, 2011] Jean-François Baget, Michel Leclère, Marie-Laure Mugnier, and Eric Salvat. On rules with existential variables: Walking the decidability line. *Artif. Intell.*, 175(9-10):1620–1654, 2011.
- [Bárány *et al.*, 2010] Vince Bárány, Georg Gottlob, and Martin Otto. Querying the guarded fragment. In *Proceedings of the 25th Annual IEEE Symposium on Logic in Computer Science, LICS 2010, 11-14 July 2010, Edinburgh, United Kingdom*, pages 1–10, 2010.
- [Beeri and Vardi, 1981] Catriel Beeri and Moshe Y. Vardi. The implication problem for data dependencies. In *Automata, Languages and Programming, 8th Colloquium, Acre (Akko), Israel, July 13-17, 1981, Proceedings*, pages 73–85, 1981.
- [Cabibbo, 1998] Luca Cabibbo. The expressive power of stratified logic programs with value invention. *Inf. Comput.*, 147(1):22–56, 1998.
- [Calì *et al.*, 2009] Andrea Calì, Georg Gottlob, and Thomas Lukasiewicz. A general datalog-based framework for tractable query answering over ontologies. In *Proceedings of the Twenty-Eighth ACM SIGMOD-SIGACT-SIGART Symposium on Principles of Database Systems, PODS 2009, June 19 - July 1, 2009, Providence, Rhode Island, USA*, pages 77–86, 2009.
- [Calì *et al.*, 2012] Andrea Calì, Georg Gottlob, and Andreas Pieris. Towards more expressive ontology languages: The query answering problem. *Artif. Intell.*, 193:87–128, 2012.
- [Calì *et al.*, 2013] Andrea Calì, Georg Gottlob, and Michael Kifer. Taming the infinite chase: Query answering under expressive relational constraints. *J. Artif. Intell. Res.*, 48:115–174, 2013.
- [Calvanese *et al.*, 2007] Diego Calvanese, Giuseppe De Giacomo, Domenico Lembo, Maurizio Lenzerini, and Riccardo Rosati. Tractable reasoning and efficient query answering in description logics: The *DL-Lite* family. *J. Autom. Reasoning*, 39(3):385–429, 2007.
- [Civili and Rosati, 2012] Cristina Civili and Riccardo Rosati. A broad class of first-order rewritable tuple-generating dependencies. In *Proceedings of the 2nd International Conference on Datalog in Academia and Industry (Datalog-2012)*, pages 68–80, 2012.
- [Deutsch *et al.*, 2008] Alin Deutsch, Alan Nash, and Jeffrey B. Remmel. The chase revisited. In *Proceedings of the Twenty-Seventh ACM SIGMOD-SIGACT-SIGART Symposium on Principles of Database Systems, PODS 2008, June 9-11, 2008, Vancouver, BC, Canada*, pages 149–158, 2008.
- [Fagin *et al.*, 2005] Ronald Fagin, Phokion G. Kolaitis, Renée J. Miller, and Lucian Popa. Data exchange: semantics and query answering. *Theor. Comput. Sci.*, 336(1):89–124, 2005.
- [Gogacz and Marcinkowski, 2017] Tomasz Gogacz and Jerzy Marcinkowski. Converging to the chase - A tool for finite controllability. *J. Comput. Syst. Sci.*, 83(1):180–206, 2017.
- [Gottlob *et al.*, 2013] Georg Gottlob, Marco Manna, and Andreas Pieris. Combining decidability paradigms for existential rules. *Theory and Practice of Logic Programming*, 16(1):877–892, 2013.
- [Grau *et al.*, 2013] Bernardo Cuenca Grau, Ian Horrocks, Markus Krotzsch, Clemens Kupke, Despoina Magka, Boris Motik, and Zhe Wang. acyclicity notions for existential rules and their application to rquery answering in ontologies. *Journal of Artificial Intelligence Research*, 47:741–808, 2013.
- [Johnson and Klug, 1984] David S. Johnson and Anthony C. Klug. Testing containment of conjunctive queries under functional and inclusion dependencies. *J. Comput. Syst. Sci.*, 28(1):167–189, 1984.
- [Krötzsch and Rudolph, 2011] Markus Krötzsch and Sebastian Rudolph. Extending decidable existential rules by joining acyclicity and guardedness. In *IJCAI 2011, Proceedings of the 22nd International Joint Conference on Artificial Intelligence, Barcelona, Catalonia, Spain, July 16-22, 2011*, pages 963–968, 2011.
- [Leone *et al.*, 2012] Nicola Leone, Marco Manna, Giorgio Terracina, and Pierfrancesco Veltri. Efficiently computable datalog \exists programs. In *Principles of Knowledge Representation and Reasoning: Proceedings of the Thirteenth International Conference, KR 2012, Rome, Italy, June 10-14, 2012*, 2012.
- [Maier *et al.*, 1979] David Maier, Alberto O. Mendelzon, and Yehoshua Sagiv. Testing implications of data dependencies. *ACM Trans. Database Syst.*, 4(4):455–469, 1979.
- [Patel-Schneider and Horrocks, 2007] Peter F. Patel-Schneider and Ian Horrocks. A comparison of two modelling paradigms in the semantic web. *J. Web Sem.*, 5(4):240–250, 2007.
- [Rosati, 2006] Riccardo Rosati. On the decidability and finite controllability of query processing in databases with incomplete information. In *Proceedings of the Twenty-Fifth ACM SIGACT-SIGMOD-SIGART Symposium on Principles of Database Systems, June 26-28, 2006, Chicago, Illinois, USA*, pages 356–365, 2006.
- [Rosati, 2011] Riccardo Rosati. On the finite controllability of conjunctive query answering in databases under open

world assumption. *J. Comput. Syst. Sci.*, 77(3):572–594, 2011.

[Zhang *et al.*, 2015] Heng Zhang, Yan Zhang, and Jia-Huai You. Existential rule languages with finite chase: Complexity and expressiveness. In *Proceedings of the 29th AAAI Conference on Artificial Intelligence (AAAI-2015)*, pages 1678–1685, 2015.