

Language-Independent Representer for Neural Machine Translation

Long Zhou^{1,2}, Yuchen Liu^{1,2}, Jiajun Zhang^{1,2}, Chengqing Zong^{1,2,3}, Guoping Huang⁴

¹National Laboratory of Pattern Recognition, CASIA, Beijing, China

²University of Chinese Academy of Sciences, Beijing, China

³CAS Center for Excellence in Brain Science and Intelligence Technology, Shanghai, China

⁴Tencent AI Lab

{long.zhou, yuchen.liu, jjzhang, cqzong}@nlpr.ia.ac.cn, donkeyhuang@tencent.com

Abstract

Current Neural Machine Translation (NMT) employs a language-specific encoder to represent the source sentence and adopts a language-specific decoder to generate target translation. This language-dependent design leads to large-scale network parameters and makes the duality of the parallel data underutilized. To address the problem, we propose in this paper a language-independent representer to replace the encoder and decoder by using weight sharing. This shared representer can not only reduce large portion of network parameters, but also facilitate us to fully explore the language duality by jointly training **source-to-target**, **target-to-source**, **left-to-right** and **right-to-left** translations within a multi-task learning framework. Experiments show that our proposed framework can obtain significant improvements over conventional NMT models on resource-rich and low-resource translation tasks with only a quarter of parameters.

Introduction

End-to-end neural machine translation (NMT) has significantly improved the quality of machine translation in recent several years (Bahdanau, Cho, and Bengio 2015; Gehring et al. 2017; Vaswani et al. 2017). Although NMT has shown superior performance on public benchmarks (Bojar et al. 2017) and rapid adoption in deployments by, e.g., Baidu (Zhou et al. 2016), Google (Wu et al. 2016), and Microsoft (Hassan et al. 2018), it still faces many challenges (Koehn and Knowles 2017).

No matter which basic blocks we use, such as recurrence (Bahdanau, Cho, and Bengio 2015), convolution (Gehring et al. 2017), or self-attention (Vaswani et al. 2017), conventional NMT adopts language-specific encoder to transform the source language and utilizes a language-specific decoder to generate target translation token by token. It is clear that this language-dependent encoder-decoder framework has two problems. First, encoder and decoder have similar structures but contain separate parameters, resulting in the waste of enormous parameters. Second, one NMT model can only perform one unidirectional translation task using parallel corpora, which cannot take full advantage of language duality.

To address the issue of parameters scale, existing studies usually use weight pruning or knowledge distillation (See, Luong, and Manning 2016; Kim and Rush 2016) to compress NMT models. Press and Wolf (2017) conducted the

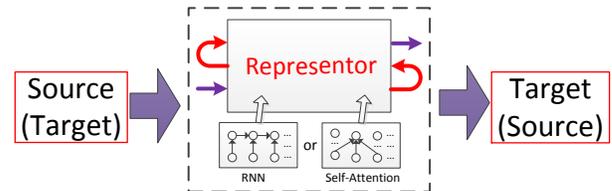


Figure 1: Our language-independent representer, replacing encoder and decoder in conventional NMT, can perform and combine the advantage of source-to-target and target-to-source translation tasks by leveraging language duality.

weight tying of input and output embedding in RNN-based NMT. However, their researches are built under the language-dependent encoder-decoder framework which does not consider the language commonality. Being orthogonal to previous work, we are interested in exploiting language-independent model to reduce network parameters.

On the other hand, dual properties and agreement of translation have attracted much attention in NMT (Cheng et al. 2016a; Liu et al. 2016; Tu et al. 2017; Hassan et al. 2018). Cheng et al. (2016a) proposed agreement-based joint training for source-to-target and target-to-source translation directions. Besides, Liu et al. (2016) focused on the agreement between left-to-right and right-to-left on the target side to overcome the unbalanced output problem. Although these approaches have incorporated language duality into NMT, they all use language-specific encoders and decoders for each language and each direction separately. How to integrate multiple translation tasks into one model is still an open question.

In this work, we introduce a simple yet highly effective language-independent NMT framework by using weight sharing and multi-task learning. To reduce model parameters, we first present a language-independent representer by investigating the effectiveness of weight sharing in different hierarchies, including embeddings weight sharing, layer weight sharing and encoder-decoder sharing. With the ability of representing both source and target languages, the shared representer inspires us to make full use of the language duality by jointly training source-to-target, target-to-source, left-to-right, and right-to-left translations within a multi-task learning framework. We verify the effectiveness

of this framework on resource-rich Chinese↔English and low-resource English↔Japanese translation tasks. Experimental results demonstrate that our model can leverage only a quarter of parameters to achieve substantial improvements over conventional NMT models.

Specifically, we make the following contributions in this paper:

- To the best of our knowledge, this is the first work to introduce a language-independent representer to replace encoder and decoder in conventional NMT by using weight sharing. Specifically, this framework achieves model compression from a very different perspective.
- Our model can perform and combine the advantage of four translation tasks in a representer by utilizing language duality, which contains *source-to-target*, *target-to-source*, *left-to-right*, and *right-to-left* translations.
- Our proposed framework drastically reduces model parameters and achieves significant improvements especially for low-resource translations, where our framework can be viewed as a data augmentation technique.

Background

Both RNN-based NMT (RNMT) (Luong, Pham, and Manning 2015) and Transformer (Vaswani et al. 2017) employ a language-dependent encoder-decoder structure, consisting of stacked encoder and decoder layers. The encoder maps an input sequence of symbol representations (x_1, \dots, x_m) to a sequence of continuous representations $z = (z_1, \dots, z_m)$. Given z , the decoder then generates an output sequence (y_1, \dots, y_t) of symbols one element at a time. At each step the model is auto-regressive, consuming the previously generated symbols as additional input when generating the next.

Here, we mainly introduce the Transformer, as shown in Figure 2. Encoder layers consist of two sublayers: multi-head intra-attention followed by a position-wise feed-forward layer. Decoder layers consist of three sublayers: multi-head intra-attention followed multi-head inter-attention, and then followed by a position-wise feed-forward layer. It uses residual connections around each of the sublayers, followed by layer normalization. The decoder uses masking in its self-attention to preserve the auto-regressive property during training step.

Given a set of training examples $\{x^{(n)}, y^{(n)}\}_{n=1}^N$, the training algorithm aims to find the model parameters that maximize the likelihood of the training data:

$$J(\theta) = \sum_{n=1}^N \log P(y^{(n)} | x^{(n)}; \theta) \quad (1)$$

For the sake of brevity, we refer the reader to (Luong, Pham, and Manning 2015) and (Vaswani et al. 2017) for additional details regarding the architecture.

Our Approach

We introduce a simple language-independent NMT framework which can not only reduce the model parameters, but also take full advantage of language duality. The central idea

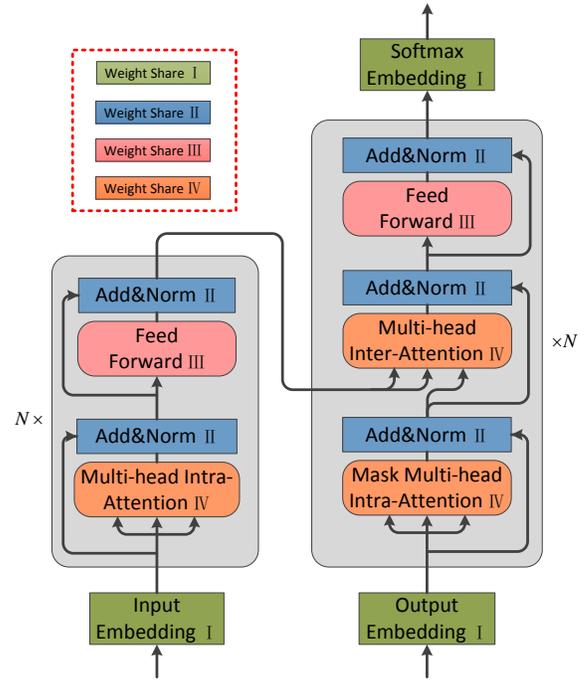


Figure 2: The architecture of Transformer, also of our representer, which only has four components for Transformer architecture: embedding, multi-head attention, feed-forward and layer normalization weight matrices. The same Roman number or color indicates weight sharing among them.

is to achieve language-independent representer by weight sharing, and perform multiple translation tasks by multi-task learning, as shown in Figure 3(a).

Language-Independent Representer

Transformer and RNMT still employ language-dependent encode-decoder framework which leads to large-scale parameters. In this section, we will introduce a language-independent representer achieved by embedding weight sharing and encoder-decoder sharing, as shown in Figure 2.

Embedding Weight Sharing (ES): NMT model uses embeddings to convert input tokens and output tokens to vectors. It also utilizes the linear transformation and softmax function to convert the decoder output to next-token probabilities. Press and Wolf (2017) conducted the weight tying of input and output embedding in RNMT, whose results show that it can reduce the size of NMT models without harming their performance. However, they conducted the experiments on English-German and English-French parallel pairs which are similar languages and have shared source-target vocabulary. What if they are not similar languages, such as Chinese-English or Japanese-English translation?

To address the problem, we design a *frequency-based embedding weight sharing* strategy. The steps are as follows: (1) We first count the frequency of word occurrences in bilingual languages and sort them in descending order. (2) We select a vocabulary according to the predefined vocabulary size. For example, we limit the source and target vo-

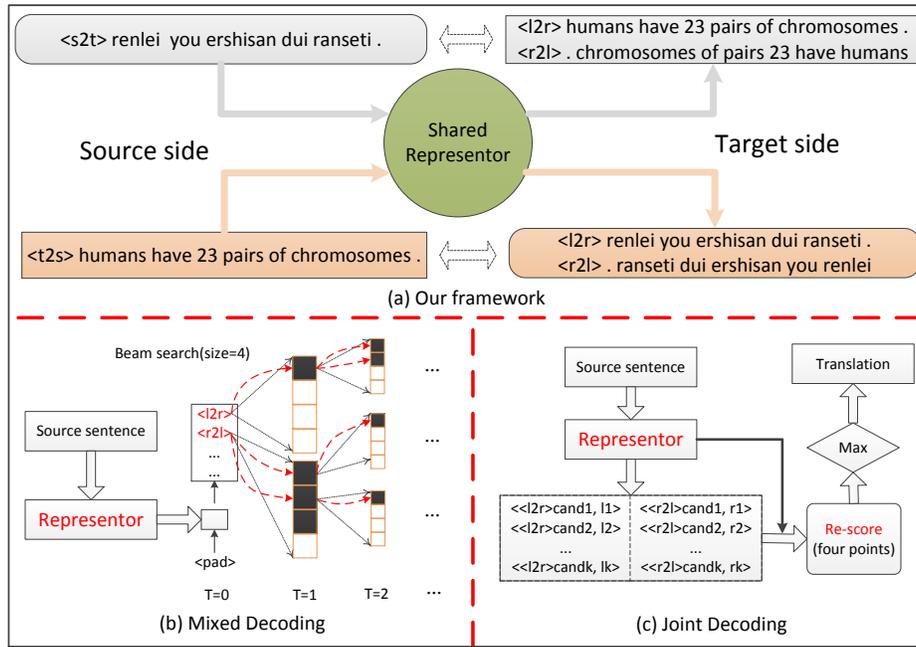


Figure 3: Our proposed framework and two decoding methods. Our goal is to perform multiple translation tasks in a language-independent repesor by utilizing language duality, as shown in (a) for Chinese-English translation. (b) denotes the mixed decoding which can combine the left-to-right decoding and right-to-left decoding in one beam-search process determined by model. Joint decoding (c) works as a reranking technique to select a better translation from the two k-best candidates generated by the decoder.

cabularies to the most frequent 35K and 30K tokens, respectively. (3) Words of bilingual vocabulary having the same frequency rank share a word embedding. For instance, the sixth word of the source vocabulary and the sixth word of the target vocabulary use the same word embedding in training and inference. (4) If the source and target vocabularies have different vocabulary sizes, the length of shared embedding weight matrix is maximum of the source and target vocabulary size. As a result, the input embedding of the decoder, the output embedding of the decoder and the input embedding of the encoder are all shared.

Encoder-Decoder Sharing (EDS): Encoder and decoder play a key role in NMT, which map sequence of symbol representation to sequence of continuous representation. Weight sharing, such as RNN weight matrices or multi-head attention weight matrices, has been used for the different time steps within encoder or decoder. Here, we mainly focus on the weight sharing between encoder and decoder.

As shown in Figure 2, Transformer has some similar components which play analogous roles in every layer, consisting of multi-head attention layer, feed-forward layer, and layer normalization layer. The same Roman number or color indicates weight sharing among them in every layer. In other words, our repesor replaces encoder and decoder of conventional NMT, and it only has three sets of parameters, namely self-attention, feed-forward and layer normalization weight matrix. Additionally, we also explore the **Layer Weight Sharing (LS)**, in which every layer of encoder and decoder shares common weights. For RNMT, our proposed repesor adopts one RNN (LSTM (Hochre-

iter and Schmidhuber 1997) or GRU (Cho et al. 2014)) to replace encoder and decoder.

Multi-Task Learning for Repesor

In the last section, we present a language-independent repesor which can reduce large portion of network parameters. With the ability of representing both source and target languages, the shared repesor facilitates us to fully explore the language duality consisting of source-to-target, target-to-source, left-to-right and right-to-left translation. In this section, we attempt to conduct multiple translation tasks in the shared repesor by leveraging multi-task learning framework.

Source-to-Target and Target-to-Source (S-T&T-S): Conventional NMT directly models the probability of a target-language sentence given a source-language sentence. Some work have noticed the symmetry of translation (Cheng et al. 2016b; He et al. 2016; Tu et al. 2017; Sennrich et al. 2017; Zhang et al. 2018), which bridge source-to-target and target-to-source translation. However, above approaches use two encoder-decoder models or additional reconstructor, in which encoder and decoder have separate parameters. Since the encoder and decoder in our model share a set of parameters where both encoder and decoder are capable of mapping source and target languages, a straightforward idea is to utilize the joint training of source-to-target and target-to-source in the language-independent repesor.

We introduce our new training objective as follows:

$$J(\theta) = \sum_{n=1}^N \log P(y^{(n)}|x^{(n)}; \theta) + \sum_{n=1}^N \log P(x^{(n)}|y^{(n)}; \theta) \quad (2)$$

where θ is shared model parameters in a single representor. Note that the objective consists of two parts: source-to-target likelihood and target-to-source likelihood. In this way, our representor is able to translate both source-to-target and target-to-source.

Left-to-Right and Right-to-Left (L-R&R-L): The decoders of RNN, convolution, or self-attention based usually generate the target words from left to right. Many studies have pointed out the shortcoming of unidirectional decoding, and proposed some approaches to combine the advantage of left-to-right decoding and right-to-left decoding (Liu et al. 2016; Sennrich et al. 2017; Hassan et al. 2018). Our goal in this work is to find a way to combine the left-to-right and right-to-left decoding in one end-to-end model. Formally, the training can be written as the following equation:

$$J(\theta) = \sum_{n=1}^N \log P(\vec{y}^{(n)}|x^{(n)}; \theta) + \sum_{n=1}^N \log P(\overleftarrow{y}^{(n)}|x^{(n)}; \theta) \quad (3)$$

where $P(\vec{y}^{(n)}|x^{(n)}; \theta)$ denotes the sequence generation from left to right, and $P(\overleftarrow{y}^{(n)}|x^{(n)}; \theta)$ denotes the generation from right to left. All models consisting of an encoder, left-to-right decoder, and right-to-left decoder use a shared representor.

Combining Four Patterns (CFP): By integrating the above two train objectives, we present a simple yet highly effective multi-task learning approach that utilizes source-to-target, target-to-source, target left-to-right and target right-to-left translation in one representor to enhance the translation agreement. To this end, the training algorithm aims to maximize the likelihood of the training data:

$$J(\theta) = \sum_{n=1}^N \log P(\vec{y}^{(n)}|x^{(n)}; \theta) + \sum_{n=1}^N \log P(\overleftarrow{y}^{(n)}|x^{(n)}; \theta) + \sum_{n=1}^N \log P(\vec{x}^{(n)}|y^{(n)}; \theta) + \sum_{n=1}^N \log P(\overleftarrow{x}^{(n)}|y^{(n)}; \theta) \quad (4)$$

where θ is shared weight for all translation patterns. Here, our proposed model can conduct four translation tasks for one parallel corpora in a representor, while using half parameters compared to a standard end-to-end model.

Training and Testing

In order to train multiple translation tasks in a representor, we design a simple yet smart strategy to indicate the pre-defined translation direction. More specifically, we utilize two special labels ($\langle s2t \rangle$ and $\langle t2s \rangle$) in the first word of input sentences to guide the translation tasks (source-to-target or target-to-source). Besides, we employ another two special labels ($\langle l2r \rangle$ and $\langle r2l \rangle$) at the beginning of output sentences to indicate translating from left to right or from right to left.

It is easy to use the stochastic gradient descent algorithm to implement duality-based joint learning since the single translation model in four directions uses the same training data and model parameters.

Once a model is trained, we can use a beam search to conduct mixed decoding simply. Alternatively, we introduce a joint decoding method for the proposed framework, as shown in Figure 3(b) and 3(c).

Mixed Decoding (MD) The central idea of mixed decoding is to combine the left-to-right and right-to-left decoding in one beam-search process simultaneously. More specifically, the first input token of decoder is a $\langle pad \rangle$ whose embedding is all zeros for initialization. Instead of adding the label at the beginning of output sentences to guide translating from left to right or from right to left, we predict the first output token ($\langle l2r \rangle$ or $\langle r2l \rangle$) determined by the model. And we do not need to do anything until the end-of-sentence flag is predicted. That is, our model has the ability to choose left-to-right or right-to-left decoding automatically according to the source representation.

Joint Decoding (JD) Inspired by (Liu et al. 2016) and (Tu et al. 2017), we adapt a joint decoding method to find a translation that approximately maximizes the likelihood score. For Equation 4, the joint decoding consists of two steps: 1) run beam search for target left-to-right and right-to-left models independently to obtain two k-best lists; 2) rerank the union of two k-best lists using the joint model to get the best candidate.

Experimental Settings

Dataset

We evaluate our experiments on large-scale NIST Chinese \leftrightarrow English translation tasks, and low-resource KFTT English \leftrightarrow Japanese translation datasets.

For Chinese \leftrightarrow English translation, our training data consists of 2.08M sentence pairs extracted from LDC corpus¹. We use NIST 2003 (MT03) dataset as the validation set, NIST 2004 (MT 04), NIST 2005 (MT05), NIST 2006 (MT 06) datasets as our test sets. We use BPE (Sennrich, Haddow, and Birch 2016b) to encode Chinese and English respectively, and limit the source and target vocabularies to the most frequent 30K tokens.

For English \leftrightarrow Japanese translation tasks, we use KFTT datasets² consisting of 440K sentence pairs, which also is used in (Arthur, Neubig, and Nakamura 2016). Sentences were encoded using BPE, and the vocabulary sizes are 31K and 33K for English and Japanese respectively.

Training Details

We use the tensor2tensor³ library for training and evaluating our Transformer model. Additionally, we utilize the OpenNMT⁴ to train and test our RNMT model.

¹The corpora include LDC2000T50, LDC2002T01, LDC2002E18, LDC2003E07, LDC2003E14, LDC2003T17 and LDC2004T07.

²<http://isw3.naist.jp/philip-a/emnlp2016/>

³<https://github.com/tensorflow/tensor2tensor>

⁴<https://github.com/OpenNMT/OpenNMT-py>

Model	Params	Percent	MT03	MT04	M05	MT06	AVE
RNMT	157.0M	100%	40.15	40.37	37.25	37.91	38.92
RNMT + ES	97.1M	61.8%	40.75	41.20	37.98	38.99	39.73 ‡
RNMT + EDS	125.0M	79.6%	38.24	38.57	36.02	35.91	37.19
RNMT + ES + EDS	65.0M	41.4%	37.77	37.77	35.49	35.27	36.84
Transformer	270.8M	100%	47.27	48.83	45.71	45.14	46.74
Transformer + ES	207.8M	76.7%	47.63	48.32	47.51	45.31	47.19 ‡
Transformer + EDS	170.0M	62.8%	47.13	47.02	45.96	45.46	46.39
Transformer + ES + EDS	107.1M	39.5%	47.97	47.30	46.32	45.28	46.71
Transformer + ES + EDS + LS	44.1M	16.6%	45.04	45.51	43.46	43.70	44.43
Transformer (base)	60.0M	22.1%	45.62	45.67	44.45	44.72	45.12
Transformer (2-2)	153.2M	56.6%	44.72	46.03	43.23	42.25	44.05

Table 1: Results of our proposed representor for Chinese-English translation. Although the number of model parameters is drastically reduced, their performance is comparable to baseline. ES and EDS mean embedding weight sharing and encoder-decoder sharing separately. “Transformer + ES + EDS”, namely our proposed representor, will be used in latter experiments. LS denotes layer weight sharing, and the last line shows the results that transformer has two layers encoder and decoder respectively. “‡”: significantly better than baseline ($p < 0.05$).

For our Transformer model, we employ the Adam optimizer with $\beta_1=0.9$, $\beta_2=0.98$, and $\epsilon=10^{-9}$. We use the same warmup and decay strategy for learning rate as (Vaswani et al. 2017), with 4,000 warmup steps. During training, we employ label smoothing of value $\epsilon_{ls}=0.1$. For evaluation, we use beam search with a beam size of $k=4$ and length penalty $\alpha=0.6$. Additionally, we use 6 encoder and decoder layers, hidden state size $d_x=1024$, 16 attention-heads, and 4096 feed forward inner-layer dimensions.

For RNMT, we use 4 encoder and decoder layers with LSTM. The word embedding dimension and the size of hidden layers are both set to 1,000. we use global attention (Luong, Pham, and Manning 2015) and beam search with beam size $k=12$ in RNMT. Parameter optimization is performed using Adam with the default configuration.

Results and Analysis

Below we discuss the results of our translation experiments about representor and multi-task learning framework, measuring translation quality with case-insensitive BLEU (Papineni et al. 2002).

Language-Independent Representor

We first analyze the effects of representor on both RNMT and Transformer. The results on Chinese-English translation are shown in Table 1. Experimental results demonstrate that our proposed *frequency-based embedding weight sharing* strategy obtains significant accuracy improvements on RNMT (39.73 vs. 38.92) and Transformer (47.19 vs. 46.74). We find that the weight sharing of encoder and decoder is more effective to Transformer (46.39 vs. 46.74) than RNMT (37.19 vs 38.92), where the number of Transformer parameters is sharply reduced, and their performance is comparable to baseline. Note that even though our proposed model (Transformer + ES + EDS) only uses 39.5% parameters of baseline model, their performance is comparable.

Furthermore, we also compare with the base Transformer model⁵ and two layers encoder-decoder Transformer model,

⁵For base model, we use hidden state size $d_x=512$, 8 attention-

Model	Params	Test
Arthur, Neubig, and Nakamura (2016)	-	23.20
Nguyen and Chiang (2018)	-	26.20
Transformer	210.8M	29.88
Our Representor	110.0M	31.63

Table 2: Translation performance of Transformer and our proposed representor on English-Japanese. We also provide some experimental results of the first two models on the same data set.

whose results are reported in the last two lines of Table 1. The base Transformer reduces model parameters but decreases dramatically the translation quality. Our proposed weight sharing models outperform the two layer Transformer in terms of BLEU scores and model parameters. Considering the balance between model size and translation performance, we will use this kind of representor without LS (Transformer + ES + EDS) in subsequent experiments.

Table 2 shows the performance of representor on low-resource English-Japanese translation, which demonstrates that even though the weight sharing models contain fewer parameters than the baseline models, it gets an improvement of +1.75 BLEU points. Furthermore, we show that our representor can reduce the size of Transformer models to less than half of their original size while achieving significant improvement for low-resource translation.

Multi-Task Learning for Representor

In this section, we will report and analyze the results of multi-task learning framework, which conducts multiple translation tasks in a language-independent representor.

Results on Chinese↔English Our results of multi-task learning technique on large-scale Chinese↔English translation tasks are presented in Table 3. We find that our CFP model with joint decoding obtains the best results in Ch-En translation, and it outperforms standard Transformer by 1.34 BLEU points. Additionally, L-R&R-L model, getting an improvement of 1.02 BLEU points than Transformer, behaves

heads, and 2048 feed forward inner-layer dimensions.

System	Decoding Manner	Chinese↔English		English↔Japanese	
		Ch→En	En→Ch	En→Ja	Ja→En
Transformer	Left-to-right	46.74	22.49	29.88	23.70
Represntor	Left-to-right	46.71	21.74	31.63	25.61
S-T&T-S	Left-to-right	46.72	21.12	32.81†	25.88†
L-R&R-L	Mixed Decoding	47.41‡	23.51 †	32.84†	25.55†
CFP Method	Mixed Decoding	47.25‡	23.08‡	32.62†	26.59 †
	Joint Decoding	48.08 †	23.47†	33.41 †	26.19†

Table 3: Experimental results of multi-task learning framework for four directions on two translation tasks. S-T&T-S and L-R&R-L extend represnetor by introducing the new training objective Eq.(2) and Eq.(3) respectively. The CFP method means the multi-task learning technique that utilizes a representer to training four translation directions shown in Eq.(4). The results marked by † are significantly better than Transformer ($p < 0.01$), and “‡” denotes $p < 0.05$.

better than CFP model on En-Ch translation. Experiments demonstrate that our single model can conduct source-to-target and target-to-source translation by using less than a quarter of parameters, while still achieving better performance on large-scale datasets.

Results on English↔Japanese Three kinds of task-level weight sharing methods have achieved remarkable improvements in low-resource translation, as demonstrated in Table 3. Experiments show that our CFP framework combining four translation patterns outperforms the Transformer by +3.53 and + 2.89 BLEU points in bidirectional English-Japanese translation separately. We think the main reason is that our proposed framework can be regarded as a data augmentation technique for low-resource translation.

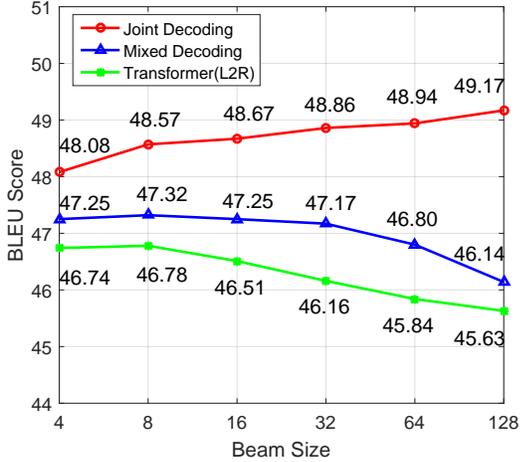


Figure 4: Translation qualities (BLEU score) of our joint decoding, mixed decoding, and Transformer(L2R) on Chinese-English translation as beam size become larger.

Effect of Large Decoding Space (Tu et al. 2017) observed that general likelihood objective favors short translations, and can not decode well in a large search space. We present the effect of CFP model with mixed and joint decoding on different beam sizes k , as shown in Figure 4. Unlike Transformer, increasing the size of decoding space leads to improving the BLEU scores for our joint decoding. Although joint decoding is more complicated than mixed decoding, it can capture dependency of four translation directions to select the best candidate.

Ratio of L2R and R2L The mixed decoding allows the model to choose either right-to-left or left-to-right decoding based on the particular source representation. We have conducted the statistical analysis on the proportion of left-to-right decoding and right-to-left decoding. We find that the proportion of L2R in Ch-En translation is higher than that of R2L, and En-Ja has opposite phenomenon. These phenomena are consistent with the experimental results that L2R decoding behaves better than R2L decoding in Ch-En and L2R decoding is worse than R2L decoding in En-Ja.

Direction	Chinese↔English		English↔Japanese	
	Ch→En	En→Ch	En→Ja	Ja→En
L2R	56.0%	54.8%	48.2%	45.3%
R2L	44.0%	45.2%	51.8%	54.7%

Table 4: Translation proportion of L2R and R2L manners on Ch↔En and En↔Ja translation tasks.

Length Analysis We follow Bahdanau, Cho, and Bengio (2015) to group sentences of similar lengths together and compute a BLEU score per group. Figure 5 shows that joint decoding can alleviate the inability of translating long sentences, but mixed decoding behaves better in handling short sentences.

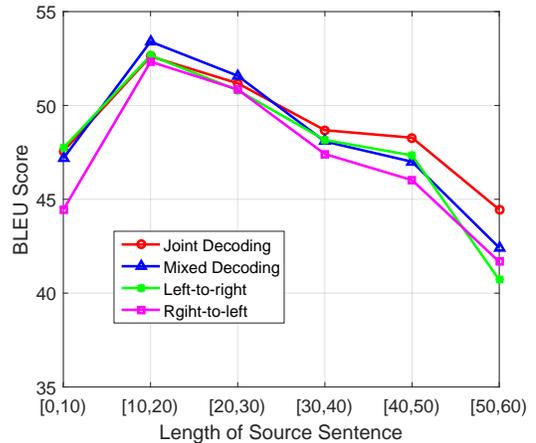


Figure 5: Length Analysis - performance of translations with respect to the lengths of the source sentences.

Duality Analysis Table 5 gives a translation example of different models. Transformer(L2R) drops out the second

Source	héngfú xiàfāng shì yī zhāng shíduō píngfāngmǐ de wángxuǎn jùfú yíxiàng, tā dài zhe yǎnjìng, miànlù wēixiào, qìzhì rúyǎ
Reference	below the banner , there was a big picture of wang xuan that was more than ten square meters in size . <i>wang was wearing a pair of glasses , smiling with a scholarly air .</i>
Transformer(L2R)	below the scroll is a huge portrait of a 10-square-meter wang .
Transformer(R2L)	<i>he had a look on his face , wearing glasses , a smiling face and a refined air .</i>
Mixed Decoding	below the banner is a big portrait of more than 10 square meters , <i>wearing glasses , smiling , and elegant .</i>
Joint Decoding	below the banner is a huge portrait of wang xuan , which is more than 10 square meters long . <i>he wears glasses , smiles , and is elegant .</i>

Table 5: Chinese-English translation examples of Transformer decoding in left-to-right and right-to-left ways, our proposed models using mixed decoding (MD) and joint decoding (JD) technique respectively.

half of the Chinese sentence, while Transformer(R2L) omits the versa part. Mixed decoding gets better translation result than Transformer. Compared with mixed decoding, joint decoding not only translates successfully the latter part of the sentence, but also translates accurately the name wángxuǎn, which demonstrates that our proposed models can enhance the translation duality and agreement.

Related Work

Our work is inspired by three lines of research on improving NMT by:

Model Compression and Multi-Task Learning To reduce model parameters, weight pruning and knowledge distillation have been proposed to compress NMT models (See, Luong, and Manning 2016; Kim and Rush 2016). Additionally, a recent lines of research have investigated multilingual machine translation by using multi-task learning (Ha, Niehues, and Waibel 2016; Firat et al. 2016; Johnson et al. 2017). However, we achieve model compression from a very different perspective, even though this is not the main purpose. Besides, our model can also be adapted to these approaches because they are orthogonal to each other.

Data Augmentation for NMT For low-resource NMT, most of the existing approaches and models mainly focus on utilizing transfer learning (Zoph et al. 2016; Lakew, Gangi, and Federico 2017; Gu et al. 2018), or exploiting large-scale monolingual data (Cheng et al. 2016b; Sennrich, Haddow, and Birch 2016a; Zhang and Zong 2016). Fadaee, Bisazza, and Monz (2017) proposed a data augmentation method that generates new sentence pairs by replacing high-frequency words with rare words. In this paper, our proposed framework can be viewed as a novel data augmentation technique that expands training corpora multiple times by data transformation for low-resource translation.

Translation Duality for NMT Some work have noticed the symmetry of translation (Cheng et al. 2016b; He et al. 2016; Zhang et al. 2018), which attempt to bridge source-to-target translation and target-to-source translation. In the other hand, many studies have pointed out the shortcoming of unidirectional decoding, and proposed some approaches to combine the advantage of left-to-right decoding and right-to-left decoding (Liu et al. 2016; Sennrich et al. 2017; Hassan et al. 2018). However, above methods are designed for alternative translation agreement and use two different encoder-decoder models. We attempt at designing a unified

framework to boost the duality of four translation directions by using one representor.

Conclusions and Future Work

In this work, we propose a novel language-independent NMT framework in which a language-independent representor can perform multiple translation tasks by using weight sharing and multi-task learning. Our proposed framework can drastically reduce model parameters and take full advantage of language duality. Experiments on two resource-rich and low-resource translation tasks show that our framework can use only a quarter of parameters while achieving significant improvements over conventional NMT models. For future work, we plan to design explicit training constraints in the multi-task learning framework to further exploit the language duality. Additionally, it is interesting to extend this approach to monolingual data utilization and unsupervised neural machine translation.

References

- [Arthur, Neubig, and Nakamura 2016] Arthur, P.; Neubig, G.; and Nakamura, S. 2016. Incorporating discrete translation lexicons into neural machine translation. In *Proceedings of the 2016 Conference on Empirical Methods in Natural Language Processing*, 1557–1567. Association for Computational Linguistics.
- [Bahdanau, Cho, and Bengio 2015] Bahdanau, D.; Cho, K.; and Bengio, Y. 2015. *Neural machine translation by jointly learning to align and translate*. In *Proceedings of ICLR 2015*.
- [Bojar et al. 2017] Bojar, O.; Chatterjee, R.; Federmann, C.; Graham, Y.; Haddow, B.; Huang, S.; Huck, M.; Koehn, P.; Liu, Q.; Logacheva, V.; et al. 2017. Findings of the 2017 conference on machine translation (wmt17). In *Proceedings of the Second Conference on Machine Translation*, 169–214.
- [Cheng et al. 2016a] Cheng, Y.; Shen, S.; He, Z.; He, W.; Wu, H.; Sun, M.; and Liu, Y. 2016a. Agreement-based joint training for bidirectional attention-based neural machine translation. In *In Proceedings of IJCAI 2016*.
- [Cheng et al. 2016b] Cheng, Y.; Xu, W.; He, Z.; He, W.; Wu, H.; Sun, M.; and Liu, Y. 2016b. *Semi-supervised learning for neural machine translation*. In *Proceedings of ACL 2016*.

- [Cho et al. 2014] Cho, K.; van Merriënboer, B.; Gulcehre, C.; Bahdanau, D.; Bougares, F.; Schwenk, H.; and Bengio, Y. 2014. *Learning phrase representations using RNN encoder-decoder for statistical machine translation*. In Proceedings of EMNLP 2014.
- [Fadaee, Bisazza, and Monz 2017] Fadaee, M.; Bisazza, A.; and Monz, C. 2017. Data augmentation for low-resource neural machine translation. In *Proceedings of the 55th Annual Meeting of the Association for Computational Linguistics (Volume 2: Short Papers)*, 567–573. Association for Computational Linguistics.
- [Firat et al. 2016] Firat, O.; Sankaran, B.; Al-Onaizan, Y.; Vural, F. T. Y.; and Cho, K. 2016. *Zero-resource translation with multi-lingual neural machine translation*. In Proceedings of EMNLP 2016.
- [Gehring et al. 2017] Gehring, J.; Auli, M.; Grangier, D.; Yarats, D.; and Dauphin, Y. 2017. Convolutional sequence to sequence learning. In *ICML*.
- [Gu et al. 2018] Gu, J.; Hassan, H.; Devlin, J.; and Li, V. O. 2018. Universal neural machine translation for extremely low resource languages. In *Proceedings of NAACL 2018*.
- [Ha, Niehues, and Waibel 2016] Ha, T.-L.; Niehues, J.; and Waibel, A. 2016. Toward multilingual neural machine translation with universal encoder and decoder. In *Proceedings of IWSLT 2016*.
- [Hassan et al. 2018] Hassan, H.; Aue, A.; Chen, C.; Chowdhary, V.; Clark, J.; Federmann, C.; Huang, X.; Junczys-Dowmunt, M.; Lewis, W.; Li, M.; et al. 2018. Achieving human parity on automatic chinese to english news translation. *arXiv preprint arXiv:1803.05567*.
- [He et al. 2016] He, D.; Xia, Y.; Qin, T.; Wang, L.; Yu, N.; Liu, T.; and Ma, W.-Y. 2016. Dual learning for machine translation. In *Advances in Neural Information Processing Systems*, 820–828.
- [Hochreiter and Schmidhuber 1997] Hochreiter, S., and Schmidhuber, J. 1997. Long short-term memory. *Neural computation* 9(8):1735–1780.
- [Johnson et al. 2017] Johnson, M.; Schuster, M.; Le, Q. V.; Krikun, M.; Wu, Y.; Chen, Z.; Thorat, N.; Viégas, F.; Wattenberg, M.; Corrado, G.; et al. 2017. Google’s multilingual neural machine translation system: enabling zero-shot translation. *Transactions of the Association for Computational Linguistics*.
- [Kim and Rush 2016] Kim, Y., and Rush, A. M. 2016. Sequence-level knowledge distillation. In *Proceedings of the 2016 Conference on Empirical Methods in Natural Language Processing*, 1317–1327. Association for Computational Linguistics.
- [Koehn and Knowles 2017] Koehn, P., and Knowles, R. 2017. Six challenges for neural machine translation. In *Proceedings of the First Workshop on Neural Machine Translation*, 28–39. Association for Computational Linguistics.
- [Lakew, Gangi, and Federico 2017] Lakew, S. M.; Gangi, M. A. D.; and Federico, M. 2017. Multilingual neural machine translation for low resource languages. In *CLiC-it*.
- [Liu et al. 2016] Liu, L.; Utiyama, M.; Finch, A.; and Sumita, E. 2016. Agreement on target-bidirectional neural machine translation. In *Proceedings of the 2016 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, 411–416.
- [Luong, Pham, and Manning 2015] Luong, M.-T.; Pham, H.; and Manning, C. D. 2015. *Effective approaches to attention-based neural machine translation*. In Proceedings of EMNLP 2015.
- [Nguyen and Chiang 2018] Nguyen, T., and Chiang, D. 2018. Improving lexical choice in neural machine translation. In *Proceedings of the 2018 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long Papers)*, 334–343. Association for Computational Linguistics.
- [Papineni et al. 2002] Papineni, K.; Roukos, S.; Ward, T.; and Zhu, W. 2002. *Bleu: a method for automatic evaluation of machine translation*. In Proceedings of ACL 2002.
- [Press and Wolf 2017] Press, O., and Wolf, L. 2017. Using the output embedding to improve language models. In *Proceedings of the 15th Conference of the European Chapter of the Association for Computational Linguistics: Volume 2, Short Papers*, 157–163. Association for Computational Linguistics.
- [See, Luong, and Manning 2016] See, A.; Luong, M.-T.; and Manning, C. D. 2016. Compression of neural machine translation models via pruning. In *Proceedings of The 20th SIGNLL Conference on Computational Natural Language Learning*, 291–301. Association for Computational Linguistics.
- [Sennrich et al. 2017] Sennrich, R.; Birch, A.; Currey, A.; Hermann, U.; Haddow, B.; Heafield, K.; Barone, A. V. M.; and Williams, P. 2017. The university of edinburgh’s neural mt systems for wmt17. *arXiv preprint arXiv:1708.00726*.
- [Sennrich, Haddow, and Birch 2016a] Sennrich, R.; Haddow, B.; and Birch, A. 2016a. *Improving neural machine translation models with monolingual data*. In Proceedings of ACL 2016.
- [Sennrich, Haddow, and Birch 2016b] Sennrich, R.; Haddow, B.; and Birch, A. 2016b. *Neural machine translation of rare words with subword units*. In Proceedings of ACL 2016.
- [Tu et al. 2017] Tu, Z.; Liu, Y.; Shang, L.; Liu, X.; and Li, H. 2017. Neural machine translation with reconstruction. In *AAAI*, 3097–3103.
- [Vaswani et al. 2017] Vaswani, A.; Shazeer, N.; Parmar, N.; Uszkoreit, J.; Jones, L.; Gomez, A. N.; Kaiser, Ł.; and Polosukhin, I. 2017. Attention is all you need. In *Advances in Neural Information Processing Systems*, 6000–6010.
- [Wu et al. 2016] Wu, Y.; Schuster, M.; Chen, Z.; Le, Q. V.; and Mohammad Norouzi, e. a. 2016. *Google’s neural machine translation system: bridging the gap between human and machine translation*. *arXiv preprint arXiv:1609.08144*.

- [Zhang and Zong 2016] Zhang, J., and Zong, C. 2016. *Exploiting source-side monolingual data in neural machine translation*. In Proceedings of EMNLP 2016.
- [Zhang et al. 2018] Zhang, Z.; Liu, S.; Li, M.; Zhou, M.; and Chen, E. 2018. Joint training for neural machine translation models with monolingual data. In *Proceedings of AAAI 2018*.
- [Zhou et al. 2016] Zhou, J.; Cao, Y.; Wang, X.; Li, P.; and Xu, W. 2016. Deep recurrent models with fast-forward connections for neural machine translation. *Transactions of the Association for Computational Linguistics* 4:371–383.
- [Zoph et al. 2016] Zoph, B.; Yuret, D.; May, J.; and Knight, K. 2016. Transfer learning for low-resource neural machine translation. In *Proceedings of the 2016 Conference on Empirical Methods in Natural Language Processing*, 1568–1575. Association for Computational Linguistics.