
Zero-Shot Transfer VQA Dataset

Yuanpeng Li, Yi Yang, Jianyu Wang

{liyuanpeng01,yangyi05,wangjianyu02}@baidu.com
Baidu Research, USA

Wei Xu

wei.xu@horizon.ai
Horizon Robotics Research, USA

Abstract

Acquiring a large vocabulary is an important aspect of human intelligence. One common approach for human to populating vocabulary is to learn words during reading or listening, and then use them in writing or speaking. This ability to transfer from input to output is natural for human, but it is difficult for machines. Human spontaneously performs this knowledge transfer in complicated multimodal tasks, such as Visual Question Answering (VQA). In order to approach human-level Artificial Intelligence, we hope to equip machines with such ability. Therefore, to accelerate this research, we propose a new *zero-shot transfer VQA* (ZST-VQA) dataset by reorganizing the existing VQA v1.0 dataset in the way that during training, some words appear only in one module (i.e. questions) but not in the other (i.e. answers). In this setting, an intelligent model should understand and learn the concepts from one module (i.e. questions), and at test time, transfer them to the other (i.e. predict the concepts as answers). We conduct evaluation on this new dataset using three existing state-of-the-art VQA neural models. Experimental results show a significant drop in performance on this dataset, indicating existing methods do not address the zero-shot transfer problem. Besides, our analysis finds that this may be caused by the implicit bias learned during training.

1 Introduction

With the fast development of deep learning [15, 27, 9], Artificial Intelligence achieved human level in many domains [26, 21]. However, current AIs are only designed for specific tasks, and still far from human’s general intelligence. A way to make a human-like machine is to make them learn as the human does so that it is important to understand how the human learns. One characteristic of human learning is the ability to transfer from input to output. For example, to populate vocabulary, people learn words during reading and listening, and use them in writing and speaking. This transferability from input to output is natural for human, but it is difficult for machines.

Human spontaneously performs this transfer with language compositionality [7] in complicated multimodal tasks, such as VQA. For example, in Fig. 1a, in order to learn from the question-answer pair [“What fruit is wearing sunglasses?”, “bananas”], one needs to understand the concept of “sunglasses”. Then for another question [“What is on the man’s face?”], humans can provide the correct answer “sunglasses” even though they have never seen it as an answer during training. Similarly, humans can also transfer concepts learned from answers to questions. Although VQA achieved high performances in standard benchmarks [2, 6, 12, 14, 8], little investigation has been made to address abilities for zero-shot transfer learning.



(a) Example of zero-shot answer task (ZSA). A zero-shot word “sunglasses” appears in question but not in answer during train, and it appears in answer for test. (b) Example of zero-shot question task (ZSQ). A zero-shot word “chair” appears in answer but not in question during train, and it appears in question for test.

Figure 1: Examples of ZSA and ZSQ tasks. Transferring learned words from questions to answers or from answers to questions is required in these tasks.

To facilitate this study, we create a new dataset, named as *zero-shot transfer VQA (ZST-VQA)*, by rearranging the original VQA v1.0 dataset [2]. The dataset includes two tasks: (1) the zero-shot answer task (ZSA) as shown in Fig. 1a, and (2) the zero-shot question task (ZSQ) as shown in Fig. 1b. The dataset is also helpful for detecting whether a model is biased to remember superficial relation between input and output, because such relation can not solve zero-shot transfer learning problems. For example, when a question asks what is on the ground, the answer is likely to be snow, because this is an interesting and natural situation.

We evaluate three state-of-the-art VQA models [24, 32, 19] on these two newly proposed tasks. Experiments show that the testing accuracy significantly decreases on the ZSQ task. What is even worse, the testing accuracy drops to zero on the ZSA task. Both suggest that current models do not have the zero-shot transfer ability. We made further analysis and found that the training data affect the biases in the networks, causing significant drop in performance.

In summary, our contributions are threefold. (1) We propose the problem of zero-shot transfer learning, which is an important skill for human-level Artificial Intelligence. (2) We build the ZST-VQA dataset for this problem, and experiment on three existing methods. We show that these methods do not work well on this problem, and we analyze the reasons. (3) This dataset is also useful to detect if a model learns to simply remember superficial input and output relations in VQA tasks.

2 Related Work

Visual Question Answering. VQA has improving dramatically recently [24, 10, 13]. We briefly introduce typical VQA methods, and recommend the surveys [14, 8] for a more details. Depending on the attention usage, VQA methods can be roughly divided into three groups: (i) non-attention methods, (ii) visual attention methods and (iii) visual-text co-attention methods. Non-attention methods include multimodal compact bilinear networks [5], relational networks [25], and Deeper LSTM Question+Image [18]. They usually produce answers through a general network architecture with attention implicitly embedded in the model. Visual attention methods, on the contrary, utilize image-question pairs to attend to the discriminative image regions to predict the answer. For example, stacked attention networks [32], ABC-CNN [3] and dynamic memory networks [31] all explicitly compute the visual attention by combining top-down question contexts and bottom-up image cues. Visual-text co-attention methods such as hierarchical co-attention networks [19], dual attention networks [20] and compositional attention networks [11] all build explicit attention on both images and questions. Tough results are encouraging, these methods don’t address zero-shot transfer problem.

Zero-Shot Learning. Zero-shot learning was early proposed by [22] and soon become an interesting research problem in the cross-modal domain spanning natural language processing and computer vision [28], where no finite set of samples can cover the diversity of the real world and all datasets naturally follow a heavy-tail distribution with new classes appearing frequently after the training [28, 16]. Usually, zero-shot learning requires to transfer knowledge from other sources such as attributes [17], word embedding [4] or the relationship to other categories [30] in order to predict the novel class

Algorithm 1 Steps to create the proposed ZST-VQA dataset.

- 1: Mix the original train and test samples together, and find the shared words between questions and answers.
 - 2: Filter out stop words from the shared words list.
 - 3: Randomly sample 10% of words from this list with uniform distribution.
 - 4: Equally divide the sampled words to ZSA and ZSQ words.
 - 5: Create **ZSA test dataset** from all samples with ZSA words in answer.
 - 6: Create **ZSQ test dataset** from all samples with ZSQ words in question.
 - 7: Create **normal test dataset** from the original test samples that don't overlap with ZSA test and ZSQ test.
 - 8: Create **normal train dataset** from the original train samples that don't overlap with ZSA test and ZSQ test.
 - 9: Combine three test datasets, and label each sample with its source test dataset.
-

Table 1: Statistics of the original VQA [2] and the proposed ZST-VQA dataset.

	VQA v1.0 [2]		zero-shot transfer VQA			
	Original train	Original test	Normal train	Normal test	ZSA test	ZSQ test
Questions	248,349	121,512	163,281	80,436	15,302	34,353
Images	82,783	40,504	54,427	26,812	14,549	29,962

labels. In our dataset, novel words are embedded inside one module (i.e. questions) and we test the model's zero-shot generalization ability to the other module (i.e. answers).

VQA datasets. There are many VQA datasets, such as [12, 1] for compositionality, zero-shot VQA dataset [29, 23] using extra resources, and more on the surveys [14, 8]. Different from them, our dataset focus on transfer between input and output for natural human learning.

3 Dataset Construction

We consider two scenarios: (1) Zero-shot answer (ZSA), where a set of selected words are contained in training questions and testing answers, but not training answers. In this case, we expect a model to transfer the concept of words learned from questions to answers for correct outputs in testing. (2) Zero-shot question (ZSQ), where another set of words are contained in training answers and testing questions, but not in training questions. ZSA and ZSQ are similar tasks in the opposite direction.

To do this, we first find a list of shared words between questions and answers in the original VQA dataset (including both training and testing) and filter out stop words from it. We then uniformly sample two mutually exclusive sets of words from this list as zero-shot words for ZSA and ZSQ tasks. Note that this is different from [29] where only words less than 20 times are selected. This is because of two main concerns: (1) Zero-shot words may appear when there are not enough training data so that some words are not observed. In this case, the frequency of the zero-shot words in the test set may be small. (2) Zero-shot words may also appear when there is concept drift (i.e. new words appear over time). In this case, the frequency of zero-shot words in the test set can be high. In order to consider both cases, we hence uniformly sample zero-shot words from words shared by all questions and answers with all possible frequencies.

We then create the ZSA test set by extracting samples that contain the corresponding zero-shot words in answers. Similarly, we create the ZSQ test set with the corresponding zero-shot words in questions. The remaining training samples are used as the normal train set, and the remaining test sample as the normal test set. To avoid the normal training set sharing images with any test set and to keep the normal test set generated in the same process as the normal training set, we discard training samples if they share the same images as ZSA or ZSQ test sets. Algorithm 1 summarize our dataset creation process and Table 1 shows the basic statistics. Due to page limitation, please see more dataset details in the appendix.


4 Experiments

4.1 Baselines

We evaluate three typical types of VQA algorithms on our dataset: non-attention (LSTM Q+I) [18], visual attention (SAN) [32], and visual-text co-attention (HieCoAtt) [19] methods.

Table 2: Testing accuracies of baseline and extended baseline methods on zero-shot transfer VQA dataset, with reported results on VQA dataset as reference.

	VQA val	Baselines			Extended baselines		
		Normal	ZSA	ZSQ	Normal	ZSA	ZSQ
LSTM Q+I [18]	54.23%	47.72%	0.00%	40.03%	46.43%	0.00%	40.14%
SAN [32]	55.86%	48.70%	0.00%	41.63%	46.35%	0.00%	40.54%
HieCoAtt [19]	57.09%	41.70%	0.00%	35.46%	40.10%	0.00%	33.95%

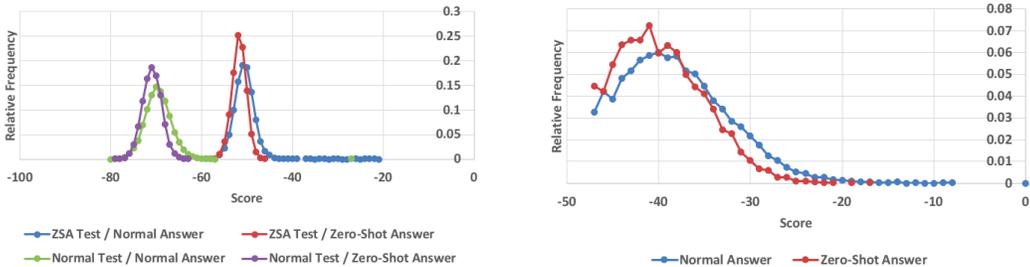

(a) Average scores. Implicit bias is learned and preserved to zero-shot test task.

(b) Implicit bias for a sample in Fig. 1a. “sunglasses” is predicted as “frisbee”.

Figure 2: Normalized histograms of binned scores for answers. Implicit bias assigns higher scores on normal answers (blue, green) than on zero-shot answers (red, purple).

Deeper LSTM Question+Image (LSTM Q+I) [18] processes images and questions in different channels. The image channel extracts image feature from the last hidden layer of VGGNet [27]. The question channel extract question feature from the last state of a 2-layered LSTM. The image and question features are then merged by element-wise multiplication and fed into a fully-connected layer for prediction. The model is trained with cross-entropy loss.

Stacked Attention Networks (SAN) [32] computes a sequence of attentions for prediction. The question is converted to an embedding to obtain attention map over image feature map. The attended image and the question embedding are then combined with the encoded question as a new embedding. It repeats this process for two times, and a fully-connected layer is used for prediction.

Hierarchical Question-Image Co-attention Networks (HieCoAtt) [19] applies attentions on both images and questions. Both attentions are computed hierarchically and the features in different hierarchical levels are combined. Then it is passed to a fully-connected layer for prediction.

4.2 Results

We use publicly available original implementation for each algorithm. The results in Table 2 (middle) show 0% accuracy in ZSA and significantly lower results than normal test set in ZSQ. There are some obvious reasons for the performance drop. In the baseline methods, question and answer vocabularies are constructed with training dataset. This means answer set does not contain zero-shot answers, and question vocabulary does not contain zero-shot question words. At test time, zero-shot answers will not be predicted, because the models do not have the corresponding classes, and all zero-shot question words are treated as unknown words. For ZSA problem, even if zero-shot classes are available in training, since these methods use fully-connected layer as the last layer, the bias in this layer for the zero-shot classes will be very low, because all it always receives negative gradient. These low bias will reduce the score of the zero-shot classes during testing, and prevents zero-shot answer prediction. Another problem is questions and answers don’t share information so that a word is treated as different ones in question and answer, therefore it cannot be transferred.

To avoid these problems, we define joint vocabulary for both questions and answers, share the word embedding and the transposed weights of the last fully-connected layer, and remove bias from the last layer. The result (Table 2 right) shows that ZSA still has zero accuracy, and ZSQ is still significantly lower than normal test, which is consistent with previous observation.

5 Discussions

The above results indicate that there should be other reasons for performance drop. In ZSA task, a reason might be intermediate network learns an implicit bias and always maps test input to a manifold that appeared in training. We use SAN for analysis. In Fig. 2a, we plot normalized histograms of binned average scores for answers. The scores are the last representation before the final Softmax layer, so that they are monotonic to output probabilities. We consider two test datasets for normal and ZSA tasks, and two answer sets for normal and zero-shot answers, altogether four histograms. In normal test, the curve of normal answer set (green) is right to that of zero-shot answer set (purple). This indicates the model has learned an implicit bias to assign higher scores on normal answers. In ZSA test, the curve of normal answer set (blue) is also right to that of zero-shot answer set (red), and the relation (blue vs. red) is very similar to that in normal test (green vs. purple). This indicates that the implicit bias is preserved to ZSA task, so that zero-shot answers have low scores, and the model doesn't predict them as answers. We also plot histograms in Fig. 2b for a sample in Fig. 1a with question ["What is on the man's face?"], and "sunglasses" (zero-shot answer) is predicted as "frisbee" (normal answer). The plot shows the implicit bias also exists for a single sample.

In ZSQ, the performance is also worse than normal test, meaning the words aren't transferred from answers to questions very well. However, unlike ZSA task, it has much higher accuracy than zero or random prediction. This might be because questions contain many words so that zero-shot words don't influence the prediction too much.

In both ZSA and ZSQ tasks, one key problem might be compositionality, decoupling words and the way that they are processed. This is because transfer alone doesn't solve zero-shot problems, and the model needs the ability to process transferred zero-shot words in the same manner as normal words. This may be achieved with some special network architectures, such as attention and memory, appropriate loss and regularization, or other types of innovations.

6 Conclusion

We created the ZST-VQA dataset with ZSA and ZSQ tasks. We evaluated existing VQA algorithms on the new dataset, and found that the algorithms and their extensions do not address the zero-shot transfer problem. We analyzed that implicit bias may be a reason of low performance, and discussed possible solutions with compositionality. We hope this dataset will encourage the research on zero-shot transfer learning in VQA community.

Acknowledgement

We thank Liang Zhao and Ka Yee Lun for meaningful discussions and revisions.

References

- [1] Aishwarya Agrawal, Aniruddha Kembhavi, Dhruv Batra, and Devi Parikh. C-vqa: A compositional split of the visual question answering (vqa) v1.0 dataset. *arXiv preprint arXiv:1704.08243*, 2017.
- [2] Stanislaw Antol, Aishwarya Agrawal, Jiasen Lu, Margaret Mitchell, Dhruv Batra, C Lawrence Zitnick, and Devi Parikh. Vqa: Visual question answering. In *Proceedings of the IEEE International Conference on Computer Vision*, pages 2425–2433, 2015.
- [3] Kan Chen, Jiang Wang, Liang-Chieh Chen, Haoyuan Gao, Wei Xu, and Ram Nevatia. Abc-cnn: An attention based convolutional neural network for visual question answering. *arXiv preprint arXiv:1511.05960*, 2015.
- [4] Andrea Frome, Greg S Corrado, Jon Shlens, Samy Bengio, Jeff Dean, Tomas Mikolov, et al. Devise: A deep visual-semantic embedding model. In *Advances in neural information processing systems*, pages 2121–2129, 2013.
- [5] Akira Fukui, Dong Huk Park, Daylen Yang, Anna Rohrbach, Trevor Darrell, and Marcus Rohrbach. Multimodal compact bilinear pooling for visual question answering and visual grounding. *arXiv preprint arXiv:1606.01847*, 2016.
- [6] Haoyuan Gao, Junhua Mao, Jie Zhou, Zhiheng Huang, Lei Wang, and Wei Xu. Are you talking to a machine? dataset and methods for multilingual image question. In *Advances in neural information processing systems*, pages 2296–2304, 2015.
- [7] Tim Gelder. Compositionality: A connectionist variation on a classical theme. *Cognitive Science*, 14(3):355–384, 1990.
- [8] Akshay Kumar Gupta. Survey of visual question answering: Datasets and techniques. *arXiv preprint arXiv:1705.03865*, 2017.
- [9] Kaiming He, Xiangyu Zhang, Shaoqing Ren, and Jian Sun. Deep residual learning for image recognition. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 770–778, 2016.
- [10] Ronghang Hu, Jacob Andreas, Marcus Rohrbach, Trevor Darrell, and Kate Saenko. Learning to reason: End-to-end module networks for visual question answering. *CoRR*, abs/1704.05526, 3, 2017.
- [11] Drew A Hudson and Christopher D Manning. Compositional attention networks for machine reasoning. *arXiv preprint arXiv:1803.03067*, 2018.
- [12] Justin Johnson, Bharath Hariharan, Laurens van der Maaten, Li Fei-Fei, C Lawrence Zitnick, and Ross Girshick. Clevr: A diagnostic dataset for compositional language and elementary visual reasoning. In *Computer Vision and Pattern Recognition (CVPR), 2017 IEEE Conference on*, pages 1988–1997. IEEE, 2017.
- [13] Justin Johnson, Bharath Hariharan, Laurens van der Maaten, Judy Hoffman, Li Fei-Fei, C Lawrence Zitnick, and Ross Girshick. Inferring and executing programs for visual reasoning. *arXiv preprint arXiv:1705.03633*, 2017.
- [14] Kushal Kafle and Christopher Kanan. Visual question answering: Datasets, algorithms, and future challenges. *Computer Vision and Image Understanding*, 163:3–20, 2017.
- [15] Alex Krizhevsky, Ilya Sutskever, and Geoffrey E Hinton. Imagenet classification with deep convolutional neural networks. In *Advances in neural information processing systems*, pages 1097–1105, 2012.
- [16] Brenden Lake and Marco Baroni. Generalization without systematicity: On the compositional skills of sequence-to-sequence recurrent networks. In *International Conference on Machine Learning*, pages 2879–2888, 2018.
- [17] Christoph H Lampert, Hannes Nickisch, and Stefan Harmeling. Attribute-based classification for zero-shot visual object categorization. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 36(3):453–465, 2014.
- [18] Jiasen Lu, Xiao Lin, Dhruv Batra, and Devi Parikh. Deeper lstm and normalized cnn visual question answering model. *GitHub repository*, 2015.

- [19] Jiasen Lu, Jianwei Yang, Dhruv Batra, and Devi Parikh. Hierarchical question-image co-attention for visual question answering. In *Advances In Neural Information Processing Systems*, pages 289–297, 2016.
- [20] Hyeonseob Nam, Jung-Woo Ha, and Jeonghee Kim. Dual attention networks for multimodal reasoning and matching. *arXiv preprint arXiv:1611.00471*, 2016.
- [21] OpenAI. Openai five. <https://blog.openai.com/openai-five/>, 2018.
- [22] Mark Palatucci, Dean Pomerleau, Geoffrey E Hinton, and Tom M Mitchell. Zero-shot learning with semantic output codes. In *Advances in neural information processing systems*, pages 1410–1418, 2009.
- [23] Santhosh K Ramakrishnan, Ambar Pal, Gaurav Sharma, and Anurag Mittal. An empirical evaluation of visual question answering for novel objects. *arXiv preprint arXiv:1704.02516*, 2017.
- [24] Mengye Ren, Ryan Kiros, and Richard Zemel. Exploring models and data for image question answering. In *Advances in neural information processing systems*, pages 2953–2961, 2015.
- [25] Adam Santoro, David Raposo, David G Barrett, Mateusz Malinowski, Razvan Pascanu, Peter Battaglia, and Tim Lillicrap. A simple neural network module for relational reasoning. In *Advances in neural information processing systems*, pages 4974–4983, 2017.
- [26] David Silver, Julian Schrittwieser, Karen Simonyan, Ioannis Antonoglou, Aja Huang, Arthur Guez, Thomas Hubert, Lucas Baker, Matthew Lai, Adrian Bolton, et al. Mastering the game of go without human knowledge. *Nature*, 550(7676):354, 2017.
- [27] Karen Simonyan and Andrew Zisserman. Very deep convolutional networks for large-scale image recognition. *arXiv preprint arXiv:1409.1556*, 2014.
- [28] Richard Socher, Milind Ganjoo, Christopher D Manning, and Andrew Ng. Zero-shot learning through cross-modal transfer. In *Advances in neural information processing systems*, pages 935–943, 2013.
- [29] Damien Teney and Anton van den Hengel. Zero-shot visual question answering. *arXiv preprint arXiv:1611.05546*, 2016.
- [30] Xiaolong Wang, Yufei Ye, and Abhinav Gupta. Zero-shot recognition via semantic embeddings and knowledge graphs. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, pages 6857–6866, 2018.
- [31] Caiming Xiong, Stephen Merity, and Richard Socher. Dynamic memory networks for visual and textual question answering. In *International Conference on Machine Learning*, pages 2397–2406, 2016.
- [32] Zichao Yang, Xiaodong He, Jianfeng Gao, Li Deng, and Alex Smola. Stacked attention networks for image question answering. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, pages 21–29, 2016.

Table 3: Frequent zero-shot words appearing in ZSA test set answers.

Freq.	Word	Freq.	Word	Freq.	Word	Freq.	Word	Freq.	Word
6,206	3	125	closed	74	beige	43	cherry	32	straight
1,229	0	120	sunglasses	56	love	43	bun	32	marble
1,138	dog	115	plastic	56	center	42	dusk	30	butterfly
684	stop	115	head	54	swimming	42	bandana	28	hours
625	purple	111	chicken	52	sugar	41	serve	28	daisies
324	male	105	meter	50	know	41	east	28	bamboo
302	bat	102	tomato	49	parrot	39	35	27	remotes
241	picture	89	overcast	45	ford	38	surfer	27	cheesecake
137	tower	85	blanket	44	p	34	stand	26	natural
126	giraffes	76	tea	43	tulips	32	tape	24	tour

Table 4: Frequent zero-shot words appearing in ZSQ test set questions.

Freq.	Word	Freq.	Word	Freq.	Word	Freq.	Word	Freq.	Word
3,205	sport	464	use	296	carrying	155	crossing	92	popular
1,153	appear	461	chair	287	face	150	tires	92	planning
976	fire	430	parked	283	writing	148	cabinets	88	batters
898	pattern	415	coming	230	television	145	beds	85	enjoy
845	material	399	buses	223	vegetarian	127	mountain	85	dirt
689	bed	395	take	220	beside	119	levels	85	carpet
669	facing	357	utensil	201	graffiti	117	catcher	83	slice
612	big	335	dish	167	foot	113	falling	80	salad
565	trying	321	sink	163	couch	101	faces	79	square
474	sandwich	317	three	160	silver	98	fireplace	78	roll

Table 5: Movement of question samples from original train and test data sets to new datasets.

	Questions		Images	
	Train	Test	Train	Test
Normal Train	163,281	0	54,427	0
Normal Test	0	80,436	0	26,812
ZSA Test	10,360	4,942	9,860	4,689
ZSQ Test	23,145	11,208	20,165	9,797

A Frequent Zero-Shot Words

Zero-shot words are used to select samples for ZSA and ZSQ data sets. Some of these words often appears and some are not. To understand the effect of these words, we list frequent zero-shot words that appear in answer in ZSA data set (Table 3) and in question for ZSQ data set (Table 4). The lists of all zero-shot words are publicly available as a part of the dataset. These zero-shot words are already filtered by stop words from this address.¹

B Data Movement from Original to New Datasets

To better understand the connection between original VQA dataset and the new dataset, we summarized the movement of samples between the two sets (Table 5). It shows that for both questions and images, there is no intersection between original train and normal test dataset, or between original test and normal train dataset. Also, ZSA and ZSQ datasets have the same ratio of the samples from original train and test sets.

¹<https://github.com/Yoast/YoastSEO.js/blob/develop/src/config/stopwords.js>