

Detection of Community Structures in Networks with Nodal Features based on Generative Probabilistic Approach

Hadi Zare, Mahdi Hajiabadi, Mahdi Jalili, *Senior Member, IEEE*

Abstract—Community detection is considered as a fundamental task in analyzing social networks. Even though many techniques have been proposed for community detection, most of them are based exclusively on the connectivity structures. However, there are node features in real networks, such as gender types in social networks, feeding behavior in ecological networks, and location on e-trading networks, that can be further leveraged with the network structure to attain more accurate community detection methods. We propose a novel probabilistic graphical model to detect communities by taking into account both network structure and nodes' features. The proposed approach learns the relevant features of communities through a generative probabilistic model without any prior assumption on the communities. Furthermore, the model is capable of determining the strength of node features and structural elements of the networks on shaping the communities. The effectiveness of the proposed approach over the state-of-the-art algorithms is revealed on synthetic and benchmark networks.

Index Terms—Community detection, Unsupervised learning, Node Features, Graphical Model, Social Networks.

1 INTRODUCTION

A network is a set of inter-connected items with a powerful mathematical basis for modeling many real-world systems, such as the Internet, World Wide Web, and transportation networks [1]. Detection of communities as the main hidden structures of networks has attracted the interests of researchers from the early stages of the the appearance of network science [2]. A community in a network is defined as a set of nodes with intense intra community connections while having sparse inter community links. Nodes within the same community are likely to share common properties and play similar actions [3]. The role of community structures in the functional modules of the networks has been applied on a wide range of fields including spammers identification in online social networks [4], image clustering [5], and detection the neural units dense modules [6].

Much effort has been carried out on various aspects and assumptions about communities while focusing primarily on the connectivity information. Algorithms to discover non-overlapping communities are generally aimed at partitioning the network into sub-networks which are densely connected internally, while weakly connected externally. Examples of such algorithms are graph partitioning [7], hierarchical agglomeration algorithm [8], optimization based methods [9] and many variants of spectral clustering method [10]. On the other hand, several methods have been proposed to discover overlapping communities, such as mixed membership stochastic block-models [11], map

equation framework based on probabilistic flows (*InfoMap*) [12], label propagation (*Fast-Greedy*) [13], nonnegative matrix factorization (*BigClam*) [14], modularity based optimization (*COMBO*) [15], tracking the evolution of online social networks [16], neighborhood seed expansion [17], a unified approach on detection of general community structures [18], and asymmetric triangle cuts [19].

Indeed, the community detection can be considered as an ill-posed hard unsupervised learning problem. There are node (or edge) features that can be effectively used to provide better community structures [20], [21]. On the one hand, it is known that significant correlation exists between community structure and node features, hereafter called as “features”, in a variety of real networks [2]. On the other hand, most of the well-known approaches are based on applying only one of these two information sources. Exploiting features in the community detection process could yield better results. Moreover, it is shown that there is strong dependency between the communities and features in some real networks [22]. Recently, some researchers have addressed the community detection using network structure coupled with the features, such as single-assignment clustering heuristic [23], topic derived models [24], generative model (*CESNA*) [25], Bayesian Graph Clustering (*BAGC*) [26], and Expectation-Maximization (EM) approach [22]. However, most of these approaches are somewhat sensitive to correctness of the model specification.

In this paper, we propose a novel graphical model to find communities through a probabilistic approach. The proposed model provides the level of correlations between communities and features that could be used to select the suitable divisions of the network as well as the appropriate features. The summary of our contributions in this work are as follows,

- Hadi Zare and Mahdi Hajiabadi are with the Faculty of New Sciences and Technologies, University of Tehran, Tehran, Iran. Mahdi Jalili is with the School of Engineering, RMIT University, Melbourne, Australia. Mahdi Jalili is supported by Australian Research Council through project No. DP170102303.

E-mail: h.zare@ut.ac.ir, m.hajiabadi@ut.ac.ir, mahdi.jalili@rmit.edu.au

Manuscript received ; revised .

- We propose a graphical model to form the relation between the communities and features
- We investigate the correlation between the community structures and features based on the learned model
- We extract communities for a general class of networks through exploiting features
- We introduce a novel approach on the influence of features on the community structures

The paper is organized as follows. Section 2 presents the related works and motivation of the proposed approach. Section 3 introduces the elements of the proposed model. Section 4 describes the statistical learning of the model parameters. Section 5 represents the experimental results on benchmark real network dataset. Section 6 presents a case study to illustrate the proposed approach. Section 7 concludes the paper with suggestions for further works on this field.

2 RELATED WORKS AND MOTIVATION

2.1 Related works

The role of nodal features on different aspects of network modeling are considered in a variety of works such as the missing nodes prediction via non-parametric Bayesian inference [27], finding k-truss subgraphs with the aid of features [28], and network approach on topic modeling [29].

On community detection with nodal features, there are generally two types of techniques, model-free methods and generative models. Like the structure based algorithms with some optimality criteria to detect communities such as the modularity based methods [9], [30], [31] and label propagation [32], such model-free methods are proposed to exploit the features including structure mining [33], simulated annealing [34], Joint Community Detection Criterion (*JCDC*) [35], Semidefinite Programming (*SDP*) [36], and Covariance Assisted Spectral Clustering (*CASC*) [37]. Most methods in this category exploit features in the same way without considering the relationship between them and communities.

Generative models were initially introduced on connectivity based community detection including affiliation graph model [38], matrix factorization *BigClam* [14], Bayesian community detection [39], and nonparametric probabilistic model by conducting random walks [40]. Feature based generative models on community extraction have been proposed in some works such as topic modeling [24], *CESNA* [25], and stochastic block model [22]. In [25], a generative model was introduced to consider just the influence of community structures on features. The modified stochastic block model aligned with the features is modified in [22] to reveal the efficacy of each feature on community structures by employing the Expectation-Maximization inference stage. On the one hand, most of the model-free feature based methods suffer from the dependency to multiple tuning parameters such as *JCDC* [35], and *CASC* [37]. On the other hand, the generative feature based models on extraction of communities have some problems including the model sensitivity on the presumed graphical representation of the features and communities *CESNA* [25], and modeling a correlation of single feature with the community structure at a time [22].

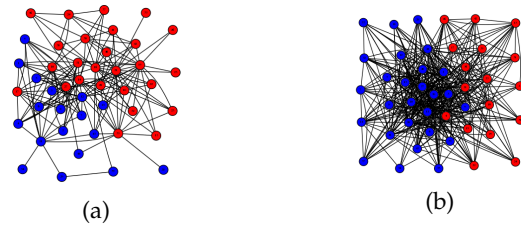


Fig. 1: The influence of features on communities in two real networks, (a): *Weddell Sea* with feature “Environment” with two categories, “Pelagic” (Blue) and “Benthic” (Red). (b): *World Trade* with feature “continent” where each node(country) belongs to “Asia” (Blue) or “Europe” (Red).

2.2 Motivation

In general, there are two paradigms in constructing the effect of features on the community structure: (i) the assortative features like age, sexuality, race and overall personal user’s attributes having significant influence on the formation of communities, and (ii) the community generative features like education, living place, office location and user’s interests in social networks which is imitated from the community structure. To clarify the effect of features on the formation of community structure, we consider two real-world networks. Figure 1 (a) shows a snapshot of the *Predator-Prey* network where each node represents a unique marine creature of the Weddell Sea and the color of each node shows its living environment, “Pelagic” or “Benthic” [41]. Figure 1 (b) shows a snapshot of *World Trade* network, where each node (country) belongs to “Asia” or “Europe” [42]. As it can be seen, the features provide a useful insight on discovering the more likely community structures on these case studies.

Our primary aim in this work is to study how to extract community based on two different type of features, assortative and generative, which has not been considered in the earlier works. We propose a principled graphical model via the division of features into assortative and generative features to construct a general approach to deal with the community detection problem. It is assumed that each community can be formed by causal relationship of assortative features and the *community* generative features which are influenced within the community structure. The community generative features is called as *generative features* for simplicity.

The causal relationship is represented in a graphical model to encode the main elements of the community formation through two main sources: connectivity structure and features. The schematic representation of features and their relations on the community structures are depicted in Figure 2. The proposed approach is designed based on the different types of features in the probabilistic generative model. Moreover, it can also model the joint features altogether unlike most of ad-hoc based earlier methods [22], [35]. The parameters of the proposed model are learned through a likelihood based approach. Furthermore, the dependency of features on the community structure is computed through the learning phase that can be applied to infer the main ingredients on the construction of network communities.

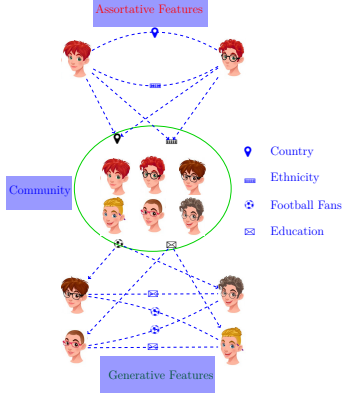


Fig. 2: The connection between features and community structure where *gender* and *ethnicity* are *assortative features* with causal impact on the community structure, and *football* and *education* are *generative features* which are generated by the community structure.


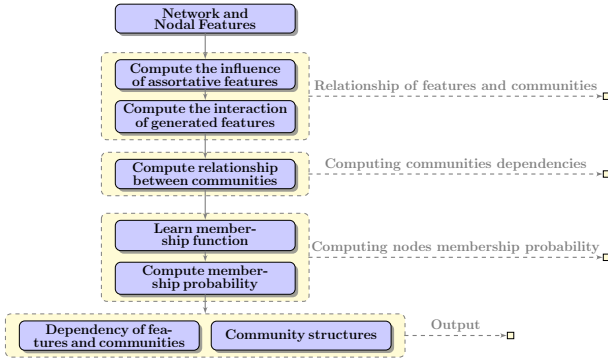


Fig. 3: The flow-graph of the proposed method

3 ELEMENTS OF THE PROPOSED APPROACH

Let's assume a network representation as $G = (V, E)$ where V and E denote nodes and edges in graph G . Furthermore, we have a set of features on nodes as $Features = S \cup F$, which comprises two disjoint subsets S for "assortative features" and F for "generative features" based on the dataset contextual information. The assortative features represent the personal attributes like race and age, and the generative features represent features like education, sports and users' interests, see Figure 2 for further details.

The proposed approach consists of three main steps, which is depicted in Figure 3. Initially, the features are divided into assortative and generative. The first main step is to measure the dependency of features towards each community. In this step, the influence of assortative and generative features on the community formation is computed. The first main step is to measure the dependency of features towards each community. In this step, the influence of assortative and generative features on the community formation is computed. The relationship between communities is the second component of the proposed algorithm. The next important step is computing the probability membership function for each node, which is performed by statistical learning of the main parameters and iteratively updating the initial membership function to result in the final ones.



Node	Type	Description
M	Hidden Variable	Membership function of each node
I	Weight Factor	Correlation level between communities and assortative features
W	Weight Factor	Correlation level between communities and generative features
β	Weight Factor	Level of interactions between communities
G	Observation	Input network
F	Observation	Generative features
S	Observation	Assortative features

Fig. 4: The description of main elements of proposed methodology in a graphical model

Output of the algorithm is twofold: the dependency weights of features to the community structures that is informative for interpretation of the attained results, and the community structure of the network.

3.1 Description of graphical model

Here, we describe the details of proposed community detection model. The proposed model provides a generative framework among the main factors in a graph structure to detect the community structures in a network. The graphical model is constructed based on main factors namely community membership M , community interaction matrix β , assortative features S , generative features F , the influence of assortative features on communities denoted by I and the interaction of communities with features denoted by W . Figure 4 represents the graph structure of the proposed model.

The probability of creation of an edge between a pair of nodes is directly related to their communities and the interaction levels between communities based on a probabilistic generative approach. Particularly, it is assumed that two nodes u and v are connected by considering the following probability,

$$P((u, v) \in E) = 1 - \exp(-M_u^T \beta M_v) \quad (1)$$

where M_u and M_v are non-negative membership functions of nodes u and v toward each community and β represents the probability matrix of interactions between different communities. If nodes u and v share more communities or belong to communities c_i and c_j with high level of interaction (β_{c_i, c_j}) among them, their tendency to establish an edge will be increased. Hence, nodes u and v do not share a connection with the following probability,

$$P((u, v) \notin E) = 1 - P((u, v) \in E) = \exp(-M_u^T \beta M_v) \quad (2)$$

Based on the generative probabilistic process between any pair of nodes (u, v) , each pair of nodes are independently distributed as Bernoulli distribution. Therefore, each element $A_{uv} \in \{0, 1\}$ of the adjacency matrix is generated according to the following generative approach,

$$\begin{aligned} P_{uv} &= 1 - \exp(-M_u^T \beta M_v) \\ A_{uv} &\sim \text{Bernoulli}(P_{uv}) \end{aligned} \quad (3)$$

The graphical model in Figure 4 indicates that the generative features F is conditionally dependent on variables M and W , which is assumed to be parametrized through the following sigmoid probabilistic function,

$$P(F_{uk} = 1) = \frac{1}{1 + \exp(-\sum_{i=1}^K M_{uc_i} W_{kc_i})} \quad (4)$$

where $F_{uk} = 1$ denotes the property of node u to have the k th feature, M_{uc_i} and W_{kc_i} denote the membership of node u in community c_i and the interaction between the k -th feature and community c_i . In summary, we assume that F_{uk} follows the Bernoulli distribution in the following way:

$$P(F_{uk} = 0) = \frac{\exp(-\sum_{i=1}^K M_{uc_i} W_{kc_i})}{1 + \exp(-\sum_{i=1}^K M_{uc_i} W_{kc_i})} \quad (5)$$

Furthermore, communities are influenced by the assortative features S and its weight parameters I in the graph structure. In a similar way, the community membership of each node is estimated by,

$$M_{uc_i} = \frac{1}{1 + \exp(-\sum_{j \in I} I_{jc_i} S_{uj})} \quad (6)$$

4 PARAMETERS LEARNING

Here, we consider the learning and inference stage on the proposed probabilistic model. The probability distribution on the observed variables M and F is written as,

$$P(G, F | M, \beta, I, W, S) = P(G | M, \beta, I, S) P(F | M, W) \quad (7)$$

The likelihood function is calculated based on the model configuration as follows,

$$\begin{aligned} L(\theta) &= \prod_{(u,v)} (1 - \exp(-M_u^T \beta M_v))^{a_{uv}} (\exp(-M_u^T \beta M_v))^{1-a_{uv}} \\ &\times \prod_u \prod_{k \in F} \left(\frac{1}{1 + \exp(-\sum_{c_i} M_{uc_i} W_{kc_i})} \right)^{F_{uk}} \\ &\times \left(\frac{\exp(-\sum_{c_i} M_{uc_i} W_{kc_i})}{1 + \exp(-\sum_{c_i} M_{uc_i} W_{kc_i})} \right)^{1-F_{uk}} \end{aligned} \quad (8)$$

The well-known optimization approaches could not be applied to obtain the maximum of the non-linear likelihood function of (8) which contains the latent variables M and W . Some approximate algorithms have been proposed to solve the hardship of optimization problems with latent variables in machine learning such as the expectation-maximization algorithm (EM) [43], variational Inference [11] and block coordinate approach [44]. We employ the *Block Coordinate Ascent* algorithm to find the solution of the objective function in Eq 8. According to *Block Coordinate Ascent* approach, updating the parameters takes place in two main steps, (i) updating the first block, the membership function M , by fixing the second block, the parameters β, I, W , and (ii) updating the second block of parameters by fixing the first one. The log-likelihood function $\ell(\theta)$ is employed in our

calculations that is more tractable than the likelihood in (8) as,

$$\begin{aligned} \ell(\theta) &= \sum_{(u,v)} a_{uv} \log(1 - \exp(-M_u^T \beta M_v)) \\ &+ (1 - a_{uv}) (-M_u^T \beta M_v) \\ &+ \sum_u \sum_{k \in F} F_{uk} \log \frac{1}{1 + \exp(-\sum_{c_i} M_{uc_i} W_{kc_i})} \\ &+ (1 - F_{uk}) \log \frac{\exp(-\sum_{c_i} M_{uc_i} W_{kc_i})}{1 + \exp(-\sum_{c_i} M_{uc_i} W_{kc_i})} \end{aligned} \quad (9)$$

Details of the learning stage is follows.

4.1 Updating the parameters

The first step is to update the values of membership function M_u . To do so, it is required to derive the partial derivative of the log-likelihood function (9) with respect to M_u as,

$$\begin{aligned} \frac{\partial \ell(M_u)}{\partial M_u} &= \sum_{v \in N(u)} \beta M_v \frac{\exp(-M_u^T \beta M_v)}{1 - \exp(-M_u^T \beta M_v)} + \sum_{v \notin N(u)} -\beta M_v \\ &+ \left(F_{uk} - \frac{1}{1 + \exp(-\sum_{c_i} M_{uc_i} W_{kc_i})} \right) W_{kc_i} \end{aligned} \quad (10)$$

where the set of neighbors of u is represented by $N(u)$. Each M_u is first updated by gradient ascent in Eq (10), and then transformed to space of $[0, \infty)$ to meet the non-negativity property,

$$M_u(t+1) = \max(0, M_u(t) + \alpha \left(\frac{\partial \ell(M_u)}{\partial M_u} \right)) \quad (11)$$

where α is the learning weight parameter. After updating M_u , the second block of parameters (I, W, β) are updated once at a time.

First, the important probabilistic dependencies among the parameters are employed to simplify the calculations. The conditional independence between the parameters (I, W, β) , given M_u is derived from the proposed probabilistic model. Also, the structure of the graphical model implies the probabilistic dependencies of I to β and W . Taking into account the relation of M and I , and the chain rule to get $\frac{\partial \ell}{\partial I}$ for a node u as,

$$\frac{\partial \ell}{\partial I} = \frac{\partial \ell(M_u)}{\partial M_u} \times \frac{\partial M_u}{\partial I} \quad (12)$$

The $\frac{\partial M_u}{\partial I}$ is obtained from Eq. (6) by,

$$\frac{\partial M_u}{\partial I} = S_u \times \frac{\exp(-\sum_{k \in I} S_{uk} \cdot I_{c_i k})}{[1 + \exp(-\sum_{k \in I} S_{uk} \cdot I_{c_i k})]^2} \quad (13)$$

Eq. (13) and Eq. (10) imply the updating procedure of I as,

$$I(t+1) = I(t) + \alpha \left(\sum_{u \in V} \frac{\partial \ell(M_u)}{\partial M_u} \times \frac{\partial M_u}{\partial I} \right) \quad (14)$$

In the next step, parameter W , which is responsible for the correlation levels between generative features and the community is updated according to the following,

$$\frac{\partial \ell}{\partial W_{kc_i}} = \sum_u \left(F_{uk} - \frac{1}{1 + \exp(-\sum_{c_i} M_{uc_i} W_{kc_i})} \right) M_{uc_i} \quad (15)$$

In a similar way, the final updating form of parameter W takes the form as the following,

$$W_{kc_i}(t+1) = W_{kc_i}(t) + \alpha \left(\frac{\partial \ell}{\partial W_{kc_i}} \right) \quad (16)$$

To update β , the derivation of the log-likelihood function with respect to β is calculated as,

$$\begin{aligned} \frac{\partial \ell}{\partial \beta} &= \sum_{v \in N(u)} -M_u^T M_v \times \frac{\exp(-M_u^T \beta M_v)}{1 - \exp(-M_u^T \beta M_v)} \\ &+ \sum_{v \notin N(u)} -M_u^T M_v \end{aligned} \quad (17)$$

The Eq. (17) provides the updating procedure for β as,

$$\beta(t+1) = \beta(t) + \alpha \left(\frac{\partial \ell(M_u)}{\partial \beta} \right) \quad (18)$$

Algorithm 1 Probabilistic Feature based Community Detection(PFCD)

```

1: Input:  $G = (V, E)$ ,  $Features$ ,  $Number\ of\ communities(k)$ .
2: Output:  $M$  Community memberships of each node.
3: Initialize: Initializing parameters.
4:  $t \leftarrow 0$ 
5: while  $|M_u(t+1) - M_u(t)| \leq threshold$  do
6:    $t \leftarrow t + 1$ 
7:   for  $i = 1$  to  $|V|$  do
8:      $DevM = findDerivationM()$ 
9:     Update:  $M_{v_i}(t+1) = UpdateM(DevM, M_{v_i}(t))$ .
10:  end for
11:  for  $i = 1$  to  $|S|$  do
12:     $DevI = findDerivationI()$ 
13:     $I(t+1) = UpdateI(I(t), DevI)$ 
14:  end for
15:  for  $i = 1$  to  $|F|$  do
16:     $DevW = findDerivationW()$ 
17:     $W(t+1) = UpdateW(W(t), DevW)$ 
18:  end for
19:  for  $i = 1$  to  $k$  do
20:     $Dev\beta = findDerivation\beta()$ 
21:     $\beta(t+1) = UpdateBeta(\beta(t), Dev\beta)$ 
22:  end for
23: end while

```

4.2 PFCD algorithm

The proposed approach, *PFCD* (Probabilistic Feature based Community Detection) is represented in Algorithm 1. According to *PFCD*, the inputs are the network structure (G), the features ($S \cup F$), the number of assortative features ($|S|$), the number of generative features ($|F|$) and the number of communities (k). The final output is the membership function of each node. The relationship between different types of features and communities can also be two important output of the proposed algorithm with the aim of interpretation. After initialization of the parameters, the main part of the algorithm is performed in an iterative manner. The algorithm stops when the absolute difference between the subsequent log-likelihoods of the model (Eq. (8)) is less than a threshold parameter, which is set to 0.001 in our setting. Function *findDerivationM* is applied to compute the derivation of the *log-likelihood* function with respect to M based on Eq. (10). The update procedure on M is performed by *UpdateM* based on Eq. (11). When updating the membership function for all nodes is finished, the next step is to update the parameters I , W and β . The *findDerivationI* calculates the derivation of the *log-likelihood*

function with respect to I by Eq. (13) and function *UpdateI* updates I by Eq. (14). W which captures the correlation level between the communities and the generative features, is updated by *FindDerivationW* and *UpdateW* according to equations (15) and (16). β is updated based on equations (17) and (18). The update procedure is repeated until the convergence criterion is met.

4.3 Computational Complexity

The complexity of PFCD in each iteration is linearly dependent on the number of communities, assortative and generative features in network. The process of updating of *PFCD* consists of two parts, updating the membership value of each node toward each community and updating the weight of each feature to each community. The membership value is updated based on Eq.s (10) and (11). For each given node u , the process considers the membership of its neighbors $M_v, v \in N(u)$ and non-neighbors towards communities $M_v, v \notin N(u)$. Therefore, for each given node Eq. 10 takes $O(|N(u)|(k^2 + k)) \sim O(|N(u)|k^2)$ (because of multiplying $M_u^T \beta M_v$) time for the neighbors and $O(|N(u)|k^2)$ for the non-neighbors. After iterating on all nodes the time complexity is $O(|E| \times k^2)$.

The time complexity for each given node of the second component of Eq. 10 is related to $O(k \times |F|)$. As a result the time complexity of the second component iterating on all nodes would end up with $O(|V| \times k \times |F|)$. The next step is the weight computation for each feature, $\{I, W\}$, and the community interaction matrix, β . According to Eq. 13, the time complexity is related to multiplying $S_u \times I_{c_i}$ which can be done in $O(|V| \times k \times |S|)$. Accordingly, updating the parameter W has complexity of $O(|V| \times k \times |F|)$ and the matrix β takes $O(|E| \times k^2)$ for updating its values by considering Eq. (18). Therefore, the proposed method would have the complexity of $max(O(|E| \times k^2), O(|V| \times k \times |F|))$.

5 EXPERIMENTS

Synthetic and real-world networks are used to evaluate performance of *PFCD*. The efficiency of the proposed model is demonstrated on the state-of-the-art community detection methods by considering the feature based methods and structure based ones'. On state-of-the-art feature based methods, *Cesna* [25], *JCDC* [35], *NC* [22], *BAGC* [26], *SDP* [36], and *CASC* [37] are employed in the experiments. On state-of-the-art structure based methods, *BigClam* [14], *Fast-Greedy* [13], *Infomap* [12], *Louvain* [9], and *COMBO* [15] are applied in the experiments. Table1 summarizes these algorithms.

Initially, synthetic networks are used to examine the proposed approach. Then, we compare the performance of *PFCD* on benchmark real networks with ground-truth communities. In our experiments, the ground-truth communities and presumed number of communities are used for all of the methods to yield a fair comparison as highly recommended [2]. Experiments are run on a desktop PC with 4GB memory and Core i5 CPU under JAVA using JGraphT library. The source codes are provided in the supplementary information. The weight parameter α is set as 0.001 in the experiments. The β is initialized based on the conductance

TABLE 1: Overview of the state-of-the-art algorithms

Methods	Description	Reference
Feature based Community Detection Methods		
Cesna	Feature enabled Generative model	[25]
JCDC	Joint Feature based Community Detection Criterion	[35]
NC	Modified Feature based Stochastic Block Model	[22]
BAGC	Bayesian Graph Clustering	[26]
SDP	Semi-Definite Programming	[36]
CASC	Covariance Assisted Spectral Clustering	[37]
Structure based Community Detection Methods		
BigClam	Find Overlapping community	[14]
Fast-Greedy	Fast Overlapping community detection	[13]
Infomap	Find Overlapping community by probabilistic flows	[12]
Louvain	Heuristic method for detecting non-overlapping community	[9]
COMBO	Find overlapping and non-overlapping communities	[15]

measure approach [45]. The algorithms are run with their default parameters.

5.1 Evaluation criteria

Two well-known evaluation criteria, the *F1 score* and the *NMI*, are applied to measure the accuracy of the community detection algorithms as compared to the ground-truth communities [2]. *F1 score* is a standard evaluation measure in machine learning and community detection tasks, which quantifies the relative frequency of the number of correct detections of the members in each community based on the gold-standard information. The second performance measure is *NMI* which is the mutual information of the similarity (or dissimilarity) between the discovered communities and the ground-truth ones’.

5.2 Synthetic networks

Synthetic networks are generated based on the degree-corrected stochastic block model [35]. The generation process is performed at two phases. At the first phase, the structure of network is shaped and the features are provided to each node at the second phase.

At the first phase, a pair of nodes (i, j) are sharing an edge independently from the other pairs. The probability of an edge generation between any pair of nodes depends on whether they are in a same community or not. If they share a community, the probability would be $\beta\theta_i\theta_j$, otherwise is $r\theta_i\theta_j\beta$. Parameter β indicates the level of interaction between any pair of communities, such that higher level of β for a pair of communities (i, j) results in more interactions of them. The r is used for handling the density inside the community and parameters θ_i, θ_j are used for controlling the degree of nodes. To avoid homogeneity in the generated networks, we set 10% of nodes inside a community as hub by setting $\theta_i = 10$ and for non-hub nodes $\theta_i = 1$. We set $\beta = 0.1$ and $r = 0.25$ in generating the networks. The average degree of the resulted network is around 31. After shaping the structure of network, at the second phase we generate features for two communities from the Gaussian distribution $\mathcal{N}(\mu, 1)$, for nodes of the first community and $\mathcal{N}(-\mu, 1)$ for nodes of the second community. As μ increases, the feature of each community becomes stronger. To reveal the impact of nodal features on communities, three different networks are generated with $N = \{1000, 2000, 5000\}$ by considering three different scenarios $\mu = \{2, 3, 5\}$ for each network. A summary of properties of the synthetic networks are given in Table 2.

TABLE 2: Main properties of the synthetic networks.

Network	Nodes	Edges	Communities
1000-2	1000	51578	2
1000-3.5	1000	56401	2
1000-5	1000	52488	2
2000-2	2000	177719	2
2000-3.5	2000	181288	2
2000-5	2000	177592	2
5000-2	5000	819220	2
5000-3.5	5000	783694	2
5000-5	5000	845994	2

The performance of *PFCD* is demonstrated on these generated networks by using the state-of-the-art feature based methods in Table 1. The results are shown in Figures 5 and 6. As μ increases, the influence of features on community structures becomes stronger. Due to the number of features in the generation of networks, there exists a slight difference between the proposed approach and other feature-enabled community detection methods. In addition, the main aim of the experiments on synthetic networks is to demonstrate the impact of features on the performance of community detection (Figures 7 and 8). We compare the proposed approach with the well-known structure-based methods in Table 1 to reveal the importance of features on community detection process by using F1-Score and NMI criteria. Figures 7 and 8 indicate that the proposed method outperforms the well-known structure based methods.

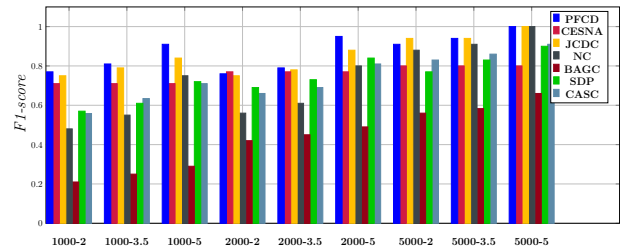


Fig. 5: Results of *PFCD* compared with feature based community detection methods (Table 1) in terms of F1-Score, where the horizontal axis represents three different scenarios for each generated network with sample sizes from 1000 to 5000.

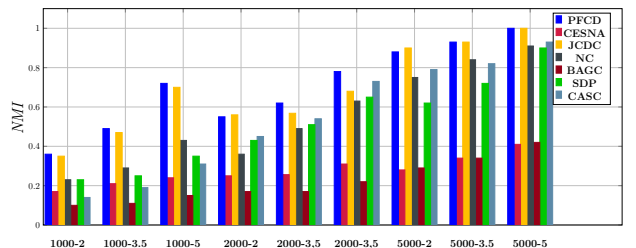


Fig. 6: Results of *PFCD* compared with the feature based community detection methods (Table 1) in terms of NMI, where the horizontal axis presents three different scenarios for each generated network with sample sizes from 1000 to 5000.

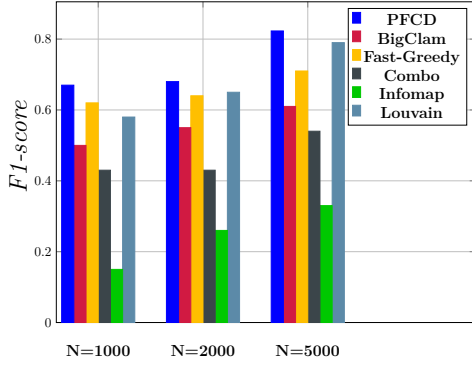


Fig. 7: Results of *PFCD* compared with the structure based community detection methods (Table 1) in terms of F1-Score, where the horizontal axis presents three generated networks with sample sizes from 1000 to 5000.

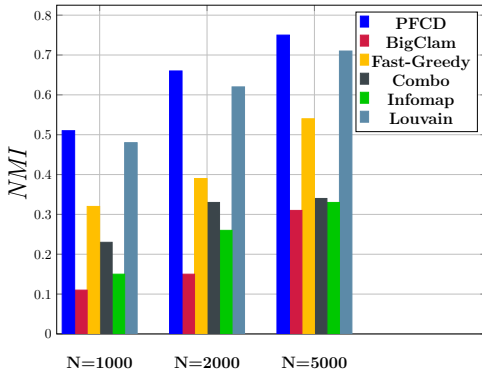


Fig. 8: Results of *PFCD* compared with the structure based community detection methods (Table 1) in terms of NMI, where the horizontal axis presents three generated networks with sample sizes from 1000 to 5000.

5.3 Real networks

We examine our approach on a number of benchmark real-world network dataset. The networks are from different domains including economy, biology, ecology, and social.

5.3.1 Dataset description

Three social friendship networks, namely *Lawyer*, *CalTech*, and *Rice*, are used in this study. The *Lawyer* dataset is derived from a study of corporate law partnership that was developed in a Northeastern US corporate law firm. It contains the friendship networks among 71 attorneys (partners and associates) of this company. There are several features for the members as part of the dataset, such as seniority, formal status, working office location, gender, law school attended, working hours, the years of activity, and attitudes on various management options [46]. We consider two Facebook subnetworks, namely *CalTech* and *Rice*, from the Facebook-100 dataset, which consists of the Facebook networks for 100 colleges and universities in the US. There are links between the members (student or faculty) inside each school, and also nodal features including the status of student/faculty, major, senior or junior, dormitory, year and high school information [47].

Five information networks are used in our experiments, including *DBLP*, *ArXiv*, *WTrade*, *Internet*, and *PolBlogs*. In

TABLE 3: Summary of the real network datasets.

Network	Nodes	Edges	Domain	Features	Communities
<i>Lawyer</i> [46]	71	379	Social	Status, Office, Years	2
<i>CalTech</i> [47]	769	16656	Social	Gender, Class year, Major, Residence	9
<i>Rice</i> [47]	4087	184828	Social	Gender, Class year, Major, Residence	9
<i>DBLP</i> [49]	774	1757	Social	Extracted Keywords from papers	20
<i>PolBlogs</i> [48]	1490	19090	Political	Political Affiliation	2
<i>World Trade</i> [42]	80	876	Economical	Continent, Positions	6
<i>Malaria</i> [50], [51]	307	7759	Biological	Cys-PoLV labels	4
<i>WeddellSea</i> [41]	488	15435	Ecological	Feeding type and mode, Body mass, Environment	4
<i>ArXiv</i> [49]	856	2660	Scientific	Abstract Keywords of papers	9
<i>Internet</i> [52]	46676	262953	Technological	Country	131
<i>Patent</i> [49]	100000	188631	Citation	Year, Country, PatentClass, Assigned Code	15

DBLP repository, the nodes and edges represent the authors and co-authorship relationships. 20 keywords are extracted from the title of papers to represent four different fields: Data-Mining, Computer Graphics, Artificial Intelligence and Databases. The keywords include “classification”, “cluster”, “graphic” and “human”. In *ArXiv*, the nodes represent papers and the edges show citations between them. The features denote how often a specific keyword appears in the abstract of a paper. The *ArXiv* network contains 30 distinct keywords. *WTrade* is a dataset of various manufactures from 80 countries on metal trade commodities in 1994. The edges show the exports from one country to another for metal commodities. The nodes are countries with features such as the continent, position in world system and GDP [42]. *Internet* network is a topological network where each node represents Autonomous Systems (AS) and the edges represent the path from an AS to another one. Communities are countries of the registered AS. *PolBlogs* is a network of hyperlinks between weblogs on US politics, recorded in 2005 by Adamic and Glance [48]. Each node is represented by its political affiliation, conservative or liberal. *Patent* [49] is a large citation networks on the utility patents granted which is maintained by the National Bureau of Economic Research during January 1, 1963 to December 30, 1999.

Two biological networks *Predator-Prey* and *Malaria* are employed in the experimental settings. *Predator-Prey* is an ecological network about 488 marine creatures living in the WeddellSea. Each creature has different features such as feeding type, feeding mode, environment and body mass [41]. *Malaria* dataset is a biological network of genetic sequences from the malaria parasites [50], [51]. In this network, the nodes represent 297 genes and their various shared amino acid substrings. The common process of recombination among genes to produce proteins generates a natural two-mode network which consists two types of nodes: genes in HVRs (highly variables regions) and every HVR has different set of edges among the same nodes [51]. A summary of the datasets are given in Table 3.

5.3.2 Experimental results

At first, we consider the performance of *PFCD* without taking into account of features, *Plain*, along with some of the state-of-the-art structure based methods such as, *BigClam* [14], *Fast-Greedy* [13], *Infomap* [12], *Louvain* [9], and *COMBO* [15] (see Table1). An automatic strategy is used on threshold specification in *Plain* approach, where each node is assigned to the community with the greater membership value than the average of the memberships of all nodes [2]. Figures 9 and 10 show the results. It reveals that the proposed method is able to perform as well as the other structure-based methods. Moreover, its result on some networks like *Lawyer*, *CalTech* and *Rice* is so competitive compared with

results of its original version. Actually, the PFCD algorithm without nodal features considers community as dense sub-graphs like most of other structure-based methods. The obtained results by considering just the structural properties are not good enough (less than 0.2) on certain type of networks such as DBLP, Arxiv, Internet, and Patent due to the fact that the community structures consist of the dense sub-graphs and assortative modules [49]. In addition, structure based methods perform better than the *Plain* on some networks such as *Predator* and *PolBlogs* (Figure 9) due to having small number of features. These results reveal the impact of features from the viewpoint of types and numbers on the detection of community structures in real networks, where Figure 11 demonstrate the usefulness of features on the community detection process.

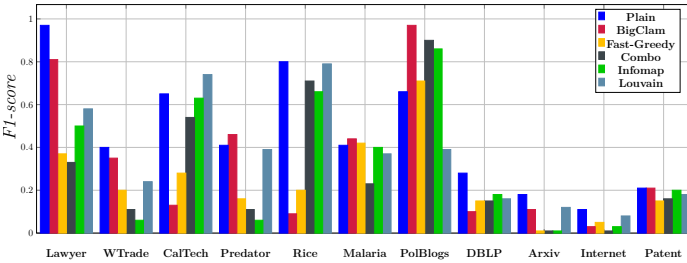


Fig. 9: Results of the proposed method compared with others by just considering connectivity structure, *Plain*, in terms of F1-score. The baseline methods include *BigClam* [14], *Fast-Greedy* [13], *Infomap* [12], *Louvain* [9], and *COMBO* [15]

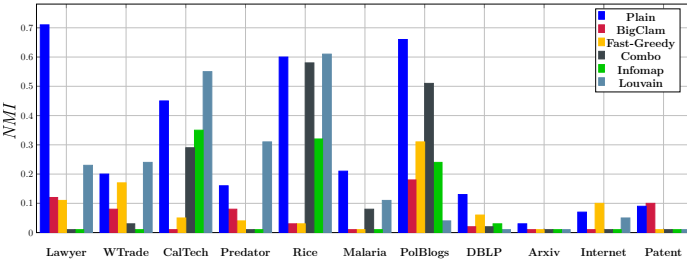


Fig. 10: Results of the proposed method compared with others by just considering connectivity structure, *Plain*, in terms of NMI. The baseline methods include *BigClam* [14], *Fast-Greedy* [13], *Infomap* [12], *Louvain* [9], and *COMBO* [15].

Then, the *PFCD* is compared with the the well-known structure based methods in Table 1. Figure 11 represents the results in terms of *F1-score* and *NMI*. We observe that considering nodal features in the community detection process leads to the superiority of *PFCD* compared to the algorithms that are only based on structural information. The difference is specially well pronounced in some networks, such as *Lawyer*, *Malaria*, *Predator-Prey*, *DBLP*, *ArXiv* and *Internet*, for which *PFCD* has higher *F1-score* and *NMI* than other algorithms.

Moreover, the performance of our approach are demonstrated with the state-of-the-art feature based algorithms in Table1. The obtained results are shown in Figure 12. We observe that *PFCD* outperforms others in almost all experiments. Specifically in the networks for which features

are completely dependent on the community structures, such as *WTrade*, *PolBlogs*, *DBLP* and *ArXiv* networks, the proposed approach performs better than the others. The results show that higher dependency between features and community structure can lead to higher accuracy in the community detection process. While *JCDC* performs well on small networks, it fails to accurately detect communities in large networks due to its dependency on multiple tuning parameters. *NC* considers only one type of feature as a metadata and fails to precisely detect communities. The results return similar weak performance of *CESNA*, on networks such as *WTrade*, *Predator-Prey*, *Malaria*, *PolBlogs* and *ArXiv*. On the division of the features into assortative and generative categories, we used *NMI* to select the appropriate assortative features due to the high level impact on the community structures. After selection the assortative features, the remaining features are used in the category of generative features. The details are reported in Table 4.

TABLE 4: The properties of features in the real network datasets.

Network	Features	Assortative Feature
<i>Lawyer</i> [46]	Status, Office, Years	Status
<i>CalTech</i> [47]	Gender, Class year, Major, Residence	Class Year
<i>Rice</i> [47]	Gender, Class year, Major, Residence	Class Year
<i>DBLP</i> [49]	extracted keywords from papers	Keyword
<i>PolBlogs</i> [48]	Political Affiliation(Liberal, Conservative)	Political Affiliation
<i>World Trade</i> [42]	Continent, Positions	Continent
<i>Malaria</i> [50], [51]	Cys-PoLV labels	Cys-PoLV
<i>WeddellSea</i> [41]	Feeding type, Feeding mode, Body mass, Environment	Feeding Type
<i>ArXiv</i> [49]	Keywords from abstract of papers	Keywords
<i>Internet</i> [52]	Country	Country
<i>Patent</i> [49]	Year, Country, PatentClass, Assigned Code	PatentClass

TABLE 5: The execution running time of *PFCD* along with *NC*, *CESNA*, and *Louvain*.

Network	PFCD	NC	CESNA	Louvain
WorldTrade	0.52	3.097	0.38	0.04
PolBlogs	0.702	41	2.16	0.01
Lawyer	0.765	21	0.12	0.01
Malaria	0.81	34	1.918	0.02
WeddellSea	1.41	1461	3.18	0.03
CalTech	1.497	1518	4.71	0.02
DBLP	2	1114	0.7	0.005
Arxiv	2.31	91	0.26	0.01
Rice	31	3476	5.4	0.33
Patent	446	-	37	3.5
Internet	2818	-	5400	0.63

The execution running time of *PFCD* is compared with the state-of-the-art competitors in Table 5, *CESNA* with $O(E)$ and developed in C++, *NC* with $O(|V|^2 \times k^2)$ and developed in C, and the fast non-overlapping community detection method, *Louvain*, developed in C and taking $O(|V| \log(|V|))$. All of the experiments are performed using a single Lenovo machine with 4GB Ram and Core i5 CPU and the proposed method is implemented in JAVA using JGraphT library. It is worth mentioning that most of the feature-oriented methods are unable to report results in decent time because some of them were developed in MATLAB or require adjacency matrix ($|V| \times |V|$) which is not working on big networks. In the execution time of each method, *Louvain* algorithm is quite faster compared with the proposed algorithm because first of all its time complexity is $O(|V| \log(|V|))$ which is generally lower than

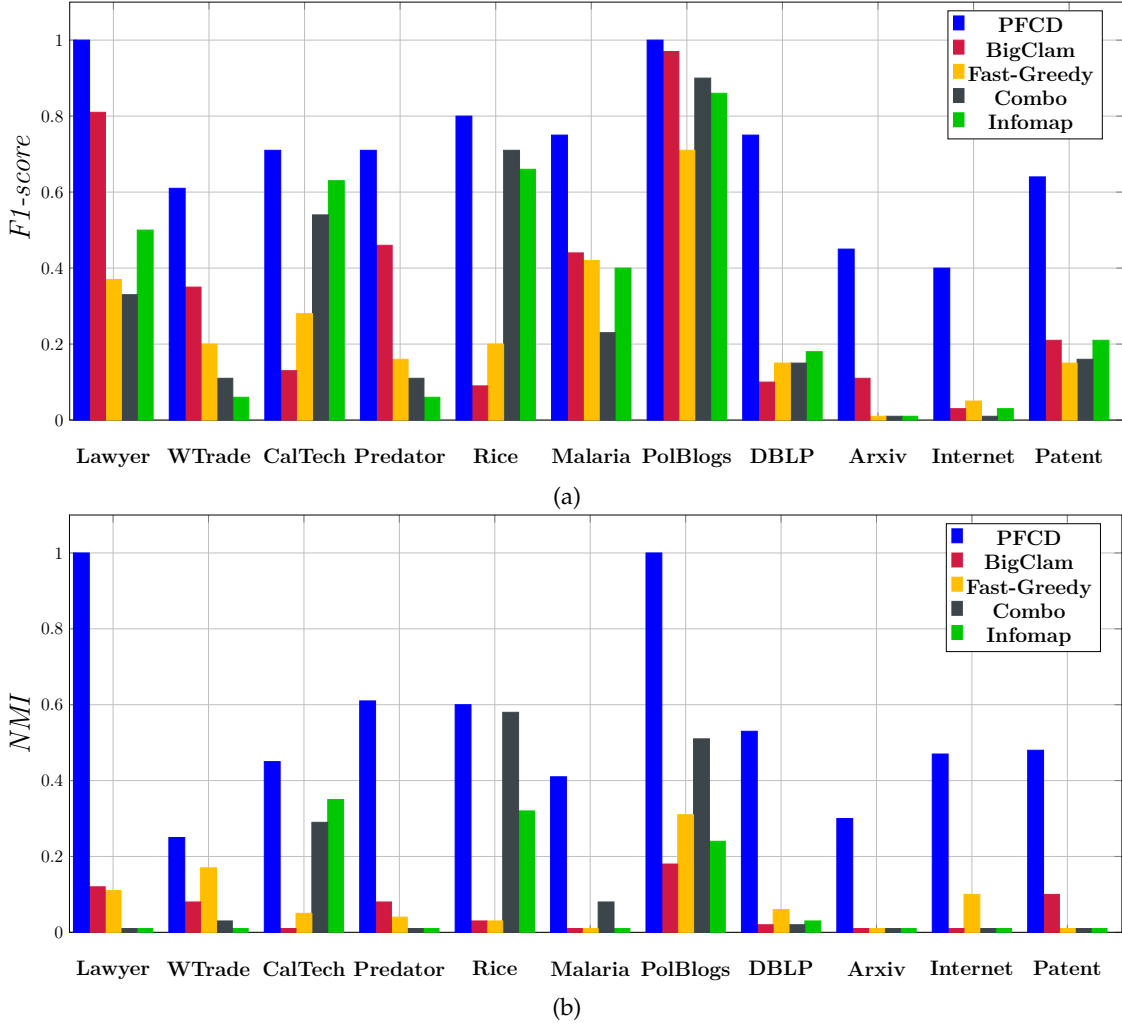


Fig. 11: Results of *PFCD* compared with the well-known structure based methods. The baseline methods include *BigClam* [14], *Fast-Greedy* [13], *Infomap* [12], *Louvain* [9], and *COMBO* [15] (Table 1)

$O(|E|)$ and it is just based on the network structure and does not take into account node features. However, the Louvain algorithm is not able to detect communities on several networks such as CalTech (0.34 F1-score), WorldTrade (0.24 F-score), Arxiv or DBLP (around 0.1 F-score).

6 CASE STUDY

Here, we demonstrate the effectiveness of features for detection of communities. *Lawyer* network is considered for further analyzing its communities and the role of features in each community structure. To illustrate the situation, Figure 13 depicts the adjacency matrix sorted by different features, *status* (*Partner*, *Associate*) and *office location* (*Boston*, *Hartford*). In Figure 13 part (a), yellow block denotes a group of lawyers with *Partner* status and blue block consists of lawyers with *Associate* status. In Figure 13 part (b), lawyers working in *Boston* are shown in yellow block, and the others working in *Hartford* are depicted in blue block. According to Figure 13, the features are strong enough to shape communities where nodes with similar features are more likely to share connections together compared with those with different features. The level of strength between

TABLE 6: the Impact of each feature on each community.

Community	Partner	Associate	Boston	Hartford
1	-0.66	0.8	0.04	-0.001
2	0.9	-0.7	0	0.081

the features and communities, is shown in Table 6. In the first glimpse, Table 6 shows that the proposed method is able to extract the unique set of features among all possible features for each community based on their strength levels. For example, feature *Partner* has a positive impact on the second community while it does not carry out the same impact on the first one. Moreover, the features, “lawyers with *associate* status”, and “the lawyer’s working offices located in *Boston*”, play important role for shaping the first community. In the same way, “lawyers with *partner* status” whose working offices located in *Hartford* are more influential in shaping the second community. The proposed method is also able to prioritize the importance levels of specific features of each community. It is shown in Table 6, “*status*” is more important than “*office location*”.

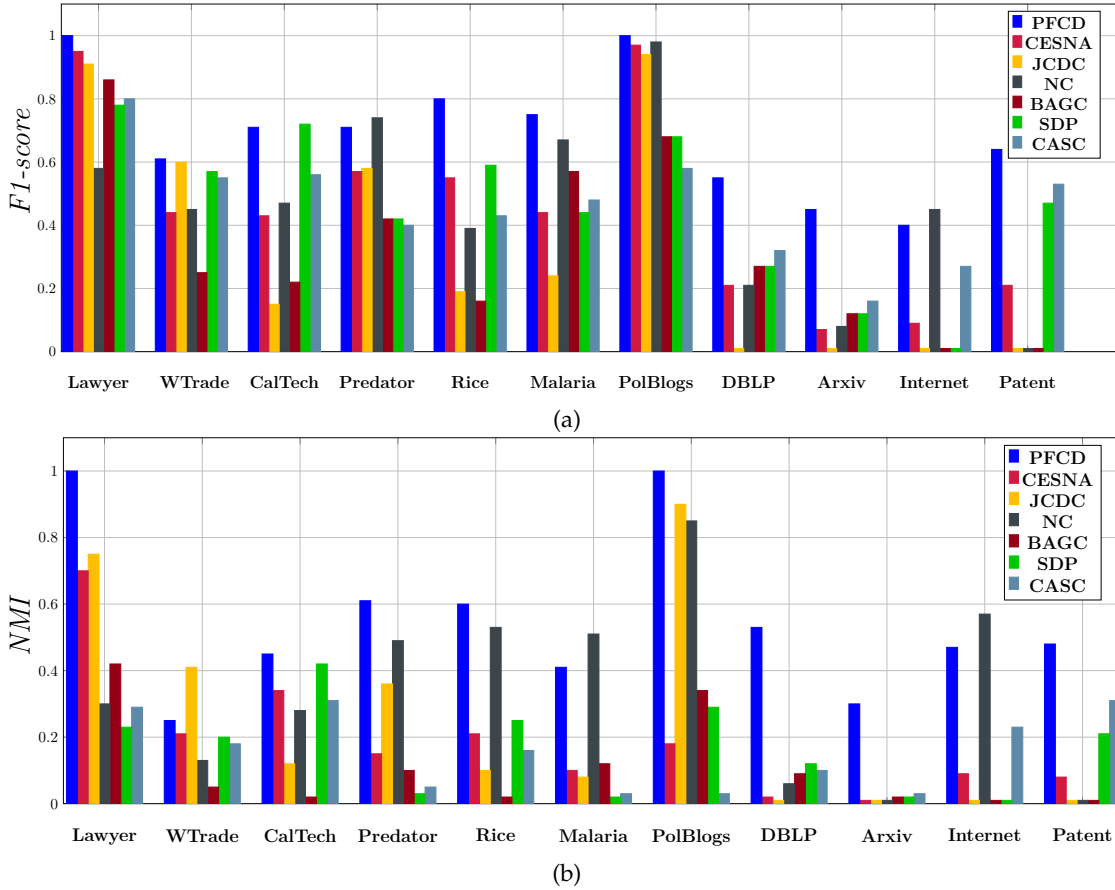


Fig. 12: Results of *PFCD* compared with the benchmark feature based methods in terms of F1–score and NMI. The baseline methods include *Cesna* [25], *JCDC* [35], *NC* [22], *BAGC* [26], *SDP* [36] and *CASC* [37] (Table 1)

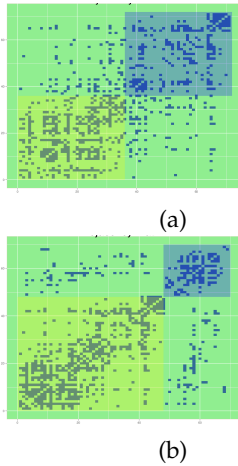


Fig. 13: Adjacency matrix according to the value of each feature. (a): status, (b): office. Points represent edges among nodes and each either yellow or blue block shows the group of nodes with a similar feature.

7 CONCLUSION

In this work, we introduced a novel graphical model based approach for community detection. The proposed approach, *PFCD*, considered both the network structure and nodal features. The different influence of nodal features on com-

munity structures are investigated in our proposed framework. The proposed model is inferred through an efficient probabilistic algorithm. The block-coordinate descent algorithm was employed to learn parameters of the model to deal with the latent variables in an efficient computational manner. In line with the discrimination of features influence on community formation, the priority of each feature on the structure of communities can be inferred from our model. The experimental results on synthetic networks justified the strength of the *PFCD* approach on detection of communities compared with the well-known methods. Furthermore, a variety of small to large real network datasets were used to evaluate the proposed model based on standard evaluation measures. The results on real networks showed the high performance of the proposed model and very promising results on the detection of community structures based on a network aligned with the nodal features.

There are some future works, such as representation learning approach to derive automatic features from the network structure and extending the proposed method to temporal networks.

REFERENCES

- [1] M. E. Newman, The structure and function of complex networks, *SIAM review* 45 (2) (2003) 167–256.
- [2] S. Fortunato, D. Hric, Community detection in networks: A user guide, *Physics Reports* 659 (2016) 1–44.

- [3] M. Coscia, F. Giannotti, D. Pedreschi, A Classification for Community Discovery Methods in Complex Networks, *Stat. Anal. Data Min.* 4 (5) (2011) 512–546.
- [4] S. Y. Bhat, M. Abulaish, Community-based Features for Identifying Spammers in Online Social Networks, in: *Proceedings of the 2013 IEEE/ACM International Conference on Advances in Social Networks Analysis and Mining, ASONAM '13*, ACM, New York, USA, 2013, pp. 100–107.
- [5] M. Okuda, S. Satoh, S. Iwasawa, S. Yoshida, Y. Kidawara, Y. Sato, Community detection using random-walk similarity and application to image clustering, in: *2017 IEEE International Conference on Image Processing (ICIP)*, 2017, pp. 1292–1296.
- [6] J. O. Garcia, A. Ashourvan, S. Muldoon, J. M. Vettel, D. S. Bassett, Applications of Community Detection Techniques for Brain Graphs: Algorithmic Considerations and Implications for Neural Function, *Proceedings of the IEEE* 106 (5) (2018) 846–867.
- [7] M. Girvan, M. E. Newman, Community structure in social and biological networks, *Proceedings of the national academy of sciences* 99 (12) (2002) 7821–7826.
- [8] A. Clauset, M. E. Newman, C. Moore, Finding community structure in very large networks, *Physical review E* 70 (6) (2004) 066111.
- [9] V. D. Blondel, J.-L. Guillaume, R. Lambiotte, E. Lefebvre, Fast unfolding of communities in large networks, *Journal of statistical mechanics: theory and experiment* 2008 (10) (2008) P10008.
- [10] T. Qin, K. Rohe, Regularized spectral clustering under the degree-corrected stochastic blockmodel, in: *Advances in Neural Information Processing Systems*, 2013, pp. 3120–3128.
- [11] E. M. Airoldi, D. M. Blei, S. E. Fienberg, E. P. Xing, Mixed membership stochastic blockmodels, *Journal of Machine Learning Research* 9 (Sep) (2008) 1981–2014.
- [12] M. Rosvall, C. T. Bergstrom, Maps of random walks on complex networks reveal community structure, *Proceedings of the National Academy of Sciences* 105 (4) (2008) 1118–1123.
- [13] S. Gregory, Finding overlapping communities in networks by label propagation, *New Journal of Physics* 12 (10) (2010) 103018. doi:10.1088/1367-2630/12/10/103018.
- [14] J. Yang, J. Leskovec, Overlapping community detection at scale: a nonnegative matrix factorization approach, in: *Proceedings of the sixth ACM international conference on Web search and data mining, ACM*, 2013, pp. 587–596.
- [15] S. Sobolevsky, R. Campari, A. Belyi, C. Ratti, General optimization technique for high-quality community detection in complex networks, *Physical Review E* 90 (1) (2014) 012811.
- [16] S. Y. Bhat, M. Abulaish, HOCTracker: Tracking the Evolution of Hierarchical and Overlapping Communities in Dynamic Social Networks, *IEEE Transactions on Knowledge and Data Engineering* 27 (4) (2015) 1019–1013.
- [17] J. J. Whang, D. F. Gleich, I. S. Dhillon, Overlapping Community Detection Using Neighborhood-Inflated Seed Expansion, *IEEE Transactions on Knowledge and Data Engineering* 28 (5) (2016) 1272–1284.
- [18] M. Hajiabadi, H. Zare, H. Bobarshad, IEDC: An integrated approach for overlapping and non-overlapping community detection, *Knowledge-Based Systems* 123 (2017) 188–199.
- [19] M. Rezvani, W. Liang, C. Liu, J. X. Yu, Efficient Detection of Overlapping Communities Using Asymmetric Triangle Cuts, *IEEE Transactions on Knowledge and Data Engineering* 30 (11) (2018) 2093–2105.
- [20] L. Peel, D. B. Larremore, A. Clauset, The ground truth about metadata and community detection in networks, *Science Advances* 3 (5) (2017) e1602548.
- [21] T. Chakraborty, Z. Cui, N. Park, Metadata vs. Ground-truth: A Myth Behind the Evolution of Community Detection Methods, in: *Companion Proceedings of the The Web Conference 2018, WWW '18, International World Wide Web Conferences Steering Committee*, Geneva, Switzerland, 2018, pp. 45–46.
- [22] M. E. J. Newman, A. Clauset, Structure and inference in annotated networks, *Nature Communications* 7 (2016) ncomms11863.
- [23] Y. Ruan, D. Fuhry, S. Parthasarathy, Efficient community detection in large networks using content and links, in: *Proceedings of the 22nd international conference on World Wide Web, ACM*, 2013, pp. 1089–1098.
- [24] Y. Sun, C. C. Aggarwal, J. Han, Relation strength-aware clustering of heterogeneous information networks with incomplete attributes, *Proceedings of the VLDB Endowment* 5 (5) (2012) 394–405.
- [25] J. Yang, J. McAuley, J. Leskovec, Community detection in networks with node attributes, in: *2013 IEEE 13th International Conference on Data Mining, IEEE*, 2013, pp. 1151–1156.
- [26] Z. Xu, Y. Ke, Y. Wang, H. Cheng, J. Cheng, A model-based approach to attributed graph clustering, in: *Proceedings of the 2012 ACM SIGMOD international conference on management of data, ACM*, 2012, pp. 505–516.
- [27] D. Hric, T. P. Peixoto, S. Fortunato, Network Structure, Metadata, and the Prediction of Missing Nodes and Annotations, *Physical Review X* 6 (3) (2016) 031038. doi:10.1103/PhysRevX.6.031038.
- [28] X. Huang, L. V. S. Lakshmanan, Attribute-driven Community Search, *Proc. VLDB Endow.* 10 (9) (2017) 949–960. doi:10.14778/3099622.3099626.
- [29] M. Gerlach, T. P. Peixoto, E. G. Altmann, A network approach to topic models, *Science Advances* 4 (7) (2018) eaaq1360. doi:10.1126/sciadv.aaq1360.
- [30] M. E. Newman, Modularity and community structure in networks, *Proceedings of the national academy of sciences* 103 (23) (2006) 8577–8582.
- [31] M. Chen, K. Kuzmin, B. K. Szymanski, Community Detection via Maximization of Modularity and Its Variants, *IEEE Transactions on Computational Social Systems* 1 (1) (2014) 46–65. doi:10.1109/TCSS.2014.2307458.
- [32] M. Lu, Z. Zhang, Z. Qu, Y. Kang, LPANNI: Overlapping Community Detection Using Label Propagation in Large-Scale Complex Networks, *IEEE Transactions on Knowledge and Data Engineering* 31 (9) (2019) 1736–1749. doi:10.1109/TKDE.2018.2866424.
- [33] A. Silva, W. Meira Jr, M. J. Zaki, Mining attribute-structure correlated patterns in large attributed graphs, *Proceedings of the VLDB Endowment* 5 (5) (2012) 466–477.
- [34] H. Cheng, Y. Zhou, J. X. Yu, Clustering large attributed graphs: A balance between structural and attribute similarities, *ACM Transactions on Knowledge Discovery from Data (TKDD)* 5 (2) (2011) 12.
- [35] Y. Zhang, E. Levina, J. Zhu, Community detection in networks with node features, *Electronic Journal of Statistics* 10 (2) (2016) 3153–3178.
- [36] B. Yan, P. Sarkar, Convex relaxation for community detection with covariates, *arXiv preprint arXiv:1607.02675*.
- [37] N. Binkiewicz, J. T. Vogelstein, K. Rohe, Covariate-assisted spectral clustering, *Biometrika* 104 (2) (2017) 361–377.
- [38] J. Yang, J. Leskovec, Community-Affiliation Graph Model for Overlapping Network Community Detection, in: *Proceedings of the 2012 IEEE 12th International Conference on Data Mining, ICDM '12, IEEE Computer Society, Washington, DC, USA*, 2012, pp. 1170–1175. doi:10.1109/ICDM.2012.139.
- [39] S. L. van der Pas, A. W. van der Vaart, Bayesian Community Detection, *Bayesian Analysis* 13 (3) (2018) 767–796. doi:10.1214/17-BA1078.
- [40] R. Zhu, W. Jiang, Bayesian Complex Network Community Detection Using Nonparametric Topic Model, in: L. M. Aiello, C. Cherifi, H. Cherifi, R. Lambiotte, P. Lió, L. M. Rocha (Eds.), *Complex Networks and Their Applications VII, Studies in Computational Intelligence*, Springer International Publishing, 2019, pp. 280–291.
- [41] U. Jacob, A. Thierry, U. Brose, W. E. Arntz, S. Berg, T. Brey, I. Fetzer, T. Jonsson, K. Mintenbeck, C. Mollmann, et al., The role of body size in complex food webs: A cold case, *Advances In Ecological Research* 45 (2011) 181–223.
- [42] W. De Nooy, A. Mrvar, V. Batagelj, *Exploratory social network analysis with Pajek*, Vol. 27, Cambridge University Press, 2011.
- [43] K. P. Murphy, *Machine learning: a probabilistic perspective*, MIT press, 2012.
- [44] Y. Xu, W. Yin, A Block Coordinate Descent Method for Regularized Multiconvex Optimization with Applications to Nonnegative Tensor Factorization and Completion, *SIAM Journal on Imaging Sciences* 6 (3) (2013) 1758–1789.
- [45] D. F. Gleich, C. Seshadhri, Vertex neighborhoods, low conductance cuts, and good seeds for local community methods, in: *Proceedings of the 18th ACM SIGKDD International Conference on Knowledge Discovery and Data Mining, KDD '12, ACM, New York, NY, USA*, 2012, pp. 597–605.
- [46] E. Lazega, *The collegial phenomenon: The social mechanisms of cooperation among peers in a corporate law partnership*, Oxford University Press on Demand, 2001.

- [47] A. L. Traud, P. J. Mucha, M. A. Porter, Social structure of facebook networks, *Physica A: Statistical Mechanics and its Applications* 391 (16) (2012) 4165–4180.
- [48] L. A. Adamic, N. Glance, The political blogosphere and the 2004 us election: divided they blog, in: *Proceedings of the 3rd international workshop on Link discovery*, ACM, 2005, pp. 36–43.
- [49] S. Gunnemann, I. Farber, S. Raubach, T. Seidl, Spectral subspace clustering for graphs with feature vectors, in: *Data Mining (ICDM), 2013 IEEE 13th International Conference on*, IEEE, 2013, pp. 231–240.
- [50] D. B. Larremore, A. Clauset, C. O. Buckee, A network approach to analyzing highly recombinant malaria parasite genes, *PLoS computational biology* 9 (10) (2013) e1003268.
- [51] T. S. Rask, D. A. Hansen, T. G. Theander, A. G. Pedersen, T. Lavstsen, *Plasmodium falciparum* erythrocyte membrane protein 1 diversity in seven genomes—divide and conquer, *PLoS computational biology* 6 (9) (2010) e1000933.
- [52] D. Hric, R. K. Darst, S. Fortunato, Community detection in networks: Structural communities versus ground truth, *Physical Review E* 90 (6) (2014) 062805.



Hadi Zare received his masters and the PhD in Statistics from Amirkabir University of Technology in 2007 and 2012, respectively. He is currently an assistant professor with the faculty of New Sciences and Technologies in the University of Tehran, Tehran, Iran. His main research interests are in Statistical Machine Learning, Probabilistic Graphical Models and Social Network Analysis. More specifically, he has published papers on structure learning on graphical models, feature selection, exploring probabilistic

models on the summarization of big data structures such as social networks.



Mahdi Hajiabadi received his masters in Knowledge Engineering and Decision Sciences from University of Tehran in 2016. He's currently working toward on the PhD in Computer Science at the University of Victoria, Victoria, Canada. His main research interests are in Data Mining, Statistical Learning, and Social Networks. He has published some national and international papers on community detection problem in social networks.



Mahdi Jalili (M09SM16) received the B.S. degree in electrical engineering from Tehran Polytechnic, Tehran, Iran, in 2001, the M.S. degree in electrical engineering from the University of Tehran, Tehran, in 2004, and the Ph.D. degree in synchronization in dynamical networks from the Swiss Federal Institute of Technology Lausanne, Lausanne, Switzerland. He then joined Sharif University of Technology as an Assistant Professor. He is currently a Senior Lecturer with the School of Engineering, RMIT University, Melbourne, Vic., Australia. His research interests include network science, dynamical systems, social networks analysis and mining, and data analytics. Dr. Jalili was a recipient of Australian Research Council DECRA Fellowship and RMIT Vice-Chancellor Research Fellowship. He is an Associate Editor for the IEEE Canadian Journal of Electrical and Computer Engineering and an Editorial Board Member of the *Mathematical Problems in Engineering* and *Complex Adaptive Systems Modeling*.

bourne, Vic., Australia. His research interests include network science, dynamical systems, social networks analysis and mining, and data analytics. Dr. Jalili was a recipient of Australian Research Council DECRA Fellowship and RMIT Vice-Chancellor Research Fellowship. He is an Associate Editor for the IEEE Canadian Journal of Electrical and Computer Engineering and an Editorial Board Member of the *Mathematical Problems in Engineering* and *Complex Adaptive Systems Modeling*.