

# Reliable Estimation of KullbackLeibler Divergence by Controlling Discriminator Complexity in the Reproducing Kernel Hilbert Space

Sandesh Ghimire\*

Prashna K Gyawali

Linwei Wang

Golisano College of Computing and Information Sciences

Rochester Institute of Technology, NY, USA

## Abstract

Several scalable methods to compute the KullbackLeibler (KL) divergence between two distributions using their samples have been proposed and applied in large-scale machine learning models. While they have been found to be unstable, the theoretical root cause of the problem is not clear. In this paper, we study in detail a generative adversarial network based approach that uses a neural network discriminator to estimate KL divergence. We argue that, in such case, high fluctuations in the estimates are a consequence of not controlling the complexity of the discriminator function space. We provide a theoretical underpinning and remedy for this problem through the following contributions. First, we construct a discriminator in the Reproducing Kernel Hilbert Space (RKHS). This enables us to leverage sample complexity and mean embedding to theoretically relate the error probability bound of the KL estimates to the complexity of the neural-net discriminator. Based on this theory, we then present a scalable way to control the complexity of the discriminator for a consistent estimation of KL divergence. We support both our proposed theory and method to control the complexity of the RKHS discriminator in controlled experiments.

## 1 Introduction

Calculating KullbackLeibler (KL) divergence from data samples is an essential component in many machine learning problems that involve Bayesian inference or the calculation of mutual information. In small data regime,

this problem has been studied using variational technique and convex optimization (Nguyen et al. [2010]). In the presence of ever-increasing data, neural models such as total correlation variational autoencoder (TCVAE) (Chen et al. [2018]), adversarial variational Bayes (AVB) (Mescheder et al. [2018]), information maximizing GAN (InfoGAN) (Chen et al. [2016]), and amortized MAP (Sønderby et al. [2017]) have imposed the following new requirements on estimating KL divergence:

1. Scalability: The estimation algorithm should be able to compute KL divergence from a large amount of data samples.
2. Minibatch compatibility: The algorithm should be compatible with minibatch-based optimization and allow backpropagation or other ways of optimizing the rest of the network based on the estimated value of KL divergence.

These needs make classic methods such as (Nguyen et al. [2010]) impractical, but were later met by modern methods using adversarial neural network as a discriminator to estimate KL divergence such as variational divergence minimization (VDM) (Nowozin et al. [2016]), mutual information neural estimation (MINE) (Belghazi et al. [2018]) and GAN-based KL estimation (Mescheder et al. [2017], Sønderby et al. [2017]). A key attribute of these methods is that they are based on updating a neural-net discriminator function from a subset of samples, which makes them scalable and minibatch compatible. We however noted that, even in simple toy examples, these methods tended to be either unreliable (high fluctuation in different trials, such as GAN based approach by Mescheder et al. [2017]), or unstable (discriminator yields infinity, such as in MINE and VDM) (see Table 1). This behavior exacerbated when increasing the size of the discriminator. Similar observations of instability of VDM and MINE have been reported in the literature (Mescheder et al. [2017], Song and Ermon [2019]).

In this paper, we consider GAN based estimation of KL divergence, and focus on the core problem of the large

Corresponding author email: sg9872@rit.edu

fluctuation in the estimates – a problem to which the theoretical underpinning is still lacking. We approach this problem from the perspective of sample complexity, and propose that these fluctuations are a consequence of not controlling the complexity of the discriminator function. This direction has not been explored in existing works, and it faces the challenge of how to properly measure the complexity of the large function space represented by neural networks. Note that naive approaches to bound complexity by the number of parameters would neither be guaranteed to yield tight bound, nor be practical because it requires dynamically changing the size of the network during optimization.

To provide a theoretical underpinning and remedy for this challenge, we introduce the following contributions. First, we propose an approach to construct the discriminator such that it lies in a smaller and smooth function space, the Reproducing Kernel Hilbert Space (RKHS). This allows us to leverage ideas from sample complexity analysis and mean embedding of RKHS to compute bound on the probability of error of KL-divergence estimates in terms of the complexity of RKHS space. Based on it, we theoretically substantiate our main proposition that not controlling the complexity of the discriminator may lead to high fluctuation in estimation. Finally, we propose a scalable way to control the complexity of the discriminator based on the error probability bound we obtained. In a controlled experimental setup, we demonstrate that not controlling the complexity of the discriminator function leads to fluctuation in KL divergence estimates, and that the proposed method can decrease such fluctuations.

## 2 Related Works

Nguyen et al. [2010] used variational function to estimate KL divergence from samples of two distribution by using convex risk minimization (CRM). They used the RKHS norm of the variational function as a measure of complexity and penalized it to control the complexity of variational function. However, their work required handling of all data at once and solving a convex optimization problem and, as a result, could not be scaled. Variational divergence minimization (VDM) reformulates the f-Divergence objective using Fenchel duality and uses a neural network to represent the variational function (Nowozin et al. [2016]). It is in concept very close to the approach of (Nguyen et al. [2010]), although it uses neural network and adversarial optimization to make the estimation scalable. Unlike CRM, VDM did not control the complexity and resulted in unstable estimations.

One area of modern application of KL-divergence estimation is in computing mutual information which, as

shown in MINE (Belghazi et al. [2018]), is useful in applications such as stabilizing GANs or realizing the information bottleneck principle. Similar to CRM and VDM, MINE also optimizes a lower bound, but tighter, to KL divergence obtained by dual functions (Donsker-Varadhan representation). Similar to VDM, MINE uses a neural network as the dual variational function and is scalable, but without complexity control and unstable.

Another use of KL divergence is scalable variational inference as shown in AVB (Mescheder et al. [2017]). Variational Inference requires estimation of KL divergence between the posterior and the prior. While in some cases like vanilla VAE (Kingma and Welling [2013]), the posterior distribution could be assumed to have simplified Gaussian distribution to make this computation easier, AVB uses an expressive posterior distribution parameterized by neural networks and hence requires estimation of KL divergence from samples in a scalable manner. This is done via GAN based adversarial formulation using a neural network as a discriminator. Similarly, Sønderby et al. [2017] used GAN based adversarial formulation to obtain KL divergence in amortized inference.

To disentangle latent representations in VAE, Chen et al. [2018] proposed total correlation VAE (TC-VAE) which penalized the KL divergence between marginal latent distribution and the product of marginals in each dimension. This KL divergence was computed by minibatch based sampling strategy that gives a biased estimate.

None of the existing works considered the problem of inconsistent KL-divergence estimates, its theoretical underpinning, or approaches to mitigate the problem by controlling the complexity of the discriminator function.

## 3 Preliminaries

### 3.1 Reproducing Kernel Hilbert Space

Let  $\mathcal{H}$  be a Hilbert space of functions  $f : \mathcal{X} \rightarrow \mathbb{R}$  defined on non-empty space  $\mathcal{X}$ . It is a Reproducing Kernel Hilbert Space (RKHS) if the evaluation functional,  $\delta_x : \mathcal{H} \rightarrow \mathbb{R}$ ,  $\delta_x : f \mapsto f(x)$ , is linear continuous  $\forall x \in \mathcal{X}$ . Every RKHS,  $\mathcal{H}$ , is associated with a unique positive definite kernel,  $K : \mathcal{X} \times \mathcal{X} \rightarrow \mathbb{R}$ , called reproducing kernel (Berlinet and Thomas-Agnan [2011]), such that it satisfies:

1.  $\forall x \in \mathcal{X}, K(\cdot, x) \in \mathcal{H}$  (*Membership property*)
2.  $\forall x \in \mathcal{X}, \forall f \in \mathcal{H}, \langle f, K(\cdot, x) \rangle_{\mathcal{H}} = f(x)$  (*Reproducing property*)

RKHS is often studied using a specific integral operator. Let  $\mathcal{L}_2(d\rho)$  be a space of functions  $f : \mathcal{X} \rightarrow \mathbb{R}$  that are square integrable with respect to a Borel probability

measure  $d\rho$  on  $\mathcal{X}$ . Then, we can define an integral operator  $L_K : \mathcal{L}_2(d\rho) \rightarrow \mathcal{L}_2(d\rho)$  (Bach [2017a], Cucker and Smale [2002]):

$$(L_K f)(x) = \int_{\mathcal{X}} f(y)K(x, y)d\rho(y) \quad (1)$$

This integral operator will be important in constructing a function in RKHS and in computing sample complexity.

### 3.2 Mean Embedding in RKHS

Let  $f : \mathcal{X} \rightarrow \mathbb{R}$  be a function in RKHS,  $\mathcal{H}_K$ , and  $p$  be a Borel probability measures on  $\mathcal{X}$ . If  $E_{x \sim p} \sqrt{K(x, x)} < \infty$ , then we have  $\mu_p \in \mathcal{H}_K$  called the mean embedding of the distribution  $p$  and defined as (Sriperumbudur et al. [2010], Berlinet and Thomas-Agnan [2011], Gretton et al. [2012]):

$$E_{x \sim p} f = \langle f, \mu_p \rangle_{\mathcal{H}_K} \quad (2)$$

The condition for the existence of mean embedding is readily satisfied since we assume  $\sup_{x, t} K(x, t) < \infty$ .

## 4 GAN Formulation of KL Divergence

Let  $p(x)$  and  $q(x)$  be two probability density functions in space  $\mathcal{X}$  and we want to estimate their KL divergence using finite samples from each of the distributions in a scalable and minibatch compatible manner. Following Mescheder et al. [2017], Sønderby et al. [2017], we use a discriminator function to obtain the running estimate of KL divergence. In this formulation, we train a discriminator  $f : \mathcal{X} \rightarrow \mathbb{R}$  with the objective:

$$\max_f [E_{p(x)} \log \sigma(f(x)) + E_{q(x)} \log(1 - \sigma(f(x)))] \quad (3)$$

where  $\sigma$  is the Sigmoid function given by  $\sigma(x) = \frac{e^x}{1+e^x}$ . If  $f^*$  is a maximizer of the eq.(3), then it can be shown (Mescheder et al. [2017], Sønderby et al. [2017]) that the KL divergence  $KL(p(x)||q(x))$  is given by:

$$KL(p(x)||q(x)) = E_{p(x)}[f^*(x)] \quad (4)$$

Typically, a neural network is used as the discriminator. This implies that we are considering the space of functions represented by the neural network of given architecture as the hypothesis space, over which the maximization occurs in eq.(3). Below, we first design a discriminator function lying in RKHS so that we can compute the error bound of the KL-divergence estimate in relation to the complexity of the hypothesis space.

## 5 Constructing $f$ in RKHS

In this section, we construct a function in RKHS by using an operator  $T$  related to integral operator  $L_K$  by  $L_K =$

$TT^*$  (Bach [2017a]). The following theorem due to Bach [2017b] paves a way to construct a function in RKHS via a simple modification to the neural network.

**Theorem 1.** [Bach [2017b] Appendix A] A function  $f \in \mathcal{L}_2(d\rho)$  is in Reproducing Kernel Hilbert Space, say  $\mathcal{H}_K$  if and only if it can be expressed as

$$\forall x \in \mathcal{X}, f(x) = \int_{\mathcal{W}} g(w)\psi(x, w)d\tau(w), \quad (5)$$

for a certain function  $g : \mathcal{W} \rightarrow \mathbb{R}$  such that  $\|g\|_{\mathcal{L}_2(d\tau)}^2 < \infty$ . The RKHS norm of  $f$  satisfies

$$\|f\|_{\mathcal{H}_K}^2 \leq \|g\|_{\mathcal{L}_2(d\tau)}^2 \quad (6)$$

and the kernel  $K$  is given by

$$K(x, t) = \int_{\mathcal{W}} \psi(x, w)\psi(t, w)d\tau(w) \quad (7)$$

Theorem 1 gives us a condition when a square integrable function is guaranteed to lie in RKHS. We simply choose  $g(w) = \mathbf{1}$ , a constant unit function over the domain  $\mathcal{W}$ . This means that we can convert a square integrable neural network function  $f : \mathcal{X} \rightarrow \mathbb{R}$  into a function in RKHS if we make some weights in the neural network stochastic (drawn from some valid distribution) and average over them. In our construction, we make the last layer of the neural network to be drawn from Gaussian distribution. Note that we still learn the Gaussian-distributed parameters of this last layer during training.

More precisely, we consider  $\psi(x, w) = \phi_\theta(x)^T w$ , where  $\phi_\theta(x)$  denotes the transformation by using a neural network until the last layer, and  $w$  is the last linear layer of the neural network which is sampled from Gaussian distribution. Note that we can choose to make any number of layers of neural network anywhere to be stochastic. We picked this architecture minimize the computational cost of sampling. With this construction, the kernel  $K$  as defined in eq.(7) can be obtained as:

$$\begin{aligned} K(x^*, t^*) &= \int_{\mathcal{W}} \phi_\theta(x^*)^T w w^T \phi_\theta(t^*) d\tau(w) \\ &= \phi_\theta(x^*)^T (\bar{w}\bar{w}^T + \Sigma) \phi_\theta(t^*) \end{aligned} \quad (8)$$

where  $\bar{w}$  and  $\Sigma$  denote the mean and covariance of  $w$ . We sometimes denote the kernel  $K$  by  $K(\theta)$  to emphasize that it is a function of neural network parameters,  $\theta$

With  $g(w) = \mathbf{1}$ , it is easy to verify that  $\|g\|_{\mathcal{L}_2(d\tau)}^2 = 1$  since  $w$  is sampled from a normal distribution. The inequality in eq.(6) gives us  $\|f\|_{\mathcal{H}_K(\theta)}^2 \leq 1$ . It is interesting that the RKHS norm of function  $f$  is upper-bounded by 1. Typically, the norm of the function  $f$  determines the sample complexity and the kernel  $K$  remains fixed. In

this case, the RKHS itself changes during training since it is determined by the kernel that depends on neural parameters  $\theta$ . We are thus interested in the role of the neural network in the complexity of the discriminator.

## 6 Bounding the Error of KL Estimates

In this section, we investigate how the neural network enters the equation of the error bound of the estimates of KL divergence. Suppose we have  $m$  samples from each of the distributions  $p(x)$  and  $q(x)$ . Since we have finite samples (as opposed to infinite) to estimate KL divergence using eq.(4), we will make some level of errors. By following (Cucker and Smale [2002]), we can obtain a bound on the error in this estimation. In Lemma 1, we first bound this error in terms of the covering number. Then, we use an estimate of the covering number of RKHS due to Cucker and Smale [2002] to obtain a bound of error in terms of the kernel  $K(\theta)$  in Theorem 2.

**Lemma 1.** *Let  $f^*$  be a discriminator function in a RKHS  $\mathcal{H}_K$  which is  $M$ -bounded. Let  $\hat{KL}_m$  be the estimate of KL divergence from  $m$  samples and  $KL$  be the KL divergence estimate obtained by using true distribution  $p(x)$ :*

$$\hat{KL}_m = \frac{1}{m} \sum_i f^*(x_i), \text{ and } KL = E_{p(x)}[f^*(x)] \quad (9)$$

Then the probability of error at some accuracy level,  $\epsilon$  is lower-bounded as:

$$\begin{aligned} \text{Prob.}(|\hat{KL}_m - KL| \leq \epsilon) \\ \geq 1 - 2\mathcal{N}(\mathcal{H}_K, \frac{\epsilon}{4\sqrt{S_K}}) \exp(-\frac{m\epsilon^2}{4M^2}) \end{aligned} \quad (10)$$

where  $\mathcal{N}(\mathcal{H}_K, \eta)$  denotes the covering number of a RKHS space  $\mathcal{H}_K$  with disks of radius  $\eta$ , and  $S_K = \sup_{x,t} K(x,t)$  which we refer as kernel complexity

*Proof.* Let  $\ell_z(f) = E_{p(x)}[f(x)] - \frac{1}{m} \sum_i f(x_i)$  denotes the error in the estimate such that we want to bound  $|\ell_z(f)|$ . We have,

$$\begin{aligned} \ell_z(f_1) - \ell_z(f_2) \\ = E_{p(x)}[f_1(x) - f_2(x)] - \frac{1}{m} \sum_i f_1(x_i) - f_2(x_i) \end{aligned}$$

We know  $E_{p(x)}[f_1(x) - f_2(x)] \leq \|f_1 - f_2\|_\infty$  and  $\frac{1}{m} \sum_i f_1(x_i) - f_2(x_i) \leq \|f_1 - f_2\|_\infty$ . Using the triangle inequality, we obtain:

$$|\ell_z(f_1) - \ell_z(f_2)| \leq 2\|f_1 - f_2\|_\infty \quad (11)$$

Since the RKHS space norm and  $\ell_\infty$  norm of a function are related by  $\|f\|_\infty \leq \sqrt{S_K}\|f\|_{\mathcal{H}_K}$ , we have:

$$|\ell_z(f_1) - \ell_z(f_2)| \leq 2\sqrt{S_K}\|f_1 - f_2\|_{\mathcal{H}_K} \quad (12)$$

The idea of the covering number is to cover the whole RKHS space  $\mathcal{H}_K$  with disks of some fixed radius  $\eta$ , which helps us bound the error probability in terms of the number of such disks. Let  $\mathcal{N}(\mathcal{H}_K, \eta)$  be such disks covering the whole RKHS space. Then, for any function  $f$  in  $\mathcal{H}_K$ , we can find some disk,  $D_j$  with centre  $f_j$ , such that  $\|f - f_j\|_{\mathcal{H}_K} \leq \eta$ . If we choose  $\eta = \frac{\epsilon}{2\sqrt{S_K}}$ , then from eq.(12), we obtain,

$$\sup_{f \in D_j} |\ell_z(f)| \geq 2\epsilon \implies |\ell_z(f_j)| \geq \epsilon \quad (13)$$

from which we arrive at

$$\text{Prob.}(\sup_{f \in D_j} |\ell_z(f)| \geq 2\epsilon) \leq 2e^{-\frac{m\epsilon^2}{2M^2}} \quad (14)$$

by using the Hoeffding's inequality,

$$\text{Prob.}(|\ell_z(f_j)| \geq \epsilon) \leq 2e^{-\frac{m\epsilon^2}{2M^2}} \quad (15)$$

Applying union bound over all the disks, we obtain,

$$\text{Prob.}(\sup_{f \in \mathcal{H}} |\ell_z(f)| \geq 2\epsilon) \leq 2\mathcal{N}(\mathcal{H}, \frac{\epsilon}{2\sqrt{S_K}}) e^{-\frac{m\epsilon^2}{2M^2}} \quad (16)$$

$$\text{Prob.}(\sup_{f \in \mathcal{H}} |\ell_z(f)| \leq \epsilon) \geq 1 - 2\mathcal{N}(\mathcal{H}, \frac{\epsilon}{4\sqrt{S_K}}) e^{-\frac{m\epsilon^2}{8M^2}}$$

□

**Remark 1.** *We derived the error bound based on the Hoeffding's inequality by assuming we only know  $f$  is bounded. If we have other knowledge, for example, if we know the variance of  $f$ , we could use Bernstein's inequality instead of Hoeffding's inequality with minimal change. To the extent we are interested in the contribution of neural network in error bound, however, there is not much gain by using one inequality or the other. Hence, we stick with Hoeffding's inequality and note other possibilities.*

Lemma 1 bounds the probability of error in terms of the covering number of the RKHS space. Next, we use Lemma 2 due to Cucker and Smale [2002] to obtain an error bound in estimating KL divergence with finite samples in Theorem 2.

**Lemma 2** (Cucker and Smale [2002]). *Let  $K : \mathcal{X} \times \mathcal{X} \rightarrow \mathbb{R}$  is a  $C^\infty$  Mercer kernel and the inclusion  $I_K : \mathcal{H}_K \hookrightarrow \mathcal{C}(\mathcal{X})$  is the compact embedding defined by  $K$  to the Banach space  $\mathcal{C}(\mathcal{X})$ . Let  $B_R$  be the ball of radius  $R$  in RKHS  $\mathcal{H}_K$ . Then  $\forall \eta > 0, R > 0, h > n$ , we have*

$$\ln \mathcal{N}(I_K(B_R), \eta) \leq \left( \frac{RC_h}{\eta} \right)^{\frac{2n}{h}} \quad (17)$$

where  $\mathcal{N}$  gives the covering number of the space  $I_K(B_R)$  with discs of radius  $\eta$ , and  $n$  represents the dimension of inputs space  $\mathcal{X}$ .  $C_h$  is given by

$$C_h = C_s \sqrt{\|L_s\|} \quad (18)$$

where  $L_s$  is a linear embedding from square integrable space  $\mathcal{L}_2(d\rho)$  to the Sobolev space  $H^{h/2}$  and  $C_s$  is a constant.

To prove Lemma 2, the RKHS space is embedded in the Sobolev Space  $H^{h/2}$  using  $L_s$  and then covering number of Sobolev space is used. Thus the norm of  $L_s$  and the degree of Sobolev space,  $h/2$ , appears in the covering number of a ball in  $\mathcal{H}_K$ . In Theorem 2, we use this Lemma to bound the estimation error of KL divergence.

**Theorem 2.** *Let  $KL$  and  $\hat{K}L_m$  be the estimates of KL divergence obtained by using true distribution  $p(x)$  and  $m$  samples respectively as described in Lemma 1, then the probability of error in the estimation at the error level  $\epsilon$  is given by:*

$$\text{Prob.}(|\hat{K}L_m - KL| \leq \epsilon)$$

$$\geq 1 - 2 \exp \left[ \left( \frac{4RC_s \sqrt{S_K} \|L_s\|}{\epsilon} \right)^{\frac{2n}{h}} - \frac{m\epsilon^2}{4M^2} \right]$$

*Proof.* Lemma 2 gives the covering number of a ball or radius  $R$  in a RKHS space. If we consider the hypothesis space to be a ball of radius  $R$  in Lemma 1, we can apply Lemma 2 in it. Additionally, since we fix the radius of discs to be  $\eta = \frac{\epsilon}{4\sqrt{S_K}}$  in Lemma 1, we obtain,

$$\text{Prob.}(|\hat{K}L_m - KL| \leq \epsilon)$$

$$\geq 1 - 2 \exp \left[ \left( \frac{4\sqrt{S_K} RC_h}{\epsilon} \right)^{\frac{2n}{h}} - \frac{m\epsilon^2}{4M^2} \right] \quad (19)$$

Substituting  $C_h = C_s \sqrt{\|L_s\|}$ , gives the required result.  $\square$

Theorem 2 shows that the error increases exponentially with the radius of the RKHS space, complexity of the kernel  $S_K$ , and the norm of Sobolev space embedding  $\|L_s\|$ . Since we have  $\|f\|_{\mathcal{H}} \leq 1$ , we can consider our hypothesis space to be a ball of radius 1. To bound  $\|L_s\|$ , we need to compute higher order derivatives of  $K(x, t)$ , which we leave as future work. This allows us to focus on kernel complexity  $S_K$ , which is exponentially related to the error in KL estimate.

Note that the KL-divergence estimate and its error bound depend only on  $f^*$ , the optimum discriminator learnt during the maximization in eq (3). So far, we have shown

that if the kernel complexity of  $f^*$  is high, then there is a high chance of error in the estimation. However, it is not clear if the kernel complexity  $S_K$  does increase during maximization of eq.(3). To fill this gap, in the next section, we present an upper bound on the objective in eq.(3), and give some geometric intuition connecting the optimization objective with the kernel complexity  $S_K$ .

## 7 Mean Embedding Upper Bound

In addition to deriving complexity bound, another advantage of using RKHS is that it allows us to use mean embedding representation. This helps us derive some geometrical insights into the maximization objective in eq.(3), on which we give an upper bound in Theorem 3.

**Theorem 3.** *Let  $f \in \mathcal{H}_{K(\theta)}$  be a function in RKHS  $\mathcal{H}_{K(\theta)}$ . Then we have the following upper bound on the objective of KL divergence estimation:*

$$E_{p(x)} \log \sigma(f(x)) + E_{q(x)} \log(1 - \sigma(f(x))) \quad (20)$$

$$\leq \log \sigma[\langle \mu_p - \mu_q, f \rangle] \quad (21)$$

and the KL divergence is given by :

$$KL = \langle \mu_p, f \rangle$$

where  $\mu_p$  and  $\mu_q$  represent mean embeddings of distributions  $p(x)$  and  $q(x)$  with respect to  $\mathcal{H}_K$ .

The following Lemma is useful to prove this theorem.

**Lemma 3.**

$$E_{p(x)} \log \sigma(f(x)) + E_{q(y)} \log(1 - \sigma(f(y))) \\ \leq \log \sigma[E_{p(x)}(f(x)) - E_{q(y)}(f(y))]$$

*Proof.*

$$E_{p(x)} \log \sigma(f(x)) + E_{q(x)} \log(1 - \sigma(f(x))) \\ = E_{p(x)} \log \sigma(f(x)) + E_{q(x)} \log \left( \frac{1}{1 + \exp(f)} \right) \\ = E_{p(x)} \log \sigma(f(x)) + E_{q(x)} \log \left( \frac{\exp(-f)}{1 + \exp(-f)} \right) \\ = E_{p(x)} \log \sigma(f(x)) + E_{q(x)} \log \sigma(-f(x)) \\ \leq \log \sigma[E_{p(x)}(f(x))] + \log \sigma[E_{q(x)}(-f(x))] \\ \leq \log \sigma[E_{p(x)}(f(x)) - E_{q(x)}(f(x))]$$

where we used the fact that  $\log \sigma$  is a concave function and applied Jensen's inequality in last two lines and linearity of expectation in the last line.  $\square$

*Proof of Theorem 3.* If  $f$  lies in the RKHS, then there exists some  $\mu_p$  and  $\mu_q$  such that

$$E_{p(x)}(f(x)) = \langle \mu_p, f \rangle, \quad E_{q(x)}(f(x)) = \langle \mu_q, f \rangle$$

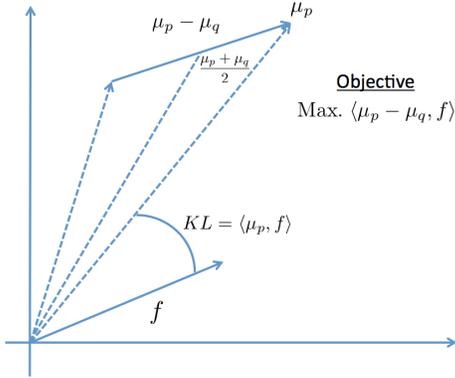


Figure 1: Geometrically representing mean embeddings of two distributions, their relation to maximization objective and KL divergence.

Applying the definition of mean embedding to the Lemma 1, we immediately obtain

$$\begin{aligned} E_{p(x)} \log \sigma(f(x)) + E_{q(y)} \log(1 - \sigma(f(y))) \\ \leq \log \sigma[\langle \mu_p - \mu_q, f \rangle] \end{aligned}$$

□

**Geometric Intuition:** Theorem 3 tells us that the upper bound (MEBUB) to the objective is  $\log \sigma$  of the inner product between  $\mu_p - \mu_q$  and  $f$ . The inner product and KL divergence estimates have been depicted geometrically in Fig. (1). When the objective is maximized, MEBUB also increases which leads to an increase in the inner product since  $\log \sigma$  is monotonic. When this happens, nothing is preventing the norm of the individual mean embedding, *i.e.*, both  $\mu_p$  and  $\mu_q$ , from going away from the origin in Fig.1. In the next section, we show how this affects kernel complexity  $S_K$ .

## 8 Fitting Pieces and Complexity Control

Theorem 2 shows that the error bound of the KL estimate is exponentially controlled by the kernel complexity  $S_K = \sup_{x,t} K(x,t)$ . We know that the  $\ell_2$  norm of a vector is upper bounded by  $\ell_\infty$  norm. Hence, we have

$$\frac{\mu_p + \mu_q}{2} \leq \sup_{x,t} \frac{1}{2} K(x,t) = \frac{S_K}{2} \quad (22)$$

As the training progresses in maximizing the objective in eq.(3), the algorithm tries to do two things: 1) align  $f$  with  $\mu_p - \mu_q$  and 2) increase norm of  $\mu_p - \mu_q$  as well as  $f$ . While maximizing this objective, nothing would prevent the norm of individual  $\mu_p$  and  $\mu_q$  from increasing while maintaining the difference parallel to  $f$ . When both  $\|\mu_p\|$  and  $\|\mu_q\|$  increases, the inequality in eq.(22) suggests that  $S_K$  also increases, thereby increasing the

probability of error in the KL estimate by Theorem 2. In other words, as we train the neural discriminator, the neural network parameters  $\theta$  change such that the complexity of RKHS itself keeps increasing which causes exponential growth in the sample complexity.

Obviously, the way to control the complexity of RKHS space is by controlling  $S_K$ . To indicate that kernel complexity is a function of neural network parameters, we denote it by  $S_K(\theta)$  and we want to train neural network such that the complexity  $S_K(\theta)$  does not increase undesirably. To do this in a scalable way that is compatible with neural networks, we use gradient descent based optimization. Computation of gradient of  $S_K(\theta)$  w.r.t  $\theta$  is straightforward using definition of  $K(x,t)$  and can be easily realized by using backpropagation in neural networks. Ideally,  $S_K(\theta)$  is  $\max K(x,t)$  over all the datapairs  $(x,t) \in \mathcal{X} \times \mathcal{X}$ , which would require passing all the datapoints through neural network. Instead, we simply compute supremum over the minibatch matrix which contains the  $2b \times 2b$  entries corresponding to every pair in  $2b$  elements ( $b$  from each distribution  $p(x)$  and  $q(x)$ ). This is obviously a lowerbound – denoted by  $S_{mini}(\theta)$  – of  $S_K(\theta)$ . To penalize the RKHS space that are high in complexity, we add a loss term with regularization parameter  $\lambda$  to obtain a modified objective to maximize:

$$E_{p(x)} \log \sigma(f(x)) + E_{q(x)} \log(1 - \sigma(f(x))) - \lambda \cdot S_{mini}^\gamma \quad (23)$$

where  $\gamma$  is an estimation of  $\frac{\eta}{h}$  and treated as a hyperparameter to be learned. Optimization of eq.(23) w.r.t. neural network parameters  $\theta$  allows dynamic control of the complexity of the discriminator function on the fly in a scalable and efficient way.

## 9 Experimental Results

### 9.1 Experimental Setup

We assume that we have finite sets of samples from two distributions. We further assume that we are required to apply minibatch based optimization. We consider the problem of estimating KL divergence in a simple case of two Gaussian distributions in 2D where we know the analytical KL divergence between the two distributions as the ground truth. We consider three different pairs of distributions corresponding to true KL divergence values of 1.3, 13.8 and 61.1, respectively.

As the discriminator, we use a fully connected neural network with two hidden layers. The number of hidden units are varied to understand the effect of the discriminator complexity on the fluctuation of the KL estimate. The dimensions are kept identical between the neural-net discriminator and the RKHS discriminator, the latter being different only in that its last layer is stochastic.

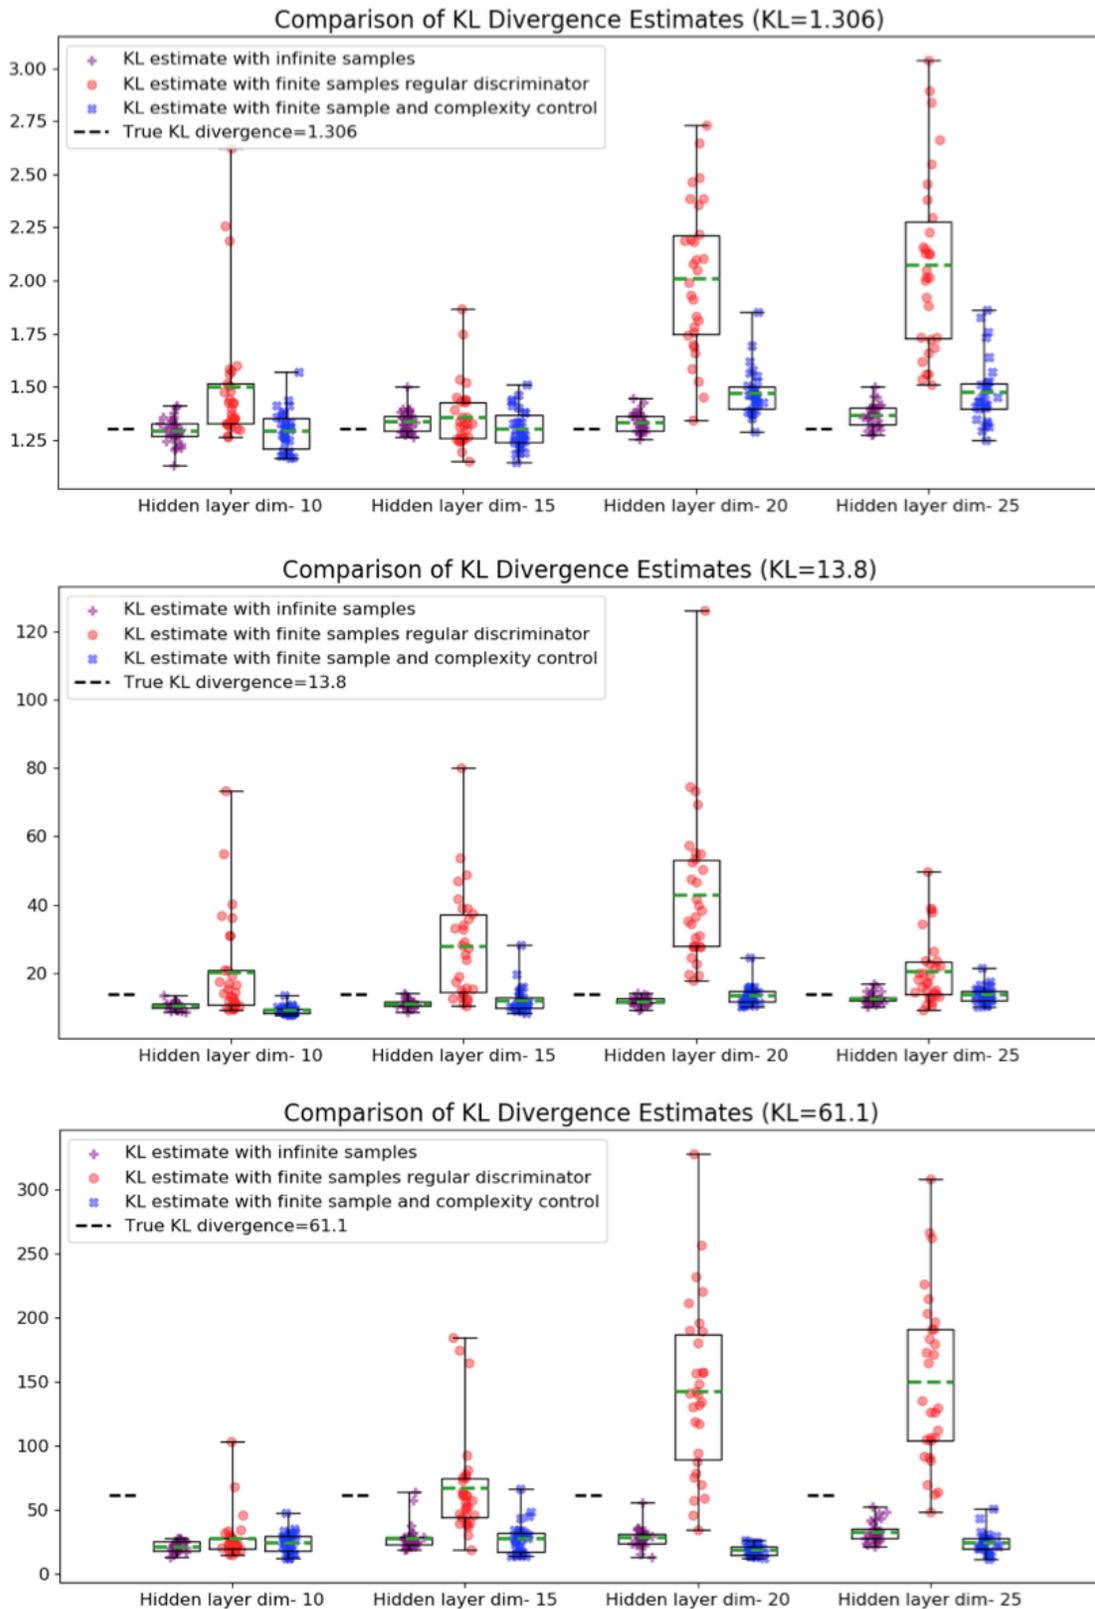


Figure 2: Comparison of KL divergence estimates using i) infinite samples, ii) finite samples and a normal neural network discriminator, and iii) finite sample and the presented RKHS discriminator with complexity control.

---

**Algorithm 1** KL divergence estimation with complexity control

---

```
1: Fix minibatch size,  $b$ , hyperparameter  $\gamma$ , number of
   samples  $m$ ,  $flat\_n = 100$ ,  $idx = 0$ ,  $\ell_{min} = \infty$ 
2: Initialize the neural network parameters  $\theta$ , last layer
    $w \sim \mathcal{N}(\bar{w}, LL^T)$ , such that  $\bar{w} = 0$ ,  $LL^T = I$ 
3: for iteration  $iter$  in 1 to  $iter_{max}$  do
4:    $kl_{sum} = 0$ ,  $\ell_{adv} = 0$ ,  $n\_batch = (m/b)$ 
5:   for iteration  $k$  in 1 to  $n\_batch$  do
6:     Sample minibatch  $\{x_i\}_{i=1}^b$  from  $p(x)$ 
       and  $\{y_i\}_{i=1}^b$  from  $q(x)$ , and  $J =$ 
        $\{\{x_i\}_{i=1}^b, \{y_i\}_{i=1}^b\}$ 
7:     For each  $x_i, y_i$ , sample  $\epsilon \sim \mathcal{N}(0, I)$  and obtain
       samples  $\{w_j\}_{j=1}^d$  where  $w_j = \bar{w} + L\epsilon_j$ 
8:      $f(x)_i = \frac{1}{d} \sum_j \phi_\theta(x_i)^T w_j$ 
        $f(y)_i = \frac{1}{d} \sum_j \phi_\theta(y_i)^T w_j$ 
9:      $loss_d = -\frac{1}{b} \sum_i \log \sigma(f(x)_i) + \log(1 - f(y)_i)$ 
10:     $S_{mini} = \max_{x \in J, t \in J} \phi_\theta(x)^T (\bar{w}\bar{w}^T + \Sigma) \phi_\theta(t)$ 
11:    Backpropagate  $loss = loss_d + \lambda \cdot S_{mini}^\gamma$  and up-
       date  $\theta, \bar{w}, L$ 
12:     $kl_{sum} = kl_{sum} + \frac{1}{b} \sum_i \log \sigma(f(x)_i)$ 
        $\ell_{adv} = \ell_{adv} + loss_d$ 
13:   end for
14:    $\ell = \ell_{adv}/n\_batch$ ,  $kl_{iter} = kl_{sum}/n\_batch$ 
15:   if  $\ell < \ell_{min}$  then
16:      $kl = kl_{iter}$ ,  $idx = iter$ 
17:   else if  $iter > idx + flat\_n$  then
18:     return  $kl$ 
19:   end if
20: end for
21: return  $kl$ 
```

---

## 9.2 Finite v.s. Infinite Samples

By infinite samples, we mean that we have access to the generative model generating data from the given distributions. Hence, we do not use a finite number of samples but continuously sample from the two given distributions. The results of KL estimates using infinite samples is shown in Fig. 2 and Table 1, in comparison to estimates using finite samples without controlling the complexity of the neural-net discriminator. We observe that when we use infinite samples, we obtain an estimate with low variance and values close to the analytical truth in  $KL = 1.3$  and  $KL = 13.8$  and an underestimate when  $KL = 61.1$ . In contrast, when we use finite samples without controlling the complexity of the neural-net discriminator, the estimates fluctuated heavily confirming our hypothesis: we need to control the complexity of the function when the number of samples is finite, or else the probability of estimation error increases.

Table 1: Comparison of KL-divergence estimates using different methods; hidden layer dimension = 25.

Method	True KL		
	1.3	13.8	61.1
MINE	Unstable	Unstable	Unstable
VDM	Unstable	Unstable	Unstable
Infinite sample	$1.36 \pm 0.05$	$12.58 \pm 1.49$	$32.4 \pm 7.87$
NN Disc	$2.07 \pm 0.42$	$20.63 \pm 9.82$	$149.9 \pm 65$
Complexity control	$1.47 \pm 0.15$	$13.64 \pm 2.39$	$24.04 \pm 8.2$

Table 2: The effect of the regularization parameter  $\lambda$ ; hidden layer dimension = 20.

Lambda	True KL		
	1.3	13.8	61.1
5e-5	$1.46 \pm 0.22$	$16.65 \pm 10.4$	$116.7 \pm 116$
1e-4	$1.56 \pm 0.25$	$30.97 \pm 10.5$	$39.17 \pm 18.5$
5e-4	$1.47 \pm 0.11$	$13.44 \pm 2.68$	$18.36 \pm 3.9$

## 9.3 Complexity Control

In Fig. 2 and Table 1, we then compare the estimation of KL divergence with and without controlling the discriminator complexity as proposed. By penalizing the complexity of the discriminator, we obtain KL estimates that are much more consistent (low variation), as well as much closer to the estimates from infinite samples.

We further note in Fig.2 that the erratic behavior of the KL estimator without complexity penalization worsens as we increase the number of hidden layers in the discriminator. This is consistent with our theory because increasing the number of hidden layers increases the complexity of the discriminator. While using discriminator without complexity control, we further note that the ratio of true KL divergence to standard deviation of KL estimates also becomes worse (decreases) as we increase the discriminator size. This highlights the need of penalizing the complexity of the discriminator function as a neural network with increased capacity is used to estimate higher values of KL divergence.

## 9.4 Effect of Regularization Parameter $\lambda$

Fig. 3 and Table 2 shows the effect of the regularization parameter  $\lambda$  that tunes the level of complexity control in estimating the KL divergence. As expected, in all cases, we observe that the fluctuation in estimates decreases as we increase the value of  $\lambda$ .

Furthermore, for a discriminator with low complexity

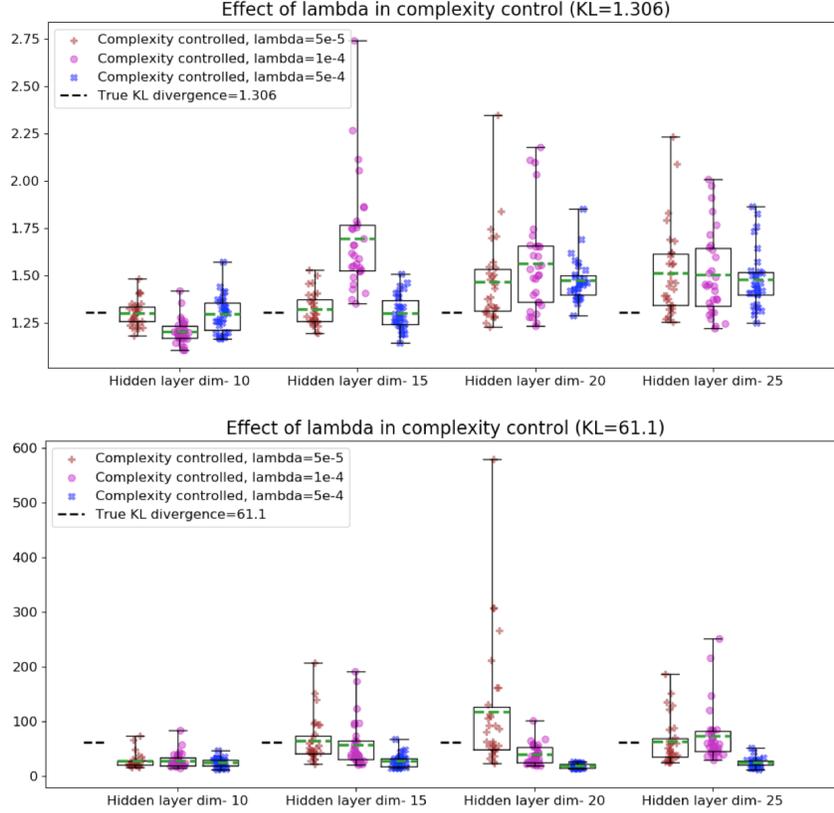


Figure 3: The effect of the regularization parameter  $\lambda$  in different discriminator architectures.

(*e.g.*, latent dimension = 10), a smaller value of  $\lambda$  is sufficient to yield low-variance estimate. On the contrary, as the size of the hidden layer increases, we need to penalize the complexity aggressively with a higher value of  $\lambda$  in order to obtain the same level of consistency. This further supports our theory.

### 9.5 Underestimation for High KL Divergence

We observe in Table 1 and Fig. 2 that, for  $KL = 61.1$ , results from both infinite samples and finite samples with complexity control give an underestimation of KL divergence even though they reduce fluctuation significantly. This might indicate that the function space represented by three-layer neural networks is not rich enough. Because of this restriction on the function space  $\mathcal{H}_K$ , the optimum discriminator  $f^* \in \mathcal{H}_K$  is not close to true discriminator function, a typical case of low variance but high bias in the function space owing to bias-variance trade-off (Cucker and Smale [2002], Bishop [2006]).

## 10 Conclusions & Discussion

We have shown that using a regular neural network as a discriminator in estimating KL divergence results in unreliable estimation due to not controlling the complexity

of the function space. We then showed that this could be resolved by penalizing the kernel complexity in a scalable way using neural networks.

The idea of constructing a neural-net function in RKHS and complexity control could also be useful in stabilizing GANs, or potentially in improving generalization of neural networks. Several papers have identified issues with the stability of GANs (Mescheder et al. [2018], Kodali et al. [2018], Thanh-Tung et al. [2019]). One common understanding is that, in its raw form, we don't enforce the discriminator function to be smooth or regular around the neighborhood of its inputs. Currently most successful way to stabilize GANs is to enforce smoothness by gradient penalization. Even in variations like Wasserstein GAN (Arjovsky et al. [2017], Gulrajani et al. [2017]) and MMD GAN (Bikowski et al. [2018]), gradient penalty is crucial to achieve stable results. On the light of the present analysis, we believe that the gradient penalty can be thought as one way to control the complexity of the discriminator. The objective and nature of optimization is such that the complexity of discriminator is bound to increase and therefore some way of decreasing complexity is a must. Similarly, generalization of neural network classifiers could be improved with complexity control.

## References

- XuanLong Nguyen, Martin J Wainwright, and Michael I Jordan. Estimating divergence functionals and the likelihood ratio by convex risk minimization. IEEE Transactions on Information Theory, 56(11):5847–5861, 2010.
- Tian Qi Chen, Xuechen Li, Roger B Grosse, and David K Duvenaud. Isolating sources of disentanglement in variational autoencoders. In Advances in Neural Information Processing Systems, pages 2610–2620, 2018.
- Lars Mescheder, Andreas Geiger, and Sebastian Nowozin. Which training methods for gans do actually converge? arXiv preprint arXiv:1801.04406, 2018.
- Xi Chen, Yan Duan, Rein Houthooft, John Schulman, Ilya Sutskever, and Pieter Abbeel. Infogan: Interpretable representation learning by information maximizing generative adversarial nets. In Advances in neural information processing systems, pages 2172–2180, 2016.
- Casper Kaae Sønderby, Jose Caballero, Lucas Theis, Wenzhe Shi, and Ferenc Huszár. Amortised map inference for image super-resolution. ICLR, 2017.
- Sebastian Nowozin, Botond Cseke, and Ryota Tomioka. f-gan: Training generative neural samplers using variational divergence minimization. In Advances in neural information processing systems, pages 271–279, 2016.
- Mohamed Ishmael Belghazi, Aristide Baratin, Sai Rajeshwar, Sherjil Ozair, Yoshua Bengio, Aaron Courville, and Devon Hjelm. Mutual information neural estimation. In International Conference on Machine Learning, pages 531–540, 2018.
- Lars Mescheder, Sebastian Nowozin, and Andreas Geiger. Adversarial variational bayes: Unifying variational autoencoders and generative adversarial networks. In International Conference on Machine Learning (ICML), 2017.
- Jiaming Song and Stefano Ermon. Understanding the limitations of variational mutual information estimators. arXiv preprint arXiv:1910.06222, 2019.
- Diederik P Kingma and Max Welling. Auto-encoding variational bayes. arXiv preprint arXiv:1312.6114, 2013.
- A. Berline and C. Thomas-Agnan. Reproducing Kernel Hilbert Spaces in Probability and Statistics. Springer US, 2011. ISBN 9781441990969.
- Francis Bach. On the equivalence between kernel quadrature rules and random feature expansions. The Journal of Machine Learning Research, 18(1):714–751, 2017a.
- Felipe Cucker and Steve Smale. On the mathematical foundations of learning. Bulletin of the American mathematical society, 39(1):1–49, 2002.
- Bharath K Sriperumbudur, Arthur Gretton, Kenji Fukumizu, Bernhard Schölkopf, and Gert RG Lanckriet. Hilbert space embeddings and metrics on probability measures. Journal of Machine Learning Research, 11(Apr):1517–1561, 2010.
- Arthur Gretton, Karsten M Borgwardt, Malte J Rasch, Bernhard Schölkopf, and Alexander Smola. A kernel two-sample test. Journal of Machine Learning Research, 13(Mar):723–773, 2012.
- Francis Bach. Breaking the curse of dimensionality with convex neural networks. The Journal of Machine Learning Research, 18(1):629–681, 2017b.
- Christopher M Bishop. Pattern recognition and machine learning. springer, 2006.
- Naveen Kodali, James Hays, Jacob Abernethy, and Zsolt Kira. On convergence and stability of GANs. 2018. URL <https://openreview.net/forum?id=ryepFJbA->.
- Hoang Thanh-Tung, Truyen Tran, and Svetha Venkatesh. Improving generalization and stability of generative adversarial networks. In International Conference on Learning Representations, 2019. URL <https://openreview.net/forum?id=ByxPYjC5KQ>.
- Martin Arjovsky, Soumith Chintala, and Léon Bottou. Wasserstein gan. arXiv preprint arXiv:1701.07875, 2017.
- Ishaan Gulrajani, Faruk Ahmed, Martin Arjovsky, Vincent Dumoulin, and Aaron C Courville. Improved training of wasserstein gans. In I. Guyon, U. V. Luxburg, S. Bengio, H. Wallach, R. Fergus, S. Vishwanathan, and R. Garnett, editors, Advances in Neural Information Processing Systems 30, pages 5767–5777. Curran Associates, Inc., 2017.
- Mikoaj Bikowski, Dougal J. Sutherland, Michael Arbel, and Arthur Gretton. Demystifying MMD GANs. In International Conference on Learning Representations, 2018.