

---

# Robust Deep Reinforcement Learning through Adversarial Loss

---

**Tuomas Oikarinen**  
MIT EECS  
tuomas@mit.edu

**Tsui-Wei Weng**  
MIT EECS  
tweng@mit.edu

**Luca Daniel**  
MIT EECS  
luca@mit.edu

## Abstract

Deep neural networks, including reinforcement learning agents, have been proven vulnerable to small adversarial changes in the input, thus making deploying such networks in the real world problematic. In this paper, we propose RADIAL-RL, a method to train reinforcement learning agents with improved robustness against any  $l_p$ -bounded adversarial attack. By simply minimizing an upper bound of the loss functions under worst case adversarial perturbation derived from efficient robustness verification methods, we significantly improve robustness of RL-agents trained on Atari-2600 games and show that RADIAL-RL can beat state-of-the-art robust training algorithms when evaluated against PGD-attacks. We also propose a new evaluation method, *Greedy Worst-Case Reward (GWC)*, for measuring attack agnostic robustness of RL agents. GWC can be evaluated efficiently and it serves as a good estimate of the reward under the worst possible sequence of adversarial attacks; in particular, GWC accounts for the importance of each action and their temporal dependency, improving upon previous approaches that only evaluate whether each single action can change under input perturbations. Our code is available at [https://github.com/tuomaso/radial\\_rl](https://github.com/tuomaso/radial_rl).

## 1 Introduction

Deep learning has achieved enormous success on a variety of challenging domains, ranging from computer vision [1] and natural language processing [2] to reinforcement learning [3, 4]. Despite this, recently questions have been raised about how reliable and robust these deep learning systems really are. One concern is due to the existence of adversarial examples [5], where small and often imperceptible perturbations can result in misclassifications of state-of-the-art deep neural networks (DNNs). This indicates that current DNNs are not as robust and trust-worthy as we would expect, and that there could be many problems if they are deployed in the real world without care.

Recently, adversarial attacks have also been shown possible for deep reinforcement learning (deep RL) agents [6, 7, 8]. State-of-the-art agents may perform arbitrarily bad with significant drops in the total accumulative reward due to adversarial perturbations in the observation space and/or action space. As deep reinforcement learning agents are involved in many safety critical applications such as self-driving cars and robotics, it is of crucial importance to develop robust training algorithms (a.k.a. defense algorithms) such that the resulting trained agents are robust to adversarial (and non-adversarial) perturbation.

There have been many publications on developing heuristic defenses to improve neural robustness against adversarial attacks for image classification tasks, but they often fail against stronger adversarial attack algorithms. [9] show that 13 such defense methods, recently proposed at prestigious conferences, can all be broken by clever attacks. A possible emerging alternative direction is to develop defense algorithms based on robustness verification bounds [10, 11, 12, 13], which produce robustness certificates such that for any perturbations within the specified  $l_p$ -norm distance  $\epsilon$ , the

trained network will produce consistent classification results on given data points. We don't use the naming convention in this field to call this type of defense as *certified defense* because we think it is misleading as such defense methodology cannot provide any certificates on unseen data. Several representative works include [11] and [14], where the authors show that by including the robustness verification bounds in the loss function with proper training schedule, the learned models can have much higher certified accuracies<sup>1</sup>, even if the verifier produces loose robustness certificate [14] for models without robust training (a.k.a. nominal models).

However, there are much fewer defense algorithms designed for deep RL agents due to additional challenges that are not present in classification tasks, such as lack of a stationary training set and no clear correct action for each state. To bridge this gap, in this paper we present **RADIAL**(Robust **AD**versarial **IA**l Loss)-RL to overcome these challenges by utilizing robustness verification bounds in a deep reinforcement learning setting. **RADIAL** can improve the robustness of deep RL agents by carefully designing the adversarial loss functions with robustness verification bounds during training. We summarize our contributions of this paper in the following:

- We propose a novel robust training framework for deep RL agents called **RADIAL**-RL, which can be applied to different types of RL methods. We demonstrate **RADIAL** on two popular RL algorithms, Deep Q-Networks (DQN) and Asynchronous Advantage Actor Critic (A3C) [15]. We use interval bound propagation [14] for our experiments for training efficiency, but **RADIAL** can be used with other existing robustness verification algorithms [11, 12, 16].
- We train and evaluate our **RADIAL**-DQN and **RADIAL**-A3C on the vision-based Atari-2600 games and show that our robust policies outperforms the two recent works [17, 18]. In particular, our **RADIAL**-DQN and **RADIAL**-A3C can still retain very high rewards even when evaluated against  $3\times$  larger perturbations under PGD attacks.
- We also propose a new evaluation method, *Greedy Worst-Case Reward (GWC)*, for efficiently evaluating deep RL agent performance under attack of strongest adversaries (i.e. worst-case perturbation). We show that GWC can be computed efficiently<sup>2</sup> and that it is a good estimate of the lower bound on worst-case reward.

## 2 Related Work and backgrounds

### 2.1 Adversarial attacks in Deep RL

Most of the research work studying adversarial examples has focused on supervised learning tasks, especially classification. More recently, [6, 7, 8] showed that adversarial attacks are also an issue for deep RL agents. There exists many types of perturbations, including adversarial perturbations on agents' observations/actions [6, 7, 8], mis-specification on the environment [19] and adversarial disruptions on the agents [20]. In this paper, we focus on the threat model of  $\ell_p$ -norm bounded adversarial perturbations on agents' observations.

### 2.2 Robustness verification and robust training for Deep RL

Previous work has applied adversarial training to defend against adversarial attacks [21, 22]; however, these approaches might not succeed against stronger adversaries and often have much higher computational cost than standard training. Alternatively, robustness certification methods designed for classifiers [12] have been utilized in deep RL setting. For example, [23] propose a policy of choosing the action with highest certified lower bound Q-value during execution, and [24] derived tighter robustness certificate for neural network policies under persistent adversarial perturbations in the system. Nevertheless, these methods do not describe how to train more robust models.

The most relevant works related to our work are two very recent papers [17] and [18] that propose robust training methods for deep Q-learning agents. [17] propose to train two neural networks, one

<sup>1</sup>The percentage of the test images that are guaranteed to be classified correctly under a given perturbation magnitude  $\epsilon$

<sup>2</sup>Lower bound on worst-case reward requires  $O(c^T)$  to compute, while GWC requires  $O(T)$ , where  $T$  is the number of timesteps in an episode and  $c$  is the number of possible actions in a given state.

with standard Q-learning and the other for imitating the first network, named as Robust Student-DQN (RS-DQN). The main idea is to decouple the DQN agent into a policy-student network and the other Q network is used to enable leveraging additional constraints on the student DQN without strongly affecting learning of the correct Q-function. On the other hand, [18] propose adding a hinge loss regularizer to Q-learning so that the DQN agents will tend to follow their original actions when there are perturbations in the observation space. Their method relies on a more complex robustness verification method which is around 5-10 times more expensive to calculate than IBP in this setting. Although both of these approaches showed improvement on DQN robustness against adversarial attacks, they focus on making sure the agent does not change its preferred action under input perturbations. While this is a valid approach in many situations, it might cause problems in some situations. For example in the case where  $\epsilon = 0$  or close enough to zero that the output bounds are tight, our loss function simply reduces to the standard DQN loss function, but SA-DQN loss function will still have a regularization term that drives the difference between highest and second highest Q-value to be at least a constant gap. This skews the learning in cases where the optimal Q-values differ by less than gap, and drives Q-values for the current highest action too high, and the Q-values for other actions too low. This may cause difficulties during learning and at evaluation if some actions are randomized, as the network will learn a less flexible policy.

Experiments in Section 4.2 demonstrate our **RADIAL-DQN** and **RADIAL-A3C** can resist stronger adversarial attacks when trained with the same  $\epsilon$ , outperforming both the baselines [17, 18] in four atari games (see Table 1). Additionally, as detailed in Sec 3.3, we propose a novel method to evaluate agent performance against worst possible adversary, while [17, 18] lack a good metric for evaluating certified robustness of RL agents and simply evaluate whether the DQN agents actions can change.

### 2.3 Basics of Reinforcement Learning (RL)

Environments used in this paper are discrete space MDPs, which can be described by the tuple  $(\mathcal{S}, \mathcal{A}, \mathcal{P}, \mathcal{R}, \gamma, s_0)$ , where  $\mathcal{S}$  is a set of discrete states,  $\mathcal{A}$  is a discrete set of the available actions,  $\mathcal{P} : \mathcal{S} \times \mathcal{A} \times \mathcal{S} \rightarrow \mathbb{R}$  defines the transition probabilities, and  $\mathcal{R} : \mathcal{S} \times \mathcal{A} \rightarrow \mathbb{R}$  is the scalar reward function,  $s_0$  the initial state distribution and  $\gamma$  is the discount factor. RL algorithms aim at learning a possibly stochastic policy  $\pi : \mathcal{S} \times \mathcal{A} \rightarrow \mathbb{R}$  describing the probability of taking an action  $a$  given state  $s$ . The goal of a policy is to maximize the cumulative time discounted reward of an episode  $\sum_t \gamma^t r_t$ , where  $t$  is the timestep and  $r_t, a_t$  and  $s_t$  are reward, action and state at timestep  $t$ .

**Deep Q-networks.** Deep Q-networks [3] (DQN) aim to learn a action-value function ( $Q$ ) for each state and action pair. The policy  $\pi$  is taking the action with highest Q-value, with some chance of taking a random action. The ideal Q-value for taking action  $a$  in state  $s$ , denoted as  $Q^*(s, a)$ , is defined as follows:

$$Q^*(s, a) = r + \gamma \mathbb{E}_{(s', a')} \left[ \max_{a'} Q^*(s', a') \right],$$

where  $s'$  is the next state and  $r$  is reward. The central idea of deep Q-networks is to use neural networks to approximate the ideal Q-value, and DQNs can be trained by minimizing the following loss as a function of network parameters  $\theta$ :

$$\mathcal{L}(\theta) = \mathbb{E}_{(s, a, s', r)} \left[ (r + \gamma \max_{a'} Q(s', a'; \theta) - Q(s, a; \theta))^2 \right].$$

In line with previous works [17, 18] that use various improvements over vanilla DQN, we use Double DQN [25] that improves on standard DQN by decoupling the Q-network used to evaluate the target value ( $Q_{target}$  with parameters  $\theta_{target}$ ) from the one being trained ( $Q_{actor}$  with parameters  $\theta_{actor}$ ).  $\theta_{target}$  is typically updated by periodically copying over parameters of  $\theta_{actor}$ , while  $\theta_{actor}$  is optimized by minimizing the following objective function:

$$\mathcal{L}(\theta_{actor}) = \mathbb{E}_{(s, a, s', r)} \left[ (r + \gamma \max_{a'} Q_{target}(s', a'; \theta_{target}) - Q_{actor}(s, a; \theta_{actor}))^2 \right]. \quad (1)$$

**Asynchronous Advantage Actor Critic.** Asynchronous Advantage Actor critic (A3C), is a reinforcement learning algorithm which uses neural networks to learn a policy function  $\pi(a|s; \theta)$  and a state-value function  $V(s; \theta_v)$ . Here the policy network determines which action to take, and value function evaluates how good each state is. Typically the policy and value functions share the same neural network architecture except the last layer. To update the network parameters, an estimate of

the advantage function,  $A$ , is defined to compute how much better/worse than expected value function  $V$ :

$$A(s_t, a_t; \theta, \theta_v) = \sum_{i=0}^{k-1} \gamma^i r_{t+i} + \gamma^k V(s_{t+k}; \theta_v) - V(s_t; \theta_v), \quad (2)$$

where  $k$  is a hyperparameter. The network parameters  $(\theta, \theta_v)$  are learned by minimizing the following loss function:

$$\mathcal{L}(\theta, \theta_v) = \mathbb{E}_{(s_t, a_t, r_t)} \left[ (A(s_t, a_t; \theta, \theta_v))^2 - \log \pi(a_t | s_t; \theta) A(s_t, a_t; \theta, \theta_v) - \beta \mathcal{H}(\pi(s_t; \theta)) \right], \quad (3)$$

where the first term optimizes the value function, second optimizes policy function and last term encourages exploration by rewarding high entropy ( $\mathcal{H}$ ) of the policy, and  $\beta$  is a hyperparameter.

### 3 RADIAL-RL: a Robust Deep RL framework with adversarial loss

In this section, we propose **RADIAL(ROBUST ADversarial IAL Loss)**-RL, a framework for training deep RL agents robust against adversarial attacks. **RADIAL** designs adversarial loss functions by leveraging existing robustness verification bounds of neural networks. We first introduce the key idea of **RADIAL** and then demonstrate how to formulate the adversarial loss for the two popular deep reinforcement learning algorithms, DQN and A3C in Sections 3.1 and 3.2. In Section 3.3, we propose and motivate an alternative method called *Greedy Worst-Case Reward* (GWC) to efficiently evaluate agent’s robustness against input perturbations.

**Key idea.** The adversarial loss function  $\mathcal{L}_{adv}$  consists of two terms:

$$\mathcal{L}_{adv} = \kappa \mathcal{L}_{standard} + (1 - \kappa) \mathcal{L}_{wc}, \quad (4)$$

where  $\mathcal{L}_{standard}$  denotes the standard loss function (such as Equations (1) and (3) in the Section 2),  $\mathcal{L}_{wc}$  accounts for the worst-case situation against the adversaries, and  $\kappa$  is a hyperparameter controlling the trade-off between standard performance and robust performance with value between 0 and 1. Standard RL training algorithms have  $\kappa = 1$  throughout the full training process, while in **RADIAL**-RL,  $\kappa$  is a variable that depends on the training steps and one can design its schedule to control the trade-off between nominal and robust performance at different training stages. For the threat model where adversaries could perturb the original observation  $s_t$  within some  $\ell_p$ -ball with radius  $\epsilon$  at each timestep, we can calculate an upper bound of the perturbed standard loss, denoted as  $\mathcal{L}_{wc}$ , by using the certified bounds from neural network robustness verification algorithms such as IBP [14], Fast-Lin [12] and many other robustness verification methods [13, 11, 26, 27, 28, 29]. Our approach is motivated by the idea that loss functions are designed to be lower for better policies, so if we can keep loss low under adversarial perturbations, the policy should perform well under adversarial perturbations.

Below we illustrate the key property of the robustness verification bounds of a given neural network: Suppose  $z_i(x)$  is the activation of the  $i$ th layer of a neural network with input  $x$ . The goal of a robustness verification algorithm is to compute layer-wise lower and upper bounds of the neural network, denoted as  $\underline{z}_i(x, \epsilon)$  and  $\bar{z}_i(x, \epsilon)$ , such that  $\underline{z}_i(x, \epsilon) \leq z_i(x + \delta) \leq \bar{z}_i(x, \epsilon)$ , for any additive input perturbation  $\delta$  on  $x$  with  $\|\delta\|_p \leq \epsilon$ . We can apply robustness verification algorithms on the Q-networks (for DQN) or policy networks (for A3C) to get layer-wise output bounds of  $Q$  and  $\pi$ , and use these output bounds to calculate an upper bound of the original loss function under worst-case adversarial perturbation  $\mathcal{L}_{wc}$ . For the purpose of efficiency, we use IBP [14] to compute the layer-wise bounds for the neural networks, but other differentiable certification methods [12, 13, 11, 26, 27, 28] could be applied directly (albeit may incur additional computation cost). In addition, our experiments focus on  $p = \infty$  to compare with baselines but the methodology works for general  $p$ .

#### 3.1 RADIAL-DQN

For a DQN with  $K$  layers, the output bounds of the Q-value under  $\epsilon$ -bounded perturbations to input  $s$  are simply  $\underline{Q}(s, a, \epsilon) = \underline{z}_{K,a}(s, \epsilon)$  and  $\bar{Q}(s, a, \epsilon) = \bar{z}_{K,a}(s, \epsilon)$ , which are used to define  $\mathcal{L}_{wc}$ :

$$\mathcal{L}_{wc}(\theta_{actor}, \epsilon) = \mathbb{E}_{(s, a, s', r)} \left[ \sum_y \left\{ \begin{array}{l} \max(B_l, B_u), \text{ if } y = a \\ \max(C_l, C_u), \text{ otherwise} \end{array} \right. \right], \quad (5)$$

where we define  $B = r + \gamma \max_{a'} Q_{target}(s', a')$  and

$$B_l = (B - \underline{Q}_{actor}(s, y, \epsilon))^2, \quad B_u = (B - \overline{Q}_{actor}(s, y, \epsilon))^2, \\ C_l = (Q_{actor}(s, y) - \underline{Q}_{actor}(s, y, \epsilon))^2, \quad C_u = (Q_{actor}(s, y) - \overline{Q}_{actor}(s, y, \epsilon))^2.$$

The  $B$  term is an upper bound of the original DQN loss function under adversarial perturbations, and the  $C$  term was added to ensure the bounds on actions not taken will also be tight. This formulation reduces to the original loss function Eq. (1) when  $\epsilon = 0$ .

### 3.2 RADIAL-A3C

In A3C, the value network  $V$  is only used to help with training and exploration, thus the approximated advantage  $A(s_t, a_t; \theta, \theta_v)$  will still be defined by Equation (2) as the unperturbed form. Likewise entropy  $\mathcal{H}$  is only important for exploration during training, and we are not interested in whether network entropy stays high under input perturbations and thus the unperturbed form of entropy term is used. In other words, to obtain a robust A3C algorithm, we can focus on designing a robust policy network  $\pi$ . Here we define the corresponding  $\mathcal{L}_{wc}$  as follows to make it an upper bound of the original loss function (i.e. Equation (3)) under worst-case adversarial input perturbations:

$$\mathcal{L}_{wc}(\theta, \theta_v) = \mathbb{E}_{(s_t, a_t, r_t)} [(A(s_t, a_t; \theta, \theta_v))^2 - D - \beta \mathcal{H}(\pi(s_t; \theta))], \quad (6)$$

where

$$D = \begin{cases} \log(\underline{\pi}(a_t|s_t, \epsilon; \theta))A(s_t, a_t; \theta, \theta_v) & , \text{ if } A(s_t, a_t; \theta, \theta_v) \geq 0, \\ \log(\overline{\pi}(a_t|s_t, \epsilon; \theta))A(s_t, a_t; \theta, \theta_v) & , \text{ otherwise.} \end{cases}$$

Here  $\overline{\pi}(a_t)$  is the upper bound of the policy network  $\pi$  at  $a_t$ -th output, which can be computed from the upper bound of  $a_t$ -th logit and lower bound of other logits due to the softmax function at the last layer. Note that  $\mathcal{L}_{wc}$  is an upper bound of  $\mathcal{L}_{standard}$  and reduces to  $\mathcal{L}_{standard}$  if  $\epsilon = 0$ .

### 3.3 New efficient evaluation method: Greedy Worst-Case Reward

The goal of training RL agents robust against input perturbations is to ensure that the agents could still perform well under any (bounded) adversarial perturbations. This can be translated into maximize the *worst-case* reward  $R_{wc}$ , which is the lowest reward under worst possible sequence of adversarial attacks. We define  $R_{wc}$  as follows:

$$R_{wc} = \min_{\|\delta_t\|_p \leq \epsilon} \mathbb{E}_\tau [R(\tau)], \quad \tau = (s_0, a_0, \dots, s_T, a_T), \quad R = \sum_t r_t, \quad (7)$$

where  $a_t \sim \pi(s_t + \delta_t)$ ,  $s_t \sim \mathcal{P}(s_{t-1}, a_{t-1})$ ,  $r_t \sim \mathcal{R}(s_{t-1}, a_{t-1})$ . However  $R_{wc}$  is practically impossible to evaluate – as finding the worst perturbations  $\delta_t$  of a set of possible actions  $a_t$  for each state  $s_t$  is NP-hard, and we will have to evaluate every possible trajectory  $\tau$  to find which produces the minimal reward. The amount of trajectories to evaluate grows exponentially with respect to trajectory length  $T$ . One way to avoid finding worst-case perturbations directly is to use certified output bounds [12, 13, 11, 26, 27, 28], which produces a superset of all possible actions under worst-case perturbations and hence the resulting total accumulative reward is a lower bound of  $R_{wc}$ . We name this reward as Absolute Worst-Case Reward (AWC) and the algorithm of computing AWC is described in Algorithm 1. Note that AWC is a lower bound of  $R_{wc}$  when both the policy and environment are deterministic.

However, AWC still requires evaluating an exponential amount of possible action sequences, which is computationally expensive. To overcome this limitation, in this section, we propose an alternative evaluation method called *Greedy Worst-Case Reward* (GWC), which approximates the desired  $R_{wc}$  and can be computed efficiently with a *linear* complexity of total timesteps  $T$ . The idea of *Greedy Worst-Case Reward* is to avoid evaluating exponential numbers of trajectories and use a simple heuristic to approximate  $R_{wc}$ : choose the action with lowest Q-value (or the probability of action taken for A3C) greedily at each state. The full algorithm is described in Algorithm 2. We show in Figure 2 that *Greedy Worst-Case Reward* are often close to Absolute Worst-Case Reward while being much faster to evaluate (linear complexity to total timesteps). In both algorithm descriptions, the output  $\pi$  will be the Q-values for the case of DQNs.

Note that previous evaluation methods do not directly measure reward. For example, [18] uses the action certification rate and [17] uses the size of average provable region of no action change.

---

**Algorithm 1: Absolute Worst-Case Reward**

---

```
 $S_{open} = \{(s_0, 0)\}$   
 $R_{min} = \infty$   
while  $S_{open} \neq \emptyset$  do  
  1. Pick a state and reward tuple  $(s', R')$  from  $S_{open}$  and remove it from the set.  
  2. Calculate certified bounds on the output  $\underline{\pi}_i(s', \epsilon; \theta)$  and  $\bar{\pi}_i(s', \epsilon; \theta)$  for each action  $i$ , as well as the unperturbed output  $\pi_i(s', \theta)$   
  3. Calculate set of possible actions  $\Gamma := \{i \mid \bar{\pi}_i \geq \max_j(\underline{\pi}_j)\}$   
  4. for action  $i$  in  $\Gamma$  do  
    Take action  $i$ , and observe new state  $s''$  and reward  $r''$ .  
    if  $s''$  is terminal then  
      Update  $R_{min} \leftarrow \min(R_{min}, R' + r'')$   
    end  
    else  
      Add  $(s'', R' + r'')$  to  $S_{open}$   
    end  
  end  
end  
return  $R_{min}$ 
```

---

---

**Algorithm 2: Greedy Worst-Case Reward**

---

```
 $R = 0$   
while  $s_t$  not terminal do  
  1. Calculate certified bounds on the output  $\underline{\pi}_i(s_t, \epsilon; \theta)$  and  $\bar{\pi}_i(s_t, \epsilon; \theta)$  for each action  $i$ , as well as the unperturbed output  $\pi_i(s_t, \theta)$   
  2. Calculate set of possible actions  $\Gamma := \{i \mid \bar{\pi}_i \geq \max_j(\underline{\pi}_j)\}$   
  3. Take the "worst" action  $k$  out of the possible actions,  $k = \operatorname{argmin}_{i \in \Gamma}(\pi_i(s_t, \theta))$ . Observe  $r_t$  and  $s_{t+1}$  and update  $R \leftarrow R + r_t$   
  4.  $t = t + 1$   
end  
return  $R$ 
```

---

These evaluation methods primarily focus on not changing agent’s original actions under adversarial perturbations, which can be useful, since if most actions don’t change under attack, the reward is also less likely to change. However, this is often not enough as attacks changing just one early action could push the agent to an entirely different trajectory with very different results. As such, high action certification rates may not follow reward received. For example, the action certification rate could be very high (say 95%) meaning that most actions don’t change; however, if mostly the changed actions (the other 5%) actually matter for the total reward, this would result in a high action certification rate but low total reward under adversarial perturbation. In addition, actions not changing does not say anything about the quality of the policy, so previous methods have to be reported together with another measure such as nominal reward which makes comparison between models harder.

## 4 Results

### 4.1 Experimental setup

**Environment, model architecture and simulation setup.** We evaluate our algorithms on four Atari-2600 games, Pong, Freeway, BankHeist and RoadRunner, on the Arcade Learning Environment [30] to compare with previous works. These games have high dimensional pixel inputs and discrete action spaces. For each game, we first train a standard agent without robust training, and then *fine-tune* the model with **RADIAL** training. We found this training flow generally improve effectiveness of training and enable the agents to reach high nominal rewards. For both DQN and A3C, we used the same architecture in [31]. See Appendix B for training details including hyperparameters and their selection procedure. Unlike [18], we aimed to use one set of hyperparameters for all games.

Game	Model/Metric	Nominal	PGD attack		GWC reward
	$\epsilon$	0	1/255	3/255	1/255
Pong	<b>Baselines:</b>				
	RS-DQN ([17])	19.73	18.13	N/A	N/A
	DQN ([18])	20.7±0.5	-21.0±0.0	N/A	N/A
	SA-DQN([18])	<b>21.0±0.0</b>	20.1±0.0	N/A	N/A
	<b>Our methods:</b>				
	DQN	20.55±0.11	-21.0±0.0	-21.0±0.0	-21.0±0.0
	RADIAL-DQN	20.85±0.08	<b>20.8±0.09</b>	<b>20.8±0.09</b>	-1.85±4.62
	A3C	21.0±0.0	-20.6±0.18	-21.0±0.0	-21.0±0.0
RADIAL-A3C	20.0±0.0	20.0±0.0	20.0±0.0	<b>20.0±0.0</b>	
Freeway	<b>Baselines:</b>				
	RS-DQN ([17])	<b>32.93</b>	<b>32.53</b>	N/A	N/A
	DQN([18])	32.9±0.7	0.0±0.0	N/A	N/A
	SA-DQN([18])	30.78±0.5	30.36±0.7	N/A	N/A
	<b>Our methods:</b>				
	DQN	21.4 ± 0.27	22.1±0.33	21.25±0.31	0.0±0.0
RADIAL-DQN	21.75±0.35	21.95±0.40	<b>21.55±0.26</b>	<b>21.7±0.39</b>	
BankHeist	<b>Baselines:</b>				
	RS-DQN ([17])	238.66	190.67	N/A	N/A
	DQN([18])	<b>1308.4±24.1</b>	56.4±21.2	N/A	N/A
	SA-DQN([18])	1041.4±12.3	<b>1043.6±9.5</b>	N/A	N/A
	<b>Our methods:</b>				
	DQN	641.0±31.6	0.0±0.0	1.0±0.7	0.0±0.0
	RADIAL-DQN	1033.5 ± 23.0	1038.0±23.0	<b>833.5±45.2</b>	<b>1048.0±32.3</b>
A3C	1099.0±22.2	197.5±15.5	16.5±2.5	0.0±0.0	
RADIAL-A3C	852.±7.3	848.0±3.8	827.0±6.0	832.5±4.1	
RoadRunner	<b>Baselines:</b>				
	RS-DQN([17])	12106.67	5753.33	N/A	N/A
	DQN([18])	36946±6089	0.0±0.0	N/A	N/A
	SA-DQN([18])	15172 ± 792	15280±828	N/A	N/A
	<b>Our methods:</b>				
	DQN	38635±1489	0.0±0.0	0.0±0.0	0.0±0.0
	RADIAL-DQN	<b>41720±3289</b>	<b>43920±1238</b>	12480±901	<b>33745±2389</b>
A3C	36670±1313	4930±710	1305±206	0.0±0.0	
RADIAL-A3C	28975±1369	30435±1504	<b>30620±1141</b>	29595±1428	

Table 1: Result comparison. For our models we have reported mean reward of 20 episodes, as well as standard error of the mean. All models are trained using  $\epsilon = 1/255$ . A3C did not learn Freeway, which was omitted from the table.

**RADIAL-DQN.** We first train a standard DQN for 6 M steps followed by 4.5 M steps of **RADIAL** training. For **RADIAL-DQN** training, we first decreased  $\kappa$  linearly from 1 to 0.5 for 3 M steps, then increased  $\epsilon$  linearly from 0 to 1/255, finally kept  $\kappa = 0.5$  and  $\epsilon = 1/255$  for the last 1.5 M steps.

**RADIAL-A3C.** We first train A3C models for 20M steps with standard training followed by 10M steps of **RADIAL-A3C** training. This has a similar computational cost as our DQN training. A3C takes actions stochastically during training but during evaluation we set it to choose the action that would have the highest probability. For **RADIAL-A3C** training,  $\epsilon$  was first linearly increased from 0 to 1/255 over the first 2/3 of the training steps and kept at 1/255 for the rest. We found that when  $\kappa = 0.5$  from the start instead of slowly increase can significantly improve the performance of A3C.

**Evaluation.** We use the following methods to evaluate the performance of our agents: (a) the reward achieved under  $l_\infty$ -bounded adversarial attacks applied on every frame and (b) *Greedy Worst-Case Reward*. For (a), we used an untargeted version of two popular white-box attack strategies, Fast Gradient Sign Method (FGSM) [32] and 30-step Projected Gradient Descent (PGD) [33], which is stronger than 4 or 10 step attacks used by previous works. For (b), each trained model was evaluated for 20 episodes with different random starts against each method.

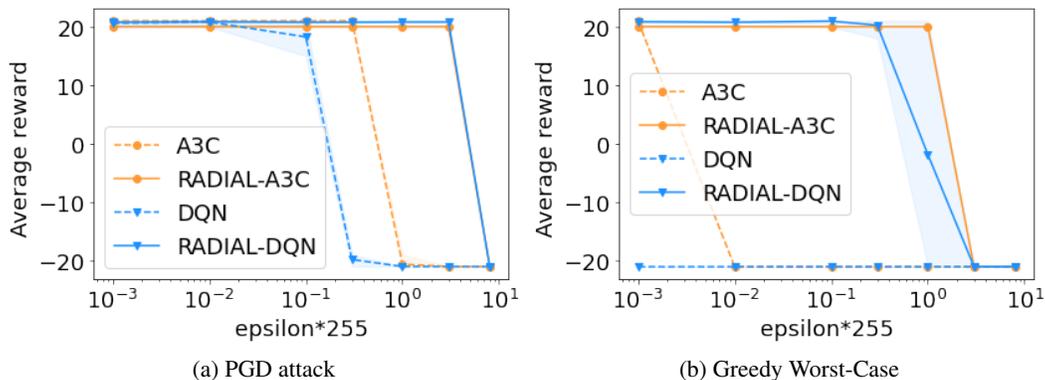


Figure 1: Robustness comparison over large range of perturbation sizes of agents trained on Pong. Lines are the mean reward over 20 episodes and shaded area is the range of rewards. This shows the magnitude of robustness improvement, with bigger improvements against stronger evaluation methods. Note that *Greedy Worst-Case Reward* starts low for very small  $\epsilon$  because IBP-bounds are loose for standard networks.

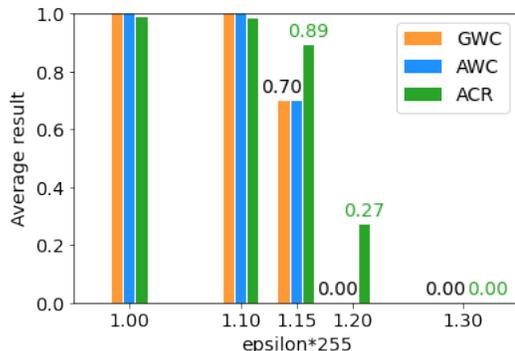


Figure 2: The means over 20 runs of **RADIAL-A3C** evaluated on Pong games up to 1 point on different perturbation sizes. GWC is the percentage of +1 rewards measured by *Greedy Worst-Case Reward*, while AWC is the percentage of +1 rewards using absolute worst-case calculation.

## 4.2 RADIAL-RL results

Table 1 shows that **RADIAL-DQN** significantly outperforms the baseline [18] on RoadRunner and Pong against  $\epsilon = 1/255$  PGD-attack, and matches their results on BankHeist. It is hard to evaluate which part of these improvements come from our robust training compared to other details of the training process. This is due to the complexity of RL training, and lack of published code by previous works at the time of writing. However, we can see that our standard Q-network performs equally well with that of [18] on Pong and RoadRunner while being significantly worse than theirs on BankHeist and Freeway. Despite this, **RADIAL-DQN** is able to match SA-DQN performance after robust training on BankHeist, and outperform it on Pong and RoadRunner. This gives us confidence in our robust training process as source of improvements. Additionally, we show **RADIAL-DQN** loses very little performance when evaluated against PGD-attacks with  $\epsilon = 3/255$ , which is  $3\times$  larger than any previous work was evaluated on, despite being only trained against  $1/255$  attacks.

For **RADIAL-A3C**, it is able to achieve very high rewards and robustness on 3/4 tasks despite these tasks being likely chosen by previous work because they are easy to learn for Q-learning agents. This is most clear for Freeway which A3C fails to learn, because the optimal policy consists of moving up a very large majority of the time, which is much more easier to be discovered by an agent doing  $\epsilon$ -greedy exploration. In Table 1 we see that **RADIAL-A3C** reaches slightly lower nominal rewards than **RADIAL-DQN** but shows superior performance in robustness. Meanwhile, its performance doesn't drop in any of the games even when evaluated under PGD-attacks with  $\epsilon = 3/255$  or GWC with  $\epsilon = 1/255$ .

### 4.3 Evaluating GWC

With the goal to increase  $R_{wc}$ , there are many approaches to perform robust training. For example, adversarial training focuses on increasing performance against a specific attack which is an upper bound of  $R_{wc}$ . On the other hand, defenses based on certified output bounds such as our proposed **RADIAL** and [18, 17] are suitable for increasing the lower bound of  $R_{wc}$ . Since *Greedy Worst-Case Reward* is aimed for evaluating methods of the latter group, it is important that GWC closely approximates the lower bound AWC, which is indeed the case as shown below.

In Figure 2 we compare GWC and action certification rate (ACR) against the Absolute Worst-Case Reward (AWC, Algorithm 1). Due to the exponential complexity of AWC, we conduct small scale experiments on single point games of Pong and implement AWC using depth first search (DFS). The implementation details are in Appendix B. The DFS searches were terminated after going through more than 5000 action sequences to save time and avoid infinite loops, and only episodes where the search finished are included in the graph. Out of the perturbations shown on the plot, only 6/20 episodes with  $\epsilon = 1.2$  terminated within this time limit, but for all other values of  $\epsilon$  every episode terminated.

For the episodes that we evaluated, *Greedy Worst-Case Reward* matched AWC perfectly every time. The mean of action certification rate also followed AWC relatively closely, but not for individual episodes. For example, at  $\epsilon = 1.15$ , 14/20 evaluation runs resulted in AWC of +1, and the average action certification rate for these was 0.873. The other 6/20 evaluation runs resulted in AWC of -1, and the average action certification rate of these was 0.938, so ACR had a negative correlation with AWC on these episodes. We acknowledge that this is a small sample size and it is likely that for the cases where absolute worst case did not terminate GWC and AWC would differ more often. Despite that, this experiment and our theoretical justifications in section 3.3 suggests that GWC is a better metric than action certification rate.

## 5 Conclusion

We have shown that using the proposed adversarial loss in our **RADIAL** framework can significantly improve the robustness of reinforcement learning agents against adversarial perturbations. We showed the robustly trained agents reach very good performance on Atari games under perturbations even 3 times larger than previous state of the art. In addition, we have presented a new evaluation method, *Greedy Worst-Case Reward*, to better evaluate reinforcement learning agent performance under adversarial input perturbations. Our proposed *Greedy Worst-Case Reward* is a good surrogate of the worst-case reward and can be computed much more efficiently. Together these contributions take us closer to safe and reliable reinforcement learning agents.

## References

- [1] A. Krizhevsky, "Learning multiple layers of features from tiny images," 2009.
- [2] S. Lai, L. Xu, K. Liu, and J. Zhao, "Recurrent convolutional neural networks for text classification," in *Twenty-ninth AAAI conference on artificial intelligence*, 2015.
- [3] V. Mnih, K. Kavukcuoglu, D. Silver, A. Graves, I. Antonoglou, D. Wierstra, and M. Riedmiller, "Playing atari with deep reinforcement learning," *arXiv preprint arXiv:1312.5602*, 2013.
- [4] T. P. Lillicrap, J. J. Hunt, A. Pritzel, N. Heess, T. Erez, Y. Tassa, D. Silver, and D. Wierstra, "Continuous control with deep reinforcement learning," *arXiv preprint arXiv:1509.02971*, 2015.
- [5] C. Szegedy, W. Zaremba, I. Sutskever, J. Bruna, D. Erhan, I. Goodfellow, and R. Fergus, "Intriguing properties of neural networks," *arXiv preprint arXiv:1312.6199*, 2013.
- [6] S. Huang, N. Papernot, I. Goodfellow, Y. Duan, and P. Abbeel, "Adversarial attacks on neural network policies," 2017.
- [7] Y.-C. Lin, Z.-W. Hong, Y.-H. Liao, M.-L. Shih, M.-Y. Liu, and M. Sun, "Tactics of adversarial attack on deep reinforcement learning agents," *arXiv preprint arXiv:1703.06748*, 2017.
- [8] T.-W. Weng, K. D. Dvijotham\*, J. Uesato\*, K. Xiao\*, S. Gowal\*, R. Stanforth\*, and P. Kohli, "Toward evaluating robustness of deep reinforcement learning with continuous control," *ICLR*, 2020.

- [9] F. Tramer, N. Carlini, W. Brendel, and A. Madry, “On adaptive attacks to adversarial example defenses,” 2020.
- [10] A. Raghunathan, J. Steinhardt, and P. Liang, “Certified defenses against adversarial examples,” *ICLR*, 2018.
- [11] J. Z. Kolter and E. Wong, “Provable defenses against adversarial examples via the convex outer adversarial polytope,” *ICML*, 2018.
- [12] T.-W. Weng, H. Zhang, H. Chen, Z. Song, C.-J. Hsieh, D. Boning, I. S. Dhillon, and L. Daniel, “Towards fast computation of certified robustness for relu networks,” 2018.
- [13] G. Singh, T. Gehr, M. Mirman, M. Püschel, and M. Vechev, “Fast and effective robustness certification,” in *NeurIPS*, 2018.
- [14] S. Gowal, K. Dvijotham, R. Stanforth, R. Bunel, C. Qin, J. Uesato, R. Arandjelovic, T. Mann, and P. Kohli, “On the effectiveness of interval bound propagation for training verifiably robust models,” 2018.
- [15] V. Mnih, A. P. Badia, M. Mirza, A. Graves, T. P. Lillicrap, T. Harley, D. Silver, and K. Kavukcuoglu, “Asynchronous methods for deep reinforcement learning,” 2016.
- [16] H. Zhang, H. Chen, C. Xiao, S. Gowal, R. Stanforth, B. Li, D. Boning, and C.-J. Hsieh, “Towards stable and efficient training of verifiably robust neural networks,” 2019.
- [17] M. Fischer, M. Mirman, S. Stalder, and M. Vechev, “Online robustness training for deep reinforcement learning,” 2019.
- [18] H. Zhang, H. Chen, C. Xiao, B. Li, D. Boning, and C.-J. Hsieh, “Robust deep reinforcement learning against adversarial perturbations on observations,” 2020.
- [19] D. J. Mankowitz, N. Levine, R. Jeong, Y. Shi, J. Kay, A. Abdolmaleki, J. T. Springenberg, T. Mann, T. Hester, and M. Riedmiller, “Robust reinforcement learning for continuous control with model misspecification,” 2019.
- [20] L. Pinto, J. Davidson, R. Sukthankar, and A. Gupta, “Robust adversarial reinforcement learning,” in *Proceedings of the 34th International Conference on Machine Learning-Volume 70*, pp. 2817–2826, JMLR. org, 2017.
- [21] J. Kos and D. Song, “Delving into adversarial attacks on deep policies,” 2017.
- [22] A. Pattanaik, Z. Tang, S. Liu, G. Bommannan, and G. Chowdhary, “Robust deep reinforcement learning with adversarial attacks,” 2017.
- [23] B. Lütjens, M. Everett, and J. P. How, “Certified adversarial robustness for deep reinforcement learning,” 2019.
- [24] Y.-S. Wang, T.-W. Weng, and L. Daniel, “Verification of neural network control policy under persistent adversarial perturbation,” *arXiv preprint arXiv:1908.06353*, 2019.
- [25] H. van Hasselt, A. Guez, and D. Silver, “Deep reinforcement learning with double q-learning,” 2015.
- [26] S. Wang, K. Pei, J. Whitehouse, J. Yang, and S. Jana, “Efficient formal safety analysis of neural networks,” in *Advances in Neural Information Processing Systems*, pp. 6367–6377, 2018.
- [27] H. Zhang, T.-W. Weng, P.-Y. Chen, C.-J. Hsieh, and L. Daniel, “Efficient neural network robustness certification with general activation functions,” in *Advances in neural information processing systems*, pp. 4939–4948, 2018.
- [28] A. Boopathy, T.-W. Weng, P.-Y. Chen, S. Liu, and L. Daniel, “Cnn-cert: An efficient framework for certifying robustness of convolutional neural networks,” in *Proceedings of the AAAI Conference on Artificial Intelligence*, vol. 33, pp. 3240–3247, 2019.
- [29] V. Tjeng, K. Xiao, and R. Tedrake, “Evaluating robustness of neural networks with mixed integer programming,” *arXiv preprint arXiv:1711.07356*, 2017.
- [30] M. G. Bellemare, Y. Naddaf, J. Veness, and M. Bowling, “The arcade learning environment: An evaluation platform for general agents,” *Journal of Artificial Intelligence Research*, vol. 47, p. 253–279, Jun 2013.

- [31] V. Mnih, K. Kavukcuoglu, D. Silver, A. A. Rusu, J. Veness, M. G. Bellemare, A. Graves, M. Riedmiller, A. K. Fidjeland, G. Ostrovski, S. Petersen, C. Beattie, A. Sadik, I. Antonoglou, H. King, D. Kumaran, D. Wierstra, S. Legg, and D. Hassabis, “Human-level control through deep reinforcement learning,” *Nature*, vol. 518, pp. 529–533, Feb. 2015.
- [32] I. J. Goodfellow, J. Shlens, and C. Szegedy, “Explaining and harnessing adversarial examples,” *ICLR*, 2015.
- [33] A. Madry, A. Makelov, L. Schmidt, D. Tsipras, and A. Vladu, “Towards deep learning models resistant to adversarial attacks,” 2017.
- [34] D. P. Kingma and J. Ba, “Adam: A method for stochastic optimization,” 2014.
- [35] S. J. Reddi, S. Kale, and S. Kumar, “On the convergence of adam and beyond,” in *International Conference on Learning Representations*, 2018.

## Appendix A: extra figures

### Pong



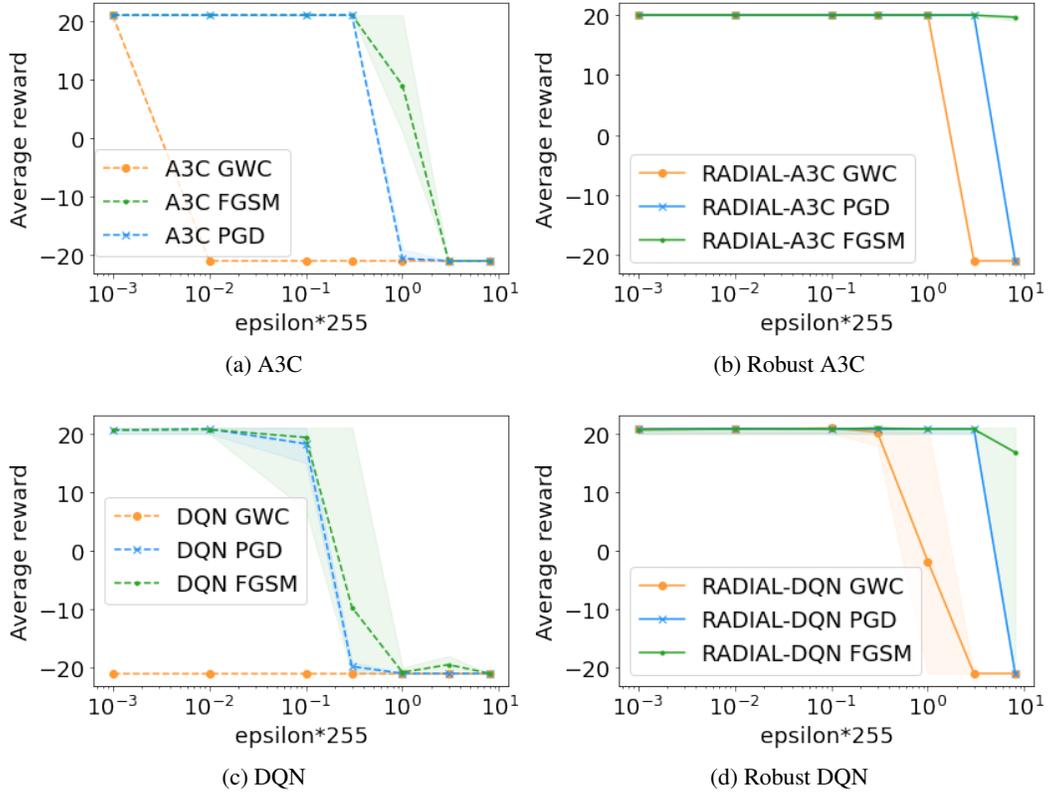


Figure 3: Our models evaluated on a large range of epsilons and different metrics. Note that GWC is stronger than PGD which is stronger than FGSM


### Freeway

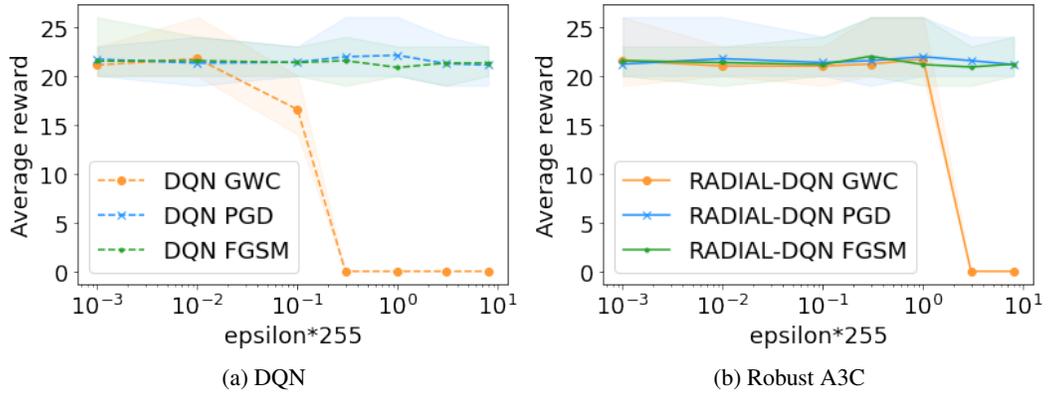


**BankHeist**

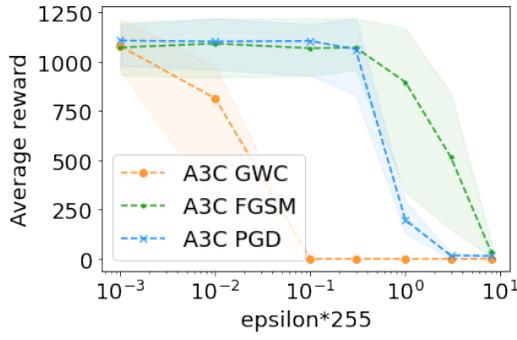


(a) A3C

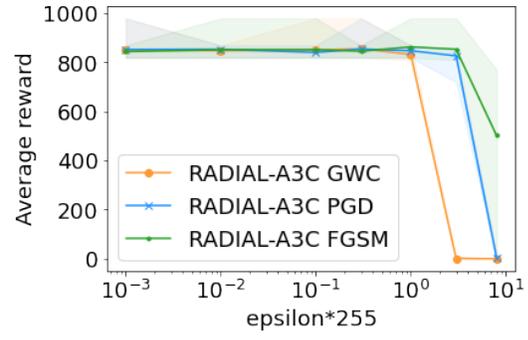


(b) Robust A3C

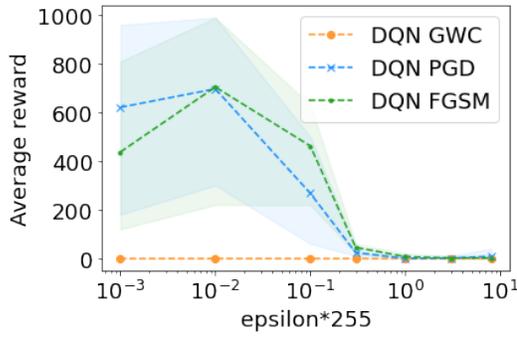


(c) DQN

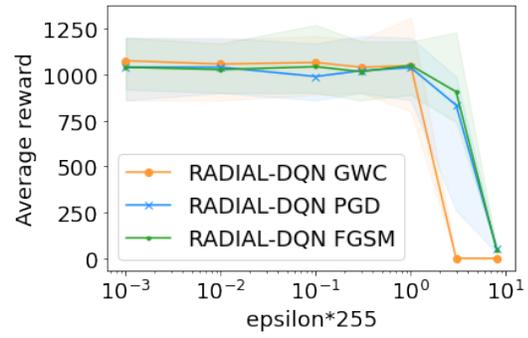

(d) Robust DQN

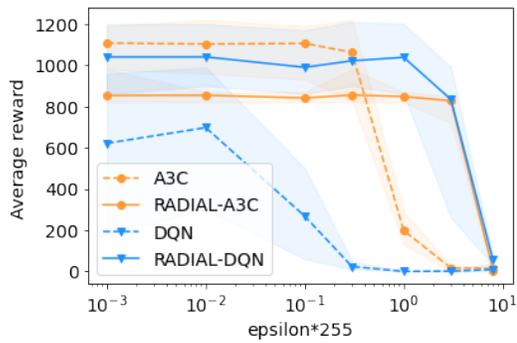


(e) PGD comparison

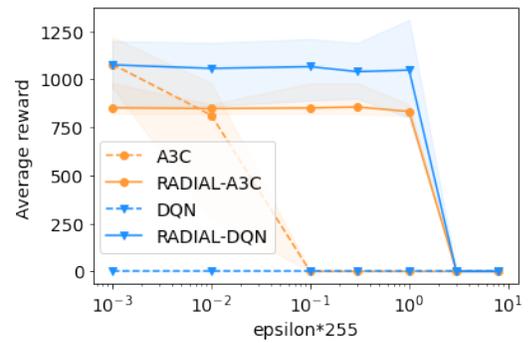


(f) GWC comparison


## RoadRunner

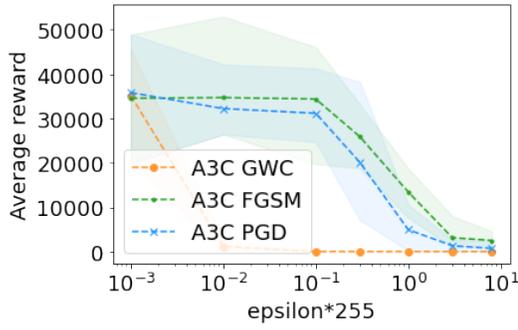


(a) A3C

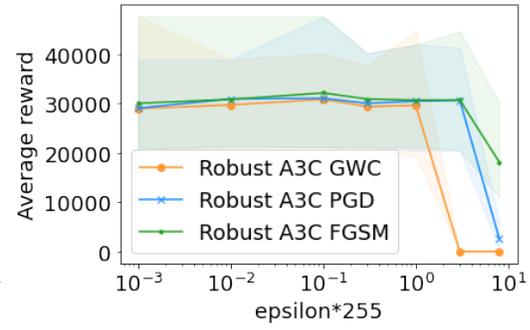


(b) Robust A3C

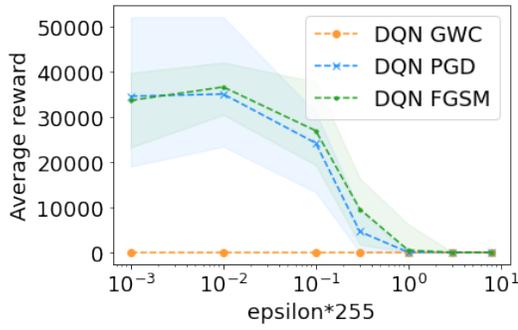


(c) DQN

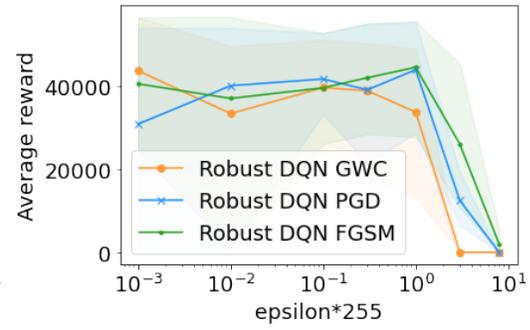

(d) Robust DQN

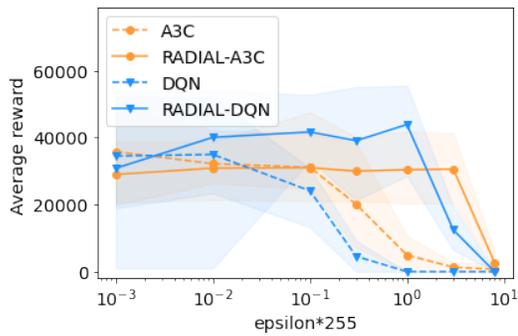

(e) PGD comparison

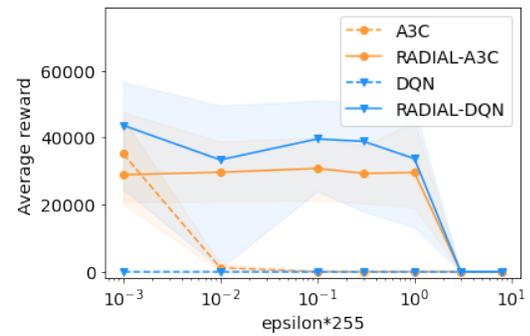

(f) GWC comparison

## Appendix B: Experimental setup details

**Neural net architecture** The neural net architecture used starts with a convolutional layer with 8x8 kernel, stride of 4 and 32 channels, second a convolutional layer with 4x4 kernel, stride of 2 and 64 channels, and a third convolutional layer with 3x3 kernel, stride of 1 and 64 channels, and last a fully connected layer with 512 units, with each layer except for last followed by a ReLU nonlinearity. Final layer had the outputs, with a Softmax activation for the policy output of A3C, while the A3C value output  $V$  or DQN output didn't have an activation function.

**Environment details** All our models take an action or step every 4 frames, skipping the other frames. The network inputs were 80x80x1 crops of the greyscaled pixels with no framestacking, scaled to be between 0-1. All rewards were clipped between [-1, 1].

**Computing infrastructure and time** All our models were trained on a Google Cloud instance with 2 NVIDIA Tesla T4 GPUs and 16 vCPUs. For DQN we typically were training 4 models in parallel, in which setting standard training took 13 hours and robust training took an additional 12 hours. For A3C we only trained one model at a time, which took around 3.5h for standard training and another 4 hours for robust training.

**DQN-hyperparameters** For all DQN models we used an Adam optimizer [34] with learning rate of  $1.25 \cdot 10^{-4}$  and  $\beta_1 = 0.9$ ,  $\beta_2 = 0.999$ . We used Double DQN with a replay buffer of  $2 \cdot 10^5$ ,  $\epsilon_{exp}$  for  $\epsilon$ -greedy exploration was linearly decreased from 1 to 0.01 over the first  $5 \cdot 10^5$  frames of standard training and kept at 0.01 for the rest of standard training and for robust training. The neural network was updated with a batch-size of 128 after every 8 steps taken, and the target network was updated every 2000 steps taken.

The hyperparameters we searched over include learning rate chosen from  $\{6.25 \cdot 10^{-5}, 1.25 \cdot 10^{-4}, 2.5 \cdot 10^{-4}, 5 \cdot 10^{-4}\}$ ,  $\epsilon_{exp}$ -end from  $\{0.01, 0.02, 0.05, 0.1\}$ ,  $\epsilon_{exp}$ -decay length from  $\{2 \cdot 10^5, 5 \cdot 10^5, 1 \cdot 10^6, 2 \cdot 10^6\}$ , batch size from  $\{32, 64, 128, 256\}$  and whether to use Amsgrad[35] optimizer or standard Adam, and were chosen based on what performed best on standard Pong training and kept the same for other tasks, with the exception of using we used the Amsgrad variant for robust training on Pong since Adam training with the same parameters was found to be unstable.

**A3C hyperparameters** A3C models were trained using all 16 cpu workers and 2 GPUs for gradient updates. We used Amsgrad optimizer at a learning rate of 0.0001,  $\beta_1 = 0.9$ ,  $\beta_2 = 0.999$  for all A3C models. Our  $\beta$  controlling entropy regularization was set to 0.01, and  $k$  in Equation (2) to 20. To optimize we chose the best learning rate from  $\{5 \cdot 10^{-5}, 1 \cdot 10^{-4}, 2 \cdot 10^{-4}\}$  and  $\kappa$  from  $\{0.25, 0.5, 0.75\}$  based on performance on Pong standard and robust training respectively.

**Absolute worst case reward evaluation** We ran experiments on Atari Pong games up to 1 (We evaluated the second point of each episode since our networks perform less consistently on the first point) instead of standard 21 to reduce episode length  $n$ , and used our RADIAL-A3C because it's high robustness helps us reduce the amount of possible actions  $c$ . Absolute worst case reward was calculated using depth first search on the state space, where finding a sequence of actions that leads to -1 reward is enough to end the search, because that is the worst possible reward, but to say absolute worst case reward is 1 we have to search every possible sequence of actions.