

The Query Complexity of Local Search and Brouwer in Rounds

Simina Brânzei* Jiawei Li†

Abstract

We study the query complexity of local search and Brouwer fixed-point computation when there are k rounds of interaction with the oracle. In this model, in each round j , any number of simultaneous queries can be issued, then the answers are received from the oracle, and then the queries for round $j + 1$ are issued. The algorithm must stop by the end of the k -th round. This model captures distributed settings, where each query is time consuming and can be executed by a separate processor to speed up computation time.

We present several new algorithms and lower bounds, which characterize the trade-off between the number of rounds of adaptivity and the total number of queries on local search and Brouwer fixed-point. We mainly focus on studying these problems on the d -dimensional grid $[n]^d$, where d is a constant.

For local search, if the number of rounds k is a constant, then we obtain a query complexity of $\Theta\left(n^{\frac{d^{k+1}-d^k}{d^k-1}}\right)$ for both deterministic and randomized algorithms. On the other hand, when the number of rounds is polynomial, i.e. of the form $n = k^\alpha$, where α is a constant with $0 < \alpha < d/2$, we obtain an upper bound of $O\left(n^{(d-1)-\frac{d-2}{d}\alpha}\right)$ and a lower bound of $\tilde{\Omega}\left(\max(n^{(d-1)-\alpha}, n^{\frac{d}{2}})\right)$ for randomized algorithms. For Brouwer fixed-point, we show a query complexity of $\Theta\left(n^{\frac{d^{k+1}-d^k}{d^k-1}}\right)$ for both deterministic and randomized algorithms.

*Purdue University, USA. E-mail: simina.branzei@gmail.com.

†Peking University, China. E-mail: davidlee1999@pku.edu.cn.

1 Introduction

Local search and fixed point computation are fundamental problems in optimization and computer science as they are embedded in many real world processes. Both problems have been studied both as a heuristic for solving optimization problems and as interesting computational problems in themselves.

In local search, the input is an undirected graph $G = (V, E)$ and a function $f : V \rightarrow \mathbb{R}$. The set V can represent any universe of elements with a notion of neighbourhood and the goal is to find a vertex v that is a local minimum, that is with $f(v) \leq f(u)$ for all $(u, v) \in E$. We have oracle access to the function f ; for any vertex v , we can query the oracle to receive the value $f(v)$. The query complexity is the number of oracle queries necessary and sufficient to find a local optimum.

Algorithms based on local search are widely used in areas such as artificial intelligence, operations research, engineering, mathematics, computational biology, and include algorithms such as hill climbing, simulated annealing, Metropolis-Hastings, and the WalkSat family of algorithms for TSP. For many interesting local search problems, it is not known whether a solution can be found in polynomial time. To study this question, Johnson, Papadimitriou and Yannakakis [JPY88] introduced the complexity class PLS to capture the difficulty of computing a locally optimal solution to an optimization problem in a discrete space.

A closely related problem is that of finding an approximate Brouwer fixed point. In the Brouwer fixed point theorem, we have a compact and convex subset K of \mathbb{R}^n and $f : K \rightarrow K$ a continuous function. Then a point $x^* \in K$ such that $f(x^*) = x^*$ is guaranteed to exist. An approximate version of this problem (denoted BROUWER) can be studied from a computational point of view, we are given an additional parameter ϵ and the goal is to find an ϵ -fixed point provided that the function is Lipschitz continuous. The class PPAD captures the difficulty of finding a Brouwer fixed point [Pap94], together with other problems that are computationally equivalent, such as finding an approximate Nash equilibrium in a multi-player game [DGP09] or an exact equilibrium in a two player game [CDT09], an Arrow-Debreu equilibrium in a market [VY11], and a polychromatic simplex in Sperner's Lemma. The classes PLS and PPAD are related. In a striking recent development, Fearnley, Goldberg, Hollender, and Savani [FGHS20] showed that the class CLS, introduced by Daskalakis and Papadimitriou [DP11] to capture continuous local search, is equal to $PPAD \cap PLS$.

We study the complexity of local search and Brouwer in the black box model when the number of rounds of interaction with the oracle is bounded. For local search, the input will be a local search instance on the d -dimensional grid together with an upper bound k on the number of rounds of interaction with the oracle. In each round j , any number of simultaneous queries can be issued, after which the oracle answers are received, and then the queries for round $j + 1$ can be issued, possibly depending on rounds $1, \dots, j$. The algorithm must stop and output a solution by the end of the k -th round. The fully adaptive case is obtained by taking $k = \infty$.

Rounds, or adaptive complexity, is a core issue for optimization in distributed settings where evaluating the function is time consuming and we have to use multiple processors to speed up the algorithm. Thus an algorithm that runs in k rounds can be viewed as follows: a central machine issues in each round j a set of queries, one to each processor,

then waits for the answers before issuing the next set of parallel queries in round $j+1$. The question then is how many processors are needed to achieve a time of k , or equivalently, what is the query complexity in k rounds. For more discussion on adaptive complexity, see, e.g. book by Akl [Akl14] on parallel sorting algorithms. Valiant [Val75] initiated the study of parallelism using the number of comparisons as a complexity measure and showed that p processor parallelism can offer speedups of at least $O(\frac{p}{\log \log p})$ for problems such as sorting and finding the maximum of a list of $n > p$ elements.

There has been a line of research on the query complexity of local search and Brouwer fixed-point in the fully adaptive setting. For local search, Aldous [Ald83] first presented a classical randomized warm algorithm, which achieves $O(\sqrt{N})$ on any graph, where N is the number of points in the graph. [Ald83] also proved a lower bound of $\tilde{\Omega}(2^{\frac{n}{2}})$ for randomized algorithms on the hypercube $\{0, 1\}^n$ with a sophisticated analysis of the random process. For deterministic algorithms, Llewellyn, Trick, and Tovey [LTT93] and Llewellyn and Tovey [LT93] proved that the divide-and-conquer procedure is optimal via an adversarial argument. Thus for the d -dimensional grid $[n]^d$, these works show a bound of $\Theta(n^{d-1})$, and the algorithm takes $O(\log n)$ rounds. The randomized case is more challenging and Aaronson [Aar06] proposed a novel technique called the *relational adversarial method* inspired by the adversarial method in quantum computing, which avoids analyzing the posterior distribution during the execution directly. Later, Zhang [Zha09], and Sun and Yao [SY09] obtained tighter lower bounds using this method with better choices on the random process, they proved a lower bound of $\tilde{\Omega}(n^{\frac{d}{2}})$. Together with the randomized algorithm of Aldous [Ald83] which has a warm start, these works concluded a near optimal bound of $\tilde{\Theta}(n^{\frac{d}{2}})$ for randomized algorithm.

The query complexity of the Brouwer problem was first studied by Hirsch, Papadimitriou, and Vavasis [HPV89], which proved an exponential bound for deterministic algorithms. Chen and Deng [CD05] improve their bound to $\Theta(n^{d-1})$ for deterministic algorithms. They also proposed a deterministic divide-and-conquer algorithm matching this bound, which takes $O(\log n)$ rounds. Later a randomized lower bound of $\Omega(n^{d-1})$ was given by Chen and Teng [CT07].

We present several new algorithms and lower bounds, which characterize the trade-off between the number of rounds of adaptivity and the total number of queries, thus showing a transition from one round algorithms to fully adaptive algorithms.

1.1 Preliminaries

Local Search Let $G = (V, E)$ be an undirected graph and $f : V \rightarrow \mathbb{R}$ a function, where $f(\mathbf{x})$ is the value of node $\mathbf{x} \in V$. The goal is to find a local minimum of f , that is, a vertex \mathbf{x} with the property that $f(\mathbf{x}) \leq f(\mathbf{y})$ for all neighbours \mathbf{y} of \mathbf{x} . We study the setting where G is a d dimensional grid of side length n , thus $V = [n]^d$ where $[n] = \{1, 2, \dots, n\}$ and $(\mathbf{x}, \mathbf{y}) \in E$ if $\|\mathbf{x} - \mathbf{y}\|_1 = 1$. The dimension d is a constant.

Brouwer Fixed-Point Consider a function $f : [n]^d \rightarrow \{\mathbf{0}, \pm \mathbf{e}^1, \pm \mathbf{e}^2, \dots, \pm \mathbf{e}^d\}$, where \mathbf{e}^i is the i -th unit vector and f satisfies the

1. for any $\|\mathbf{x} - \mathbf{y}\|_\infty \leq 1$, we have $\|f(\mathbf{x}) - f(\mathbf{y})\|_\infty \leq 1$;
2. for any $\mathbf{x} \in [n]^d$, we have $\mathbf{x} + f(\mathbf{x}) \in [n]^d$.

Then there exists a point \mathbf{x}^* such that $f(\mathbf{x}^*) = 0$. The goal is to find such a point, the existence of which was shown in [Iim03].

Query Complexity We have oracle access to the function f and are allowed k rounds of interaction with the oracle. A protocol for local search will submit a number of queries to the function f and outputs at the end a node v that is a local minimum of f in the graph G . When the protocol runs in k rounds, then multiple queries can be issued at once in each round. The choice of queries submitted in round j cannot depend on the results of queries from the same or later rounds (i.e. $j, j+1, \dots, k$). Given k as a parameter, we measure the total number of queries submitted by an algorithm.

The deterministic query complexity of a search problem in k rounds is the total number of queries necessary and sufficient to find a solution when given k rounds of interaction with the oracle. The randomized query complexity is the expected number of queries required to find a solution with probability at least $9/10$ for any input, where the expectation is taken over the coin tosses of the protocol.

1.2 Our Results

In this section we state our results and give an overview of the proofs.

1.2.1 Local Search

We start by studying the case of constant rounds k for local search.

Theorem 1. (*Local search, constant rounds*) *Let $k \in \mathbb{N}$ be a constant. The query complexity of local search in k rounds on the d -dimensional grid $[n]^d$ is $\Theta\left(n^{\frac{d^{k+1}-d^k}{d^k-1}}\right)$, for both deterministic and randomized algorithms.*

When $k \rightarrow \infty$, this bound is close to $\Theta(n^{d-1})$, with gap smaller than any polynomial. The classical result by Lewellyn, Tovey, and Trick [LTT93] showed that the query complexity of local search for deterministic algorithm is $\Theta(n^{d-1})$, and the upper bound is achieved by a divide-and-conquer algorithm with $O(\log n)$ rounds. Thus our result fills the gap between one round algorithms and logarithmic rounds algorithms except for a small margin. This theorem also implies that randomness does not help when the number of rounds is constant.

When the number of rounds k is polynomial in n , that is $k = n^\alpha$ for some constant $\alpha > 0$, the algorithm that yields the upper bound in Theorem 1 is no longer efficient. We design a different algorithm for this regime and also show an almost matching lower bound.

Theorem 2. (*Local search, polynomial rounds*) *Let $k = n^\alpha$, where $\alpha \in (0, \frac{d}{2})$ is a constant. The randomized query complexity of local search in k rounds on the d -dimensional grid $[n]^d$ is at most $O\left(n^{(d-1)-\frac{d-2}{d}\alpha}\right)$ and at least $\tilde{\Omega}\left(\max(n^{(d-1)-\alpha}, n^{\frac{d}{2}})\right)$.*

When $\alpha \rightarrow 0$, the bound is close to $\Theta(n^{d-1})$, i.e., the bound of constant and logarithmic rounds algorithm; when $\alpha \rightarrow (d/2)$, the bound is close to $\Theta(n^{\frac{d}{2}})$, i.e., the bound of fully adaptive algorithm. Thus, our polynomial rounds algorithm fills the gaps between constant / logarithmic rounds algorithm and fully adaptive algorithm.

Local Search		
Number of Rounds k	Deterministic	Randomized
Constant Rounds: $k = O(1)$	$\Theta\left(n^{\frac{d^{k+1}-d^k}{d^k-1}}\right)$ (*)	$\Theta\left(n^{\frac{d^{k+1}-d^k}{d^k-1}}\right)$ (*)
Polynomial Rounds: $k = n^\alpha$	$\Theta(n^{d-1})$ [LTT93][LT93] ¹	$O\left(n^{(d-1)-\frac{d-2}{d}\alpha}\right)$ (*) $\tilde{\Omega}\left(\max(n^{(d-1)-\alpha}, n^{\frac{d}{2}})\right)$ (*)
Fully Adaptive: $k = \infty$	$\Theta(n^{d-1})$ [LTT93]	$d = 2$: $\tilde{\Theta}(n)$ [SY09] $d \geq 3$: $\tilde{\Theta}(n^{\frac{d}{2}})$ [Ald83, Zha09]

Table 1: Query complexity of local search on d -dimensional grid of side length n with k rounds. Our results are marked with (*). The randomized algorithm for $d = 2$ and deterministic for any d [LTT93] has $O(\log n)$ rounds, while the fully adaptive randomized algorithm for $d \geq 3$ result in [Ald83] $O(n^{\frac{d}{2}})$ rounds.

Overview of Algorithms for Local Search Our local search algorithm for constant number of rounds is a direct generalization of the classical divide-and-conquer algorithm by Llewellyn, Tovey, and Trick [LTT93]. We divide the search space into many sub-cubes of side length $\ell_i := n^{\frac{d^k-d^i}{d^k-1}}$ in round i , query their boundary, then continue the search into the one that satisfies a boundary condition which guarantees the existence of a solution in that sub-cube. In the last round, we query all the points in the current sub-cube and get the solution.

For polynomial number of rounds, this approach does not give a tight bound for any $d \geq 3$, so instead we design an algorithm following the framework of Aldous [Ald83]. We randomly sample many points in round 1 as a warm start and then start tracing for the solution from the best point in round 1. Since the steepest descent used by Aldous’ algorithm is fully adaptive and takes too many rounds, we designed a recursive procedure (called “fractal-like steepest descent”) which parallelizes the steepest descent process at the cost of more queries.

Let $C(\mathbf{x}, s) := \{\mathbf{y} \in [n]^d : \|\mathbf{y} - \mathbf{x}\|_\infty \leq s\}$ be the set of grid points in the d -dimensional cube of side length $2 \cdot s$, centered at point \mathbf{x} . Let $rank(\mathbf{x})$ be the number of points with smaller function value than point \mathbf{x} . Assume we already have a procedure P and a number $s < n$ such that $P(\mathbf{x})$ will either return a point $\mathbf{y} \in C(\mathbf{x}, s)$ with $rank(\mathbf{y}) \leq rank(\mathbf{x}) - s$, or output a correct solution and halt. Also assume in both cases $P(\mathbf{x})$ takes at most r rounds and Q queries in total for any \mathbf{x} . If we want to find a point \mathbf{x}^* with $rank(\mathbf{x}^*) \leq rank(\mathbf{x}_0) - t \cdot s$ for any given \mathbf{x}_0 or output a correct solution, the naive approach is to run P *sequentially* t times, taking

$$\mathbf{y}_1 = P(\mathbf{x}_0), \mathbf{y}_2 = P(\mathbf{y}_1), \dots, \mathbf{x}^* = \mathbf{y}_t = P(\mathbf{y}_{t-1}).$$

Since each call of P must wait for the result from the previous call, the naive approach will take $t \cdot r$ rounds and $t \cdot Q$ queries.

Interestingly, we can parallelize these calls using auxiliary variables that are expensive in queries, but very cheap in rounds. For $i \in [t]$, let \mathbf{x}_i be the point with minimum function value on the boundary of cube $C(\mathbf{x}_{i-1}, s)$, which can be found in only *one* round with

$O(s^{d-1})$ queries after getting \mathbf{x}_{i-1} . Now assume we have the location of \mathbf{x}_{i-1} at the start of round i . Then we can take \mathbf{y}_i to be $P(\mathbf{x}_{i-1})$ instead of $P(\mathbf{y}_{i-1})$. The location of \mathbf{y}_i will be available at round $i+r$; then we can compare the value of \mathbf{y}_i with the value of \mathbf{x}_i . If $f(\mathbf{x}_i) \leq f(\mathbf{y}_i)$ then

$$\text{rank}(\mathbf{x}_i) \leq \text{rank}(\mathbf{y}_i) \leq \text{rank}(\mathbf{x}_{i-1}) - s. \quad (1)$$

Otherwise, since $\mathbf{y}_i \in C(\mathbf{x}_{i-1}, s)$ has smaller value than any point on the boundary of $C(\mathbf{x}_{i-1}, s)$, we could use a slightly modified version of the divide-and-conquer algorithm of [LTT93] to find the solution within the sub-cube $C(\mathbf{x}, s)$ in $\log n$ rounds and $O(s^{d-1})$ queries, and then halt all running procedures. If we have $f(\mathbf{x}_i) \leq f(\mathbf{y}_i)$ for any i , applying inequality 1 for t times we will get $\text{rank}(\mathbf{x}) \leq \text{rank}(\mathbf{x}_t) - t \cdot s$, so we could return $\mathbf{x}^* = \mathbf{x}_t$ in this case. This parallel approach will take only $t+r$ rounds and $O(t \cdot (Q + s^{d-1}))$ queries.

Overview of Lower Bounds for Local Search. To show lower bounds, we use Yao’s minimax theorem [Yao77]. We first provide a hard distribution of inputs, then show that no *deterministic* algorithm could achieve accuracy larger than some specific constant on this distribution. The hard distribution of inputs will be given by a *staircase* construction [Vav93, HPV89]. In general, a staircase is a path drawn from a random process in the domain of the function, and the only solution point is hidden at the end of the path. Interestingly, such construction could be embedded in two relevant but essentially different tasks: finding a local minimum of a function [Ald83, Aar06, SY09, Zha09, HY17] and computing a Brouwer fixed point [CT07, HPV89].

When applying the staircase to local search, the value of the start point is set to zero, and the value keeps decreasing from the start to the end along the path, like going down the stairs. The values of any points outside of the *staircase* are set to the distance to the start point of the staircase. Intuitively, the algorithm cannot find much useful structural information of the input and thus has no advantage over the default path tracing algorithm.

The most challenging part is rigorously proving such intuition is correct. Our main technical innovation is a new technique to incorporate the round limit into the randomized lower bounds, as we were not able to obtain a lower bound for rounds using the methods previously mentioned. This could also serve as a simpler alternative method of the classical relational adversarial method [Aar06] in the fully adaptive setting.

A staircase in our proof is defined by an array of connecting grid points $(\mathbf{x}_0, \mathbf{x}_1, \dots, \mathbf{x}_t)$, for $0 \leq t \leq k$, and a uniquely determined path is used to link every two consecutive points $(\mathbf{x}_i, \mathbf{x}_{i+1})$, for $0 \leq i < t$. For k round algorithms, we choose a distribution of length k staircases, where the length is defined as the number of connecting points in the staircase minus 1.

The core concept of our proof is *good staircases*. A length t staircase is good with respect to a deterministic algorithm A if for each $1 \leq i < t$, any point in the suffix after connecting point \mathbf{x}_i (\mathbf{x}_i is not included) of the staircase is not queried by A in round $1, \dots, i$, when running on the input generated by this staircase. The input functions generated by good staircases are like adversarial inputs, that is, the algorithm A could only (roughly) learn the location of the next connecting point \mathbf{x}_i in each round i , and still know little about everything after \mathbf{x}_i . We show that if 9/10 of all possible staircases

are good staircases, then the algorithm A will make a mistake with probability at least $7/40$ (Lemma 13 and Lemma 19).

We ensure that each possible staircase is chosen with the same probability, and their total number is easy to calculate. Thus the major technical part of our proof is counting the number of good staircases. The following properties of a good staircase are essential for counting them, and are formally proved in Lemma 12.

P1 If S is a good staircase, any prefix S' of S is also a good staircase, where a prefix of S is any staircase formed by a prefix of the array of the connecting points of S .

P2 Let S_1, S_2 be any two good staircase with respect to algorithm A . If the first $i + 1$ connecting points of the staircases are same, then A will make the same queries in round $1, \dots, i + 1$ running on both input functions generated by S_1, S_2 .

We count the number of good staircase in k steps. In the first step, we show all staircases of length 1 are good by definition. In each step $1 < i \leq k$, we derive a recursive inequality to calculate the numbers of length i good staircases by the number of length $i - 1$ and $i - 2$ good staircases with a method we called *two-stage analysis*.

The proof framework above works for lower bounds in both constant rounds and polynomial rounds. The major difference between these two case is the distribution of the staircases.

1.2.2 Brouwer Fixed Point

Since more than $\log n$ rounds do not improve the query complexity for Brouwer suggested by [CD05, CT07], we will focus on the case of constant number of rounds. If the number of rounds is a non-constant function smaller than $\log n$, this only changes the bound by a sub-polynomial term.

Theorem 3. (*Brouwer fixed point*) *Let k be a constant. The query complexity of computing a Brouwer fixed point on the d -dimensional grid $[n]^d$ in k rounds is $\Theta\left(n^{\frac{d^{k+1}-d^k}{d^k-1}}\right)$, for both deterministic and randomized algorithms.*

Similar to the case of local search in constant rounds, when $k \rightarrow \infty$, this bound approximate to $\Theta(n^{d-1})$ and the gap is smaller than any polynomial. Thus our result fills the gap between one round algorithm and fully adaptive algorithm (logarithmic rounds) except for an insignificant margin.

The constant round algorithm for Brouwer fixed-points is reminiscent of the constant rounds algorithm for local search. We divide the space in sub-cubes of side length $\ell_i := n^{\frac{d^k-d^i}{d^k-1}}$ in round i and then find the one guaranteed to have a solution by checking a boundary condition given in [CD05]. The parity argument shows there is always a sub-cube satisfying the boundary condition. In the last round, the algorithm queries all the points in the current sub-cube and gets the solution.

The randomized lower bound for discrete fixed-point is obtained by reducing local search instances generated by staircases to discrete fixed-point instances. We can naturally let the staircase within the local search instance to be the long path in discrete fixed-point point.

We also show in Section 3 the equivalence between the discrete Brouwer fixed-point problem and the approximate Brouwer fixed-point problem, formally defined in Definition 25. Thus we obtain the following bounds for the continuous Brouwer setting.

Corollary 4. *Let $k \in \mathbb{N}$ be a constant. For any $\epsilon > 0$, the query complexity of the ϵ -approximate Brouwer fixed-point problem in the d -dimensional unit cube $[0, 1]^d$ with k rounds is $\Theta\left((1/\epsilon)^{\frac{d^{k+1}-d^k}{d^k-1}}\right)$, for both deterministic and randomized algorithms.*

2 Local Search

In this section we study local search on the d -dimensional grid. We present algorithm for constant and polynomial number of rounds in Section 2.1 and Section 2.2 respectively. The corresponding lower bounds can be found in Section 2.3 and Section 2.4.

2.1 Algorithm for Local Search in Constant Rounds

Notation A d -dimensional *cube* is a Cartesian product of d connected (integer) intervals. We use *cube* to indicate d -dimensional *cube* for brevity, unless otherwise specified. The boundary of cube C is defined as all the points $\mathbf{x} \in C$ with fewer than $2d$ neighbors in C .

Upper Bound of Theorem 1. Given the d -dimensional grid $[n]^d$, we will define a sequence of cubes contained in each other: $C_0 \supset C_1 \supset C_2 \supset \dots \supset C_{k-1}$, where $C_0 = [n]^d$ is the whole grid. For each $0 \leq i < k$, set $\ell_i = n^{\frac{d^k - d^i}{d^k - 1}}$ as the side length of cube C_i . The values of ℓ_i are chosen for balancing the number of queries in each round, which will be proved later. Note ℓ_i is an integer divisor of n . Consider the following algorithm.

Algorithm 1: Local search in constant rounds

1. Initialize the current cube to C_0 .
2. In each round $i \in \{1, \dots, k-1\}$:
 - Divide the current cube C_{i-1} into a set of mutually exclusive sub-cubes $C_i^1, \dots, C_i^{m_i}$ of side length ℓ_i that cover C_{i-1} .
 - Query all the points on the boundary of sub-cubes $C_i^1, \dots, C_i^{m_i}$. Let \mathbf{x}_i^* be the point with minimal value among them.
 - Set $C_i = C_i^j$, where C_i^j is the sub-cube that \mathbf{x}_i^* belongs to.
3. In round k , query all the points in the current cube C_{k-1} and find the solution point.

To argue that the algorithm finds a local minimum, note that in each round $i \leq k-1$, the steepest descent starting from \mathbf{x}_i^* will never leave the sub-cube C_i , since if it did it would have to exit C_i through a point of even smaller value than \mathbf{x}_i^* , which contradicts the definition of \mathbf{x}_i^* . Thus there must exist a local optimum within C_i .

Now we calculate the number of queries in each round. In round $i \in \{1, \dots, k-1\}$, the number of points on the boundary of all sub-cubes S_1, \dots, S_{n_i} is $\ell_i^{d-1} \cdot 2d \cdot (\ell_{i-1}/\ell_i)^d$, which is equal to $2d \cdot n^{\frac{d^{k+1}-d^k}{d^{k-1}}}$. The number of queries in round k is $(\ell_{k-1})^d = n^{\frac{d^{k+1}-d^k}{d^{k-1}}}$. Since k, d are constants, the algorithm makes $O\left(n^{\frac{d^{k+1}-d^k}{d^{k-1}}}\right)$ queries in total as required. \square

An example can be found in the next figure.

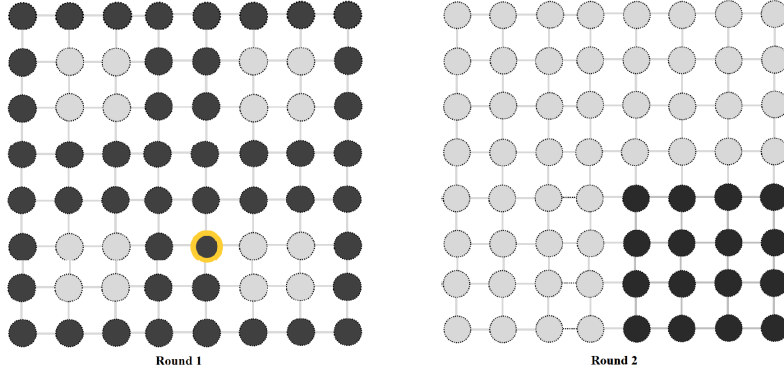


Figure 1: Two dimensional grid of size 8×8 . Suppose there are two rounds. In round 1 the algorithm queries all the black points and selects the minimum among all these points (illustrated with a yellow boundary). In round 2, it queries the entire sub-square in which the minimum from the first round was found.

2.2 Algorithm for Local Search in Polynomial Rounds

In this section we present a randomized algorithm that runs in a polynomial number of rounds, filling in the gap between the constant rounds algorithm and the fully adaptive algorithm.

Notation. Let the number of rounds be $k = n^\alpha$, where $\alpha \in (0, d/2)$ is a constant. Given a point \mathbf{x} on the grid, let $rank(\mathbf{x})$ be the number of grid points with smaller value than point \mathbf{x} . Let $C(\mathbf{x}, s) := \{\mathbf{y} \in [n]^d : \|\mathbf{y} - \mathbf{x}\|_\infty \leq s\}$ be the set of grid points in the d -dimensional cube of side length $2 \cdot s$, centered at point \mathbf{x} .

Define $h := \lfloor 1/\alpha + (d-2)/d \rfloor + 1$; $\tilde{k} := k/h$ and $\beta := (d-1) - (d-2) \cdot \alpha/d$. In the following, a point \mathbf{x} is the minimum in a set S if $\mathbf{x} \in S$ and $f(\mathbf{x}) \leq f(\mathbf{y})$ for all $\mathbf{y} \in S$.

Note there are multiple query requests from different procedures in one round. These queries will first be collected together and then submitted at once at the end of each round.

Algorithm 2: Local search in polynomial number of rounds. *Input:* Size of the instance n , dimension d , round limit $k = n^\alpha$, value function f . These are global parameters accessible from any subroutine. *Output:* Local minimum \mathbf{x}^* in $[n]^d$.

1. Set $\beta \leftarrow (d-1) - \alpha\left(\frac{d-2}{d}\right)$; $h \leftarrow \lfloor \frac{1}{\alpha} + \frac{d-2}{d} \rfloor + 1$; $\tilde{k} \leftarrow k/h$

2. Query $100 \cdot h \cdot n^\beta$ points chosen u.a.r. in round 1 and set \mathbf{x}_1 to the minimum of these
3. Set $s \leftarrow (1/h) \cdot n^{1+\alpha(d-2)/d}$
4. Return FLSD($s, h, \mathbf{x}_1, 2$)

Procedure Fractal-like Steepest Descent (FLSD). *Input:* size s , depth D , grid point \mathbf{x} , round r . *Output:* point $\mathbf{x}^* \in C(\mathbf{x}, s)$ with $\text{rank}(\mathbf{x}^*) \leq \text{rank}(\mathbf{x}) - s$; if in the process of searching for such a point it finds a local minimum, then it outputs it and halts everything.

1. Set $\mathbf{x}_0 \leftarrow \mathbf{x}$; $\text{step} \leftarrow s/\tilde{k}$ // executed in round r
2. If $D = 1$ then: // make s steps of steepest descent, since s is small enough when $D = 1$
 - a. For $i = 0$ to $s - 1$: // executed in rounds $r + i$ to $r + i + 1$
 - i. Query all the neighbors of \mathbf{x}_i ; let \mathbf{x}_{i+1} be the minimum among them
 - ii. If $\mathbf{x}_i = \mathbf{x}_{i+1}$ then: // thus \mathbf{x}_i is a local min
Output $\mathbf{x}^* \leftarrow \mathbf{x}_i$ and halt all running FLSD and DACS calls
 - b. Return $\mathbf{x}^* \leftarrow \mathbf{x}_s$ // executed in round $r + s$
3. For $i = 0$ to $\tilde{k} - 1$: // divide the whole task into \tilde{k} pieces; executed in rounds $r + i$ to $r + i + 1$
 - a. $\mathbf{y}_{i+1} \leftarrow \text{FLSD}(\text{step}, D - 1, \mathbf{x}_i, r + i)$ // execute call in parallel with current procedure
 - b. Query the boundary of $C(\mathbf{x}_i, \text{step})$ to find the point \mathbf{x}_{i+1} with minimum value on it // making a “giant step” of size step
4. For $i = 0$ to $\tilde{k} - 1$: // check if each giant step does make giant progress by using the feedback from sub-procedures; executed in round $r + i + (D - 1) \cdot \tilde{k}$, after \mathbf{y}_{i+1} was received in Step a.
 - a. If $f(\mathbf{y}_{i+1}) < f(\mathbf{x}_{i+1})$ then: // a solution exists in $C(\mathbf{x}_i, \text{step})$, call DACS to find it
 - i. Set $\mathbf{x}^* \leftarrow \text{DACS}(C(\mathbf{x}_i, \text{step}))$ // stop and wait for the result of DACS
 - ii. Output \mathbf{x}^* and halt all running FLSD and DACS calls
5. Return $\mathbf{x}^* \leftarrow \mathbf{x}_{\tilde{k}}$ // executed in round $r + D \cdot \tilde{k}$

Procedure Divide-and-Conquer Search (DACS). *Input:* cube C_0 . *Output:* Local minimum \mathbf{x}^* in C_0 .

1. Set $\mathbf{x}^* \leftarrow \text{Null}$
2. For $i = 1$ to $\lceil \log_2 n \rceil$:
 - a. If C_{i-1} contains only one point $\tilde{\mathbf{x}}$ then:
 - i. Set $\mathbf{x}^* = \tilde{\mathbf{x}}$; break
 - b. Partition C_{i-1} into 2^d disjoint sub-cubes $C_i^1, \dots, C_i^{2^d}$, each with side half that of C_{i-1}
 - c. Query all the points on the boundary of each sub-cube $C_i^1, \dots, C_i^{2^d}$.
 - d. Let \mathbf{x}_i^* be the point with minimum value among *all points queried* in C_{i-1} , including queries made by Algorithm 2 and all FLSD calls // *break ties lexicographically*
 - e. Let $C_i \in \{C_i^1, \dots, C_i^{2^d}\}$ be the unique sub-cube with $\mathbf{x}_i^* \in C_i$.
3. Return \mathbf{x}^*

An example with the trace of the execution is shown in Figure 2.

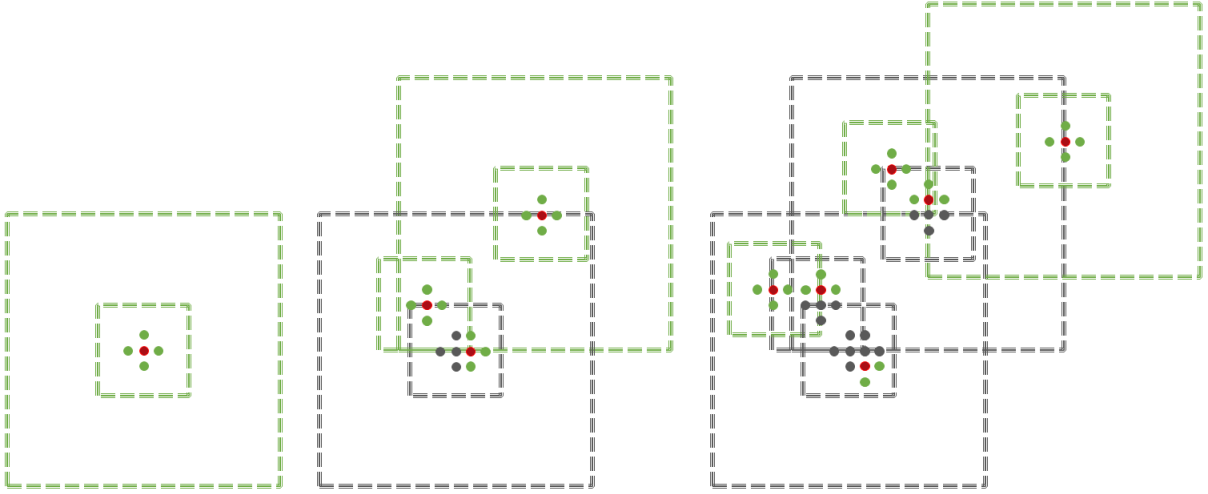


Figure 2: Pattern formed by FLSD call with $D = 3$ and $\mathbf{x} = \mathbf{x}_0$ in 3 consecutive rounds in 2D. All dots (small and large, of any color) are the points queried by FLSD. The large dots are scaled up compared to their actual sizes to make them more visible. *Notation:* *Green dots* (including those forming the dotted lines on the boundaries of the squares) are points queried in the current round. *Red dots* are points with minimum values among those queried on the boundary of their squares in the last round; FLSD will continue with these points as they become the start points of new FLSD procedures with smaller step size. *Grey dots* are all other points queried in previous rounds.

Analysis We first establish that Algorithm 2 is correct.

Lemma 5. *If the procedure $FLSD(s, D, \mathbf{x}, r)$ ² does return at Step b. or Step 5., it will return within $\tilde{k} \cdot D$ rounds after the start round r ; otherwise procedure $FLSD(s, D, \mathbf{x}, r)$ will halt within at most $\tilde{k} \cdot D + \lceil \log n \rceil$ rounds after the start round r .*

Proof. We proceed by induction on the depth D . The base case is when $D = 1$. Then by the definition of \tilde{k} and h , we have

$$\left(1/\tilde{k}^h\right) \cdot n^{1+\frac{d-2}{d}\alpha} < 1.$$

Also notice that the parameter s will be divided by \tilde{k} when D decreases by one, so when $D = 1$, the current size s will be at most \tilde{k} . Assume it holds for $1, \dots, D - 1$.

For any $D > 1$, all the queries made by the procedure itself need \tilde{k} rounds and each sub-procedure will take at most $\tilde{k} \cdot (D - 1)$ rounds by the induction hypothesis. Since all the procedures are independent of each other and could be executed in parallel, the total number of rounds needed for this procedure is $\tilde{k} \cdot D$. The first part of the lemma thus follows by induction.

Finally, recall that the divide-and-conquer procedure DACS takes $\lceil \log n \rceil$ rounds, so the procedure will halt within $\tilde{k} \cdot D + \lceil \log n \rceil$ rounds. \square

Lemma 6. *If the procedure $FLSD(s, D, \mathbf{x}, r)$ does return a point \mathbf{x}^* at Step b. or Step 5., then \mathbf{x}^* is in the cube $C(\mathbf{x}, s)$ and satisfy the inequality $rank(\mathbf{x}^*) \leq rank(\mathbf{x}) - s$ and .*

Proof of Lemma 6. We proceed by induction on the depth D . The base case is when $D = 1$. Then we know that $s \leq \tilde{k}$ by the same argument in Lemma 5, thus s of steps of steepest descent will ensure that $\mathbf{x}^* \in C(\mathbf{x}, s)$ and $rank(\mathbf{x}^*) \leq rank(\mathbf{x}) - s$. Assume it holds for $1, \dots, D - 1$ and show for D .

For any $D > 1$, by Step a. we have $rank(\mathbf{x}_i) \leq rank(\mathbf{y}_i)$ for any $1 \leq i \leq \tilde{k}$; by the induction hypothesis, we have $rank(\mathbf{y}_i) \leq rank(\mathbf{x}_{i-1}) - step$ for any $1 \leq i \leq \tilde{k}$. Combining them we get $rank(\mathbf{x}_i) \leq rank(\mathbf{x}_{i-1}) - step$ for any $1 \leq i \leq \tilde{k}$. Thus

$$rank(\mathbf{x}^*) = rank(\mathbf{x}_{\tilde{k}}) \leq rank(\mathbf{x}_0) - \tilde{k} \cdot step = rank(\mathbf{x}) - s.$$

Also notice that the L_∞ distance from \mathbf{x}^* to \mathbf{x} is at most $\tilde{k} * step = s$, i.e., $\mathbf{x}^* \in C(\mathbf{x}, s)$. This concludes the proof of the lemma for any depth D . \square

Lemma 7. *The point \mathbf{x}^* returned at Step 4.(a.)i is a local minimum.*

Proof. We use notation $\mathcal{D}.\mathbf{x}$ to denote the variable \mathbf{x} in the procedure DACS and $\mathcal{F}.\mathbf{x}$ to denote the variable \mathbf{x} in the procedure FLSD which calls the procedure DACS.

By Step a., we have $f(\mathcal{F}.\mathbf{y}_{i+1}) < f(\mathcal{F}.\mathbf{x}_{i+1})$. Then for each $\mathcal{D}.\mathbf{x}_i^*, i$, we have $f(\mathcal{D}.\mathbf{x}_i^*) \leq f(\mathcal{F}.\mathbf{y}_{i+1}) < f(\mathcal{F}.\mathbf{x}_{i+1})$ by its definition. Therefore the steepest descent from $\mathcal{D}.\mathbf{x}_i^*$ will never leave the cube $\mathcal{D}.C_i$, especially the cube $\mathcal{D}.C_0$. Let \tilde{C} be the cube that consists only of the point $\mathcal{D}.\tilde{\mathbf{x}}$ in the DACS procedure. The steepest descent from $\mathcal{D}.\mathbf{x}^* = \mathcal{D}.\tilde{\mathbf{x}}$ doesn't leave the cube \tilde{C} , which means that $\mathcal{D}.\mathbf{x}^*$ is a local optimum. \square

²All the procedures FLSD we considered in the following analysis are initiated during the execution of Algorithm 2. Thus Lemma 5, Lemma 6 and Lemma 9 may not work for FLSD with arbitrary parameters.

Lemma 8. *Algorithm 2 outputs the correct answer with probability at least 9/10.*

Proof. The point \mathbf{x}^* output at Step 2.(a.)ii is always a local optimum. By Lemma 7, the point \mathbf{x}^* output at Step 4.(a.)ii is also a local optimum. Thus we only need to argue that the Algorithm 2 will output the solution and halt with probability at least 9/10. Notice that

$$\frac{n^d}{100h \cdot n^\beta} = \frac{1}{100h} n^{1+\frac{d-2}{d}\alpha}.$$

Thus after the first round, with probability at least 9/10, we have

$$\text{rank}(\mathbf{x}_1) \leq \frac{1}{2h} n^{1+\frac{d-2}{d}\alpha}. \quad (2)$$

If inequality (2) holds, then the procedure $\text{FLSD}(1/h \cdot n^{1+\frac{d-2}{d}\alpha}, h, \mathbf{x}_1, 2)$ should halt within a number of rounds of at most

$$T = \tilde{k} \cdot \left(h - 1 + \frac{2}{3} \right) + \lceil \log n \rceil < \tilde{k} \cdot h = k.$$

Otherwise, let $t = \lfloor 2\tilde{k}/3 \rfloor$. By Lemma 5 we know that y_t is already available from Step a. by round T . Then by Lemma 6, we have

$$\text{rank}(\mathbf{y}_t) < \left(\frac{1}{2} - \frac{2}{3} \right) \cdot \left(\frac{1}{h} n^{1+\frac{d-2}{d}\alpha} \right) < 0,$$

which is impossible. Thus, the call $\text{FLSD}(1/h \cdot n^{1+\frac{d-2}{d}\alpha}, h, \mathbf{x}_1, 2)$ must halt within T rounds in this case, which completes the argument. \square

Now consider the total number of queries made by Algorithm 2.

Lemma 9. *A call of procedure $\text{FLSD}(s, D, \mathbf{x}, r)$ will make $O(\lceil s/\tilde{k} \rceil^{d-1} \cdot \tilde{k})$ number of queries, including the queries made by its sub-procedure.*

Proof. We proceed by induction on the depth D . The base case is when $D = 1$. In this case, the procedure FLSD performs s steps of steepest descent, where $s \leq \tilde{k}$. Thus it will make $s \cdot 2d = O(\tilde{k})$ queries.

For any depth $D > 1$,

- the number of queries made by Step b. is at most

$$2d \cdot (2\lceil s/\tilde{k} \rceil + 1)^{d-1} \cdot \tilde{k} = O(\lceil s/\tilde{k} \rceil^{d-1} \cdot \tilde{k});$$

- the number of queries made by all sub-procedures is bounded as follows by the induction hypothesis

$$\tilde{k} \cdot O\left(\lceil s/\tilde{k}^2 \rceil^{d-1} \cdot \tilde{k}\right) = O(\lceil s/\tilde{k} \rceil^{d-1} \cdot \tilde{k});$$

- the number of queries made by DACS is at most

$$(2\lceil s/\tilde{k} \rceil + 1)^{d-1} \cdot 2d \cdot 2 = O(\lceil s/\tilde{k} \rceil^{d-1}).$$

Thus the total number of queries is $O(\lceil s/\tilde{k} \rceil^{d-1} \cdot \tilde{k})$, which concludes the proof for all D . \square

Upper Bound of Theorem 2. The correctness of Algorithm 2 is established by Lemma 8. By Lemma 9, the total number of queries issued by Algorithm 2 is

$$100h \cdot n^{(d-1) - \frac{d-2}{d}\alpha} + O((n^{1-\frac{2\alpha}{d}})^{d-1} \cdot n^\alpha) = O(n^{(d-1) - \frac{d-2}{d}\alpha}).$$

This concludes the proof of the upper bound part in Theorem 2. \square

2.3 Randomized Lower Bound for Local Search in Constant Rounds

Notation and Definitions Recall that $\ell_i = n^{\frac{d^k - d^i}{d^k - 1}}$, $0 \leq i < k$. Let $m := \sum_{0 \leq i < k} \ell_i \leq 2n$. We now consider the grid of side length m in this subsection for technical convenience.

For a point $\mathbf{x} = (x_1, \dots, x_d)$, let $K_i(\mathbf{x})$ be the grid points that are in the cube region of size $(\ell_i)^d$ with corner point \mathbf{x} :

$$K_i(\mathbf{x}) = \{\mathbf{y} = (y_1, \dots, y_d) \in [m]^d : x_j \leq y_j < x_j + \ell_i, \forall j \in [d]\}.$$

Next we define a *quasi-segment*, which is an approximation of a straight line segment that only uses grid points.

Definition 10 (quasi-segment). *For any two points $\mathbf{x}, \mathbf{y} \in [m]^d$, the quasi-segment $QS(\mathbf{x}, \mathbf{y})$ is a set of points connecting \mathbf{x} and \mathbf{y} , defined as follows.*

- Let $E(\mathbf{x}, \mathbf{y})$ be the set of d -dimensional unit cubes that intersect with the geometrical straight segment with endpoints \mathbf{x} and \mathbf{y} . Note that the cubes intersected at the boundary are also included except those cubes that only intersect at the endpoints \mathbf{x} or \mathbf{y} .
- Let $U(\mathbf{x}, \mathbf{y})$ be the set of points that include all the endpoints of unit cubes in $E(\mathbf{x}, \mathbf{y})$.
- The quasi-segment $QS(\mathbf{x}, \mathbf{y})$ is the shortest path from \mathbf{x} to \mathbf{y} with minimal lexicographic order³ that only visits points in $U(\mathbf{x}, \mathbf{y})$. In particular, $\mathbf{x}, \mathbf{y} \in QS(\mathbf{x}, \mathbf{y})$.

Staircase Structure A staircase $S^{(i)}(\mathbf{x}_0, \mathbf{x}_1, \dots, \mathbf{x}_i)$ of length i , where $0 \leq i \leq k$, consists of a path of points defined by an array of $i+1$ “connecting” points $\mathbf{x}_0, \mathbf{x}_1, \dots, \mathbf{x}_i \in [m]^d$. We call \mathbf{x}_0 as start point and \mathbf{x}_i as end point. For each $0 \leq i < k$, we connect each pair of consecutive connecting points $(\mathbf{x}_i, \mathbf{x}_{i+1})$ by a quasi-segment.

The probability distribution of staircases of length i , where $0 \leq i \leq k$, is as follows. The point \mathbf{x}_0 is always set to be the corner point $\mathbf{1}$; the points $\mathbf{x}_1, \mathbf{x}_2, \dots, \mathbf{x}_i$ are picked iteratively: each point \mathbf{x}_j is chosen uniformly at random from the sub-cube $K_{j-1}(\mathbf{x}_{j-1})$.⁴

³A grid point $\mathbf{x} \in [m]^d$ could be viewed as a string of length d on alphabet $[m]$; a directed path of points could be viewed as a string on alphabet $[m]^d$. Thus we can define lexicographic order for grid points and directed paths, respectively.

⁴Recall that we take the side length of the grid as m rather than n . Thus the staircase will not be clipped out by the boundary of grid.

Two staircases are different if they have different set of connecting points, even if the paths defined by the two set of connecting points are the same. Thus $L^{(i)} := \prod_{j=0}^{i-1} \ell_j^d$ is the number of all possible length i staircases, and each will be selected with the same probability $1/L^{(i)}$. Also for any $j < i$, the probability distribution of staircases of length j is same as the marginal distribution of length j prefix in the distribution of length i staircases.

A staircase S of length i *grows* from a staircase S' of length $(i - 1)$ if the first i connecting points of S and S' are same. A prefix of staircase S is any staircase formed by a prefix of the connecting points sequence of S . To simplify the analysis, we assume the algorithm is given the location \mathbf{x}_i after round i , except for the round k ; this only strengthens the lower bound.

Value Function After fixing a staircase S , we can define the value function f^S . Within the staircase, the value of the point is *minus* the distance to \mathbf{x}_0 by following the staircase backward, except the end point \mathbf{x}_i of the staircase. The value of any point outside is the L_1 distance to \mathbf{x}_0 .⁵ The value of the end point \mathbf{x}_i is set as minus the distance to the point \mathbf{x}_0 by following the staircase backward with probability $1/2$, and the L_1 distance to \mathbf{x}_0 with probability $1/2$. Thus the end point of the staircase must be queried, otherwise the algorithm will make mistake on guessing the *location* of the only solution point with probability at least $1/2$.

This value function makes sure that for any two different staircases S_1, S_2 , f^{S_1}, f^{S_2} have the same value on the common prefix of them and on any point outside of both S_1 and S_2 . Also notice that f^S is deterministic on every point except the end point \mathbf{x}_i of staircase S .

Good Staircases Next we introduce *good staircases*, the core concept of our proof.

Definition 11 (good staircase). *A staircase $S^{(i)}(\mathbf{x}_0, \dots, \mathbf{x}_i)$ of length i is good with respect to a deterministic algorithm A that runs in k -rounds, if when A is running on the value function $f^{S^{(i)}}$, for any $0 < j < i$, any point $\mathbf{x} \in QS(\mathbf{x}_j, \mathbf{x}_{j+1}) \setminus \{\mathbf{x}_j\}$ is not queried by A in rounds $1, \dots, j$.*

Good staircases have the following properties.

Lemma 12. *1. If S is a good staircase with respect to algorithm A , then any prefix S' of S is also a good staircase with respect to A .*

2. Let S_1, S_2 be any two good staircases with respect to algorithm A . If the first $i + 1$ connecting points of the staircases are the same, then A will receive the same replies in rounds $1, \dots, i$ and issue the same queries in rounds $1, \dots, i + 1$ while running on both f^{S_1} and f^{S_2} .

⁵Though the distance to \mathbf{x}_0 by following the staircase backward is same as the L_1 distance, since all staircases constructed above only *grow* non-decreasingly at each coordinate. But the staircases we constructed in the next subsection for the lower bound of polynomial rounds algorithm doesn't have such properties, and thus the the distance by following the staircase backward is not same as the L_1 distance in that case.

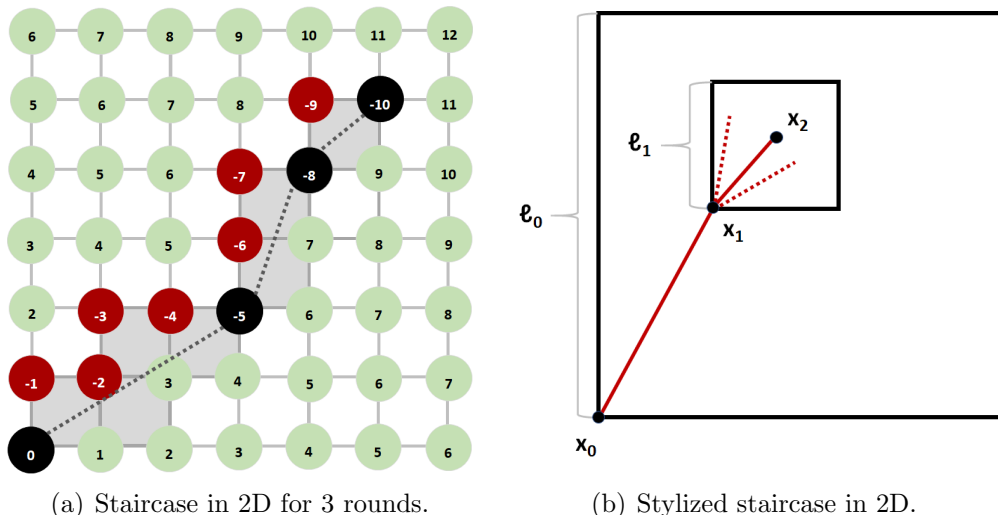


Figure 3: Figure (a) shows a staircase in 2D for 3 rounds, where the endpoints of the quasi-segments are shown in black and the points connecting them in red. The staircase consists of the union of red and black points. The squares that intersect the straight lines between the connecting points are shown in gray; these correspond to the sets $E(x, y)$ from Definition 10. Figure (b) shows in a stylized way the process of selecting the next part of the staircase given that the first quasi-segment was determined. The quasi-segments are shown as straight lines for simplicity.

Proof. We first prove part 2. By the definition of good staircase, in round $1, \dots, i$, algorithm A will not query any point on S_1 or S_2 that is after the first $i + 1$ connecting points, where f^{S_1} and f^{S_2} may have different value. Since A is a deterministic algorithm, by induction from round 1, we get that A will issue the same queries and receive the same replies in rounds $1, \dots, i$. The queries in round $i + 1$ are also same because they only depend on the replies in round $1, \dots, i$. The proof of 1 is similar by taking $S_1 = S$ and $S_2 = S'$. \square

If most of the possible staircases are good with respect to A , then A will fail on a fraction of the inputs.

Lemma 13. *If the algorithm A issues at most $Q_k = 1/10 \cdot n^{\frac{d^{k+1} - d^k}{d^k - 1}}$ queries in each round, and $9/10$ of all possible length k staircases are good with respect to A , then A will fail to get the value of \mathbf{x}_k on at least $7/20$ of all possible staircases, i.e., fail to get the correct solution with probability at least $7/40$.*

Proof. Recall that before the last round, the algorithm is given the value of \mathbf{x}_{k-1} . If the staircase $S^{(k)}(\mathbf{x}_0, \dots, \mathbf{x}_{k-1}, \mathbf{x}_k)$ is good, then A could not distinguish it from another good staircase $S'(\mathbf{x}_0, \dots, \mathbf{x}_{k-1}, \mathbf{x}'_k)$ with the same first k connecting points before the last round by Lemma 12.

Let $z_{S^{(k-1)}}$ be the fraction of length k good staircases among all length k staircases growing from the length $(k - 1)$ staircase $S^{(k-1)}$. Then define the random variable Z such that $Z = z_{S^{(k-1)}}$ if the length $(k - 1)$ staircase $S^{(k-1)}$ is chosen. Since each length $(k - 1)$ staircase is selected with the same probability, the expectation of Z is $9/10$.

Thus by Markov inequality on $(1 - Z)$, a half of all the length $(k - 1)$ staircases $S^{(k-1)}$ satisfy $z_{S^{(k-1)}} \geq 8/10$. We say a length $(k - 1)$ staircase is *great* if $z_{S^{(k-1)}} \geq 8/10$.

Recall there are $(\ell_{k-1})^d = n^{\frac{d^{k+1}-d^k}{d^k-1}}$ of length k staircases growing from a length $(k - 1)$ staircases. However, the algorithm could only query $1/10 \cdot n^{\frac{d^{k+1}-d^k}{d^k-1}}$ points in the last round, so A will fail to get the value of end point \mathbf{x}_k in $S^{(k)}$ with probability at least $7/8$ if $S^{(k)}$ is a good staircase growing from a length $k - 1$ great staircase $S^{(k-1)}$. We define the following events:

- *Fail* = $\{A \text{ fails to get the correct solution}\}$
- *Hit* = $\{A \text{ never queried } \mathbf{x}_k \text{ during the execution}\}$
- *Great* = $\{\text{the length } k - 1 \text{ prefix } S^{(k-1)} \text{ of } S^{(k)} \text{ is great}\}$
- *Good* = $\{\text{the whole length } k \text{ staircase } S^{(k)} \text{ is good}\}$.

Thus A will make a mistake with probability at least

$$\begin{aligned} \Pr[\text{Fail}] &\geq \frac{1}{2} \cdot \Pr[\text{Hit}] \geq \frac{1}{2} \cdot \Pr[\text{Hit} \mid \text{Great} \wedge \text{Good}] \cdot \Pr[\text{Great} \wedge \text{Good}] \\ &\geq \frac{1}{2} \cdot \frac{7}{8} \cdot \Pr[\text{Good} \mid \text{Great}] \cdot \Pr[\text{Great}] \geq \frac{1}{2} \cdot \frac{7}{8} \cdot \frac{8}{10} \cdot \frac{1}{2} = \frac{7}{40}, \end{aligned}$$

where the probability is taken on the staircase $S^{(k)}$ and the value of \mathbf{x}_k . □

Counting the number of good staircases Counting the number of good staircases is the major technical challenge in our proof. The concept of *probability score function* will be useful.

Definition 14 (probability score function). *For any algorithm A , let Q_A be the set of points queried by A during its execution. Given a point $\mathbf{x} \in [m]^d$, for any $0 \leq i < k$, define the set of points*

$$W_i(\mathbf{x}, Q_A) := \{\mathbf{y} \in K_i(\mathbf{x}) : QS(\mathbf{x}, \mathbf{y}) \cap Q_A = \emptyset\}.$$

The probability score function is $s_i(\mathbf{x}, Q_A) := \frac{|W_i(\mathbf{x}, Q_A)|}{\ell_i^d}$.

The probability score function for a good staircases $S^{(i)}(\mathbf{x}_0, \dots, \mathbf{x}_i)$ of length i , $0 \leq i < k$ is defined as $s(S^{(i)}) := s_i(\mathbf{x}_i, Q_A)$, where Q_A is the set of points that have been queried by A after the round i , if A is executed on value function $f^{S^{(i)}}$.⁶

For a fixed grid point \mathbf{x} , the following lemma upper bounds the number of *quasi-segments* $QS(\mathbf{x}, \mathbf{z})$ that are intersected by a point $\mathbf{y} \in K_i(\mathbf{x})$.

⁶By the definition of good staircase, A will not query the end point of staircase $S^{(i)}$ in rounds $1, \dots, i - 1$. Since A is a deterministic algorithm and $f^{S^{(i)}}$ is deterministic except at the end point of $S^{(i)}$, the set Q_A here is uniquely defined.

Lemma 15. Let $\mathbf{x} \in [m]^d$, $\mathbf{y} \in K_i(\mathbf{x})$. Let $B_i(\mathbf{x}, \mathbf{y}) := \{\mathbf{z} \in K_i(\mathbf{x}) : \mathbf{y} \in QS(\mathbf{x}, \mathbf{z})\}$. Then for all $\mathbf{x} \neq \mathbf{y}$ we have

$$|B_i(\mathbf{x}, \mathbf{y})| \leq \min \left(\frac{H(d)\ell_i^d}{\|\mathbf{x} - \mathbf{y}\|_\infty^{d-1}}, \ell_i^d \right),$$

where $H(d)$ is a constant only depending on d . In particular, $|B_i(\mathbf{x}, \mathbf{x})| = \ell_i^d$.

Intuitively, $\|\mathbf{x} - \mathbf{y}\|_\infty^{d-1}$ is the surface area of a cube of side length $\|\mathbf{x} - \mathbf{y}\|_\infty$, and $1/\|\mathbf{x} - \mathbf{y}\|_\infty^{d-1}$ is the fraction of it blocked by a unit cube on the surface. Let $D_p(\mathbf{x}, r)$ denote the L_p -norm ball of radius r , centered at \mathbf{x} .

Define $B'_i(\mathbf{x}, \mathbf{y})$ as the set of points $\mathbf{z} \in K_i(\mathbf{x})$, such that the geometric straight line (\mathbf{x}, \mathbf{z}) intersected with the unit L_∞ -norm ball centered at \mathbf{y} . Recall the definition of quasi-segment, we have $B_i(\mathbf{x}, \mathbf{y}) \subset B'_i(\mathbf{x}, \mathbf{y})$. The following lemma given an upper bound for $|B'_i(\mathbf{x}, \mathbf{y})|$ by the volume of a specific region, which is easier to estimate.

Lemma 16. Denote P_i as the cone region in ball $D_2(\mathbf{x}, \sqrt{d}(\ell_i + 1))$, defined by the center \mathbf{x} and the tangent surface of ball $D_2(\mathbf{y}, 2\sqrt{d})$.

$|B'_i(\mathbf{x}, \mathbf{y})|$ is upper bounded by the volume of the cone region P_i

Proof. Define P'_i as the cone region in the ball $D_2(\mathbf{x}, \sqrt{d}\ell_i)$, defined by the center \mathbf{x} and the tangent surface of ball $D_2(\mathbf{y}, \sqrt{d})$. For any point $\mathbf{z} \in B'_i(\mathbf{x}, \mathbf{y})$, the geometric straight line (\mathbf{x}, \mathbf{z}) also intersects with the ball $D_2(\mathbf{y}, \sqrt{d})$, because $D_\infty(\mathbf{y}, 1) \subset D_2(\mathbf{y}, \sqrt{d})$. So we have $\mathbf{z} \in P'_i$. We then claim that $D_\infty(\mathbf{z}, 0.5) \subset D_2(\mathbf{z}, \sqrt{d}) \subset P_i$.

- If $\mathbf{z} \in D_2(\mathbf{y}, \sqrt{d})$, we have $D_2(\mathbf{z}, \sqrt{d}) \subset D_2(\mathbf{y}, 2\sqrt{d}) \subset P_i$.
- Otherwise, let \mathbf{z}' be any point that is in the intersection of straight line (\mathbf{x}, \mathbf{z}) and the ball $D_2(\mathbf{y}, \sqrt{d})$. We have $D_2(\mathbf{z}', \sqrt{d}) \subset D_2(\mathbf{y}, 2\sqrt{d}) \subset P_i$. Also notice that P_i is a cone region centered at \mathbf{x} and $D_2(\mathbf{z}, \sqrt{d}) \subset D_2(\mathbf{x}, \sqrt{d}(\ell_i + 1))$. By a simple geometric observation, we know that there must be $D(\mathbf{z}, \sqrt{d}) \subset P_i$ since $D(\mathbf{z}', \sqrt{d}) \subset P_i$.

Thus we have

$$\text{Volume}(P_i) \geq \sum_{\mathbf{z} \in B'_i(\mathbf{x}, \mathbf{y})} \text{Volume}(D_\infty(\mathbf{z}, 0.5)) = |B'_i(\mathbf{x}, \mathbf{y})| .$$

□

Proof of Lemma 15. We finish the proof of Lemma 15 by estimating the volume of cone region P_i . The central angle of cone P_i is upper bounded by $\frac{8\sqrt{d}}{\|\mathbf{x} - \mathbf{y}\|_2} \leq \frac{8\sqrt{d}}{\|\mathbf{x} - \mathbf{y}\|_\infty}$. It's a basic high dimensional geometric problem that the volume of cone P_i is upper bounded by $H(d)\left(\frac{\ell_i^d}{\|\mathbf{x} - \mathbf{y}\|_\infty^{d-1}}\right)$, where $H(d)$ is a constant only depending on d . □

Lemma 17. For any $0 \leq i < k$, denote the cost on the probability score function of point \mathbf{x} incurred by point $\mathbf{y} \in Q_A$ by

$$1 - s_i(\mathbf{x}, \{\mathbf{y}\}) = \frac{|B_i(\mathbf{x}, \mathbf{y})|}{\ell_i^d}.$$

Then the total cost incurred by one point $\mathbf{y} \in Q_A$ for all \mathbf{x} is $H'(d)\ell_i$, where $H'(d) := H(d) \cdot d^2 + d^d$ is a constant only depending on d .

Proof. For a fixed point $\mathbf{y} \in Q_A$, we only need to consider the cost for point \mathbf{x} such that $\mathbf{y} \in K_i(\mathbf{x})$, since the cost for other points is zero.

$$\sum_{\mathbf{x} \text{ s.t. } \mathbf{y} \in K_i(\mathbf{x})} \frac{|B_i(\mathbf{x}, \mathbf{y})|}{\ell_i^d} \leq \frac{1}{\ell_i^d} \cdot \left(\ell_i^d + \sum_{a=1}^{\ell_i-1} ((a+1)^d - a^d) \cdot \min\left(\frac{H(d)\ell_i^d}{a^{d-1}}, \ell_i^d\right) \right) \quad (3)$$

$$\leq \frac{1}{\ell_i^d} \cdot \left(\ell_i^d + \left(\sum_{a=1}^{d-1} ((a+1)^d - a^d) \cdot \ell_i^d \right) + \left(\sum_{a=d}^{\ell_i-1} ((a+1)^d - a^d) \cdot \frac{H(d)\ell_i^d}{a^{d-1}} \right) \right) \quad (4)$$

$$\leq \frac{1}{\ell_i^d} \cdot \left(d^d \cdot \ell_i^d + \sum_{a=d}^{\ell_i-1} d^2 a^{d-1} \cdot \frac{H(d)(\ell_i)^d}{a^{d-1}} \right) \quad (5)$$

$$\leq H'(d)\ell_i \quad (6)$$

Note the first inequality enumerates \mathbf{x} by the L_∞ -norm of $(\mathbf{x} - \mathbf{y})$ and uses Lemma 15. \square

We can now prove the following key lemma by a method we called *two-stage analysis*.

Lemma 18. *If the number of queries issued by algorithm A is at most $Q_k = n \frac{d^{k+1} - d^k}{d^k - 1} \cdot \frac{1}{10 \cdot H'(d) \cdot k}$, then 9/10 of all possible length k staircases are good with respect to A.*

Proof. For $0 \leq i \leq k$, denote $G^{(i)}$ as the set of all good staircases of length i . Then $|G^{(i)}|$ is the number of all length i good staircases, and $R^{(i)} := |G^{(i)}|/L^{(i)}$ is the fraction of length i good staircases. In particular, $L^{(0)} = |G^{(0)}| = R^{(0)} = 1$.

Let's first fix any length i ($0 \leq i < k - 1$) good staircase $S^{(i)} \in G^{(i)}$, and denote the set of all good staircases growing from $S^{(i)}$ as $G(S^{(i)})$. Now consider the sum of the probability score function of these good staircases,

$$\sum_{S^{(i+1)} \in G(S^{(i)})} s(S^{(i+1)}) \geq \ell_i^d \cdot s(S^{(i)}) - Q_k \cdot H'(d)\ell_{i+1} \geq \ell_i^d \cdot \left(s(S^{(i)}) - \frac{1}{10k} \right) \quad (7)$$

For the first inequality, by Lemma 12, the algorithm will make the *same* queries in rounds $1, \dots, i + 1$ for all good staircases in $G(S^{(i)})$. Thus we can use the union bound and Lemma 17 to calculate the sum of their probability score function. The second inequality comes from the fact that $Q_k \cdot \ell_{i+1} = \frac{(\ell_i)^d}{H'(d)(10k)}$. Then consider the number of all length $i + 2$ good staircases.

$$|G^{(i+2)}| = \sum_{S^{(i+1)} \in G^{(i+1)}} s(S^{(i+1)}) \cdot \ell_{i+1}^d \quad (8)$$

$$= \sum_{S^{(i)} \in G^{(i)}} \left(\sum_{S^{(i+1)} \in G(S^{(i)})} s(S^{(i+1)}) \cdot \ell_{i+1}^d \right) \quad (9)$$

$$\geq (\ell_{i+1}^d \cdot \ell_i^d) \cdot \sum_{S^{(i)} \in G^{(i)}} \left(s(S^{(i)}) - \frac{1}{10k} \right) \quad (10)$$

$$= \ell_{i+1}^d \cdot \left(|G^{(i+1)}| - \ell_i^d \cdot \frac{|G^{(i)}|}{10k} \right) \quad (11)$$

The equality 8 and equality 11 are from the definition of probability score function. The inequality 10 is from the inequality 7. Divide each side of 11 by $L^{(i+2)}$, we get

$$R^{(i+2)} \geq R^{(i+1)} - \frac{R^{(i)}}{10k} \geq R^{(i+1)} - \frac{1}{10k}. \quad (12)$$

We know that $R^{(1)} = 1$ by definition, so $R^{(k)} \geq 9/10$ as required. \square

The correctness of the lower bound statement in Theorem 1 follows from Lemma 13 and Lemma 18.

Remark 1. *In the proof of Lemma 18, the key step is fixing a length i good staircase $S^{(i)}$ and then calculating the sum of the probability score function of all length $i + 1$ good staircases growing from $S^{(i)}$, which is by definition, equivalent to calculating the number of length $i + 2$ good staircases with $S^{(i)}$ as prefix. This method involves the enumeration of two consecutive quasi-segments, and thus we call it two-stage analysis.*

2.4 Randomized Lower Bound for Local Search in Polynomial Rounds

Our lower bound in polynomial rounds case follows the same proof framework as the case of constant rounds. Thus we only highlight the difference of the proof in this subsection. Most of the notations and definitions are same with Section 2.3.

We still denote the number of rounds be $k := n^\alpha, \alpha \in (0, d/2)$. We assume $d \geq 3$ in this subsection, because [SY09] proved a lower bound of $\tilde{\Omega}(n)$ for fully adaptive algorithm in 2D and the divide-and-conquer algorithm by [LTT93] achieve this bound with only $O(\log(n))$ rounds.

Staircase Structure The major change is on the distribution of the staircase (i.e., connecting points). We still let \mathbf{x}_0 be the corner point $\mathbf{1}$ on the grid, but the remaining connecting points $\mathbf{x}_1, \mathbf{x}_2, \dots, \mathbf{x}_i$ are picked independently uniformly in the whole grid $[n]^d$. Then we use the quasi-segment as in definition 10 to link every two consecutive connecting points.

Therefore the number of length i staircases is $L^{(i)} := n^{(d \cdot i)}$.

On the one hand, the staircase structure for constant rounds algorithm is too simple for polynomial rounds algorithm, because the total length of it is less than $2n \cdot d$, thus an $n \cdot d$ rounds algorithm could simply use steepest descent to solve it with total queries of $O(n)$.

On the other hand, the staircase structure for polynomial rounds algorithm is also not suitable for proving the lower bound of constant rounds algorithm, because constant rounds algorithm may use more than n^{d-1} number of queries in each round, it could queries multiple hyperplanes of $d - 1$ dimension with $\Omega(n^{d-1})$ queries, and divide the whole space into smaller connected component. This is the reason for which the quasi-segments become shorter after each connecting point.

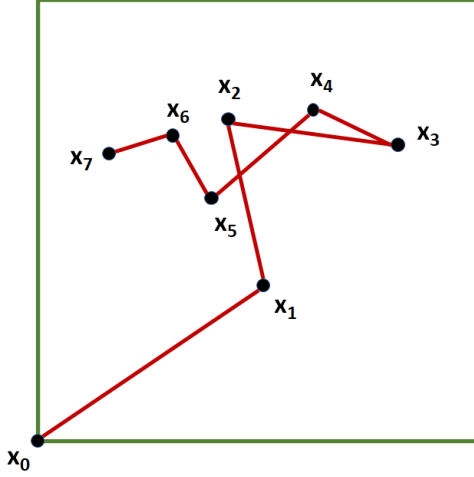


Figure 4: The staircase in 2D for lower bound of polynomial rounds algorithm. Each connecting point is uniformly chosen over the grid.

Value Function After fixing a staircase S , the definition of value function f^S is almost same as in Section 2.4.

A new special case that may occur is the self-intersection. For a point \mathbf{x} that is on $t \geq 1$ quasi-segments $QS(\mathbf{x}_{j_1}, \mathbf{x}_{j_1+1}), \dots, QS(\mathbf{x}_{j_t}, \mathbf{x}_{j_t+1}), j_1 \leq \dots \leq j_t$, we deem it belongs to the last quasi-segment $QS(\mathbf{x}_{j_t}, \mathbf{x}_{j_t+1})$. Thus, the distance from it to \mathbf{x}_0 is the number of steps it need to trace back part of $QS(\mathbf{x}_{j_t}, \mathbf{x}_{j_t+1})$ and all of the following $QS(\mathbf{x}_{j_t-1}, \mathbf{x}_{j_t}), QS(\mathbf{x}_{j_t-2}, \mathbf{x}_{j_t-1}), \dots, QS(\mathbf{x}_0, \mathbf{x}_1)$.

Good Staircase We still use definition 11 for the good staircases. The proof of both statements in Lemma 12 still holds, even with the self-intersection.

Remark 2. Notice that for any two different staircases S_1, S_2 , the value function f^{S_1}, f^{S_2} may not have the same value on the common prefix of them because of the self-intersection. Fortunately, by the definition of good staircase, an intersection point \mathbf{x} won't be queried until round $j + 1$, if \mathbf{x} belongs to $QS(\mathbf{x}_j, \mathbf{x}_{j+1})$. This is why Lemma 12 still holds in this case.

The following analogies of Lemma 13 holds with same argument.

Lemma 19. If the algorithm A makes at most $Q_k = \frac{1}{10} \cdot n^d$ queries in each round, and 9/10 of all possible length k staircases are good staircases with respect to A , then A will fail to get value of \mathbf{x}_k on at least $\frac{7}{20}$ of all possible staircases, i.e., make mistake with probability at least $\frac{7}{40}$.

Counting the number of good staircases Since the next connecting points after \mathbf{x}_i could be anywhere within the whole grid $[n]^d$, instead of within the sub-cube $K_i(\mathbf{x})$, the definition of probability score function is modified respectively.

Definition 20 (probability score function). During an execution of the algorithm A , let Q_A be the set of points that have been queried by A . Given a point $\mathbf{x} \in [n]^d$, define the

point set

$$W(\mathbf{x}, Q_A) := \{\mathbf{y} \in [n]^d : QS(\mathbf{x}, \mathbf{y}) \cap Q_A = \emptyset\},$$

then take probability score function $s(\mathbf{x}, Q_A) := \frac{|W(\mathbf{x}, Q_A)|}{n^d}$.

Probability score function for a length i good staircases $S^{(i)}(\mathbf{x}_0, \dots, \mathbf{x}_i)$ is defined as $s(S^{(i)}) := s(\mathbf{x}_i, Q_A)$, where Q_A is the set of points that have been queried by A after the round i , if A is executed on value function $f^{S^{(i)}}$.

We have the following analogues of Lemma 15, Lemma 17 and Lemma 18 in order.

Lemma 21. Let $\mathbf{x}, \mathbf{y} \in [n]^d$. Denote set

$$B(\mathbf{x}, \mathbf{y}) := \{\mathbf{z} \in [n]^d : \mathbf{y} \in QS(\mathbf{x}, \mathbf{z})\}.$$

Then we have $|B(\mathbf{x}, \mathbf{y})| \leq \min(\frac{H(d)n^d}{\|\mathbf{x}-\mathbf{y}\|_\infty^{d-1}}, n^d)$, where $H(d)$ is a constant only depending on d . In particular, we have $|B(\mathbf{x}, \mathbf{x})| = n^d$.

Proof. The correctness of this lemma follows from Lemma 15 by taking $i = 0$. \square

Lemma 22. Denote the cost on the probability score function of point \mathbf{x} incurred by point $\mathbf{y} \in Q_A$ by

$$1 - s(\mathbf{x}, \{\mathbf{y}\}) = \frac{|B(\mathbf{x}, \mathbf{y})|}{n^d}.$$

Then the total cost incurred by one point $\mathbf{y} \in Q_A$ for all $\mathbf{x} \in [n]^d$ is $H''(d)n$, where $H''(d) := H(d) \cdot 2^d \cdot d^2 + 2^d \cdot d^d$ is a constant only depending on d .

Proof.

$$\sum_{\mathbf{x} \in [n]^d} \frac{|B(\mathbf{x}, \mathbf{y})|}{n^d} \leq \frac{1}{n^d} \cdot \left(n^d + \sum_{a=1}^{n-1} ((2a+1)^d - (2a-1)^d) \cdot \min\left(\frac{H(d)n^d}{a^{d-1}}, n^d\right) \right) \quad (13)$$

$$\leq 1 + \left(\sum_{a=1}^{d-1} \left(\frac{(2a+1)^d}{n^d} - (2a-1)^d \right) \right) + \frac{1}{n^d} \cdot \left(\sum_{a=d}^{n-1} ((2a+1)^d -) \cdot \frac{(2a-1)^d H(d)n^d}{a^{d-1}} \right) \quad (14)$$

$$\leq \frac{2^d}{n^d} \cdot \left(d^d \cdot n^d + \sum_{a=d}^{n-1} d^2 a^{d-1} \cdot \frac{H(d)n^d}{a^{d-1}} \right) \quad (15)$$

$$\leq H''(d)n, \quad (16)$$

where the first inequality enumerates \mathbf{x} by the L_∞ -norm of $(\mathbf{x}-\mathbf{y})$ and use Lemma 21. \square

Lemma 23. If the algorithm A make at most $Q_k = \frac{1}{H''(d) \cdot 10} \cdot n^{(d-1)-\alpha}$ queries in total, then 9/10 of all possible length k staircases are good staircases with respect to A .

Proof. For $0 \leq i \leq k$, denote $G^{(i)}$ as the set of all good staircases of length i . Then $|G^{(i)}|$ is the number of all length i good staircases, and $R^{(i)} := |G^{(i)}|/L^{(i)}$ is the fraction of length i good staircases. In particular, $L^{(0)} = |G^{(0)}| = R^{(0)} = 1$.

Let's first fix any length i ($0 \leq i < k-1$) good staircase $S^{(i)} \in G^{(i)}$. We will denote the set of all good staircases grown from $S^{(i)}$ as $G(S^{(i)})$. Now consider the sum of the probability score function of these good staircases,

$$\sum_{S^{(i+1)} \in G(S^{(i)})} s(S^{(i+1)}) \geq n^d \cdot s(S^{(i)}) - Q_k \cdot H''(d)n \quad (17)$$

$$\geq n^d \cdot \left(s(S^{(i)}) - \frac{1}{10n^\alpha} \right) \quad (18)$$

For the first inequality, by Lemma 12, the algorithm will make the *same* queries in round $1, \dots, i+1$ for all good staircases in $G(S^{(i)})$. Thus we can use the union bound and Lemma 22 to calculate the sum of their probability score function.

Then consider $|G^{(i+2)}|$:

$$|G^{(i+2)}| = \sum_{S^{(i+1)} \in G^{(i+1)}} s(S^{(i+1)}) \cdot n^d \quad (19)$$

$$= \sum_{S^{(i)} \in G^{(i)}} \left(\sum_{S^{(i+1)} \in G(S^{(i)})} s(S^{(i+1)}) \cdot n^d \right) \quad (20)$$

$$\geq (n^d \cdot n^d) \cdot \sum_{S^{(i)} \in G^{(i)}} \left(s(S^{(i)}) - \frac{1}{10n^\alpha} \right) \quad (21)$$

$$= n^d \cdot (|G^{(i+1)}| - n^d \cdot \frac{|G^{(i)}|}{10n^\alpha}) \quad (22)$$

The equality 19 and equality 22 are from the definition of probability score function. The inequality 21 is from the inequality 17. Divide each side of equality 22 by $L^{(i+2)}$, we get

$$R^{(i+2)} \geq R^{(i+1)} - \frac{R^{(i)}}{10n^\alpha} \geq R^{(i+1)} - \frac{1}{10n^\alpha}.$$

We know that $R^{(1)} = 1$ by definition, so $R^{(k)} \geq 9/10$. \square

Combining Lemma 19 and Lemma 23, we can get a bound of $\Omega(n^{(d-1)-\alpha})$. Further notice that the lower bound for limited rounds algorithm should be no smaller than the lower bound of fully adaptive algorithm, thus we can improve our bound for the case of $\alpha > \frac{d}{2} - 1$ to $\tilde{\Omega}(n^{\frac{d}{2}})$ by [Zha09]. This concludes the proof of the lower bound from Theorem 2.

3 Brouwer Fixed Point

In this section we study the query complexity of finding fixed points guaranteed by the Brouwer fixed point theorem [Bro10, Bro11].

Theorem 24 (Brouwer fixed point theorem). *Let $K \subset \mathbb{R}^n$ be a compact and convex subset of \mathbb{R}^n and $f : K \rightarrow K$ a continuous function. Then there exists a point $\mathbf{x}^* \in K$ such that $f(\mathbf{x}^*) = \mathbf{x}^*$.*

We study the computational problem of finding a fixed point given the function f and the domain K it is defined on. Since this problem cannot be solved to arbitrary precision

on a computer, we consider the approximate version, where we are additionally given an error parameter ϵ and the goal is to find an ϵ -fixed point. In this case, the original function f can be approximated by a Lipschitz continuous function \tilde{f} , where the Lipschitz constant of \tilde{f} can be arbitrarily large and depends on the quality of approximation required. We focus on the setting where $K = [0, 1]^d$ and sometimes write fixed-point to mean Brouwer fixed-point for brevity.

Definition 25 (approximate Brouwer fixed-point problem). *Let $F : [0, 1]^d \rightarrow [0, 1]^d$ be a L -Lipschitz map, where $L > 1$ is a constant.⁷*

$$\|F(\mathbf{x}) - F(\mathbf{y})\|_\infty \leq L\|\mathbf{x} - \mathbf{y}\|_\infty, \forall \mathbf{x}, \mathbf{y} \in [0, 1]^d.$$

Given a tuple (ϵ, L, d, F) , find a point $\mathbf{x}^ \in [0, 1]^d$ such that $\|F(\mathbf{x}^*) - \mathbf{x}^*\|_\infty \leq \epsilon$.*

We will study the approximate fixed-point problem by introducing a discrete analogue of the problem. Given a vector $\mathbf{x} \in [n]^d$, let x_i denote the value at the i -th coordinate of \mathbf{x} .

Definition 26 (direction-preserving and bounded function). *Let \mathbf{e}^k be the k -th unit vector in $[n]^d$, that is, with the property that $e_k^k = 1$, and $e_i^k = 0$ for any $i \neq k$. A function $f : [n]^d \rightarrow \{\mathbf{0}, \pm\mathbf{e}^1, \pm\mathbf{e}^2, \dots, \pm\mathbf{e}^d\}$ is*

- *direction-preserving if for any $\mathbf{x}, \mathbf{y} \in [n]^d$ with $\|\mathbf{x} - \mathbf{y}\|_\infty \leq 1$, we have $\|f(\mathbf{x}) - f(\mathbf{y})\|_\infty \leq 1$.*
- *bounded if $\mathbf{x} + f(\mathbf{x}) \in [n]^d$ for all $\mathbf{x} \in [n]^d$.*

The following figure illustrates a bounded and direction preserving function in 2D.

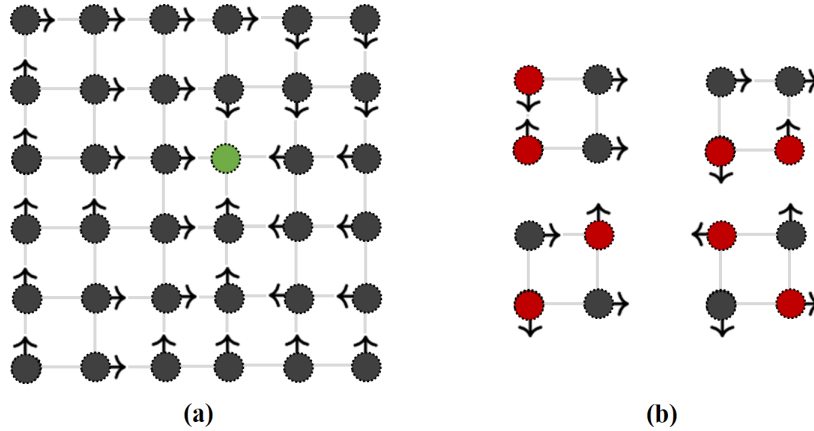


Figure 5: Figure (a) shows a bounded and direction preserving function in 2D, on a grid of size 6×6 . The fixed point is shown in green. Several examples of patterns forbidden by the direction preserving property can be seen in Figure (b).

Iimura [Iim03] showed that any bounded direction-preserving function f has a zero point $\mathbf{x}^* \in [n]^d$, i.e., a point \mathbf{x}^* such that $f(\mathbf{x}^*) = \mathbf{0}$. Thus we have the following discrete Brouwer fixed-point problem.⁸

⁷The case with $L < 1$ is called Banach fixed-point, where the unique fixed-point could be approximated exponentially fast.

⁸The approximate version and the discrete version problems are called *AFP* and *ZP* respectively in [CD05]

Definition 27 (discrete Brouwer fixed-point problem; see section 2 [CD05]). *Given a tuple (n, d, f) , where $f : [n]^d \rightarrow \{\mathbf{0}, \pm e^1, \pm e^2, \dots, \pm e^d\}$ is a bounded and direction-preserving function, find a point $\mathbf{x}^* \in [n]^d$ such that $f(\mathbf{x}^*) = \mathbf{0}$.*

To compare the difficulty of problems under rounds limit on oracle evaluation, we use the *round-preserving* reduction defined as follow.

Definition 28 (*round-preserving* reduction). *A reduction from oracle-based problem P1 to oracle-based problem P2 is round-preserving if for any instance of problem P1 with oracle \mathcal{O}_1 , the instance of problem P2 with oracle \mathcal{O}_2 given by the reduction satisfies that*

1. *A solution of the P1 instance can be obtained from any solution of the P2 instance without any more queries on \mathcal{O}_1 .*
2. *Each query to \mathcal{O}_2 can be answered by a constant number of queries to \mathcal{O}_1 in one round.*

The following lemma established the equivalence between the approximate and the discrete version of fixed-point problem.

Lemma 29 (see section 5 [CD05]). 1. *There is a round-preserving reduction such that any instance (ϵ, L, d, F) of approximate fixed-point is reduced to an instance $(C_1(d) \cdot (L + 1)/\epsilon, d, f)$ of discrete fixed-point problem, where $C_1(d)$ is a constant that only depends on d .*

2. *There is a round-preserving reduction with parameter $L > 1$ such that any instance (n, d, f) of discrete fixed-point problem is reduced to an instance (ϵ, L, d, F) of approximate fixed-point problem, such that $((L - 1)/\epsilon) \geq (C_2(d) \cdot n)$ where $C_2(d)$ is a constant that only depends on d .*

Remark 3. *The original reduction from the discrete fixed-point problem to the approximate the version in [CD05] will take one more round of queries of the function f of discrete fixed-point problem after getting the solution point \mathbf{x}^* of approximate fixed-point problem. However, these extra queries can be avoided if ϵ is small enough. E.g., by taking $\epsilon = (L - 1)/(n \cdot d \cdot 2^d)$, the closest grid point (in L_∞ -norm) to the point \mathbf{x}^* will be a zero point of f under the construction in [CD05].*

Since we deem L and d as constants irrelevant to ϵ , we can study both the upper bound and lower bound of the discrete fixed-point problem first, then replace “ n ” with “ $1/\epsilon$ ” to get the bound for the approximate fixed-point computing problem.

3.1 Upper Bound for Brouwer

Our constant rounds algorithm generalizes the divide-and-conquer algorithm in [CD05] in the same way as we generalizing the local search algorithm in [LTT93] in Section 2.1. Therefore it is not surprising that we get the same upper bound for the discrete Brouwer fixed-point problem.

We first present several necessary definitions and lemmas in [CD05].

Definition 30 (bad cube, see definition 6 [CD05]). A zero dimensional unit cube $C^0 = \{\mathbf{x}\}$ is bad if $f(\mathbf{x}) = e^1$.

For each $i \geq 1$, an i -dimensional unit cube $C^i \subset [n]^d$ is bad with respect to function $f : [n]^d \rightarrow \{\mathbf{0}, \pm e^1, \pm e^2, \dots, \pm e^d\}$ if

1. $\{f(\mathbf{x}) : \mathbf{x} \in C^i\} = \{e^1, e^2, \dots, e^{i+1}\}$
2. the number of bad $(i-1)$ -dimensional unit cubes in C^i is odd.

The following theorem on the boundary condition of the existence of the solution is essential for the design of the divide-and-conquer based algorithm.

Theorem 31 (see theorem 3 [CD05]). A $(d-1)$ -dimensional unit cube C is on the boundary of a d -dimensional cube C' if every point in C is on the boundary of C' .

If the number of bad $(d-1)$ -dimensional unit cubes on the boundary of the d -dimensional cube C is odd, then the bounded direction-preserving function f has a zero point within the cube C .

The final piece that enables us to use a divide-and-conquer approach is that we can pad the original problem instance on the grid $[n]^d$ to a larger grid: $\{0, 1, \dots, n+1\}^d$, and make sure that the new instance contains exactly one bad $(d-1)$ -dimensional unit cube on its boundary, and no new solution is introduced. Let f and f' be the function for the original and the new instance, respectively. Then $f'(\mathbf{x}) = f(\mathbf{x})$ for any $\mathbf{x} \in [n]^d$; for any other point $\mathbf{x} = (x_1, \dots, x_d)$, let i be the largest number that $x_i \in \{0, n+1\}$, we have $f'(\mathbf{x}) = \mathbf{e}_i$ if $\mathbf{x}_i = 0$ and $f'(\mathbf{x}) = -\mathbf{e}_i$ otherwise. The correctness of this reduction is showed in Lemma 5 of [CD05].

Algorithm for Brouwer.

1. Initialize the cube C_0 as $\{0, 1, \dots, n+1\}^d$; for each $0 \leq i < k$, set $\ell_i = n^{\frac{d^k - d^i}{d^k - 1}}$
2. In each round $i \in \{1, \dots, k-1\}$:
 - Divide the current cube C_{i-1} into sub-cubes $C_i^1, \dots, C_i^{n_i}$ of side length ℓ_i that cover C_{i-1} . These sub-cubes have mutually exclusive interior, but each $(d-1)$ -dimensional unit cube that is not on the boundary of cube C_{i-1} is either (i) on the boundary of two sub-cubes $C_i^{j_1}, C_i^{j_2}$ or (ii) not on the boundary of any sub-cubes
 - Query f' with all the points on the boundary of sub-cubes $C_i^1, \dots, C_i^{n_i}$
 - Set $C_i = C_i^j$, where C_i^j is the sub-cube that has odd number of bad $(d-1)$ -dimensional unit cubes on its boundary. Choose arbitrary one if there are many
3. In round k , query all the points in the current cube C_{k-1} and get the solution point.

Upper Bound of Theorem 3. Notice that for any $i \in \{1, \dots, k-1\}$, the sum of the numbers of bad $(d-1)$ -dimensional cubes on the boundary of $C_i^1, \dots, C_i^{n_i}$ is still odd, since each bad cubes that is not on the boundary of C_{i-1} is counted twice. By the parity

argument, C_i always exists. Finally, Lemma 31 guarantees that there exists a solution in cube C_{k-1} , which concludes the correctness of this algorithm.

With similar calculations in Section 2.1, we show that this algorithm make $O\left(n \frac{d^{k+1}-d^k}{d^k-1}\right)$ of queries in total. \square

3.2 Randomized Lower Bound for Brouwer

We reduce the local search instances *generated by staircases*⁹ to discrete Brouwer fixed-point instances in this section, and thus prove the lower bound part of Theorem 3.

We use the problem GP defined in [CT07] as an intermediate problem in the reduction.

Definition 32 (GP , see section 2.2 [CT07]). *A graph directed $G = ([n]^d, E)$ is grid PPAD graph if*

1. *the underlying undirected graph of G is a subgraph of grid graph defined on $[n]^d$;*
2. *there is one directed path $\mathbf{1} = \mathbf{x}_0 \rightarrow \mathbf{x}_1 \rightarrow \dots \rightarrow \mathbf{x}_{T-1} \rightarrow \mathbf{x}_T$ with no self-intersection in the graph. Any other point outside of the path is an isolated point.*

The structure of G is accessed by the mapping function $N_G(\mathbf{x})$ from $[n]^d$ to $([n]^d \cup \{\text{"no"}\}) \times ([n]^d \cup \{\text{"no"}\})$, such that

1. $N_G(\mathbf{x}_0) = (\text{"no"}, \mathbf{x}_1)$;
2. $N_G(\mathbf{x}_T) = (\mathbf{x}_{T-1}, \text{"no"})$;
3. $N_G(\mathbf{x}_i) = (\mathbf{x}_{i-1}, \mathbf{x}_{i+1})$, for all $i \in \{1, \dots, T-1\}$;
4. $N_G(\mathbf{x}) = (\text{"no"}, \text{"no"})$, otherwise;

Then GP is the following search problem: Given n, d and the function $N_G(\mathbf{x})$, find the end of the path \mathbf{x}_T .

The following lemma in [CT07] shows that we can get the lower bound of discrete fixed-point problem from the lower bound of problem GP directly.

Lemma 33 (see theorem 3.2 [CT07]). *There is a round-preserving reduction such that any instance (n, d, N_G) of problem GP is reduced to an instance $(24n+7, d, f)$ of discrete fixed-point problem.*

The remaining work is establishing the lower bound of problem GP by reducing the local search instances generated by staircases to GP .

Lemma 34. *There is a round-preserving reduction such that any local search instance (n, d, f) generated by possible staircase defined in Section 2.3 is reduced to an instance (n, d, N_G) of problem GP .*

⁹There may be no non-trivial reduction from general local search instances to Brouwer fixed-point instances.

Proof. Naturally, we can let the staircases¹⁰ in the local search instance to be the path in the GP instance. Given a local search problem instance on grid $[n]^d$ with value function f that is constructed by staircase as in Section 2.3, we reduce it to a GP instance on grid $[n]^d$ with function $N_G(\mathbf{x})$.

Each query of $N_G(\mathbf{x})$ is answered by at most $2d + 1$ of queries of value function f for \mathbf{x} and all its neighbors. From these queries of f ,

- if $f(\mathbf{x}) > 0$, let \mathbf{x} be an isolated point, i.e., $N_G(\mathbf{x}) = (“no”, “no”)$;
- otherwise, \mathbf{x} should be on the path. If $f(\mathbf{x}) = 0$, \mathbf{x} is the start of the path; if \mathbf{x} is a local optima, \mathbf{x} is the end of the path. The direction within the paths is from the point with higher value to the point with lower value, and there are at most one neighbor with higher value and at most one neighbor with lower value for any value function f constructed in Section 2.3. Thus we can answer $N_G(\mathbf{x})$ correctly by the values of \mathbf{x} and its neighbor.

Since the start point and the end point of a staircase are unique under the construction in Section 2.3, \mathbf{x}_T is the solution of the original local search problem, and the start of the path \mathbf{x}_0 satisfies $\mathbf{x}_0 = \mathbf{1}$. This reduction does not change the number of rounds needed, and only increases the number of queries by a constant factor $2d + 1$. Thus the reduction above is a *round-preserving* reduction. \square

Combining Lemma 33, Lemma 34, and Theorem 1 concludes the proof of the lower bound in Theorem 3.

References

- [Aar06] Scott Aaronson. Lower bounds for local search by quantum arguments. *SIAM Journal on Computing*, 35(4):804–824, 2006.
- [Akl14] Selim Akl. *Parallel Sorting Algorithms*. Academic Press, 2014.
- [Ald83] David Aldous. Minimization algorithms and random walk on the d -cube. *The Annals of Probability*, 11(2):403–413, 1983.
- [Bro10] L.E.J. Brouwer. Continuous one-one transformations of surfaces in themselves. *Koninklijke Neder-landse Akademie van Wetenschappen, Proceedings Series B Physical Sciences*, 13:967–977, 1910.
- [Bro11] L.E.J. Brouwer. Continuous one-one transformations of surfaces in themselves. *Koninklijke Neder-landse Akademie van Wetenschappen Proceedings Series B Physical Sciences*, 14:300–310, 1911.
- [CD05] Xi Chen and Xiaotie Deng. On algorithms for discrete and approximate brouwer fixed points. In *Proceedings of the thirty-seventh annual ACM symposium on Theory of computing*, pages 323–330, 2005.

¹⁰Recall that in Section 2.3, the value of the end point \mathbf{x} of the staircases may be a positive value with probability $\frac{1}{2}$. In this case, \mathbf{x} is not considered to be on the path, and the previous point is the end of the path in problem GP .

- [CDT09] Xi Chen, Xiaotie Deng, and Shang-Hua Teng. Settling the complexity of computing two-player nash equilibria. *J. ACM*, 56(3):14:1–14:57, 2009.
- [CT07] Xi Chen and Shang-Hua Teng. Paths beyond local search: A tight bound for randomized fixed-point computation. In *48th Annual IEEE Symposium on Foundations of Computer Science (FOCS'07)*, pages 124–134. IEEE, 2007.
- [DGP09] Constantinos Daskalakis, Paul W. Goldberg, and Christos H. Papadimitriou. The complexity of computing a nash equilibrium. *SIAM J. Comput.*, 39(1):195–259, 2009.
- [DP11] Constantinos Daskalakis and Christos H. Papadimitriou. Continuous local search. In Dana Randall, editor, *Proceedings of the Twenty-Second Annual ACM-SIAM Symposium on Discrete Algorithms, SODA 2011, San Francisco, California, USA, January 23-25, 2011*, pages 790–804. SIAM, 2011.
- [FGHS20] John Fearnley, Paul W. Goldberg, Alexandros Hollender, and Rahul Savani. The complexity of gradient descent: $\text{CLS} = \text{PPAD} \cap \text{PLS}$. *CoRR*, abs/2011.01929, 2020.
- [HPV89] Michael D Hirsch, Christos H Papadimitriou, and Stephen A Vavasis. Exponential lower bounds for finding brouwer fix points. *Journal of Complexity*, 5(4):379–416, 1989.
- [HY17] Pavel Hubáček and Eylon Yogev. Hardness of continuous local search: Query complexity and cryptographic lower bounds. In *Proceedings of the Twenty-Eighth Annual ACM-SIAM Symposium on Discrete Algorithms*, pages 1352–1371. SIAM, 2017.
- [Iim03] Takuya Iimura. A discrete fixed point theorem and its applications. *Journal of Mathematical Economics*, 39(7):725–742, 2003.
- [JPY88] David S Johnson, Christos H Papadimitriou, and Mihalis Yannakakis. How easy is local search? *Journal of computer and system sciences*, 37(1):79–100, 1988.
- [LT93] Donna Crystal Llewellyn and Craig A. Tovey. Dividing and conquering the square. *Discret. Appl. Math.*, 43(2):131–153, 1993.
- [LTT93] Donna Crystel Llewellyn, Craig Tovey, and Michael Trick. Local optimization on graphs: Discrete applied mathematics 23 (1989) 157–178. *Discrete Applied Mathematics*, 46(1):93–94, 1993.
- [Pap94] Christos H. Papadimitriou. On the complexity of the parity argument and other inefficient proofs of existence. *J. Comput. Syst. Sci.*, 48(3):498–532, 1994.
- [SY09] Xiaoming Sun and Andrew Chi-Chih Yao. On the quantum query complexity of local search in two and three dimensions. *Algorithmica*, 55(3):576–600, 2009.

- [Val75] Leslie G. Valiant. Parallelism in comparison problems. *SIAM Journal on Computing*, 4(3):348–355, 1975.
- [Vav93] Stephen A Vavasis. Black-box complexity of local minimization. *SIAM Journal on Optimization*, 3(1):60–80, 1993.
- [VY11] Vijay V. Vazirani and Mihalis Yannakakis. Market equilibrium under separable, piecewise-linear, concave utilities. *J. ACM*, 58(3):10:1–10:25, 2011.
- [Yao77] Andrew Yao. Probabilistic computations: Toward a unified measure of complexity. In *Proceedings of the 18th IEEE Symposium on Foundations of Computer Science (FOCS)*, pages 222–227, 1977.
- [Zha09] Shengyu Zhang. Tight bounds for randomized and quantum local search. *SIAM Journal on Computing*, 39(3):948–977, 2009.